Service
Service
Service

7583

ServiceManual

Contents **Page**

Safety Notes 2
General Information 10
TV Operation 29
Disassembly 55
Service Adjustments 58
Circuit Description 89
Troubleshooting 98
Waveforms 105
Electrical Diagrams 109
Exploded View 159
Parts List 160
Service Bulletin 556

©Copyright 2004 Philips Consumer Electronics.
All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by means, electronic, mechanical, photographic, or otherwise without the prior permission of Philips.

Published by Philips Consumer Electronics Subject to modification 2004 Nov 16

IMPORTANT SAFETY NOTICE

Proper service and repair is important to the safe, reliable operation of all Philips Consumer Electronics Company** Equipment. The service procedures recommended by Philips and described in this service manual are effective methods of performing service operations. Some of these service operations require the use of tools specially designed for the purpose. The special tools should be used when and as recommended.

It is important to note that this manual contains various **CAUTIONS** and **NOTICES** which should be carefully read in order to minimize the risk of personal injury to service personnel. The possibility exists that improper service methods may damage the equipment. It also is important to understand that these **CAUTIONS** and **NOTICES ARE NOT EXHAUSTIVE**. Philips could not possibly know, evaluate and advise the service trade of all conceivable ways in which service might be done, or of the possible hazardous consequences of each way. Consequently, Philips has not undertaken any such broad evaluation. Accordingly, a servicer who uses a service procedure or tool which is not recommended by Philips must first satisfy himself thoroughly that neither his safety nor the safe operation of the equipment will be jeopardized by the service method selected.

** Hereafter throughout this manual, Philips Consumer Electronics Company will be referred to as Philips.

WARNING

Critical components having special safety characteristics are identified with a ⚠ or "S" by the Ref. No. in the parts list and enclosed within a broken line* (where several critical components are grouped in one area) along with the safety symbol ⚠ on the schematics or exploded views. Use of substitute replacement parts which do not have the same specified safety characteristics may create shock, fire, or other hazards. Under no circumstances should the original design be modified or altered without written permission from Philips. Philips assumes no liability, express or implied, arising out of any unauthorized modification of design. Servicer assumes all liability.

*** Broken Line ____ _ ____ _ ____ _ ____**

FIRE AND SHOCK HAZARD

1. Be sure all components are positioned in such a way as to avoid the possibility of adjacent component shorts. This is especially important on those chassis which are transported to and from the service shop.

2. Never release a repaired unit unless all protective devices such as insulators, barriers, covers, strain reliefs, and other hardware have been installed in accordance with the original design.

3. Soldering and wiring must be inspected to locate possible cold solder joints, solder splashes, sharp solder points, frayed leads, pinched leads, or damaged insulation (including the ac cord). Be certain to remove loose solder balls and all other loose foreign particles.

4. Check across-the-line components and other components for physical evidence of damage or deterioration and replace if necessary. Follow original layout, lead length, and dress.

5. No lead or component should touch a receiving tube or a resistor rated at 1 watt or more. Lead tension around protruding metal surfaces or edges must be avoided.

6. Critical components having special safety characteristics are identified with an **'S'** by the Ref. No. in the parts list and enclosed within a broken line* (where several critical components are grouped in one area) along with the safety symbol ⚠ on the schematic diagrams and /or exploded views.

7. When servicing any unit, always use a separate isolation transformer for the chassis. Failure to use a separate isolation transformer may expose you to possible shock hazard, and may cause damage to servicing instruments.

8. Many electronic products use a polarized ac line cord (one wide pin on the plug). Defeating this safety feature may create a potential hazard to the servicer and the user. Extension cords which do not incorporate the polarizing feature should never be used.

9. After reassembly of the unit, always perform an ac leakage test or resistance test from the line cord to all exposed metal parts of the cabinet. Also, check all metal control shafts (with knobs removed), antenna terminals, handles, screws, etc., to be sure the unit may be safely operated without danger of electrical shock.

*** Broken line ____ _ ____ _ ____ _ ____**

LEAKAGE CURRENT COLD CHECK

1. Unplug the ac line cord and connect a jumper between the two prongs of the plug.

2. Turn on the power switch.

3. Measure the resistance value between the jumpered ac plug and all exposed cabinet parts of the receiver, such as screw heads, antennas, and control shafts. When the exposed metallic part has a return path to the chassis, the reading should be between 1 megohm and 5.2 megohms. When the exposed metal does not have a return path to the chassis, the reading must be infinity. Remove the jumper from the ac line cord.

LEAKAGE CURRENT HOT CHECK

1. Do not use an isolation transformer for this test. Plug the completely reassembled receiver directly into the ac outlet.

2. Connect a 1.5k, 10W resistor paralleled by a 0.15uF. capacitor between each exposed metallic cabinet part and a good earth ground such as a water pipe, as shown below.

3. Use an ac voltmeter with at least 5000 ohms/volt sensitivity to measure the potential across the resistor.

4. The potential at any point should not exceed 0.75 volts. A leakage current tester may be used to make this test; leakage current must not exceed 0.5mA. If a measurement is outside of the specified limits, there is a possibility of shock hazard. The receiver should be repaired and rechecked before returning it to the customer.

5. Repeat the above procedure with the ac plug reversed. (Note: An ac adapter is necessary when a polarized plug is used. Do not defeat the polarizing feature of the plug.)

OR

With the instrument completely reassembled, plug the ac line cord directly into a 120Vac outlet. (Do not use an isolation transformer during this test.) Use a leakage current tester or a metering system that complies with American National Standards Institute (ANSI) C101.1 Leakage Current for Appliances and Underwriters Laboratories (UL) 1410, (50.7). With the instrument ac switch first in the on position and then in the off position, measure from a known earth ground (metal water pipe, conduit, etc.) to all exposed metal parts of the instrument (antennas, handle brackets, metal cabinet, screw heads, metallic overlays, control shafts, etc.), especially any exposed metal parts that offer an electrical return path to the chassis. Any current measured must not exceed 0.5mA. Reverse the instrument power cord plug in the outlet and repeat the test. See the graphic below.

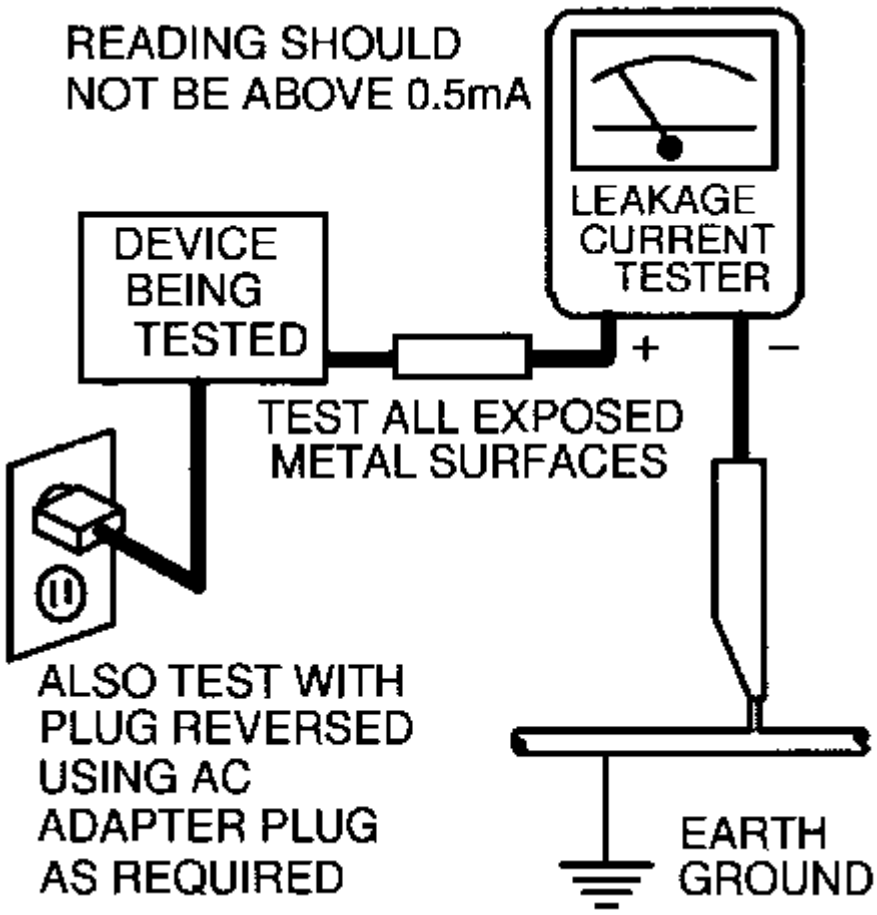
READING SHOULD
NOT BE ABOVE 0.5mA
LEAKAGE
CURRENT
TESTER
DEVICE
BEING
TESTED
+
–
TEST ALL EXPOSED
METAL SURFACES
ALSO TEST WITH
PLUG REVERSED
USING AC
ADAPTER PLUG
AS REQUIRED
EARTH
GROUND

TV SAFETY NOTES

SAFETY CHECKS

After the original service problem has been corrected, a complete safety check should be made. Be sure to check over the entire set, not just the areas where you have worked. Some previous servicer may have left an unsafe condition, which could be unknowingly passed on to your customer. Be sure to check all of the following:

Fire and Shock Hazard
Implosion
X-Radiation
Leakage Current Cold Check
Leakage Current Hot Check
Picture Tube Replacement
Parts Replacement

WARNING: Before removing the CRT anode cap, turn the unit OFF and short the HIGH VOLTAGE to the CRT DAG ground.

SERVICE NOTE: The CRT DAG is not at chassis ground.

IMPLOSION

1. All picture tubes used in current model receivers are equipped with an integral implosion system. Care should always be used, and safety glasses worn, whenever handling any picture tube. Avoid scratching or otherwise damaging the picture tube during installation.

2. Use only replacement tubes specified by the manufacturer.

X-RADIATION

1. Be sure procedures and instructions to all your service personnel cover the subject of X-radiation. Potential sources of X-rays in TV receivers are the picture tube and the high voltage circuits. The basic precaution which must be exercised is to keep the high voltage at the factory recommended level.

2. To avoid possible exposure to X-radiation and electrical shock, only the manufacturer's specified anode connectors must be used.

3. It is essential that the service technician has an accurate HV meter available at all times. The calibration of this meter should be checked periodically against a reference standard.

4. When the HV circuitry is operating properly there is no possibility of an X-radiation problem. High voltage should always be kept at the manufacturer's rated value - no higher - for optimum performance. Every time a color set is serviced, the brightness should be run up and down while monitoring the HV with a meter to be certain that the HV is regulated correctly and does not exceed the specified value. We suggest that you and your technicians review test procedures so that HV and HV regulation are always checked as a standard servicing procedure, and the reason for this prudent routine is clearly understood by everyone. It is important to use an accurate and reliable HV meter. It is recommended that the HV reading be recorded on each customer's invoice, which will demonstrate a proper concern for the customer's safety.

5. When troubleshooting and making test measurements in a receiver with a problem of excessive high voltage, reduce the line voltage by means of a Variac to bring the HV into acceptable limits while troubleshooting. Do not operate the chassis longer than necessary to locate the cause of the excessive HV.

6. New picture tubes are specifically designed to withstand higher operating voltages without creating undesirable X-radiation. It is strongly recommended that any shop test fixture which is to be used with the new higher voltage chassis be equipped with one of the new type tubes designed for this service. Addition of a permanently connected HV meter to the shop test fixture is advisable. The CRT types used in these new sets should never be replaced with any other types, as this may result in excessive X-radiation.

7. It is essential to use the specified picture tube to avoid a possible X-radiation problem.

8. Most TV receivers contain some type of emergency "Hold Down" circuit to prevent HV from rising to excessive levels in the presence of a failure mode. These various circuits should be understood by all technicians servicing them, especially since many hold down circuits are inoperative as long as the receiver performs normally.

PICTURE TUBE REPLACEMENT

The primary source of X-radiation in this television receiver is the picture tube. The picture tube utilized in this chassis is specially constructed to limit X-radiation emissions. For continued X-radiation protection, the replacement tube must be the same type as the original, including suffix letter, or a Philips approved type.

PARTS REPLACEMENT

Many electrical and mechanical parts in Philips television sets have special safety related characteristics. These characteristics are often not evident from visual inspection nor can the protection afforded by them necessarily be obtained by using replacement components rated for higher voltage, wattage, etc. The use of a substitute part which does not have the same safety characteristics as the Philips recommended replacement part shown in this service manual may create shock, fire, or other hazards.

PRODUCT SAFETY GUIDELINES FOR ALL PRODUCTS

CAUTION: Do not modify any circuit. Service work should be performed only after you are thoroughly familiar with all of the following safety checks. Risk of potential hazards and injury to the user increases if safety checks are not adhered to.

USE A SEPARATE ISOLATION TRANSFORMER FOR THIS UNIT WHEN SERVICING.

PREVENTION OF ELECTROSTATIC DISCHARGE (ESD)

Some semiconductor solid state devices can be damaged easily by static electricity. Such components commonly are called Electrostatically Sensitive (ES) Devices, Examples of typical ES devices are integrated circuits and some field-effect transistors and semiconductor "chip" components. The following techniques should be used to help reduce the incidence of component damage caused by electrostatic discharge (ESD).

1. Immediately before handling any semiconductor component or semiconductor-equipped assembly, drain off any ESD on your body by touching a known earth ground. Alternatively, obtain and wear a commercially available discharging ESD wrist strap, which should be removed for potential shock reasons prior to applying power to the unit under test.

2. After removing an electrical assembly equipped with ES devices, place the assembly on a conductive surface such as aluminum foil, to prevent electrostatic charge buildup or exposure of the assembly.

3. Use only a grounded-tip soldering iron to solder or unsolder ES devices.

4. Use only an anti-static solder removal device. Some solder removal devices not classified as "antistatic (ESD protected)" can generate an electrical charge sufficient to damage ES devices.

5. Do not use Freon propelled chemicals. These can generate electrical charges sufficient to damage ES devices.

6. Do not remove a replacement ES device from its protective package until immediately before you are ready to install it (most replacement ES devices are packaged with leads electrically shorted together by conductive foam, aluminum foil or comparable conductive material).

7. Immediately before removing the protective material from the leads of a replacement ES device, touch the protective material to the chassis or circuit assembly into which the device will be installed.

CAUTION: Be sure no power is applied to the chassis or circuit and observe all other safety precautions.

8. Minimize bodily motions when handling unpackaged replacement ES devices. (Otherwise harmless motion such as the brushing together of your clothes fabric or the lifting of your feet from a carpeted floor can generate static electricity (ESD) sufficient to damage an ES device.)

NOTE to CATV system Installer:
This reminder is provided to call the CATV system installer's attention to article 820-22 of the NEC that provides guidelines for proper grounding and, in particular, specifies that the cable ground shall be connected to the grounding system of the building, as close to the point of cable entry as practical.

PRACTICAL SERVICE PRECAUTIONS

IT MAKES SENSE TO AVOID EXPOSURE TO ELECTRICAL SHOCK. While some sources are expected to have a possible dangerous impact, others of quite high potential are of limited current and are sometimes held in less regard.

ALWAYS RESPECT VOLTAGES. While some may not be dangerous in themselves, they can cause unexpected reactions – reactions that are best avoided. Before reaching into the powered color TV set, it is best to test the high voltage insulation. It is easy to do, and is just a good service precaution.

BEFORE POWERING UP THE TV WITH THE BACK OFF (or on a test fixture), attach a clip lead to the CRT DAG ground and to a screwdriver blade that has a well insulated handle. After the TV is powered on and high voltage has developed, probe the anode lead with the blade, starting at the bottom of the High Voltage Transformer (flyback – IFT). Move the blade to within two inches of the connector of the CRT. **IF THERE IS AN ARC, YOU FOUND IT THE EASY WAY, WITHOUT GETTING A SHOCK!** If there is an arc to the screwdriver blade, replace the High Voltage Transformer or the lead, (if removable) whichever is causing the problem.

PICTURE TUBE REPLACEMENT PROCEDURE

Note: a. Two (2) people are required to handle this picture tube.
b. Safety Glasses must be worn during this procedure or whenever directly handling a picture tube.
c. Take care in each step not to damage the CRT or the cabinet.

1. Remove the Chassis and the CRT Socket Board Module from the cabinet.
2. A furniture pad or blanket should be positioned on the floor to support only the CRT Face. This pad or blanket should be high enough to keep the CRT Face approximately 12 to 14 inches off the floor.
3. Using two people, place the cabinet in a front down position with the CRT Face on the pad or blanket.
4. Place padded blocks under each corner of the cabinet to keep it from rocking.
5. Remove the four screws, at the corners of the CRT.
6. With two people lowering the cabinet to the floor, leave the CRT elevated by the pad or blanket.

Note: Take care not to grasp the neck of the CRT during this procedure, as it is extremely fragile.

7. Two (2) people may then lift the CRT from the cabinet.
8. Remove the degaussing coil from the defective CRT and mount on the replacement. Take care to maintain the exact shape and fit.

To install the new CRT, reverse steps 1 to 7.

F8 CHASSIS INTRODUCTION

The F8 chassis is a leader TV chassis produced by Philips Consumer Electronics Company for the 1999 model year. The F8 chassis is used in sets with 25“ and 27“ screen sizes. The F8 chassis is a global design and is oriented front to rear, or ”north to south“, as it has been called. The F8 chassis tuning system features 181 channels with on-screen display (OSD). The main tuning system uses a tuner, a microcomputer IC, and a memory IC mounted on the main chassis. The microcomputer communicates with the memory IC, the customer keyboard, remote receiver, U/V tuner, signal processor IC and the audio output IC via the I^2C bus. The memory IC retains the settings for favorite stations, customer-preferred settings, and service/factory data.

The F8 chassis uses a Very Large Scale (VLSI) Integrated Circuit for signal processing. This IC performs video IF, sound IF processing, AGC control, horizontal and vertical drive and synchronization, also luminance/chrominance processing. The on-screen graphics and closed caption decoding are done within the microprocessor, and then sent to the signal processor IC to be added to the main signal.

The F8 chassis utilizes a switch mode power supply for the main voltage source. The chassis has a hot chassis ground reference on the primary side of the power supply, and a cold ground reference on the secondary side of the power supply and the rest of the chassis. **ALWAYS USE AN ISOLATION TRANSFORMER WHEN SERVICING THIS CHASSIS FOR YOUR SAFETY.**

MODEL TO MODULE LIST

The model to Module list shown below identifies all electrical panels, modules and assemblies used in each model produced with the F8 chassis. This information was current at time of printing.

Information concerning cabinet parts and cabinet mounted parts (CRT/Yoke/etc.) is shown in the Cabinet Replacement Parts List.

Replacement part numbers for each module are provided in the Chassis Panel Replacement Parts List.

If you are attempting to service a model equipped with the F8 chassis, the necessary electrical information should be covered in this service manual, even if the corresponding model number is not listed.

Model Panel Number	Size	Description
25PT10-C121 00EMF803-A002	25”	PHILIPS – MAGNAVOX Main Chassis
25PT15-C121 00EMF806 A002	25”	PHILIPS – MAGNAVOX Main Chassis
25TR19-C121 00EMF803-A001	25“	PHILIPS – MAGNAVOX Main Chassis
25TS56-C121 00EMF806-A001	25“	PHILIPS – MAGNAVOX Main Chassis
26LL59-0121 00EMF820-A001, A002	25“	PHILIPS - LATIN AMERICA Main Chassis
26LL59-1121 00EMF821-A001	25“	PHILIPS - LATIN AMERICA Main Chassis
26LW59-2221 00EMF822-A001, A002	25“	PHILIPS - LATIN AMERICA Main Chassis
26LW59-3221 00EMF823-A001	25“	PHILIPS - LATIN AMERICA Main Chassis
27TS57-C101 00EMF832-A101, A102	27“	PHILIPS – MAGNAVOX Main Chassis
27TS57-C121 00EMF832-A102	27”	PHILIPS – MAGNAVOX Main Chassis
29LL69-0121 00EMF850-A001, A002	27“	PHILIPS - LATIN AMERICA Main Chassis
29LL69-1121 00EMF851-A001	27“	PHILIPS - LATIN AMERICA Main Chassis
CH1927-C101 00EMF893-A102 00A10680-B002 00A10777-A001	27”	PHILIPS – INDUSTRIAL TELEVISION - SMARTPORT Main Chassis Channel One Card Interface Module
HD2511-C121 00EMF801-A001	25“	PHILIPS – MAGNAVOX Main Chassis
HD2530-C121 00EMF804-A001	25“	PHILIPS – MAGNAVOX Main Chassis

HD2720-C101	27“	PHILIPS – MAGNAVOX
00EMF830-A101		Main Chassis
or		
00EMF831-A102		
LL9125-C121	25”	PHILIPS – INDUSTRIAL TELEVISION - SMARTPORT
00EMF899-A002		Main Chassis
MS2530C221	25"	PHILIPS – MAGNAVOX
313917808991		Main Chassis
MS2530C225	25"	PHILIPS – MAGNAVOX
313917808991		Main Chassis
MS2730C221	27"	PHILIPS – MAGNAVOX
313917868471		Main Chassis
OCC925-C121	25“	PHILIPS – MAGNAVOX
00EMF891 A001		Main Chassis
00A10777-A001		Interface Module
OCC927-C101	27“	PHILIPS – MAGNAVOX
00EMF893 A001, A102		Main Chassis
00A10777-A001		Interface Module
PA9027-C101	27”	PHILIPS – INDUSTRIAL TELEVISION - SMARTPORT
00EMF894 A102		Main Chassis
00AVJ250 A001		Pro video Card Assembly
00A10757 A001		L9 Audio Jack Panel
00A10778 A001		L9 ITV Front A-V
00A10791 A001		Comb Filter Panel
00A10808 A001		Pro Plus Interface
PA9032-C101	32”	PHILIPS – INDUSTRIAL TELEVISION - SMARTPORT
00EMF895 A102		Main Chassis
00AVJ250 A001		Pro video Card Assembly
00A10757 A001		L9 Audio Jack Panel
00A10791 A001		Comb Filter Panel
00A10808 A001		Pro Plus Interface
PC9225-C121	25“	PHILIPS – MAGNAVOX
00EMF891-A001, A102		Main Chassis
00A10777-A001		Interface Module
PC9227-C101	27“	PHILIPS INDUSTRIAL TELEVISION - CARD SET
00EMF893-A101, A102		Main Chassis
00A10777-A001		Interface Module
PL9125-C121	25“	PHILIPS – INDUSTRIAL TELEVISION - SMARTPORT
00EMF890-A001, A002		Main Chassis

PL9127-C101	27“	PHILIPS – INDUSTRIAL TELEVISION - SMARTPORT
00EMF892-A101, A102		Main Chassis
PPC927-C101	27”	PHILIPS – INDUSTRIAL TELEVISION - SMARTPORT
00EMF894 A102		Main Chassis
00A10791 A001		Comb Filter Panel
00A10757 A001		L9 Audio Jack Panel
00A10778 A001		L9 ITV Front A/V
00A10808 A001		Pro Plus Interface
PPC932-C101	32”	PHILIPS – INDUSTRIAL TELEVISION - SMARTPORT
00EMF895 A102		Main Chassis
00A10757 A001		L9 Audio Jack Panel
00A10791 A001		Comb Filter Panel
00A10808 A001		Pro Plus Interface
SC2932C121	32"	PHILIPS INDUSTRIAL TELEVISION - CARD SET
313501700770		Scan Card
00A10808 A001		Pro Plus Interface
00A10757 A001		Audio Jack Panel
00AVJ222 A001		Scan Converter Card
00A10654 A001		Scan Converter Jack Panel
00EMF895 A002		Main Chassis
00A10791 A001		Comb Filter Panel
SCN927-C101	27”	PHILIPS – INDUSTRIAL TELEVISION - SMARTPORT
00EMF894 A102		Main Chassis
00A10757 A001		L9 Audio Jack Panel
00A10777 A001		Interface Module
00A10778 A001		L9 ITV Front A/V
00A10791 A001		Comb Filter Panel
SCN932C101	32”	PHILIPS – INDUSTRIAL TELEVISION - SMARTPORT
00EMF895 A102		Main Chassis
00A10757 A001		L9 Audio Jack Panel
00A10777 A001		Interface Module
00A10791 A001		Comb Filter Panel
TC9225-C121	25“	PHILIPS – MAGNAVOX
00EMF891-A001, A002		Main Chassis
00A10777-A001		Interface Module
TL9125-C121	25“	PHILIPS – INDUSTRIAL TELEVISION - SMARTPORT
00EMF890-A001, A002		Main Chassis
TL9127-C101	27“	PHILIPS – INDUSTRIAL TELEVISION - SMARTPORT
00EMF892-A101, A102		Main Chassis
TR2503-C121	25“	PHILIPS – MAGNAVOX
00EMF801-A001		Main Chassis

TR2519-C121 00EMF803-A001	25“	PHILIPS – MAGNAVOX Main Chassis
TS2546-C121 00EMF804-A001, A002	25“	PHILIPS – MAGNAVOX Main Chassis
TS2556-C121 00EMF806-A001, A002	25“	PHILIPS – MAGNAVOX Main Chassis
TS2575-C121 00EMF807-A001, A002	25“	PHILIPS – MAGNAVOX Main Chassis
TS2746-C101 00EMF830-A101, A102	27“	PHILIPS – MAGNAVOX Main Chassis
TS2746-C121 00EMF830-A102	27“	PHILIPS – MAGNAVOX Main Chassis
TS2757-C101 00EMF832-A101	27“	PHILIPS – MAGNAVOX Main Chassis
TS2774-C101 00EMF833-A101, A102	27“	PHILIPS – MAGNAVOX Main Chassis
TS2774-C121 00EMF833-A102	27“	PHILIPS – MAGNAVOX Main Chassis
TS3256-C101 00EMF880-A102	32”	PHILIPS – MAGNAVOX Main Chassis
TS3256-C121 00EMF880-A002	32”	PHILIPS – MAGNAVOX Main Chassis
XR2503-C121 00EMF801-A001, A002	25“	PHILIPS – MAGNAVOX Main Chassis
XS2556-C121 00EMF806-A001, A002	25“	PHILIPS – MAGNAVOX Main Chassis
XS2757-C101 00EMF832-A101, A102	27“	PHILIPS – MAGNAVOX Main Chassis

MODEL TO REMOTE CROSS-REFERENCE

Remote Replacement	RC0702/04 3139 148 54201	RCO705/00 3139 228 80571 RC0705	RC282901/01 3139 228 81441 Philips	RC282901/04 3139 228 81451 PH/MX	RC2524/04 3139 228 81591	RC2528/04 3139 228 82051 RCU82D
Remote Drawing	**RC0702**	----------	**RCL9UB**	**RCL9UB**	**RCU82C**	----------
TR2503-C121	X					
25TR19-C121				X		
25TS56-C121				X		
26LL59-0121			X			
26LL59-1121			X			
26LW59-2221			X			
26LW59-3221			X			
27TS57-C101					X	
29LL69-0121			X			
29LL69-1121			X			
HD2511-C121	X					
HD2530-C121	X					
HD2720-C101						X
TL9125-C121		X				
TL9127-C101		X				
TR2519-C121				X		
TS2546-C121	X					
TS2556-C121				X		
TS2575-C121					X	
TS2746-C101	X					
TS2757-C101					X	
TS2774-C101					X	
XR2503-C121	X					
XS2556-C121				X		
XS2757-C101					X	
OCC925-C121	No Remote					
OCC927-C101	No Remote					
PC9225-C121	No Remote					
PC9227-C101	No Remote					
PL9125-C121	No Remote					
PL9127-C101	No Remote					
TC9225-C121	No Remote					

Quick-Use Guide for RC0702 Transmitter

TV Remote Buttons

RC0702 Remote Transmitter

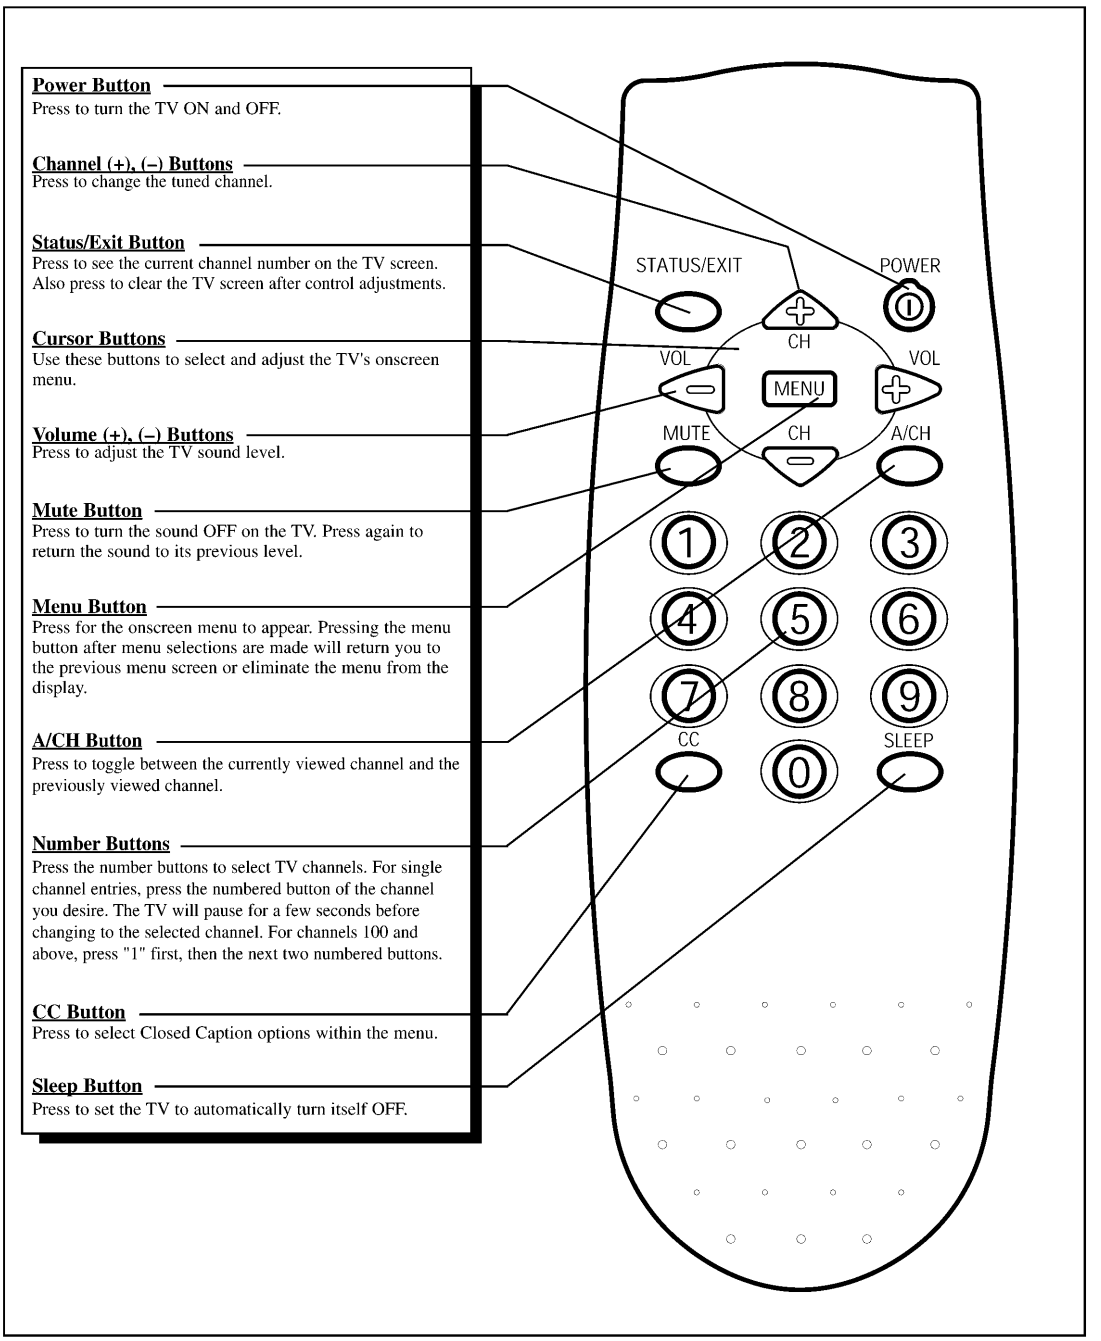
Power Button
Press to turn the TV ON and OFF.
Channel (+), (–) Buttons
Press to change the tuned channel.
Status/Exit Button
Press to see the current channel number on the TV screen. Also press to clear the TV screen after control adjustments.
Cursor Buttons
Use these buttons to select and adjust the TV's onscreen menu.
Volume (+), (–) Buttons
Press to adjust the TV sound level.
Mute Button
Press to turn the sound OFF on the TV. Press again to return the sound to its previous level.
Menu Button
Press for the onscreen menu to appear. Pressing the menu button after menu selections are made will return you to the previous menu screen or eliminate the menu from the display.
A/CH Button
Press to toggle between the currently viewed channel and the previously viewed channel.
Number Buttons
Press the number buttons to select TV channels. For single channel entries, press the numbered button of the channel you desire. The TV will pause for a few seconds before changing to the selected channel. For channels 100 and above, press "1" first, then the next two numbered buttons.
CC Button
Press to select Closed Caption options within the menu.
Sleep Button
Press to set the TV to automatically turn itself OFF.
STATUS/EXIT
POWER
CH
VOL
VOL
MENU
MUTE
CH
A/CH
1
2
3
4
5
6
7
8
9
CC
0
SLEEP

Quick-Use Guide for RCU82C Transmitter

TV Remote Buttons

RCU82C Remote Transmitter

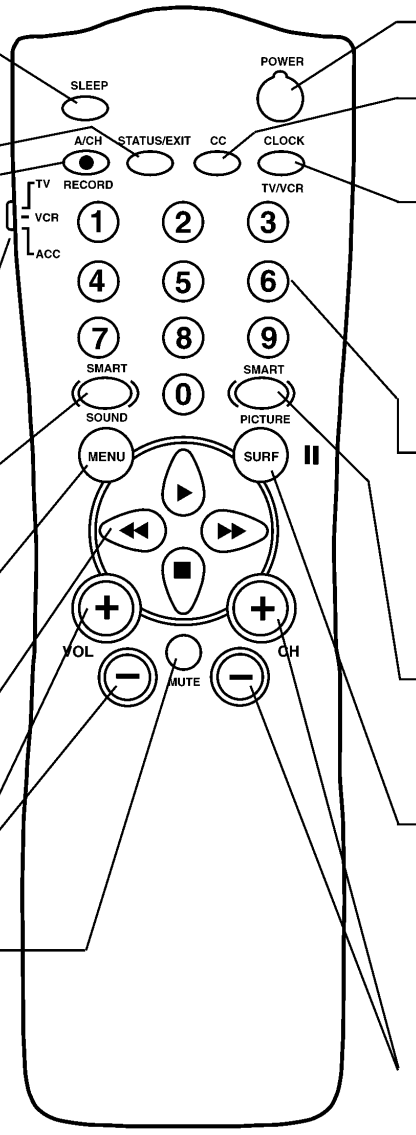

Sleep Button
Press to set the TV to automatically turn itself OFF. Also can be used as an Enter button when sending channel commands to remote controlled cable converters or VCRs.

Status/Exit Button
Press to see the current channel number on the TV screen. Also press to clear the TV screen after control adjustments.

A/CH-Record Button
Press to toggle between the currently viewed channel and the previously viewed channel. When in the VCR mode, press to start the recording of a video tape.

TV/VCR/ACC Mode Switch
Slide to TV position to control TV functions; VCR to control VCR functions; and ACC for Cable Converter, DBS, DVD, etc. functions.

SmartSound™ Button
Press to select from a list of SmartSound controls. (Factory preset sound control levels set for different types of listening, based on the type of programming being used.)

Menu Button
Press for the onscreen menu to appear. Pressing the menu button after menu selections are made will eliminate the menu from the display.

Cursor Buttons
Use these buttons to select and adjust the TV's onscreen menu. Also used with a VCR for PLAY, FAST FORWARD, REWIND, and STOP.

Volume (+), (–) Buttons
Press to adjust the TV sound level.

Mute Button
Press to turn the sound OFF on the TV. Press again to return the sound to its previous level.

Power Button
Press to turn the TV (or select VCR/ Cable Converter) ON and OFF.

CC Button
Press to select Closed Caption options within the menu. (Refer to the Owner's Manual for details.)

Clock-TV/VCR Button
When used in the TV mode, the CLOCK-TV/VCR button will access the Clock menu options.
Press while in the VCR mode (VCR indicator on the front of the unit will light) to view the playback of a tape. Press again to place in the TV position (VCR indicator light will go off) to view one program while recording another program.

Number Buttons
Press the number buttons to select TV channels. When selecting single digit channels, press the number of the desired channel. The TV will pause for a few seconds then tune to the selected channel. (Note: you can press "0", then the number also.) For channels "100" and above, first press "1" then the next two numbers of the desired channel.

SmartPicture™ Button
Press to select from a list of SmartPicture controls. (Factory preset picture control levels set for different types of viewing sources and programs.)

Surf Button
Press to select previously viewed channels. You can place up to 8 channels in memory. Then by pressing the SURF button you can quickly view the select channels. See the "Surf" section (in your other owner's manual) to see how to select a series of channels using the Surf button. When in the VCR mode, pressing this button will pause the playback of a video tape.

Channel (+), (–) Buttons
Press to change the tuned channel.

Quick-Use Guide for RCL9UB Transmitter

TV Remote Buttons

RCL9UB Remote Transmitter

Power Button
Press to turn the TV ON and OFF.

Sleep Button
Press to set the TV to automatically turn itself OFF.

CC Button
Press to select Closed Caption options within the menu.

Clock Button
Press for direct entry of the TIMER (Clock) features were you can set the TV's clock, the Start Time, and the Start Channel Controls.

Number Buttons
Press the number buttons to select TV channels. For single digit entries, press the number of the channel you desire. The TV will pause for a few seconds, then change to the selected channel. For channels 100 and above, press "1" then the next two numbers. (Example, Press "1", then "2", then "5" for channel 125.)

A/CH Button
Press to toggle between the currently viewed channel and the previously viewed channel.

Surf Button
Press to select previously viewed channels. You can place up to 8 channels in memory. Then by pressing the SURF button you can quickly view the select channels. See the "Surf" section to see how to select a series of channels using the Surf button.

Menu Button
Press for the onscreen menu to appear. Pressing the menu button after menu selections are made will eliminate the menu from the display.

Status/Exit Button
Press to see the current channel number on the TV screen. Also press to clear the TV screen after control adjustments.

Cursor Buttons
Use these button to select and adjust the TV's onscreen menu.

Volume (+), (–) Buttons
Press to adjust the TV sound level.

Mute Button
Press to turn the sound OFF on the TV. Press again to return the sound to its previous level.

Smart Sound Button
Press to select from a list of Smart Sound controls. (Factory preset sound control levels set for different types of listening sources and programs.)

Smart Picture Button
Press to select from a list of Smart Picture controls. (Factory preset picture control levels set for different types of viewing sources and programs.)

Channel (+), (–) Buttons
Press to change the tuned channel.

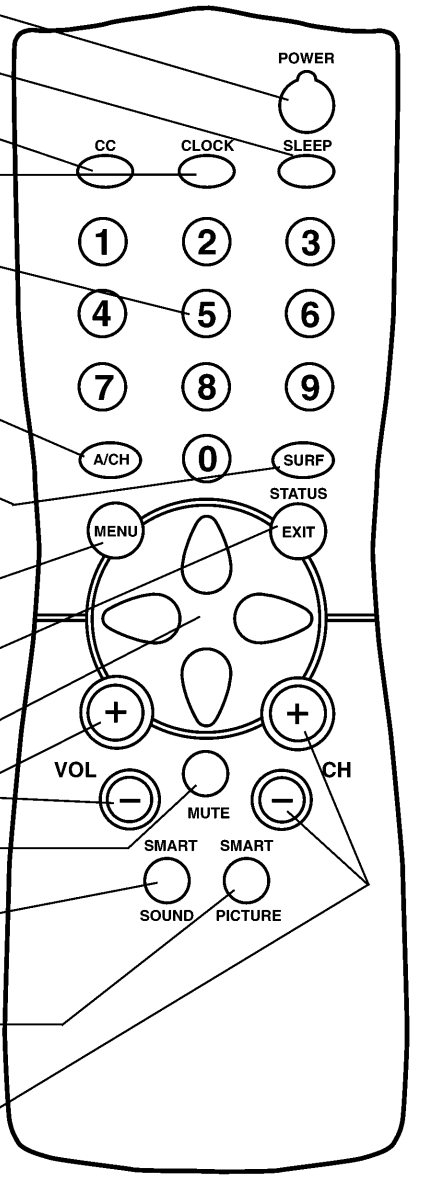

MODEL TO JACK PANEL CROSS-REFERENCE

JP9000 Jack Panel

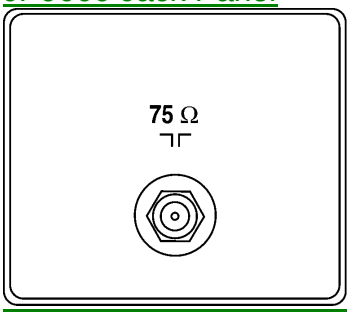

JP9103 Jack Panel

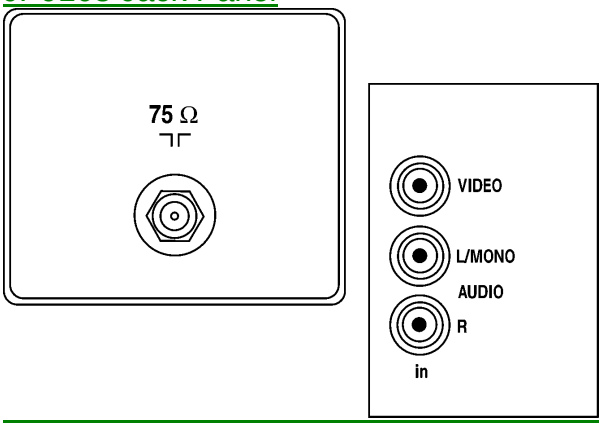

JP9106 Jack Panel

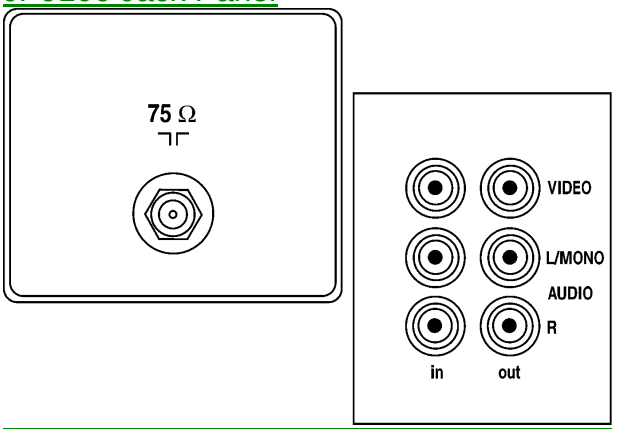

Models	Jack Panels		
	JP9000	JP9103	JP9106
TR2503-C121	X		
25TR19-C121	X		
25TS56-C121		X	
26LL59-0121		X	
26LL59-1121		X	
26LW59-2221			X
26LW59-3221			X
27TS57-C101		X	
29LL69-0121			X
29LL69-1121			X
HD2511-C121	X		
HD2530-C121	X		
HD2720-C101		X	
TR2503-C121	X		
TR2519-C121	X		
TS2546-C121	X		
TS2556-C121		X	
TS2575-C121			X
TS2746-C101		X	
TS2757-C101		X	
TS2774-C101			X
XR2503-C121	X		
XS2556-C121		X	
XS2757-C101		X	
TL9125-C121	No Jack Panel		
TL9127-C101	No Jack Panel		
OCC925-C121	No Jack Panel		
OCC927-C101	No Jack Panel		
PC9225-C121	No Jack Panel		
PC9227-C101	No Jack Panel		
PL9125-C121	No Jack Panel		
PL9127-C101	No Jack Panel		
TC9225-C121	No Jack Panel		

JACK PANEL DEFINITIONS

	JP9000	JP9103	JP9106	JP9202	JP9204	JP9403	JP9406	JP9410	JP9411	JP9519	JP9523
RF Input/ Antenna	75 ohm	75 ohm	75 ohm	75 ohm	75 ohm	75 ohm	75 ohm	75 ohm	75 ohm	2 x 75 ohm	2 x 75 ohm
Jacks Quantity	0	3	6	2	4	3	7	10	11	19	23
Video Input		1	1	1	1	1	1	2	2	3	3
Audio Input		L-R	L-R	1	L-R	1	L-R	2 (L-R)	2 (L-R)	"3(L-R) 2-Rear, 1-Side"	"3(L-R) 2-Rear, 1-Side"
SVHS Input									1	2 (1-Rear/ 1-Side)	2 (1-Rear/ 1-Side)
Head-phone					Front	Front		Front	Front	Side	Side
Surround Sound											4
Speaker Out											
Video Out			1				1	1	1	1	1
Audio Output			L-R (Fixed)				L-R (Fixed)	L-R (Fixed)	L-R (Fixed)	L-R*	L-R*
Smart Plug											
CH. 1 Demod.											
Theft Control											
Pillow Control											
Guide + Gold										1	1
YUV Comp. In										3	3

"* Only one set of audio output jacks, menu selectable, switchable between fixed and variable output"

GLOSSARY OF TERMS, ACRONYMS, AND ABBREVIATIONS

2CS	Two Channel Stereo
AFC	Automatic Frequency Control
AFT	Automatic Fine Tuning
AP	Asia Pacific
ATS	Automatic Tuning System
AV	External Audio/Video
AVL	Automatic Volume Level control
BTSC	Broadcast Television Standard Committee (TV Stereo)
CBA	Circuit Board Assembly (PCB)
CC	Closed Captioning
CSM	Customer Service Mode
CVBS	Color Video Blanking Sync

DNR	Dynamic Noise Reduction
EEPROM	Electrical Erasable Programmable Read-Only Memory
Error Buffer	Register that keeps track of errors that occur and stores error codes
Error Code	A numerical value used to indicate a failure in the television
EU	Europe
EXT	External audio/video input
FM	Frequency Modulation
I²C	Inter IC bus, 2-wire bi-directional (SCL/SDA)
ID	Identification
IDENT	Horizontal coincidence signal, transmitter identification
IF	Intermediate Frequency
IN	ITT sound IC with NICAM function
IT	ITT sound IC without NICAM function
LATAM	Latin America
LED	Light Emitting Diode
Local Keyboard	The buttons (usually volume up, volume down, channel up, and channel down) located on the front of the television set
MA	Mono All; single mono carrier receiver
NR	Noise Reduction
NTSC	National Television Systems Committee (video)
NVM	Non Volatile Memory
OB	Option Byte (Feature Byte)
OSD	On Screen Display
PCB	Printed Circuit Board (CBA)
PIP	Picture In Picture
PLL	Phase Locked Loop
PP	Personal Preference
RAM	Random Access Memory
RC	Remote Control
RC-5	Remote Control system 5
RGB	Red Green Blue
ROM	Read Only Memory
SAM	Service Alignment Mode
SAP	Second Audio Program
SCL	Serial Clock
SDA	Serial Data
SDM	Service Default Mode
SVHS	Super Video Home System
Top Level Menu	This refers to the main menu (as opposed to sub menus) in SAM
V-Chip	Violence-Chip
VCR	Video Cassette Recorder
Y/C	Luminance/Chrominance (video)

OPTION BYTES AND FEATURE LISTING - USA AND CANADIAN MODELS

CHASSIS NUMBER	313917808991	313917868471	EMF801	EMF803
BRAND	PHILIPS-MAGNAVOX	PHILIPS-MAGNAVOX	PHILIPS-MAGNAVOX	PHILIPS-MAGNAVOX
MENU LANGUAGE	ENG / SP / FR	ENG / SP / FR	ENG / SP / FR	ENG / SP / FR
REMOTE CONTROL	RC0702/04	RC0702/04	RC0702/04	RCL9UB/04
REMOTE CONTROL TYPE	21 PB LOW	21 PB LOW	21 PB LOW	29PB BBY WST
AUDIO	2X1W STEREO	2X1W STEREO	1W MONO	1W MONO
SPEAKERS	2" X 5" OVAL	2" X 5" OVAL	2" X 5" OVAL	2" X 5" OVAL
SCREEN SIZE	25"	27"	25"	25"
CRT TYPE	1R	FSQ	1R	1R
SIGNAL STANDARD	NTSC	NTSC	NTSC	NTSC
SUPPLY VOLTAGE	110 V	110 V	110 V	110 V
TUNER	FULL CABLE	FULL CABLE	FULL CABLE	FULL CABLE
ALTERNATE CHANNEL	YES	YES	YES	YES
V-CHIP (SMARTLOCK)	YES	YES	YES	YES
SURF				YES
SLEEP TIMER	YES	YES	YES	YES
CRYSTAL CLOCK (ON/OFF)				YES
COLOR TEMP				YES
SMART PICTURE				YES
BLACK STRETCH				YES
SMART SOUND PLUS				YES
VIDEO NOISE REDUCTION	YES	YES	YES	YES
BASS&TREBLE BOOST	YES			
BASS/TREBLE/BAL CONTROLS				
INCREDIBLE SURROUND				
JACK PANEL	JP9000	JP9103	JP9000	JP9000
REAR CONNECTORS		STEREO A/V IN		
COMPONENT VIDEO IN				
SET CONTROLS	DV6	DV6	DV6	DV6
CONTROL LOCATION	FRONT	FRONT	FRONT	FRONT
CLOSED CAPT	CC-1&2:W/MUTE	CC-1&2:W/MUTE	CC-1&2:W/MUTE	CC-1&2:W/MUTE
DECIMAL OPTION BYTES				
OPTION BYTE 1	160	160	128	160
OPTION BYTE 2	124	124	124	255
OPTION BYTE 3	0	0	0	130
OPTION BYTE 4	165	165	132	133
OPTION BYTE 5	34	34	3	59
OPTION BYTE 6	34	2	0	4
OPTION BYTE 7	216	216	192	192

OPTION BYTES AND FEATURE LISTING - USA AND CANADIAN MODELS

CHASSIS NUMBER	EMF804	EMF805	EMF806	EMF807
BRAND	PHILIPS-MAGNAVOX	PHILIPS-MAGNAVOX	PHILIPS-MAGNAVOX	PHILIPS-MAGNAVOX
MENU LANGUAGE	ENG / SP / FR	ENG / SP / FR	ENG / SP / FR	ENG / SP / FR
REMOTE CONTROL	RC0702/04	RC0702/04	RCL9UB/04	RCU82C
REMOTE CONTROL TYPE	21 PB LOW	21 PB LOW	29PB BBY WST	UNI WST-1
AUDIO	2X1W STEREO	2X1W STEREO	2X1W STEREO	2X3W DBX ST
SPEAKERS	2" X 5" OVAL	2" X 5" OVAL	2" X 5" OVAL	2" X 5" OVAL
SCREEN SIZE	25"	25"	25"	25"
CRT TYPE	1R	1R	1R	1R
SIGNAL STANDARD	NTSC	NTSC	NTSC	NTSC
SUPPLY VOLTAGE	110 V	110 V	110 V	110 V
TUNER	FULL CABLE	FULL CABLE	FULL CABLE	FULL CABLE
ALTERNATE CHANNEL	YES	YES	YES	YES
V-CHIP (SMARTLOCK)	YES	YES	YES	YES
SURF			YES	YES
SLEEP TIMER	YES	YES	YES	YES
CRYSTAL CLOCK (ON/OFF)			YES	YES
COLOR TEMP			YES	YES
SMART PICTURE			YES	YES
BLACK STRETCH			YES	YES
SMART SOUND PLUS			YES	YES
VIDEO NOISE REDUCTION	YES	YES	YES	YES
BASS&TREBLE BOOST	YES	YES	YES	
BASS/TREBLE/BAL CONTROLS				YES
INCREDIBLE SURROUND				YES
JACK PANEL	JP9000	JP9000	JP9103	JP9106
REAR CONNECTORS			STEREO A/V IN	STEREO A/V/I/O
COMPONENT VIDEO IN				
SET CONTROLS	DV6	DV6	DV6	DV6
CONTROL LOCATION	FRONT	FRONT	FRONT	FRONT
CLOSED CAPT	CC-1&2:W/MUTE	CC-1&2:W/MUTE	CC-1&2:W/MUTE	CC-1&2:W/MUTE
DECIMAL OPTION BYTES				
OPTION BYTE 1	160	160	160	160
OPTION BYTE 2	124	124	255	255
OPTION BYTE 3	0	0	130	130
OPTION BYTE 4	133	133	165	165
OPTION BYTE 5	35	35	59	59
OPTION BYTE 6	34	2	134	207
OPTION BYTE 7	216	216	216	208

OPTION BYTES AND FEATURE LISTING - USA AND CANADIAN MODELS

CHASSIS NUMBER	EMF830	EMF832	EMF833
BRAND	PHILIPS-MAGNAVOX	PHILIPS-MAGNAVOX	PHILIPS-MAGNAVOX
MENU LANGUAGE	ENG / SP / FR	ENG / SP / FR	ENG / SP / FR
REMOTE CONTROL	RC0702/04	RCU82C	RCU82C
REMOTE CONTROL TYPE	21 PB LOW	UNI WST-1	UNI WST-1
AUDIO	2X1W STEREO	2X1W STEREO	2X3W DBX ST
SPEAKERS	2" X 5" OVAL	2" X 5" OVAL	2" X 5" OVAL
SCREEN SIZE	27"	27"	27"
CRT TYPE	FSQ	FSQ	FSQ
SIGNAL STANDARD	NTSC	NTSC	NTSC
SUPPLY VOLTAGE	110 V	110 V	110 V
TUNER	FULL CABLE	FULL CABLE	FULL CABLE
ALTERNATE CHANNEL	YES	YES	YES
V-CHIP (SMARTLOCK)	YES	YES	YES
SURF		YES	YES
SLEEP TIMER	YES	YES	YES
CRYSTAL CLOCK (ON/OFF)		YES	YES
COLOR TEMP		YES	YES
SMART PICTURE		YES	YES
BLACK STRETCH		YES	YES
SMART SOUND PLUS		YES	YES
VIDEO NOISE REDUCTION	YES	YES	YES
BASS&TREBLE BOOST		YES	
BASS/TREBLE/BAL CONTROLS			YES
INCREDIBLE SURROUND			YES
JACK PANEL	JP9103	JP9103	JP9106
REAR CONNECTORS	STEREO A/V IN	STEREO A/V/IN	STEREO A/V/I/O
COMPONENT VIDEO IN			
SET CONTROLS	DV6	DV6	DV6
CONTROL LOCATION	FRONT	FRONT	FRONT
CLOSED CAPT	CC-1&2:W/MUTE	CC-1&2:W/MUTE	CC-1&2:W/MUTE
DECIMAL OPTION BYTES	**TS2746/HD2720**		
OPTION BYTE 1	160/160	160	160
OPTION BYTE 2	124/124	255	255
OPTION BYTE 3	0/130	130	130
OPTION BYTE 4	165/165	165	165
OPTION BYTE 5	35/35	59	59
OPTION BYTE 6	2/34	134	207
OPTION BYTE 7	216/216	216	208

OPTION BYTES AND FEATURE LISTING - LATIN AMERICAN MODELS

CHASSIS NUMBER	EMF820	EMF821	EMF822	EMF823
BRAND	PHILIPS	PHILIPS	PHILIPS	PHILIPS
MENU LANGUAGE	ENG / SP / FR	ENG / SP / FR	ENG / SP / FR	ENG / SP / FR
REMOTE CONTROL	RCL9UB/01	RCL9UB/01	RCL9UB/01	RCL9UB/01
REMOTE CONTROL TYPE	29PB BBY WST	29PB BBY WST	29PB BBY WST	29PB BBY WST
AUDIO	2X3W BISONIC	2X3W BISONIC	2X3W STEREO DBX	2X3W STEREO DBX
SPEAKERS	2" X 5" OVAL	2" X 5" OVAL	2" X 5" OVAL	2" X 5" OVAL
SCREEN SIZE	25"	25"	25"	25"
CRT TYPE	1R	1R	1R	1R
SIGNAL STANDARD	NTSC	NTSC	NTSC	NTSC
SUPPLY VOLTAGE	110 V	110-220 AMV	110 V	110-220 AMV
TUNER	FULL CABLE	FULL CABLE	FULL CABLE	FULL CABLE
ALTERNATE CHANNEL	YES	YES	YES	YES
SURF	YES	YES	YES	YES
SLEEP TIMER	YES	YES	YES	YES
CRYSTAL CLOCK (ON/OFF)	YES	YES	YES	YES
COLOR TEMP	YES	YES	YES	YES
SMART PICTURE	YES	YES	YES	YES
BLACK STRETCH	YES	YES	YES	YES
AVL (SMART SOUND)	AVL ON/OFF	AVL ON/OFF	AVL ON/OFF	AVL ON/OFF
GLOBAL SMART SOUND	YES	YES	YES	YES
BASS/TREBLE/BAL CONTROLS			YES	YES
SPEAKER ON/OFF SW			MENU	MENU
INCREDIBLE SURROUND			YES	YES
JACK PANEL	JP9103	JP9103	JP9106	JP9106
REAR CONNECTORS	STEREO A/V IN	STEREO A/V IN	STEREO A/V/I/O	STEREO A/V/I/O
SET CONTROLS	DV6	DV6	DV6	DV6
CLOSED CAPT	CC-1&2:W/MUTE	CC-1&2:W/MUTE	CC-1&2:W/MUTE	CC-1&2:W/MUTE
MAGNETIC SETTING	+300	-140	+300	-140
DECIMAL OPTION BYTES				
OPTION BYTE 1	164	164	164	164
OPTION BYTE 2	227	227	227	227
OPTION BYTE 3	130	130	130	130
OPTION BYTE 4	229	229	229	229
OPTION BYTE 5	59	59	59	59
OPTION BYTE 6	4	4	206	206
OPTION BYTE 7	200	200	208	208
HEXADECIMAL OPTION BYTES				
OPTION BYTE 1	A4	A4	A4	A4
OPTION BYTE 2	E3	E3	E3	E3

OPTION BYTES AND FEATURE LISTING - LATIN AMERICAN MODELS

CHASSIS NUMBER	EMF850	EMF851
BRAND	PHILIPS	PHILIPS
MENU LANGUAGE	ENG / SP / FR	ENG / SP / FR
REMOTE CONTROL	RCL9UB/01	RCL9UB/01
REMOTE CONTROL TYPE	29PB BBY WST	29PB BBY WST
AUDIO	2X3W STEREO DBX	2X3W STEREO DBX
SPEAKERS	2" X 5" OVAL	2" X 5" OVAL
SCREEN SIZE	27"	27"
CRT TYPE	FSQ	FSQ
SIGNAL STANDARD	NTSC	NTSC
SUPPLY VOLTAGE	110 V	110-220 AMV
TUNER	FULL CABLE	FULL CABLE
ALTERNATE CHANNEL	YES	YES
SURF	YES	YES
SLEEP TIMER	YES	YES
CRYSTAL CLOCK (ON/OFF)	YES	YES
COLOR TEMP	YES	YES
SMART PICTURE	YES	YES
BLACK STRETCH	YES	YES
AVL (SMART SOUND)	AVL ON/OFF	AVL ON/OFF
GLOBAL SMART SOUND	YES	YES
BASS/TREBLE/BAL CONTROLS	YES	YES
SPEAKER ON/OFF SW	MENU	MENU
INCREDIBLE SURROUND	YES	YES
JACK PANEL	JP9106	JP9106
REAR CONNECTORS	STEREO A/V/I/O	STEREO A/V/I/O
SET CONTROLS	DV6	DV6
CLOSED CAPT	CC-1&2:W/MUTE	CC-1&2:W/MUTE
MAGNETIC SETTING	+300	-140
DECIMAL OPTION BYTES		
OPTION BYTE 1	164	164
OPTION BYTE 2	227	227
OPTION BYTE 3	130	130
OPTION BYTE 4	229	229
OPTION BYTE 5	59	59
OPTION BYTE 6	206	206
OPTION BYTE 7	208	208
HEXADECIMAL OPTION BYTES		
OPTION BYTE 1	A4	A4
OPTION BYTE 2	E3	E3

F8 ITV Chassis Feature Listing																		
Chassis	EMF 890	EMF 890	EMF 891	EMF 891	EMF 892	EMF 892	EMF 893	EMF 893	EMF 894	EMF894	EMF 894	EMF 895	EMF 895	EMF 895	EMF 896	EMF 896	EMF 896	EMF 898
Model Number	PL9125	TL9125	PC9225	TC9225	PL9127	TL9127	CH1927	PC9227	PA9027	PPC927	SC3927	PA9032	PPC932	SC3932	PA9036	PPC936	SC3936	EP9125
Stereo			X	X	X	X	X	X										
Mono	X	X																X
DBX (STEREO)									X	X	X	X	X	X	X	X	X	
sound type/card	M	M	SC	SC	S	S	SC	SC	DC	DC	DC	DC	DC	DC	DC	DC	DC	M
Card set			X	X			X	X	X	X	X	X	X	X	X	X	X	
Non-Card Set, AUX inputs OFF	X	X			X	X												X
BASIC (No SP)																		X
SYSTEM (w/ SP)			X	X			X	X						X			X	
HealthCare																		
Lodging	X	X			X	X												
ProPlus									X	X	X	X	X	X	X	X	X	
Cable	ON	ON	ON	ON	ON	ON	ON	ON	ON	ON	ON	ON	ON	ON	ON	ON	ON	ON
Power On Channel	std	std	std	std	std	std	std	std	std	std	std	std	std	std	std	std	std	std
AVL	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
Last Channel	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5
Initial Volume setting	15 of 63	15 of 63	15 of 63	15 of 63	15 of 63	15 of 63	15 of 63	15 of 63	15 of 63	15 of 63	15 of 63	15 of 63	15 of 63	15 of 63	15 of 63	15 of 63	15 of 63	15 of 63
Color Temperature	Nat	Nat	Nat	Nat	Nat	Nat	Nat	Nat	Nat	Nat	Nat	Nat	Nat	Nat	Nat	Nat	Nat	Nat
Brightness	33	33	33	33	33	33	33	33	33	33	33	33	33	33	33	33	33	33
Contrast Plus	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
Noise Reduction	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
Color	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22
Contrast	48	48	48	48	48	48	48	48	48	48	48	48	48	48	48	48	48	48
Sharpness	50	50	50	50	50	50	50	50	50	50	50	50	50	50	50	50	50	50
Tint	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2
E/W correction (DC sets) OB5	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	ON	ON	ON	ON	ON	ON	ON	ON	OFF
ITV Type (OB10)	LD	LD	SY	SY	LD	LD	SY	SY	PP	PP	PP	PP	PP	PP	PP	PP	PP	LD
A/V inputs (OB4)	OFF	OFF	ON	ON	OFF	OFF	ON	ON	ON	ON	ON	ON	ON	ON	ON	ON	ON	OFF
Volume Bar (NVM187)	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
Power On	STD	STD	STD	STD	STD	STD	STD	STD	STD	STD	STD	STD	STD	STD	STD	STD	STD	STD
SWITCH ON CHANNEL	STD	STD	STD	STD	STD	STD	STD	STD	STD	STD	STD	STD	STD	STD	STD	STD	STD	STD
Keyboard lock	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
Channel Display	ALL	ALL	ALL	ALL	ALL	ALL	ALL	ALL	ALL	ALL	ALL	ALL	ALL	ALL	ALL	ALL	ALL	ALL
Reminder	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
Three digit entry	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
Security (NVM188)	HIGH	HIGH	HIGH	HIGH	HIGH	HIGH	HIGH	HIGH	std	std	std	std	std	std	std	std	std	HIGH
A/V Mute	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
Save CC	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
V-Chip Enable	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
Atl Channel operation	ALT	ALT	ALT	ALT	ALT	ALT	ALT	ALT	ALT	ALT	ALT	ALT	ALT	ALT	ALT	ALT	ALT	ALT
COMMERCIAL /CONSUMER (NVM189)	CM	CM	CM	CM	CM	CM	CM	CM	con	CM	CM	con	CM	CM	con	CM	CM	CM
Channel Guide	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
Min volume	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Max volume	63	63	63	63	63	63	63	63	63	63	63	63	63	63	63	63	63	63
Switch On Volume	STD	STD	STD	STD	STD	STD	STD	STD	STD	STD	STD	STD	STD	STD	STD	STD	STD	STD
Welcome Message	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
A/V 2 (FRONT PANEL) (OB4)	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	on	OFF	OFF	OFF	on	OFF	OFF	on	OFF	OFF
GROUPs (OB8)	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
Software v2.2	Yes	Yes			Yes	Yes			Yes	Yes	Yes							Yes
Software v2.3			Yes	Yes			Yes	Yes				Yes	Yes	Yes	Yes	Yes	Yes	
Option Bytes																		
OB1	192	192	192	192	192	192	192	192	192	192	192	192	192	192	192	192	192	192
OB2	48	48	48	48	48	48	48	48	176	176	176	176	176	176	176	176	176	48
OB3	13	13	13	13	13	13	13	13	13	13	13	13	13	13	13	13	13	13
OB4	202	202	234	234	202	202	234	234	250	250	250	250	250	250	250	250	250	202
OB5	43	43	43	43	43	43	43	43	43	43	43	47	47	47	47	47	47	43
OB6	4	4	4	4	4	4	4	4	207	207	207	207	207	207	207	207	207	4
OB7	192	192	200	200	200	200	200	200	200	200	200	200	200	200	200	200	200	192
OB8	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
OB9	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
OB10	0	0	0	0	0	0	0	0	68	68	68	68	68	68	68	68	68	0

CH - Channel One
HC – HealthCare
PA - ProVideo w/card
PC - Philips Card
PL - Philips Lodging
PPC - ProPlus Card
SCN - Scan Card
TC - TeleRent Card
TL - TeleRent Lodgin

How to Adjust the TV Picture

To adjust your TV picture controls, select a channel and follow the steps shown below:

BEGIN

1. **Press the MENU button** on the remote to display the onscreen menu.
2. **Press the CURSOR UP ▶ or DOWN ■ buttons** until the word **BRIGHTNESS** is highlighted. (Or, COLOR, PICTURE, SHARPNESS, TINT, COL. TEMP depending on the adjustment you want to make.)
3. **Press the CURSOR RIGHT ▶▶ or the CURSOR LEFT ◀◀ buttons** to increase or decrease the brightness of the picture.

STOP

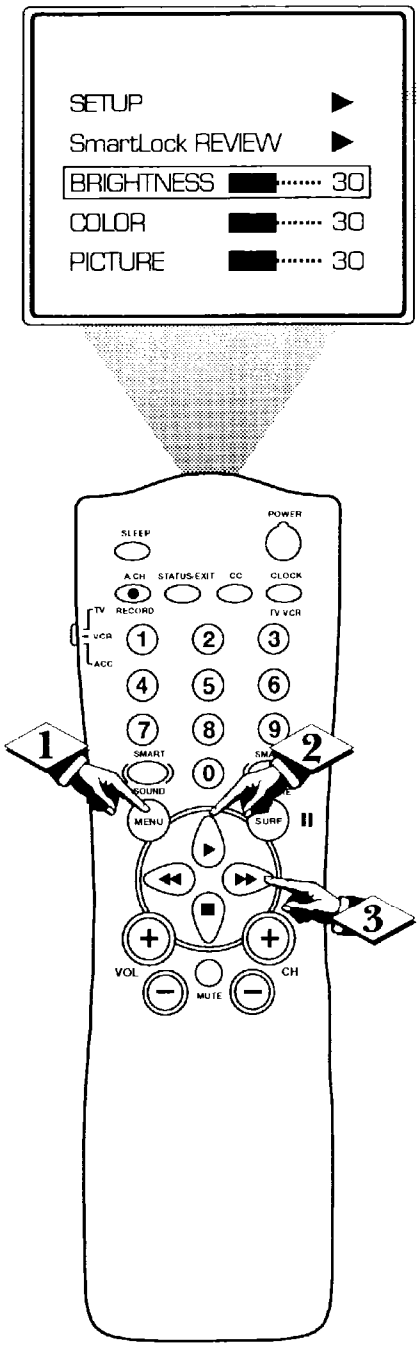

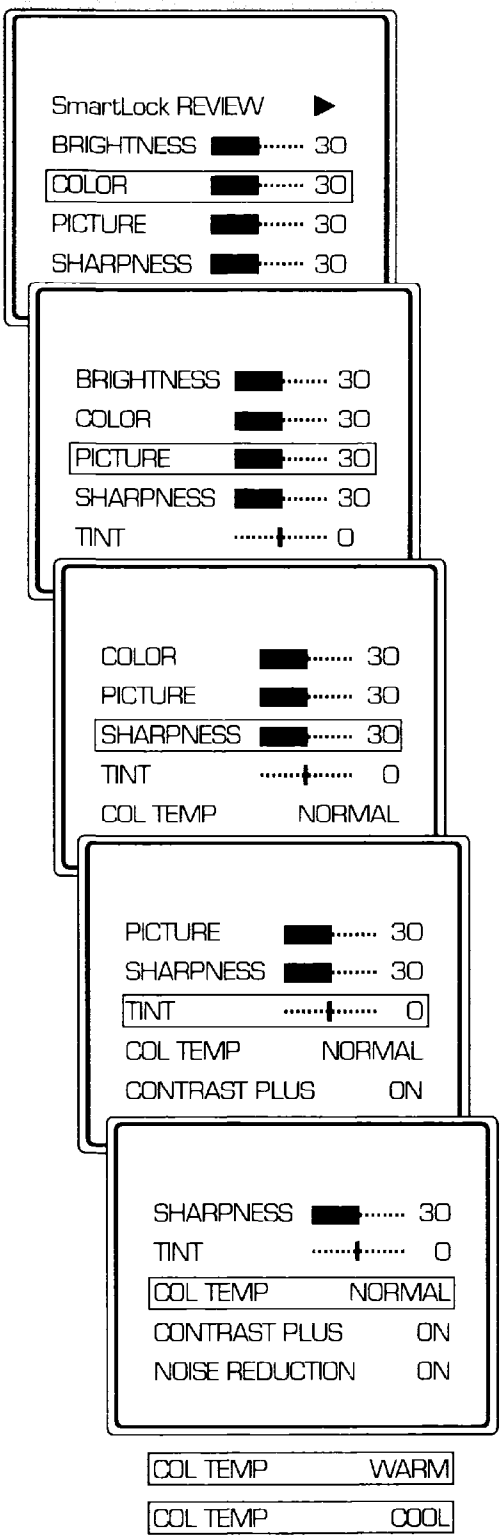

Smart Help

Remember: The onscreen menu will time out and disappear from the screen when you finish, or you can press the STATUS/EXIT button to clear the menu from the screen.

BRIGHTNESS **Press the ▶▶ or ◀◀** buttons until darkest parts of the picture are as bright as you prefer.

COLOR **Press the ▶▶ or ◀◀** buttons to add or eliminate color.

PICTURE **Press the ▶▶ or ◀◀** buttons until lightest parts of the picture show good detail.

SHARPNESS **Press the ▶▶ or ◀◀** buttons to improve detail in the picture.

TINT **Press the ▶▶ or ◀◀** buttons to obtain natural skin tones.

COLOR TEMP **Press the ▶▶ or ◀◀** buttons to select NORMAL, COOL, or WARM picture preferences. (NORMAL will keep the whites, white; COOL will make the whites, bluish; and WARM will make the whites, reddish.)

ACTIVATING THE CONTRAST PLUS (BLACK STRETCH) CONTROL

The Contrast Plus (Black Stretch) feature helps to "sharpen" the picture quality. The black portions of the picture become richer in darkness and the whites become brighter.

BEGIN

1. **Press the MENU button** on the remote to display the onscreen menu.
2. **Press the CURSOR UP ▶ or CURSOR DOWN ■ buttons** until the words **CONTRAST PLUS** are highlighted.
3. **Press the CURSOR RIGHT ▶▶ or CURSOR LEFT ◀◀ buttons** to activate or deactivate the **Contrast Plus** (Black Stretch) feature.

STOP

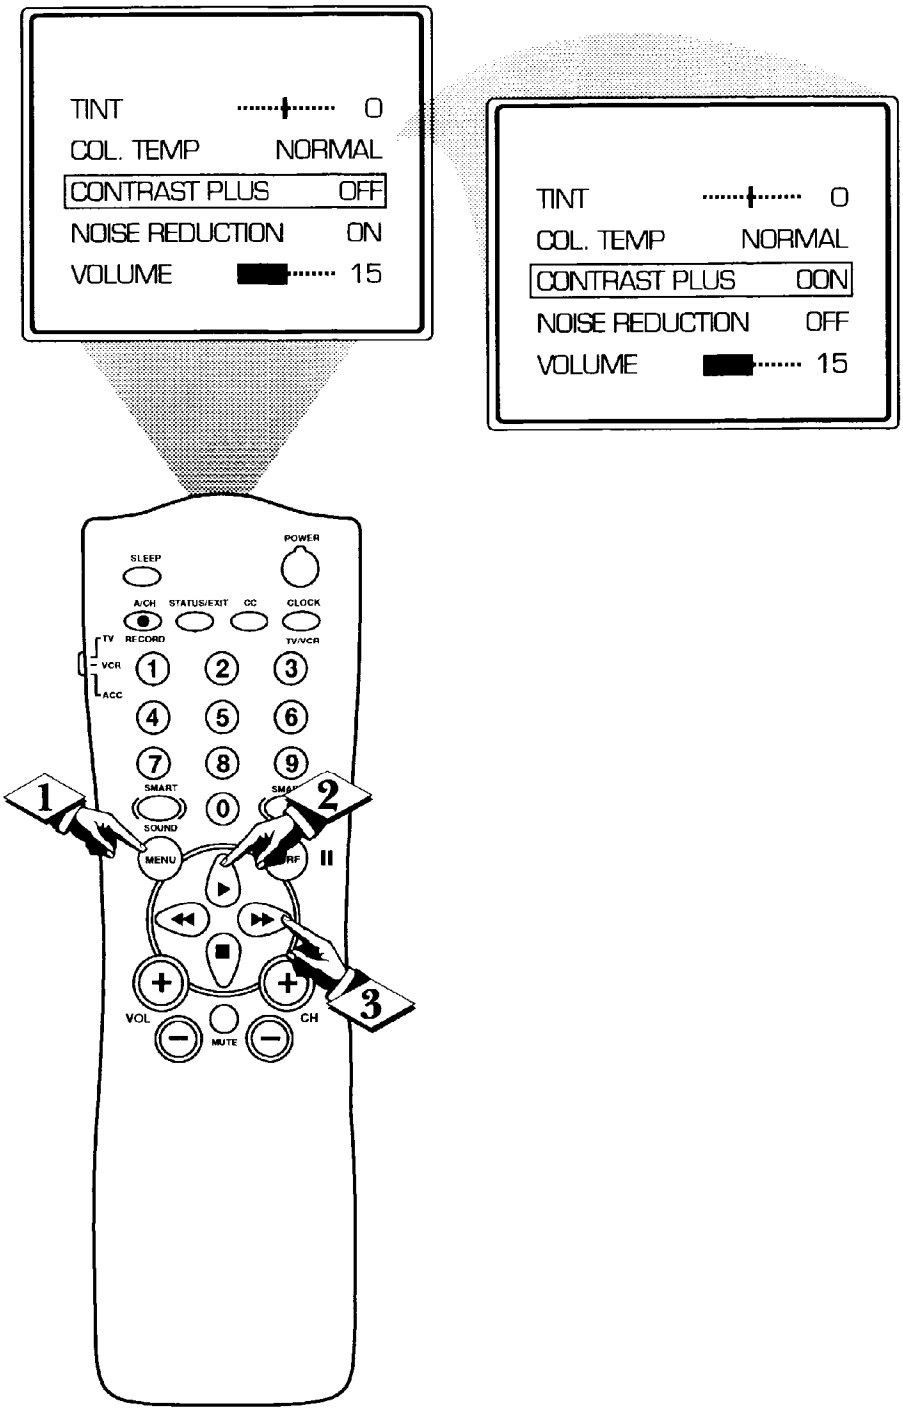

SMART HELP

Remember: The onscreen menu will disappear in a few seconds after you have finished your adjustment.

ACTIVATING THE NOISE REDUCTION (PICTURE) CONTROL

For reasons such as poor cable reception, the picture can sometime appear slightly "speckled" (signal noise shown in the picture). The NOISE REDUCTION control can help eliminate this type of interference and improve the quality of the picture.

BEGIN

1. **Press the MENU button** on the remote to display the onscreen menu.
2. **Press the CURSOR UP ▶ or CURSOR DOWN ■ button** until the words **NOISE REDUCTION** are highlighted.
3. **Press the CURSOR RIGHT ▶▶ or CURSOR LEFT ◀◀ buttons** to activate or deactivate the Noise Reduction Feature.

STOP

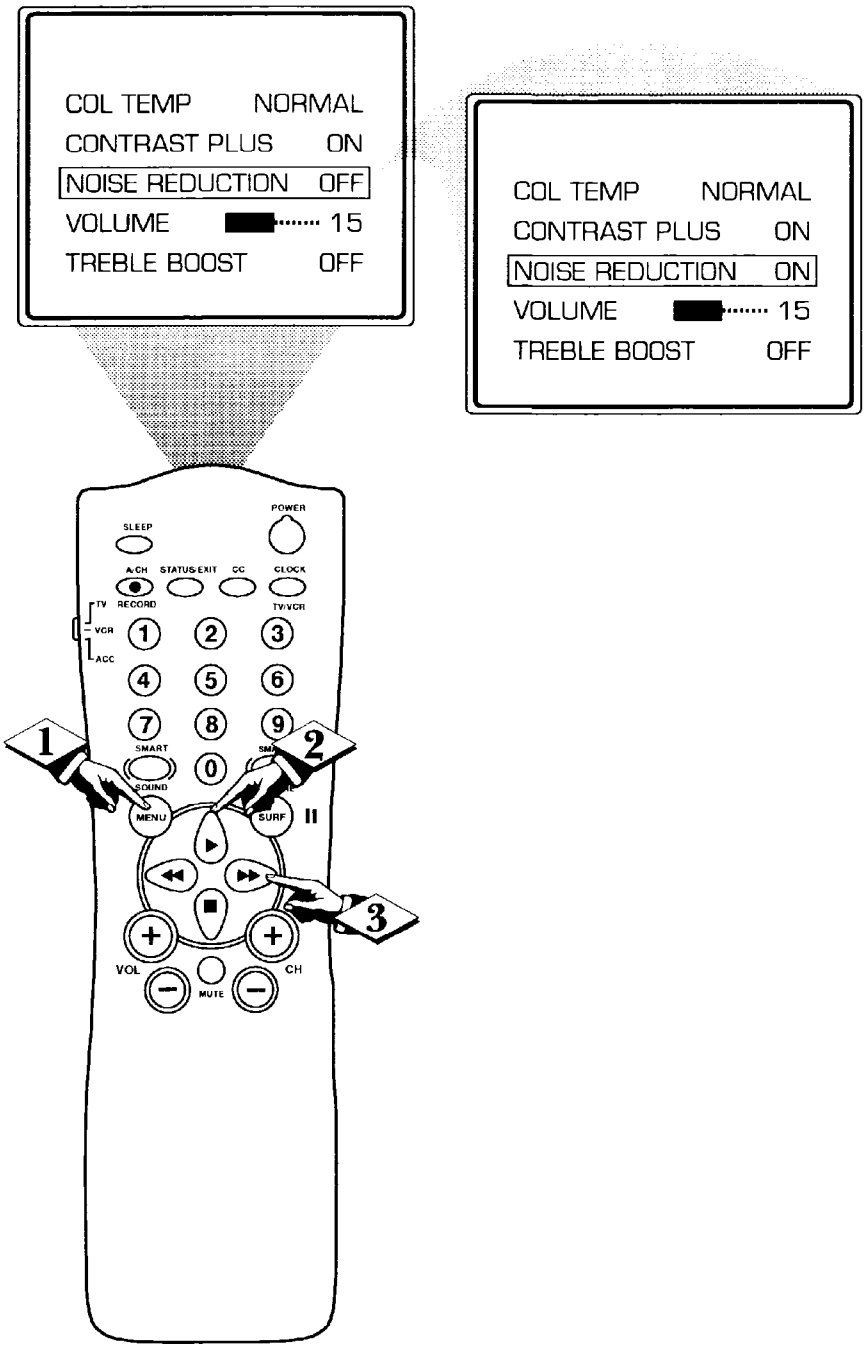

SMART HELP

Remember: The onscreen menu will disappear in a few seconds after you have finished your adjustment.

"Noise" Reduction is a video adjustmen feature that affects the picture quality of the TV not the sound.

SETTING THE TV'S CLOCK

Your television comes with an onscreen clock. During normal operation the clock appears on the screen when the STATUS/EXIT button is pressed or if the Timer DISPLAY control is turned ON.

BEGIN

1. **Press the CLOCK button** on the remote to display the onscreen CLOCK menu.
2. **Press the CURSOR UP ▶ OR CURSOR DOWN ■ buttons** until the words **SET CLOCK** are highlighted.
3. **Enter the current time using the NUMBERED buttons.** If the first number is a single digit first enter a zero then the digit (i.e., press "0", then press "8").
4. **Press the CURSOR RIGHT ▶▶ or CURSOR LEFT ◀◀ buttons** to set either **AM** or **PM** time.

Note: The **CLOCK** onscreen menu can also be accessed through the main menu by **pressing the MENU button; then scrolling up/down with the CURSOR UP ▶ or CURSOR DOWN ■ buttons** until the word **CLOCK** is highlighted. **Press the CURSOR RIGHT ▶▶ button** to activate the CLOCK menu and follow the steps above to set the time.

STOP

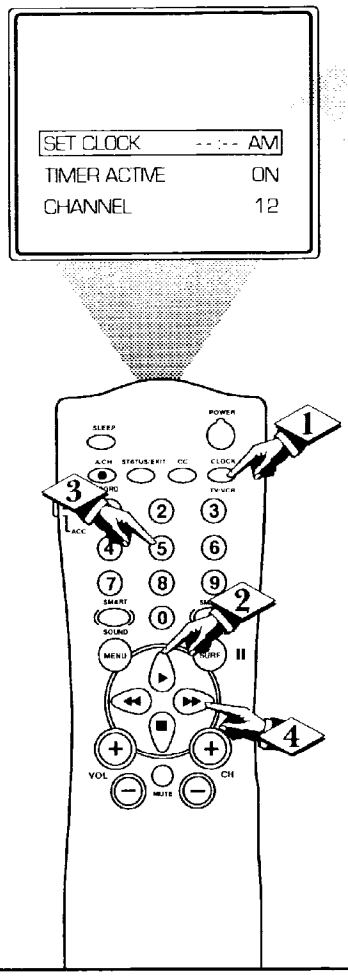

SMART HELP

Remember: Be sure to press "0" first and then the hour number for single digit entries.

To clear the onscreen menu press the STATUS/EXIT button or wait a few seconds after you have finished your adjustment and the menu will automatically disappear from the screen.

Note: If a power failure occurs, the TV's CLOCK will have to be reset.

If no time is set, the time will not appear onscreen.

ACTIVATING THE TV'S ON TIMER CONTROL

Just like an alarm clock you can set the TV to turn itself on at the same time everyday.

BEGIN

1. **Press the CLOCK button** to display the Clock onscreen menu.
2. **Press the CURSOR UP ▶ or CURSOR DOWN ■ button** until the words **TIMER ACTIVE** are highlighted..
3. **Press the CURSOR RIGHT ▶▶ or CURSOR LEFT ◀◀ button** to select **ON** (if activating) or **OFF** (if deactivating) the Timer control.

STOP

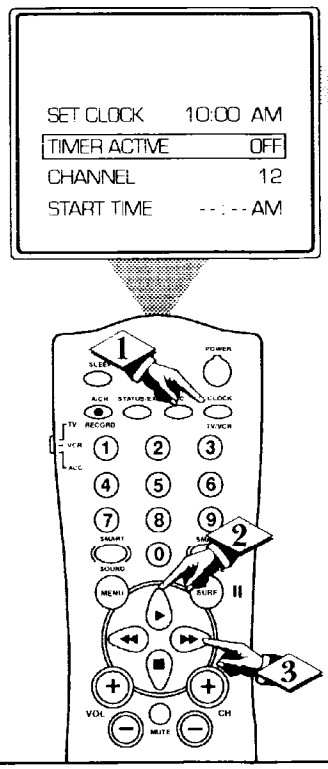

SMART HELP

Remember: Be sure to set the CLOCK and the time you want the television to turn on using the START TIME control as described on the next page.

The onscreen menu will time out and disappear from the screen when you finish, or you can press the STATUS/EXIT button to clear the menu from the screen.

ACTIVATING THE START UP CHANNEL

Used along with the Clock features, you can select a specific channel that the television will tune to when the Timer Active control is turned ON.

BEGIN

1. **Press the CLOCK button** to display the Clock onscreen menu.
2. **Press the CURSOR UP ▶ or CURSOR DOWN ■ button** until the word **CHANNEL** is highlighted.
3. **Press the number buttons** to enter the start up channel you would like the television to start on.

STOP

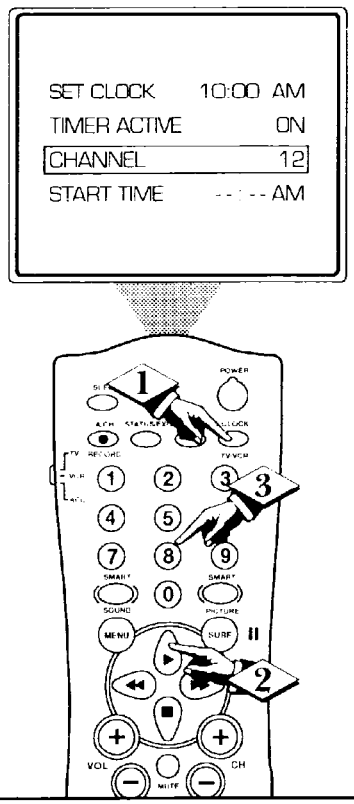

SMART HELP

Remember: Be sure to set the Timer Active control to ON.

The onscreen menu will time out and disappear from the screen when you finish, or you can press the STATUS/EXIT button to clear the menu from the screen.

SETTING THE TV'S START UP TIME

Used along with the Clock feature, you can select a specific time the television will turn on when the Timer Active control is turned ON.

BEGIN

1. **Press the CLOCK button** to display the Clock onscreen menu.
2. **Press the CURSOR UP ▶ or CURSOR DOWN ■ button** until the words **START TIME** are highlighted.
3. **Enter the time to turn on the TV using the NUMBERED buttons.** If the first number is a single digit first enter a zero then the digit (i.e.; press "0", then press "8").
4. **Press the CURSOR RIGHT ▶▶ or CURSOR LEFT ◀◀ buttons** to set either **AM** or **PM** time.

STOP

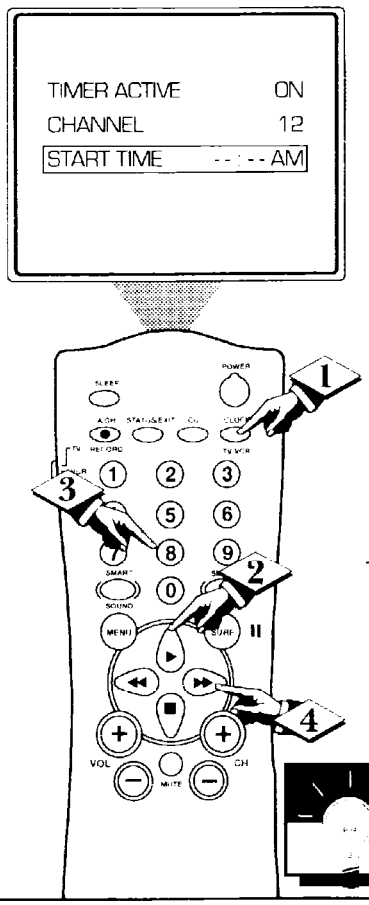



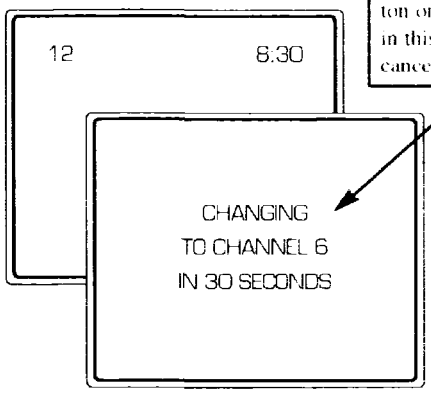

If the TV is in use when the START TIME control is about to be activated, the screen will display a warning stating it's going to change channels in 30 seconds. It will appear like the screen shown below and change to the selected start up channel. Pressing any button on the remote within this count down will cancel the change.

SMART HELP

Remember: Be sure to set the Timer Active to ON.

USING THE CLOSED CAPTION CONTROL

Closed Captioning (CC) allows you to read the voice content of television programs on the TV screen. Designed to help the hearing impaired, this feature uses onscreen "text boxes" to show dialogue and conversations while the TV program is in progress.

BEGIN

1. **Press the MENU button** on the remote to display the onscreen menu.

2. **Press the CURSOR UP ▶ or CURSOR DOWN ■ button** until the word **CC** (Closed Caption) is highlighted.

3. **Press the CURSOR RIGHT ▶▶ button** to select the CLOSED CAPTION option you want **(OFF, 1, 2, or MUTE).** Dialogue (and descriptions) for the action on the captioned TV program will appear onscreen.

4. **NOTE:** You can also set the Closed Caption by **pressing the CC button** on the remote. When pressed repeatedly the screen will display the options: **CC-OFF, CC-1, CC-2, or CC-MUTE.**

STOP

SMART HELP

Remember: The onscreen menu will time out and disappear from the screen when you finish, or you can press the STATUS/EXIT button to clear the menu from the screen.

NOTE: Not all TV programs and product commercials are made for broadcast with Closed Caption (CC) information included. Neither are all Closed Caption modes (CC-1, or CC-2) necessarily being used by a broadcast station during the transmission of a closed caption program. Refer to your area's TV program listings for the stations and times of Closed Caption shows.

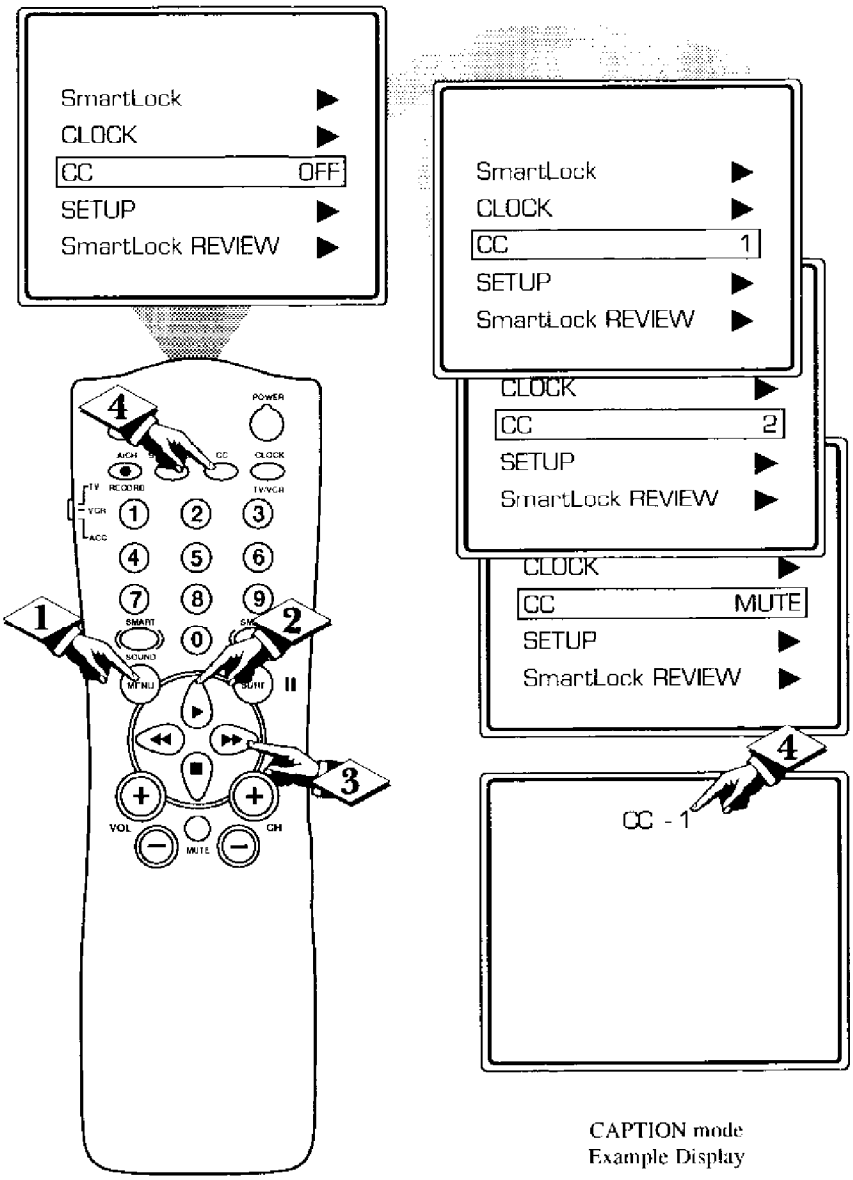

NOTE: The CC-MUTE option can be used to set the TV to turn the Closed Caption mode "ON" whenever the MUTE button on the remote is pressed. "MUTE" will be displayed smaller in the upper center of the screen.

CAPTION mode
Example Display

USING THE SLEEPTIMER CONTROL

Have you ever fallen asleep in front of the TV only to have it wake you up at two in the morning with a test pattern screeching in your ears? Well, your TV can save you all that trouble by automatically turning itself off.

BEGIN

1. **Press the SLEEP button** on the remote control and the SLEEP timer display will appear on the screen.

2. **Press the SLEEP button** repeatedly to pick the amount of time (in 15 minute increments up to 90 minutes; then 30 minute increments up to 120 minutes; then 60 minute increments up to 240 minutes) before the TV will turn itself off.

An onscreen count down will appear during the last minute before the TV

STOP

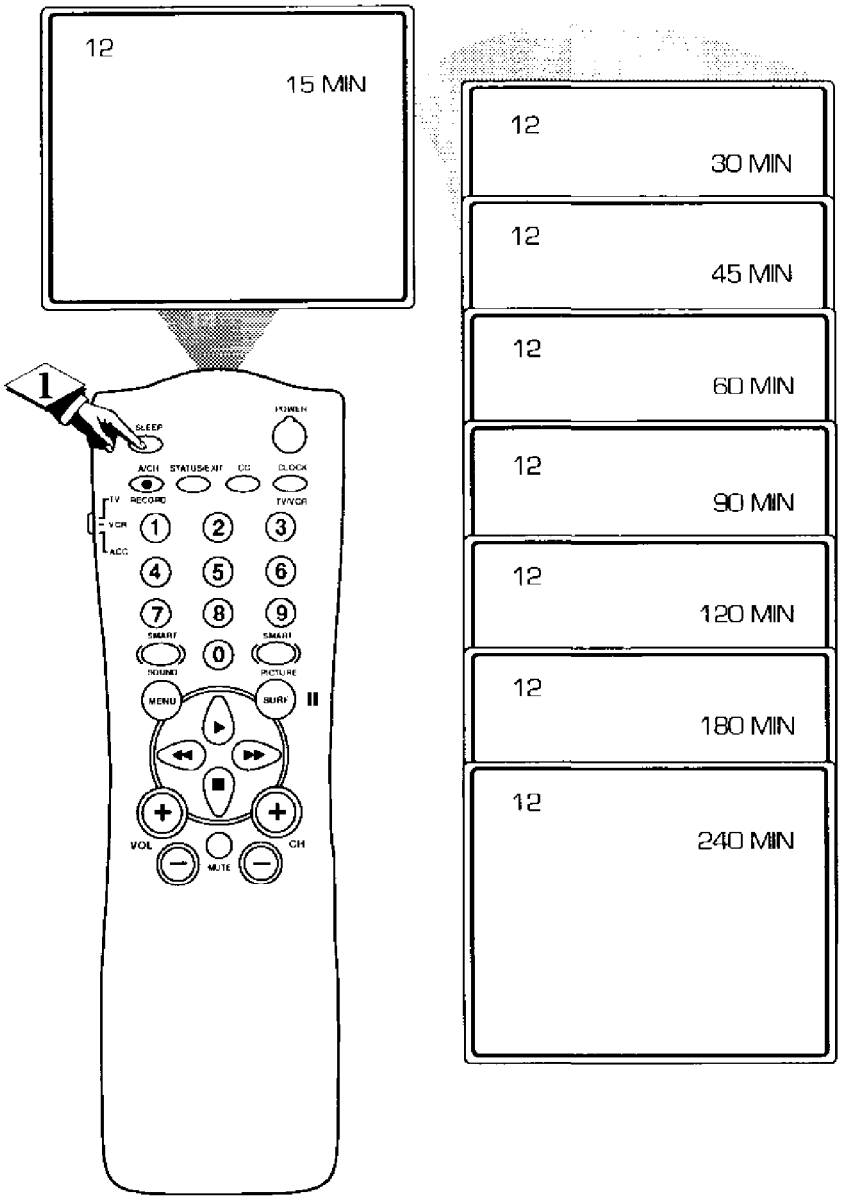

SMART HELP

Remember: The SLEEP-TIMER control can also be set within the TV's main menu

The onscreen menu will time out and disappear from the screen when you finish, or you can press the STATUS/EXIT button to clear the menu from the screen.

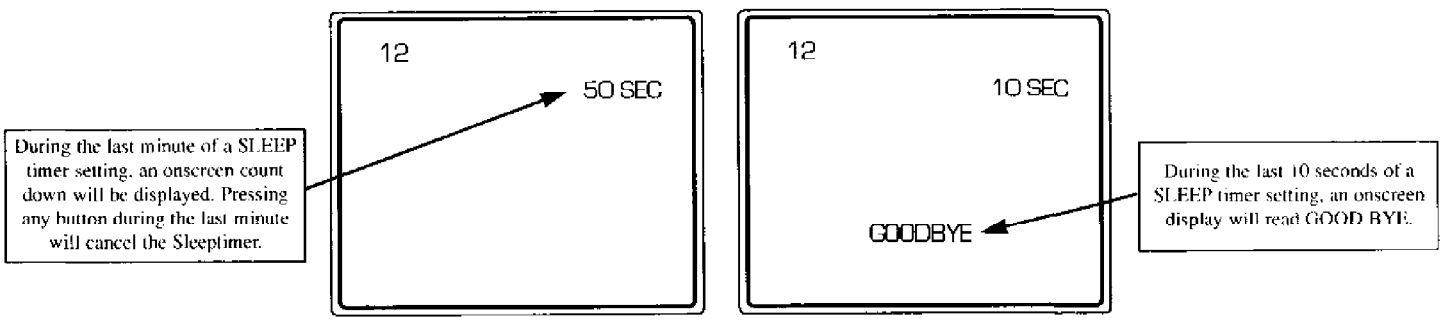
During the last minute of a SLEEP timer setting, an onscreen count down will be displayed. Pressing any button during the last minute will cancel the Sleeptimer.
12
50 SEC
12
10 SEC
GOODBYE
During the last 10 seconds of a SLEEP timer setting, an onscreen display will read GOOD BYE.

UNDERSTANDING THE SMARTLOCK™ CONTROL

The SmartLock feature is an integrated circuit that receives and processes data sent by broadcasters, or other program providers, that contain program content advisories. When programmed by the viewer, a TV with SmartLock can respond to the content advisories and block program content that may be found objectionable (such as offensive language, violence, sexual situations, etc.). This is a great feature to censor the type of viewing children may watch.

***Over the next few pages you'll learn how to block channels** and certain rated programming. Below is a brief explanation of some terms and ratings you will find in the SmartLock feature.*

SmartLock offers various BLOCKING OPTION controls from which to choose:

MASTER DISABLE: This is what might be called the "master switch" for SmartLock. When in the ON position, ALL blocking/censoring is turned off (or disabled). When in the OFF position, ALL blocking based on specifically blocked settings will take place.

BLOCK UNRATED: ALL unrated programs based on the Movie Ratings or Parental (TV) Guidelines can be blocked if this feature is set to ON and the MASTER DISABLE feature is set to OFF.

BLOCK NO RATINGS: ALL programming with NO content advisory data can be blocked if this feature is set to ON and the MASTER DISABLE feature is set to OFF.

After an access code has been programmed, you can block up to 5 individual channels. But more than just blocking channels, certain blocking options exist which will block programming based on ratings patterned by the Motion Pictures Association of America and TV broadcasters. (See description of ratings on this page.)

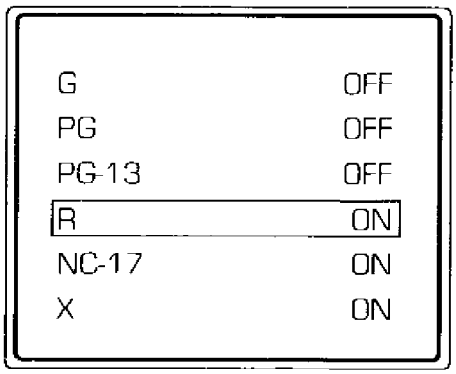

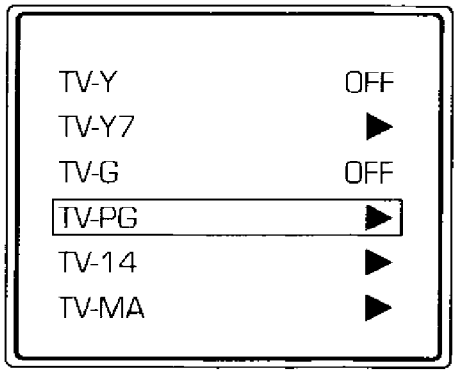

MOVIE RATINGS
(MOTION PICTURE ASSOCIATION OF AMERICA)

G: General Audience - All ages admitted. Most parents would find this program suitable for all ages. This type of programming contains little or no violence, no strong language, and little or no sexual dialogue or situations.

PG: Parental Guidance Suggested - This programming contains material that parents may find unsuitable for younger children.) It may contain one or more of the following: Moderate violence, some sexual situations, infrequent coarse language, or some suggestive dialogue.

PG-13: Parents Strongly Cautioned - This programming contains material that parents may find unsuitable for children under the age of 13. It contains one or more of the following: violence, sexual situations, coarse language, or suggestive dialogue.

R: Restricted -This is programming is specifically designed for adults. Anyone under the age of 17 should only view this programming with an accompanying parent or adult guardian. It contains one or more of the following: intense violence, intense sexual situations, strong coarse language, or intensely suggestive dialogue.

NC-17: No one under the age of 17 will be admitted. - This type of programming should be viewed by adults only. It contains graphic violence, explicit sex, or crude indecent language.

X: Adults Only - This type of programming contains one or more of the following: very graphic violence, very graphic and explicit or indecent sexual acts, very coarse and intensely suggestive language.

TV PARENTAL GUIDELINES
(TV BROADCASTERS)

TV-Y - **(All children** -- *This program is designed to be appropriate for all children.)* Designed for a very young audience, including children ages 2-6. This type of programming is not expected to frighten younger children.

TV-Y7 - **(Directed to Older Children** -- *This program is designed for children age 7 and above.)* It may be more appropriate for children who have acquired the development skills needed to distinguish between make-believe and reality. This programming may include mild fantasy and comic violence (FV).

TV-G - **(General Audience** -- *Most parents would find this program suitable for all ages.)* This type of programming contains little or no violence, no strong language, and little or no sexual dialogue or situations.

TV-PG - **(Parental Guidance Suggested** -- *This program contains material that parents may find unsuitable for younger children.)* This type of programming contains one or more of the following: Moderate violence (V), some sexual situations (S), infrequent coarse language (L), or some suggestive dialogue (D).

TV-14 - **(Parents Strongly Cautioned** -- *This program contains some material that many parents would find unsuitable for children under 14 years of age.)* This type of programming contains one or more of the following: intense violence (V), intense sexual situations (S), strong coarse language (L), or intensely suggestive dialogue (D).

TV-MA - **(Mature Audience Only** -- *This program is specifically designed to be viewed by adults and therefore may be unsuitable for children under 17.)* This type of programming contains one or more of the following: graphic violence (V), explicit sexual situations (S), or crude indecent language (L).

UNDERSTANDING THE SMARTLOCK™ CONTROL (ACCESS CODE)

Over the next few pages you'll learn how to block channels and get a better understanding of the rating terms for certain programming.
First, let's start by learning how to set a personal access code:

BEGIN

1. **Press the MENU button** on the remote to display the onscreen menu.
2. **Press the CURSOR UP ▶ or CURSOR DOWN ■ buttons** until the words **SmartLock** are highlighted.
3. **Press the CURSOR RIGHT ▶▶ button** to display the SmartLock Access Code screen.
4. **Using the NUMBERED buttons, enter 0, 7, 1, 1. "XXXX"** appears on the Access Code screen as you press the numbered buttons.
   "INCORRECT CODE" will appear on the screen, and **you will need to enter 0, 7, 1, 1 again.**
5. **Press the CURSOR DOWN ■ button** until the words **CHANGE CODE** are highlighted.
6. **Press the CURSOR RIGHT ▶▶ button** to change your personal Access Code.
7. **"Next enter a "new" 4 digit code using the NUMBERED buttons.** The screen will then ask you to confirm the code you just entered. **Enter your new code again. "XXXX"** will appear when you enter your new code.
8. **Press the STATUS/EXIT button** after the new code has been entered to set the code in the TV's memory.

STOP

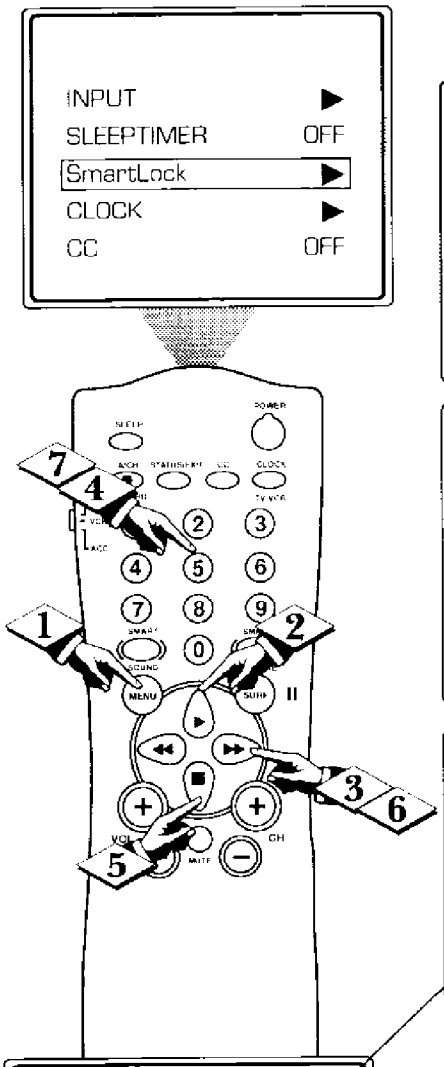

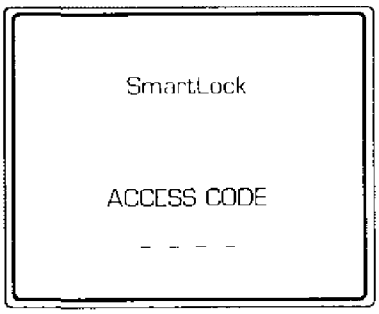

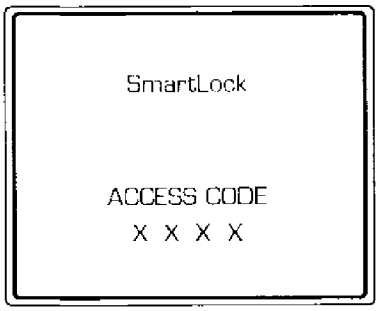

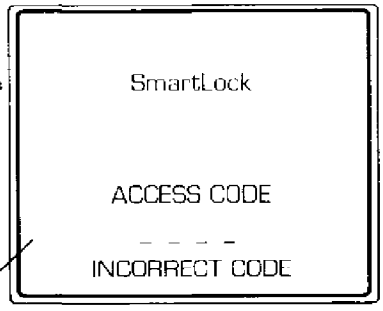

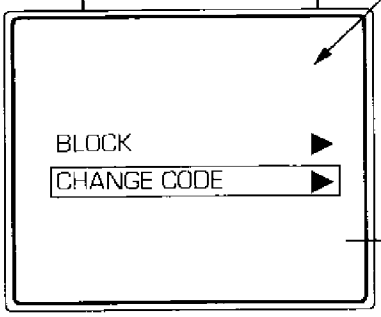

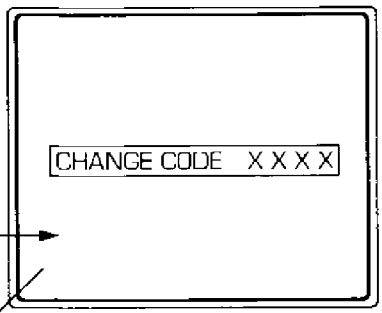

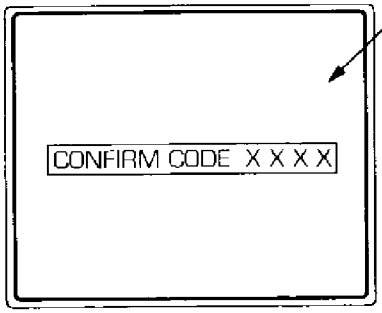

NOTE: The 0,7,1,1 access code shown on this page is the default code or a way to reset the code when the current access code is not known.

Parents - it isn't possible for your child to unblock a channel without knowing your access code or changing it to a new one. If your code changes, and you didn't change it, then you know it's been altered by someone else and blocked channels have been viewed.

UNDERSTANDING THE SMARTLOCK™ CONTROL (BLOCK CHANNEL)

After your personal access code has been set (see previous page), you are now ready to select the channels you want to block out or censor.

BEGIN

1. **Press the MENU button** on the remote to show the onscreen menu.
2. **Press the CURSOR UP ▶ or CURSOR DOWN ■ button** until the words **SmartLock** are highlighted.
3. **Press the CURSOR RIGHT ▶▶ button** to display the SmartLock Access screen.
4. **Enter the correct access code number. "XXXX"** shows on the Access Code display as you **press the NUMBERED buttons.**
5. **Press the CURSOR UP ▶ or DOWN ■ buttons** until the word **BLOCK** is highlighted. **Press the CURSOR RIGHT ▶▶ button** then highlight **CHANNELS BLOCKED.**
6. **Press the CURSOR RIGHT ▶▶ button.** Three options will be displayed; **CHANNEL, LOCK or CLEAR ALL.**
7. **With CHANNEL highlighted, use the NUMBERED buttons** to enter the channel number you wish to block.
8. **Use the CURSOR DOWN ■ button** to highlight the word **LOCK, then press the CURSOR RIGHT ▶▶ button** to select **YES** (block) or **NO** (do not block). The channel chosen is now blocked from viewing.

Repeat steps 7 and 8 for any other channels you wish to block from viewing.

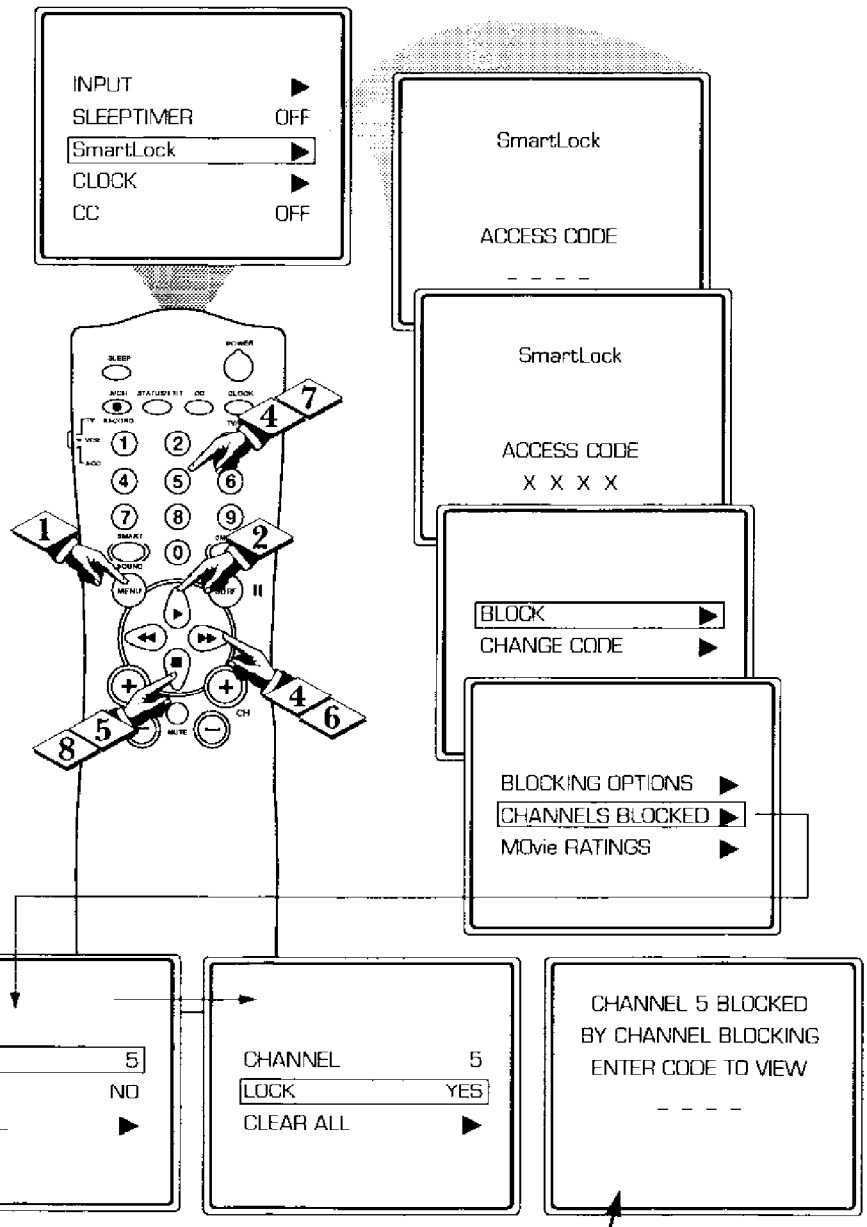

When a blocked channel is viewed, this is what the screen will display. To view the blocked channel, simply enter the current access code. Note: Once the access code is entered ALL blocked channels will be viewable until the TV is powered off. Once the set is turned off and then back on the previously blocked channels will again be blocked.

To clear blocked channels follow the steps below:

Press the CURSOR DOWN ■ button until the words **CLEAR ALL** are highlighted, **then press the CURSOR RIGHT ▶▶ button.**

The screen will read **"ALL UNBLOCKED"** for a moment. At this point **ALL** the previously blocked channels will be unblocked.

STOP

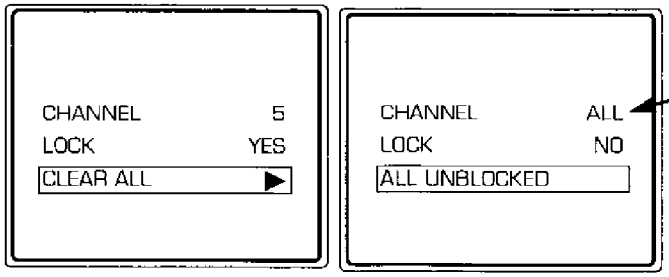

Note: When the CLEAR ALL option is selected, the CHANNEL option will display ALL.
If at this point if you change the LOCK option to YES, *ALL* channels will be blocked from viewing.

UNDERSTANDING THE SMARTLOCK™ CONTROL (BLOCKING OPTIONS)

SmartLock offers the viewer other blocking features as well. With these Blocking Option features, the censoring can be turned ON or OFF.

BEGIN

1. **Press the MENU button** on the remote to display the onscreen menu.
2. **Press the CURSOR UP ▶ or CURSOR DOWN ■ buttons** until the words **SmartLock** are highlighted.
3. **Press the CURSOR RIGHT ▶▶ button** to display the SmartLock Access Code screen.
4. **Using the NUMBERED buttons** on the remote, enter your personal Access Code.
5. With the word **BLOCK** highlighted, **Press the CURSOR RIGHT ▶▶ button.**
6. **Scroll the menu using the CURSOR UP ▶ or CURSOR DOWN ■ buttons** until the words **BLOCKING OPTIONS** are highlighted.
7. **Press the CURSOR RIGHT ▶▶ button** to display the **Blocking Options (MASTER DISABLE, BLOCK UNRATED, or BLOCK NO RATING).** When highlighted, each feature can be turned **ON** or **OFF using the CURSOR RIGHT ▶▶ or CURSOR LEFT ◀◀ buttons** on the remote.

STOP

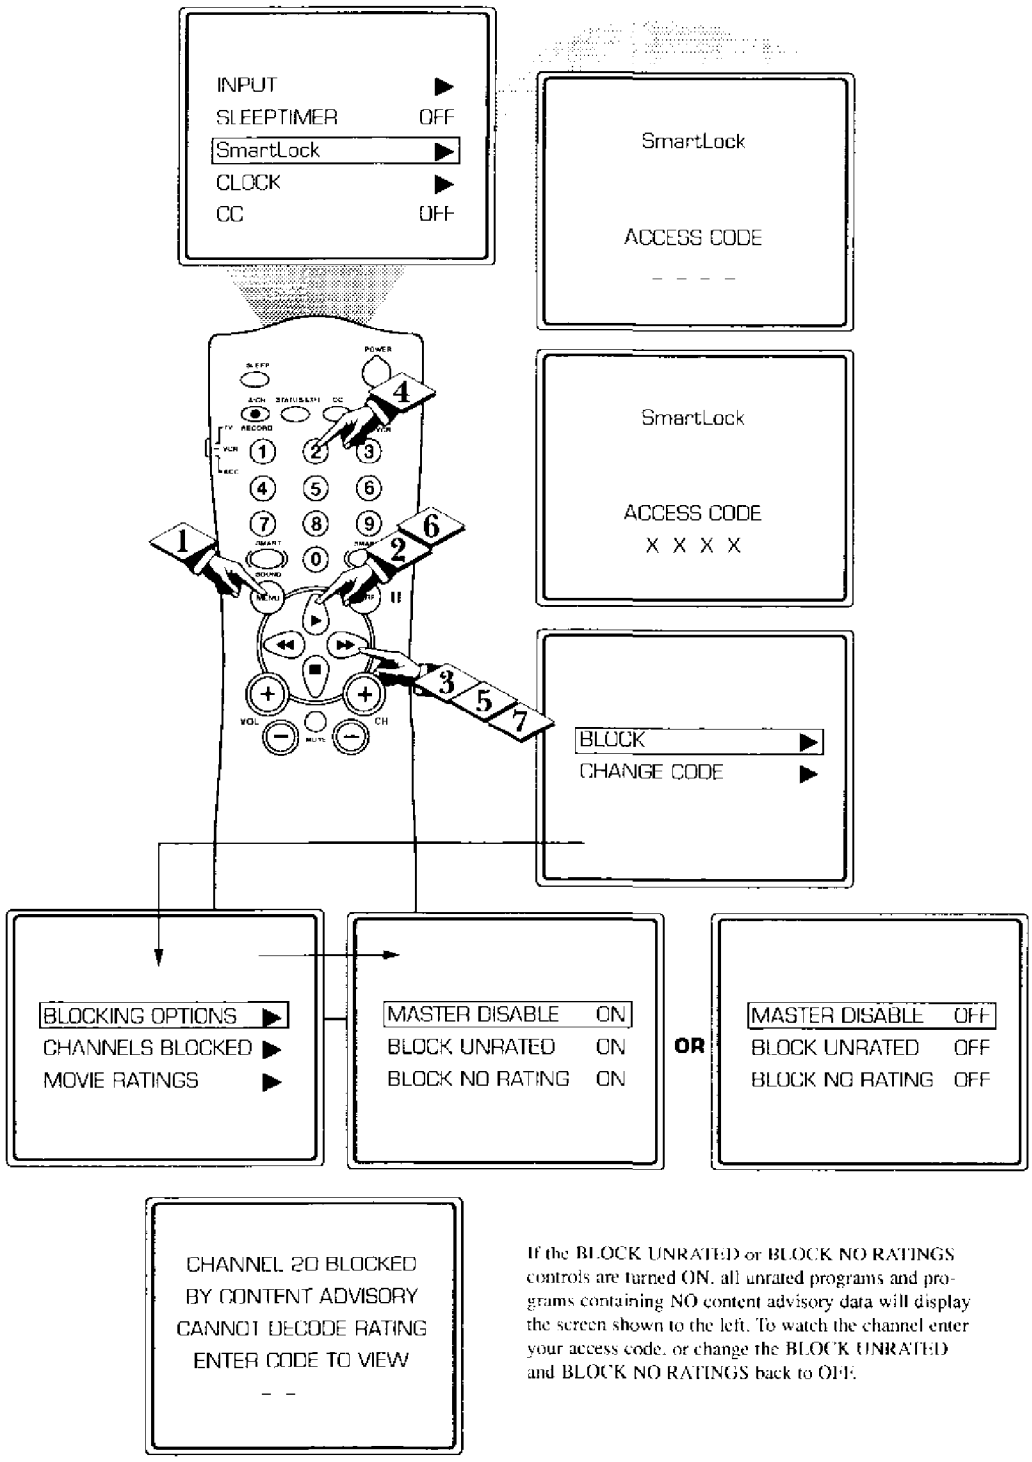

If the BLOCK UNRATED or BLOCK NO RATINGS controls are turned ON, all unrated programs and programs containing NO content advisory data will display the screen shown to the left. To watch the channel enter your access code, or change the BLOCK UNRATED and BLOCK NO RATINGS back to OFF.

BLOCKING OPTIONS:

MASTER DISABLE: This is what might be called the "master switch" for SmartLock. When in the ON position, ALL blocking/censoring is turned off (or disabled). When in the OFF position, ALL blocking based on specifically blocked settings will take place.

BLOCK UNRATED: ALL unrated programs based on the Movie Ratings or Parental (TV) Guidelines can be blocked if this feature is set to ON and the MASTER DISABLE feature is set to OFF.

BLOCK NO RATINGS: ALL programming with NO content advisory data can be blocked if this feature is set to ON and the MASTER DISABLE feature is set to OFF.

UNDERSTANDING THE SMARTLOCK™ CONTROL (PARENTAL GUIDELINE)

This portion of the SmartLock features cover program ratings based on the TV Industry rating system. This is know as Parental Guideline within SmartLock.

After selecting the SmartLock feature and entering your personal access code, the BLOCK/CHANGE CODE screen appears:

BEGIN

1. With the word **BLOCK** highlighted, **Press the CURSOR RIGHT ▶▶ button.**
2. **Scroll the menu using the CURSOR UP ▶ or CURSOR DOWN ■ buttons** until the words **PARENTAL GUIDELINE** are highlighted.
3. **Press the CURSOR RIGHT ▶▶ button** to display the **Parental (TV) Guidelines (TV-Y, TV-Y7, TV-G, TV-PG, TV-14, or TV-MA).**

   When highlighted, the TV-Y and TV-G can be turned **ON** *(which will allow blocking)* or **OFF** *(which will allow viewing)*, of these rated programs.
4. **The ratings of TV-Y7, TV-PG, TV-14, TV-MA can be customized to block V (violence) FV (fantasy violence), S (sexual situations), L (coarse language), or D (suggestive dialogue).**

   Using the CURSOR RIGHT ▶▶ or CURSOR LEFT ◀◀ buttons on the remote to turn the rating option ON or OFF.

STOP

SMART

Remember: Selecting to block any rating will cause all the higher ratings to also be blocked automatically.

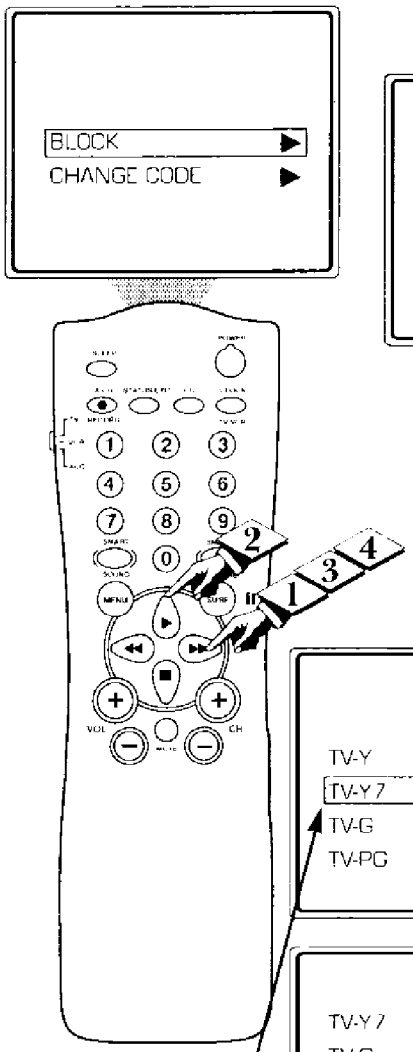

TV RATING SUB MENUS:

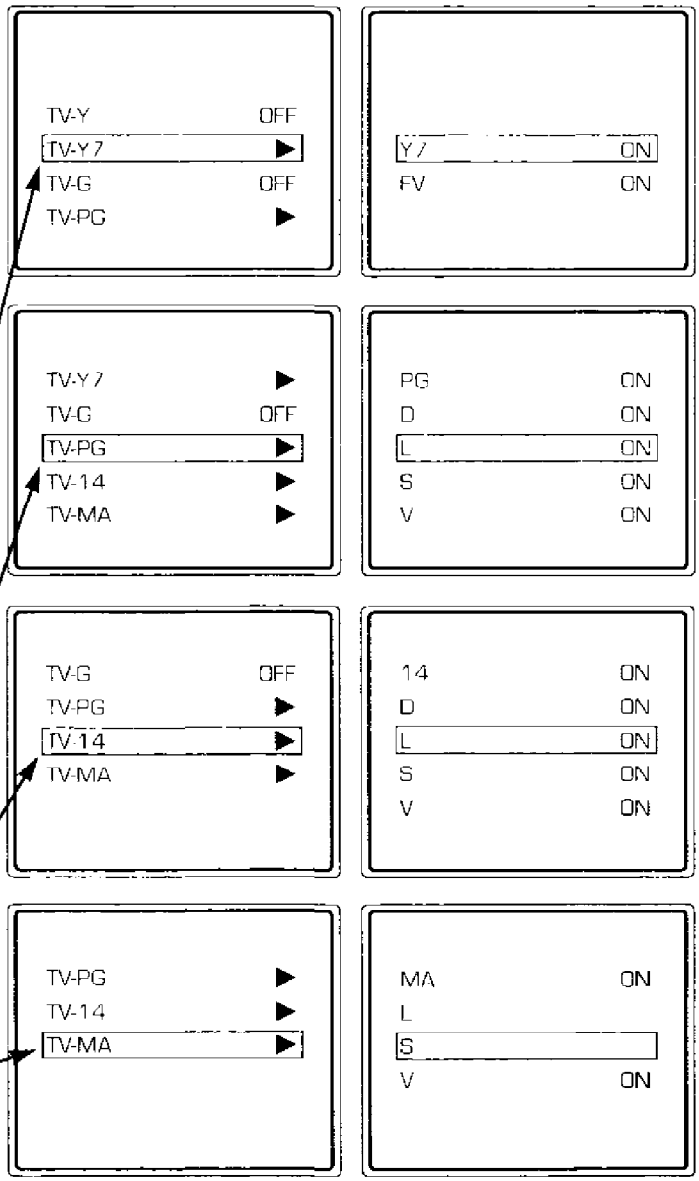

TV-Y - (All children -- *This program is designed to be appropriate for all children.*) Designed for a very young audience, including children ages 2-6. This type of programming is not expected to frighten younger children.

TV-Y7 - (Directed to Older Children -- *This program is designed for children age 7 and above.*) It may be more appropriate for children who have acquired the development skills needed to distinguish between make-believe and reality. This programming may include mild fantasy and comic violence (FV).

TV-G - (General Audience -- *Most parents would find this program suitable for all ages.*) This type of programming contains little or no violence, no strong language and little or no sexual dialogue or situations.

TV-PG - (Parental Guidance Suggested -- *This program contains material that parents may find unsuitable for younger children.*) This type of programming contains one or more of the following: some suggestive dialogue (D), infrequent coarse language (L), some sexual situations (S), or moderate violence (V).

TV-14 - (Parents Strongly Cautioned -- *This program contains some material that many parents would find unsuitable for children under 14 years of age.*) This type of programming contains one or more of the following: intensely suggestive dialogue (D), strong coarse language (L), intense sexual situations (S), or intense violence (V).

TV-MA - (Mature Audience Only -- *This program is specifically designed to be viewed by adults and therefore may be unsuitable for children under 17.*) This type of programming contains one or more of the following: crude indecent language (L), explicit sexual situations (S), or graphic violence (V).

UNDERSTANDING THE SMARTLOCK™ CONTROL (REVIEW SCREEN)

Now that you've learn how to block channels or censor your viewing using the Movie Ratings or Parental (TV) Guidelines let's review what you've done. The SmartLock Review feature allows you to see what has been blocked. Whenever the Menu button is pressed the onscreen menu will be displayed with the SmartLock Review highlighted.

BEGIN

1. **Press the MENU button** on the remote to show the onscreen menu. **SmartLock REVIEW** will be highlighted.

2. **Press the CURSOR RIGHT ▶▶ button** and the SmartLock Review Menu will appear.

This menu will display what channels have been blocked; what Movie Ratings have been blocked; what Parental (TV Ratings) Guideline have been blocked. This review screen will also display that status of Unrated and No Rating settings. If the Master Disable feature has been turned ON, the SmartLock Review screen will display "SmartLock DISABLED."

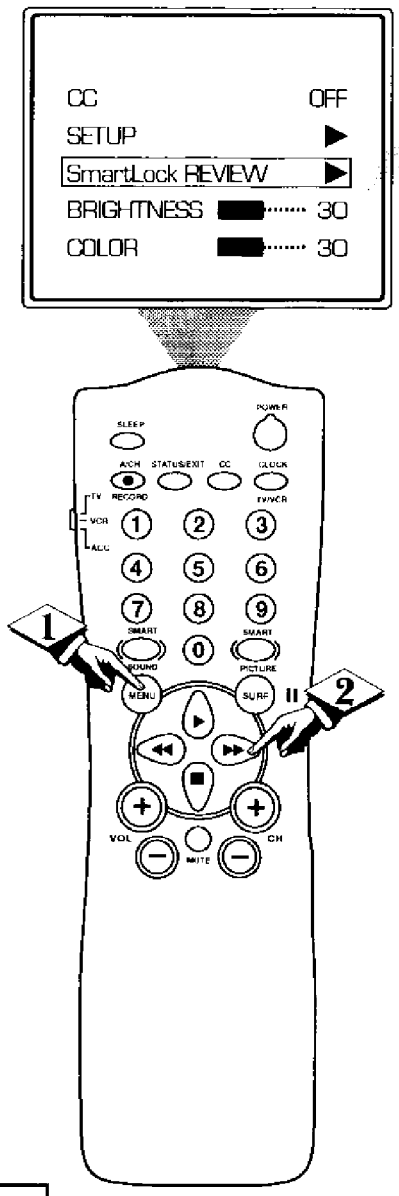

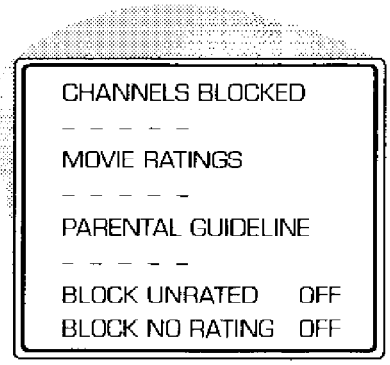

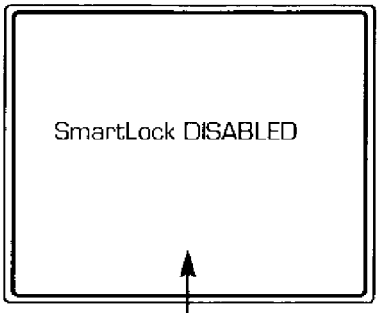

SmartLock DISABLED will appear in the SmartLock Review screen if the SmartLock Disable feature is set to ON.

CHANNELS BLOCKED - Shows all blocked channels that where set within the CHANNELS BLOCKED feature. Up to 5 channels may be blocked at one time.

MOVIE RATINGS - Shows all blocked Movie Ratings that were set within the MOVIE RATINGS feature. All or some may be blocked at one time. Note: If a lower rating is blocked; this will automatically cause the higher ratings to be blocked also. (i.e., if R is set to be blocked, X will automatically be blocked also.)

PARENTAL GUIDELINE - Shows all blocked TV Ratings that were set within the PARENTAL GUIDELINES feature. All or some may be blocked at one time. Note: If a lower rating is blocked; this will automatically cause the higher ratings to be blocked also. (i.e., if TV-14 is set to be blocked, TV-MA will automatically be blocked.) Parental Guidelines also have sub ratings for Violence (V), Fantasy Violence (FV), Sexual Situations (S), Coarse Language (L), and Suggestive Language (D). If the main rating is turned off but the sub rating is turned ON, the program will be blocked but the rating will not appear within the SmartLock Review menu.

BLOCK UNRATED - Shows ON or OFF depending on the status of the BLOCK UNRATED feature. Based on the Movie Ratings or Parental (TV) Guidelines.

BLOCK NO RATING - Shows ON or OFF depending on the status of the BLOCK NO RATING feature. Based on programming with NO content advisory data.

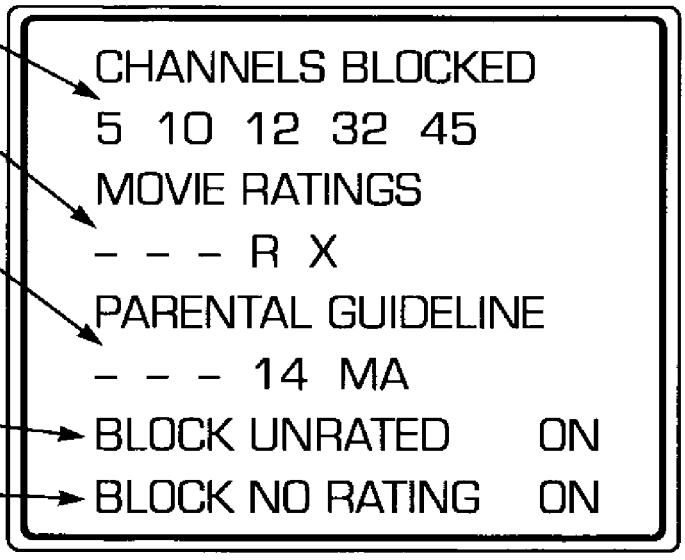

USING THE TREBLE BOOST AND BASS BOOST CONTROLS

Besides the normal volume level control, your TV also has Bass and Treble Boost sound adjustment controls. The TREBLE Boost effects only the high frequency sound coming from the TV enhancing the highs; while the BASS Boost effects only the low frequency sound coming from the TV enhancing the lows.

BEGIN

1. **Press the MENU button** on the remote to show the onscreen menu.

2. **Press the CURSOR UP ▶ or CURSOR DOWN ▼ buttons** to select and highlight the name of the control you wish to change (**TREBLE BOOST, or BASS BOOST**).

3. **Use the CURSOR LEFT ◀◀ or RIGHT ▶▶ buttons** to turn the selected control **ON** or **OFF**.

STOP

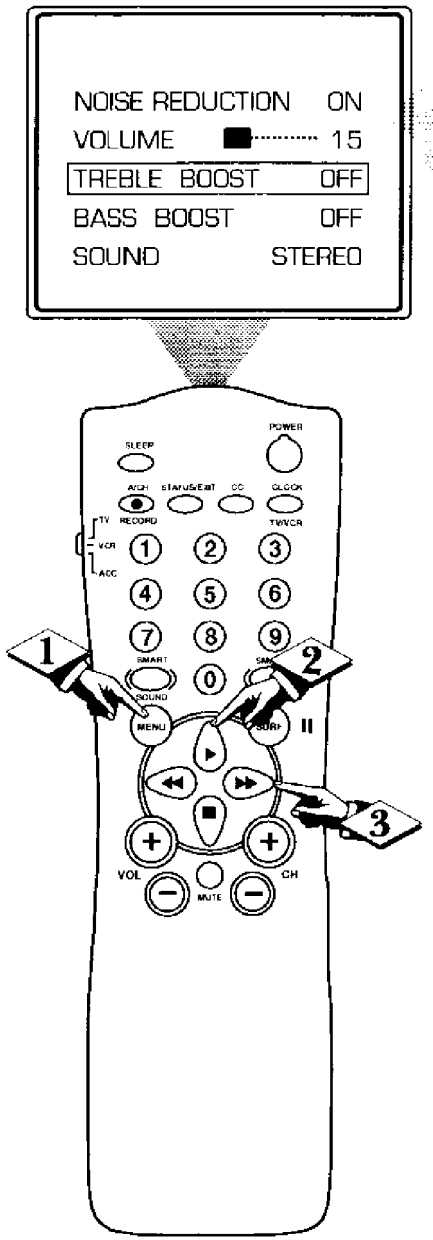

OR

NOISE REDUCTION ON
VOLUME 15
TREBLE BOOST ON
BASS BOOST OFF
SOUND STEREO

OR

VOLUME 15
TREBLE BOOST ON
BASS BOOST OFF
SOUND STEREO
AVL ON

VOLUME 15
TREBLE BOOST ON
BASS BOOST ON
SOUND STEREO
AVL ON

How to Set the TV for Stereo Programs

Your TV can detect a stereo signal and will set itself automatically so the stereo sound can be heard. However, there may be occasions when you might want to set the TV to mono. The following steps describe how to change the SOUND control:

BEGIN

1. **Press the MENU button** on the remote to show the onscreen menu.
2. **Press the CURSOR UP ▶ or CURSOR DOWN ■ button** until the word **SOUND** is highlighted.
3. **Press the CURSOR RIGHT ▶▶ or CURSOR LEFT ◀◀ buttons** to choose between **STEREO** or **MONO**.

With STEREO selected, the television will reproduce any stereo broadcast signal it receives. Please note that you can force a stereo broadcast signal to MONO, but you cannot force a mono broadcast signal to stereo.

STOP

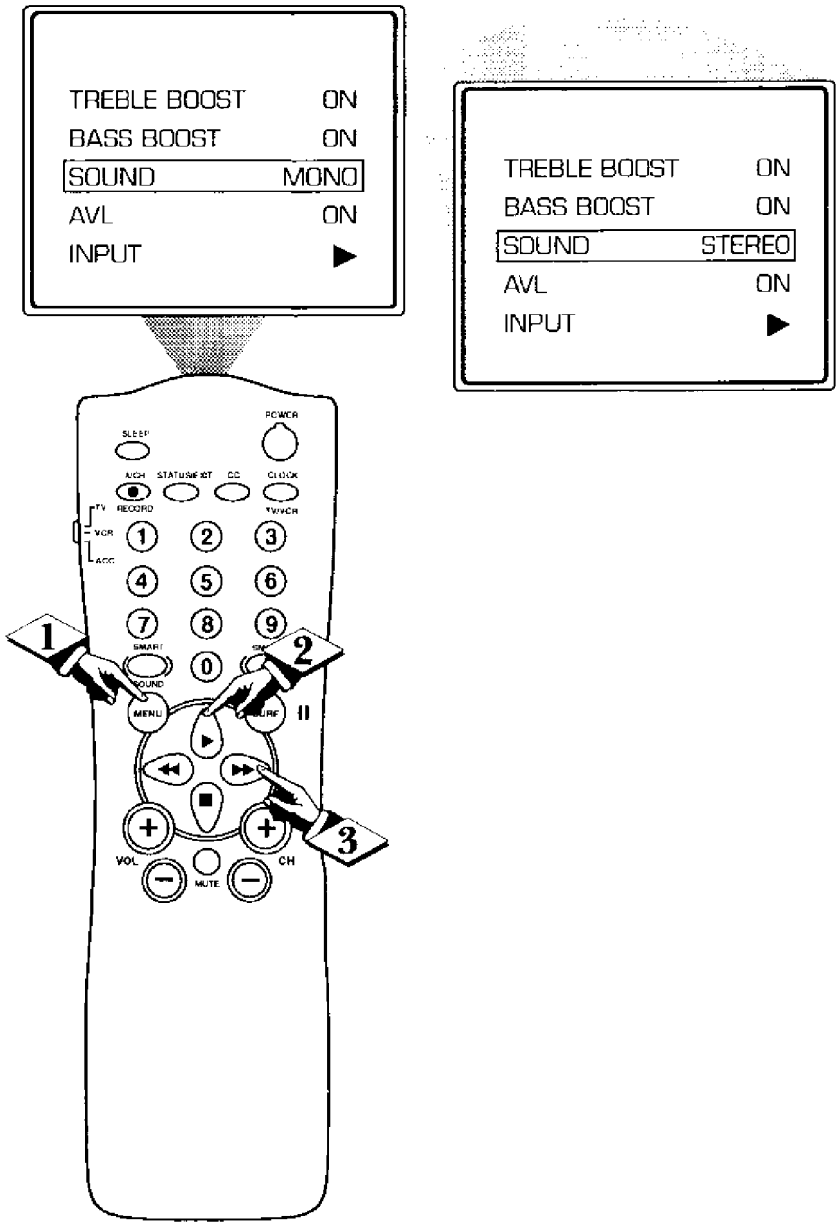

Smart Help

Remember: If stereo is not present on a selected show and the TV is placed in the STEREO mode, the sound coming from the set will remain monaural (mono).

USING THE TV VOLUME BAR CONTROL

Use the Volume Bar control to see the TV's volume level settings on the TV screen. The Volume Bar will be seen each time the VOLUME buttons (on the TV or remote) are pressed.

BEGIN

1. **Press the MENU button** to display the onscreen menu.
2. **Press the CURSOR UP ▶ or CURSOR DOWN ■ buttons** until the word **VOLUME** is highlighted.
3. **Press the CURSOR RIGHT ▶▶ button** to *increase* the TV's volume or the **CURSOR LEFT ◀◀ button** to *decrease* the sound.

STOP

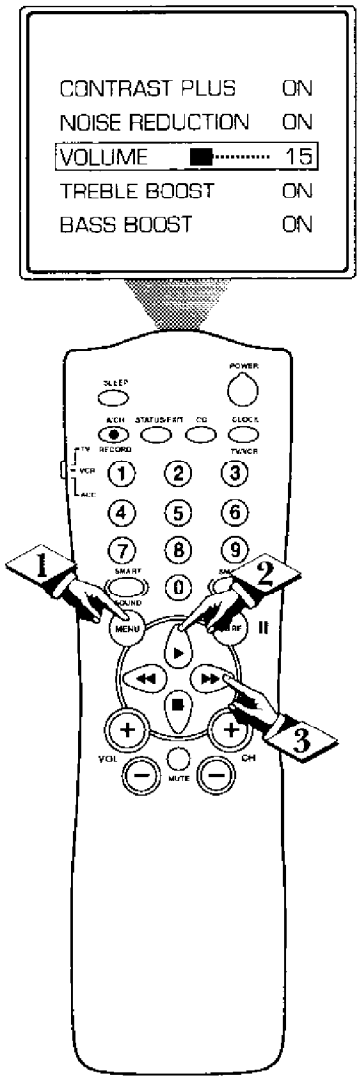

OR

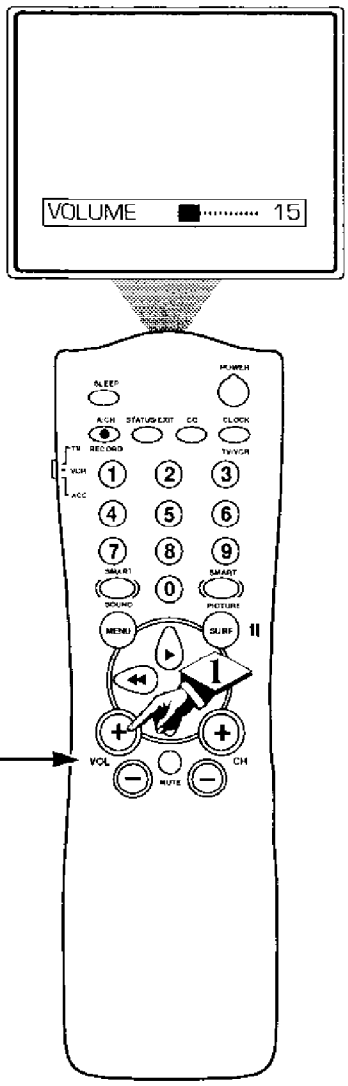

Note: Pressing the VOL (+) or (–) buttons will also allow you to adjust the sound level of the TV. A Volume Bar adjustment will appear onscreen. Press the (+) to increase the volume and the (–) button to decrease the volume.

AUDIO/VIDEO INPUTS

The TV's Audio/Video Input jacks are for direct picture and sound connections between the TV and a VCR (or similar device) that has Audio/Video Output jacks.

BEGIN

1. **Connect the VIDEO (yellow) CABLE** to the VIDEO IN jack on the back of the TV. Then connect the AUDIO (red and white) CABLES to the AUDIO (left and right) IN jacks on the rear of the TV.

2. **Connect the VIDEO (yellow) CABLE** to the VIDEO OUT jack on the back of the VCR. Then connect the AUDIO (red and white) CABLES to the AUDIO (left and right) OUT jacks on the rear of the VCR.

3. **Turn the VCR and the TV ON.**

4. **Press the MENU button** on the remote to display the onscreen menu.

5. **Press the CURSOR UP ▶ or CURSOR DOWN ▼ buttons** until the word **INPUT** is highlighted.

6. **Press the CURSOR RIGHT ▶ or CURSOR LEFT ◀ button** to display the picture/sound menu **(ANTENNA, EXT 1)**. Use the CURSOR UP ▶ or DOWN ▼ buttons to select.

Insert a pre-recorded tape and press the PLAY ▶ button on the VCR or remote.

STOP

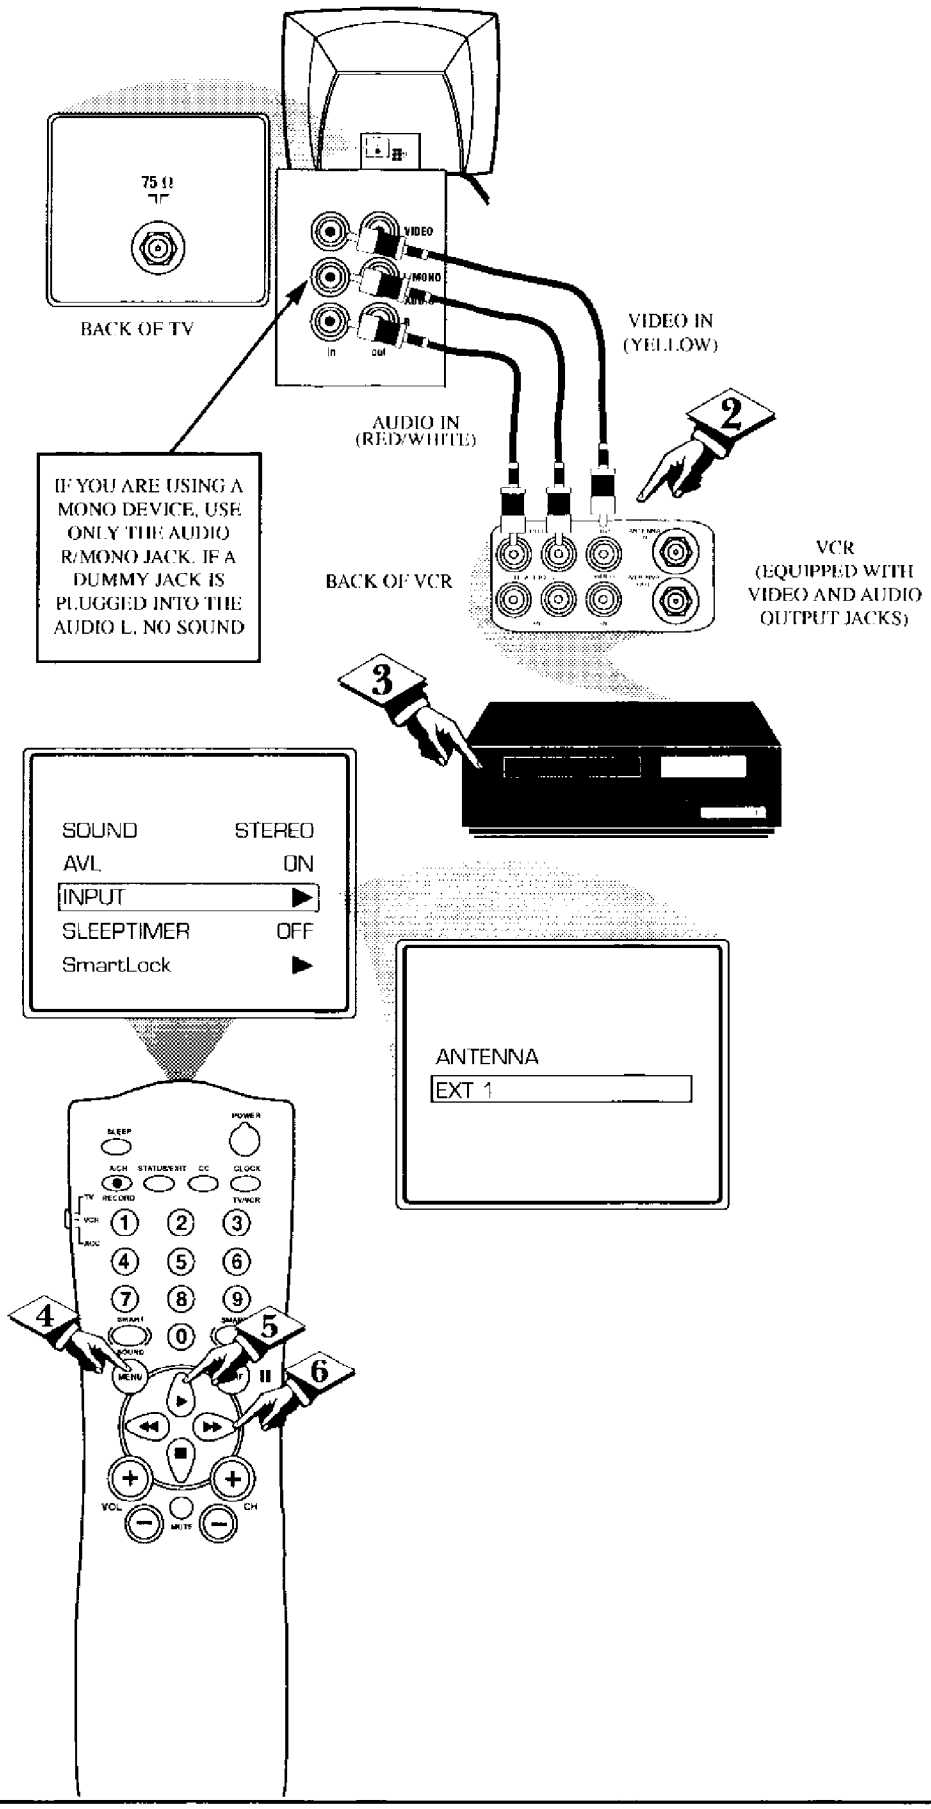

USING THE SMARTPICTURE™ CONTROL

Whether you're watching a movie or a video game, your TV has automatic video control settings matched for your current program source or content. The SmartPicture feature quickly resets your TV's video controls for a number of different types of programs and viewing conditions you may have in your home. Each SmartPicture setting is preset at the factory to automatically adjust the TV's Brightness, Color, Picture, Sharpness, Tint, and Color Temperature levels.

BEGIN

1. **Press the SMART PICTURE button** on the remote control. The current SmartPicture setting will appear in the middle of the screen.

2. **Press the SmartPicture button repeatedly** to select either PERSONAL, MOVIES, SPORTS, or WEAK SIGNAL picture settings.

Note: The PERSONAL setting is the setting that you setup using the PICTURE options within the onscreen menu. This is the only setting that can be changed. All other settings are setup at the factory during the time of production.

STOP

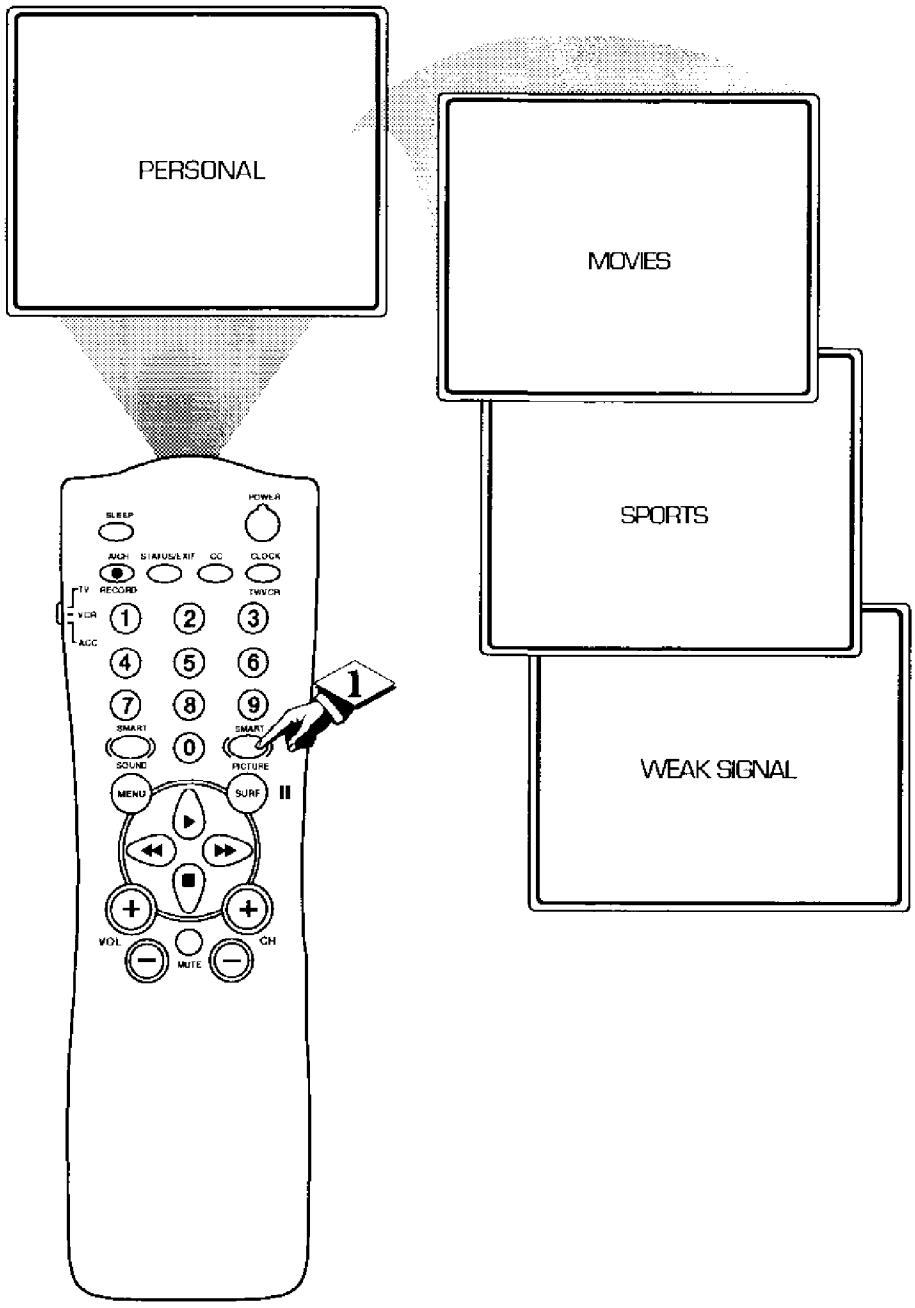

USING THE SMARTSOUND™ CONTROL

The SmartSound feature allows the listener to select between four different factory set sound options. Personal (which can be set by the user), Theater (for movie viewing), Music (for musical type programming) and Voice (when the program is mainly dialogue). To select any of the options follow the directions below.

BEGIN

1. **Press the SMARTSOUND button** on the remote control. The current SmartSound setting will appear in the middle of the screen.

2. **Press the SMART SOUND button repeatedly** to toggle between the four settings.

Remember, only the PERSONAL control can be changed by the viewer. This changes the settings in the main onscreen menu's sound controls.

STOP

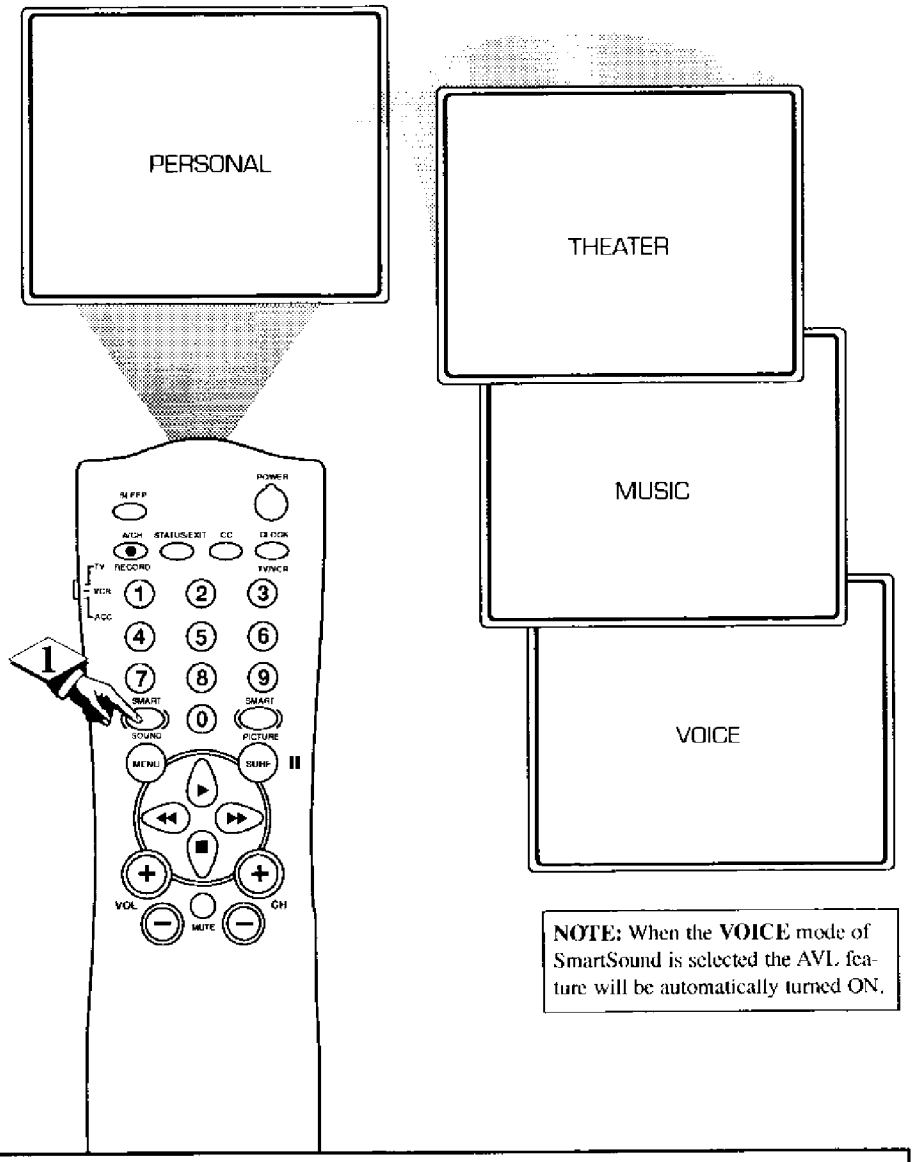

NOTE: When the **VOICE** mode of SmartSound is selected the AVL feature will be automatically turned ON.

SMART HELP

Remember, Smart Sound works only with the programs coming through the 75 Ω input on the rear of the TV (RF audio). It will not control the sound levels for the External connections.

AVL CONTROL

In most cases the volume levels coming from broadcast programming or commercials are never the same. With the AVL control turned ON, you can have the TV level out the sound being heard. This makes for a more consistent sound by reducing the peaks and valleys that occur during program changes or commercial breaks.

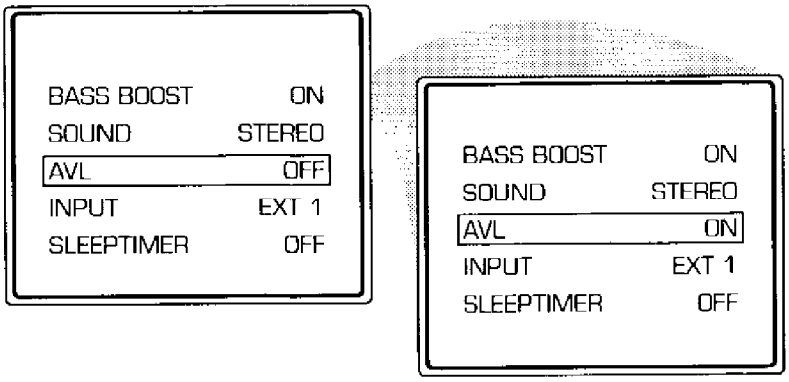

USING THE TV'S SMARTSURF™ CONTROL

A "list" or series of previously viewed channels can be selected with the SURF button on your remote control. With this feature you can easily switch between different TV programs that currently interest you. The SmartSurf control allows you set up to eight channels in its quick viewing "list".

BEGIN

1. **Press the CHANNEL (+) or (–) buttons** (or the NUMBER buttons) to select a channel to add to the SURF list.
2. **Press the SURF button** on the remote while the channel number is still displayed to ADD the channel to the SURF list.
3. Repeat steps 1 through 2 to add additional channels (up to 8) to the SURF list.

To remove a channel for the SURF list, simply choose the channel with the numbered buttons and press the SURF button while the channel number is still displayed and the screen will read DELETED.

STOP

A/CH BUTTON

Your remote also has an A/CH (Alternate Channel) button. Pressing this button will toggle between the Current and one previously selected channel.

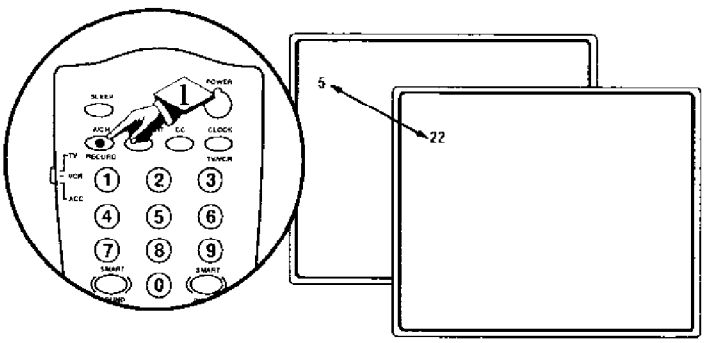

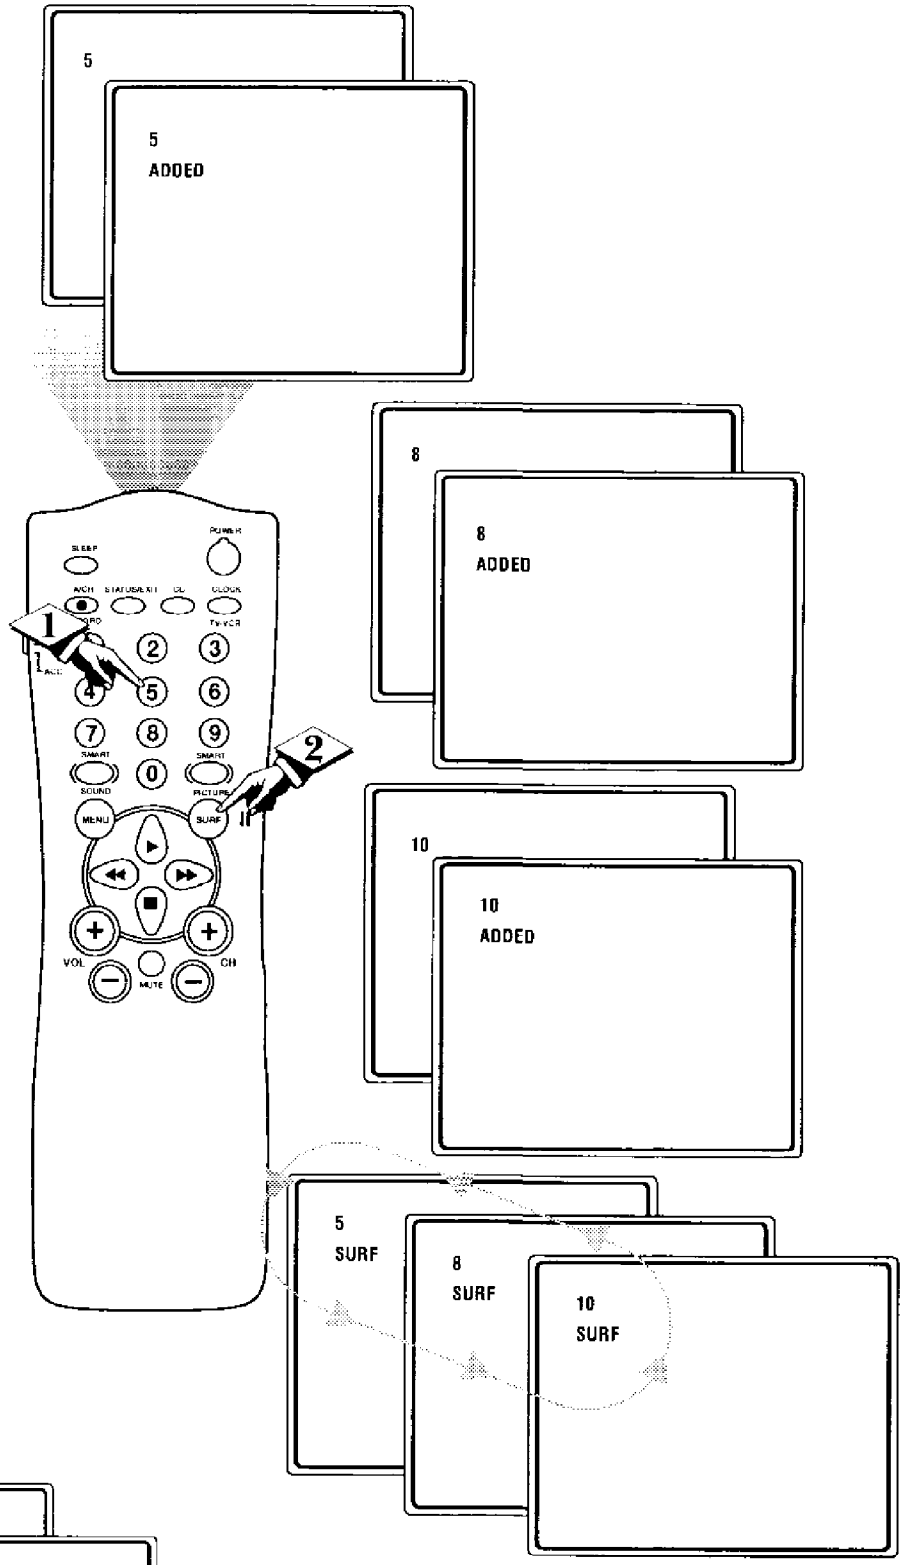

NOTE: Press the Surf button repeatedly to cycle or "loop" through the channels saved in the Surf Channel list.

Setting the Remote Control To Work With Other Devices

Your remote control is set to work your TV and many infrared remote (IR) control VCRs, Cable Boxes, Satellite Systems, DBS, DVD, etc. However, an easy onetime step may be necessary before the remote will work your VCR.

Try this initial check to see if going on to the following section is necessary.

BEGIN

1. **Place the TV/VCR/ACC Mode Switch** in the proper position.
2. **Point the remote control** at the device and press the POWER button.
3. Does the remote turn the device ON?

If YES, stop and try other function buttons on the remote. If they also work the device, then the remote is ready and no further steps are needed.

If NO, continue...

1. First look up a **THREE-DIGIT remote control number** for your brand of Device before going through the simple steps on the following page.

Find your Three-Digit Code on pages 29-30.

Smart Help

Remember, if more than one number is listed, you may have to try more than the first Three-Digit code given in order to locate your Device's remote code.

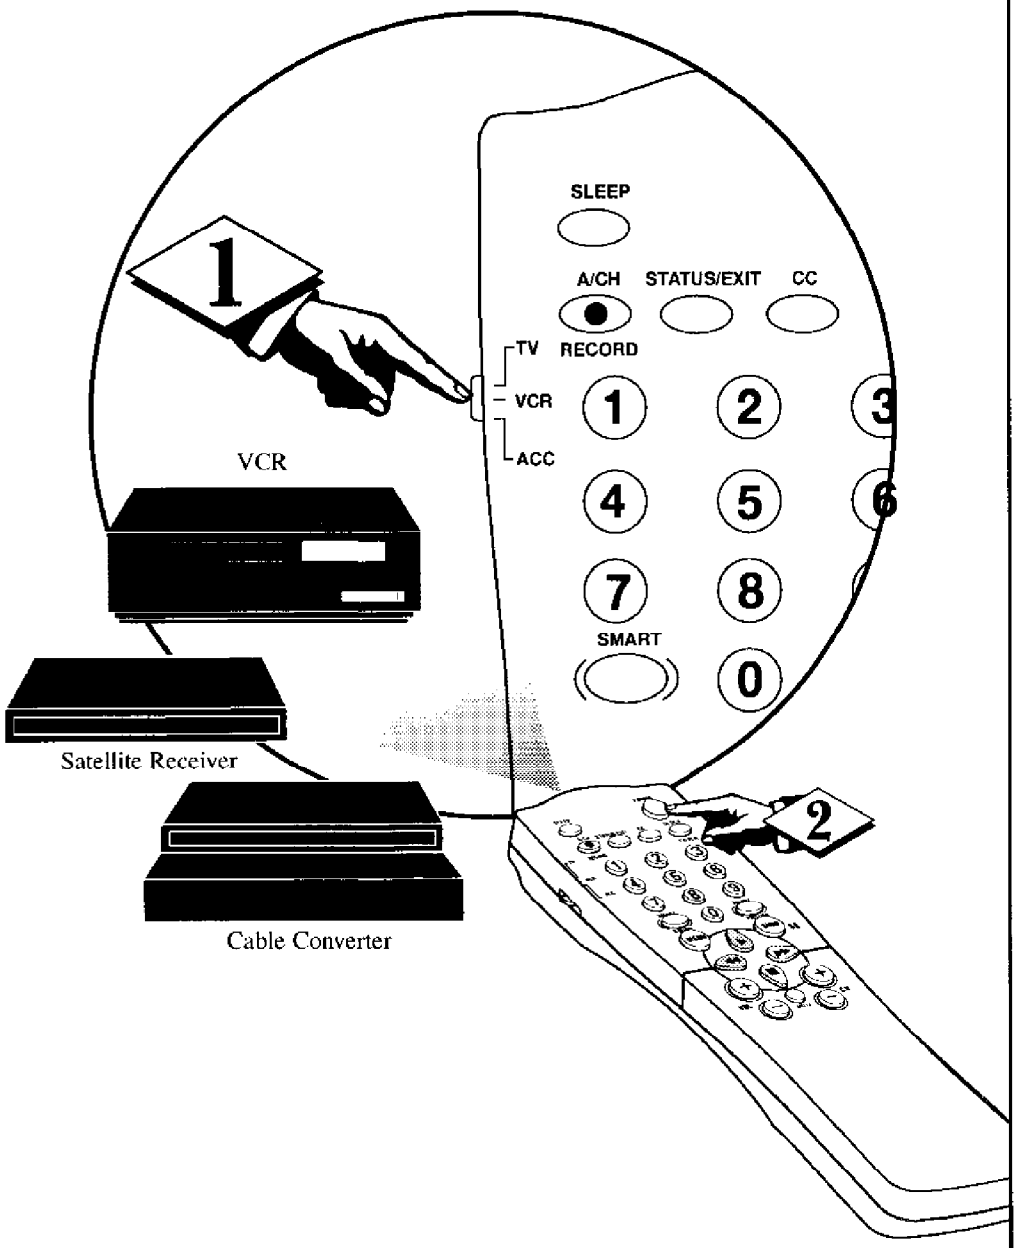

SETTING THE REMOTE CONTROL TO WORK WITH OTHER DEVICES

Direct Access Method

Now that you have looked up the three-digit Remote Code Number for your brand of device, you are ready to follow the four simple steps below.

Please read through steps 1-4 before beginning.

BEGIN

1. **Place the TV/VCR/ACC Mode Switch** in the proper position.
2. **Press the VCR • RECORD button** on the remote control and release.
3. **Press the SmartSound button** on the remote within 30 seconds, then release.
4. **Enter the THREE-DIGIT REMOTE CODE NUMBER** for your desired device. The remote is now ready to send commands to the unit.
5. **Point the remote** at the Device. Press the POWER button on the remote to turn the unit ON.

STOP

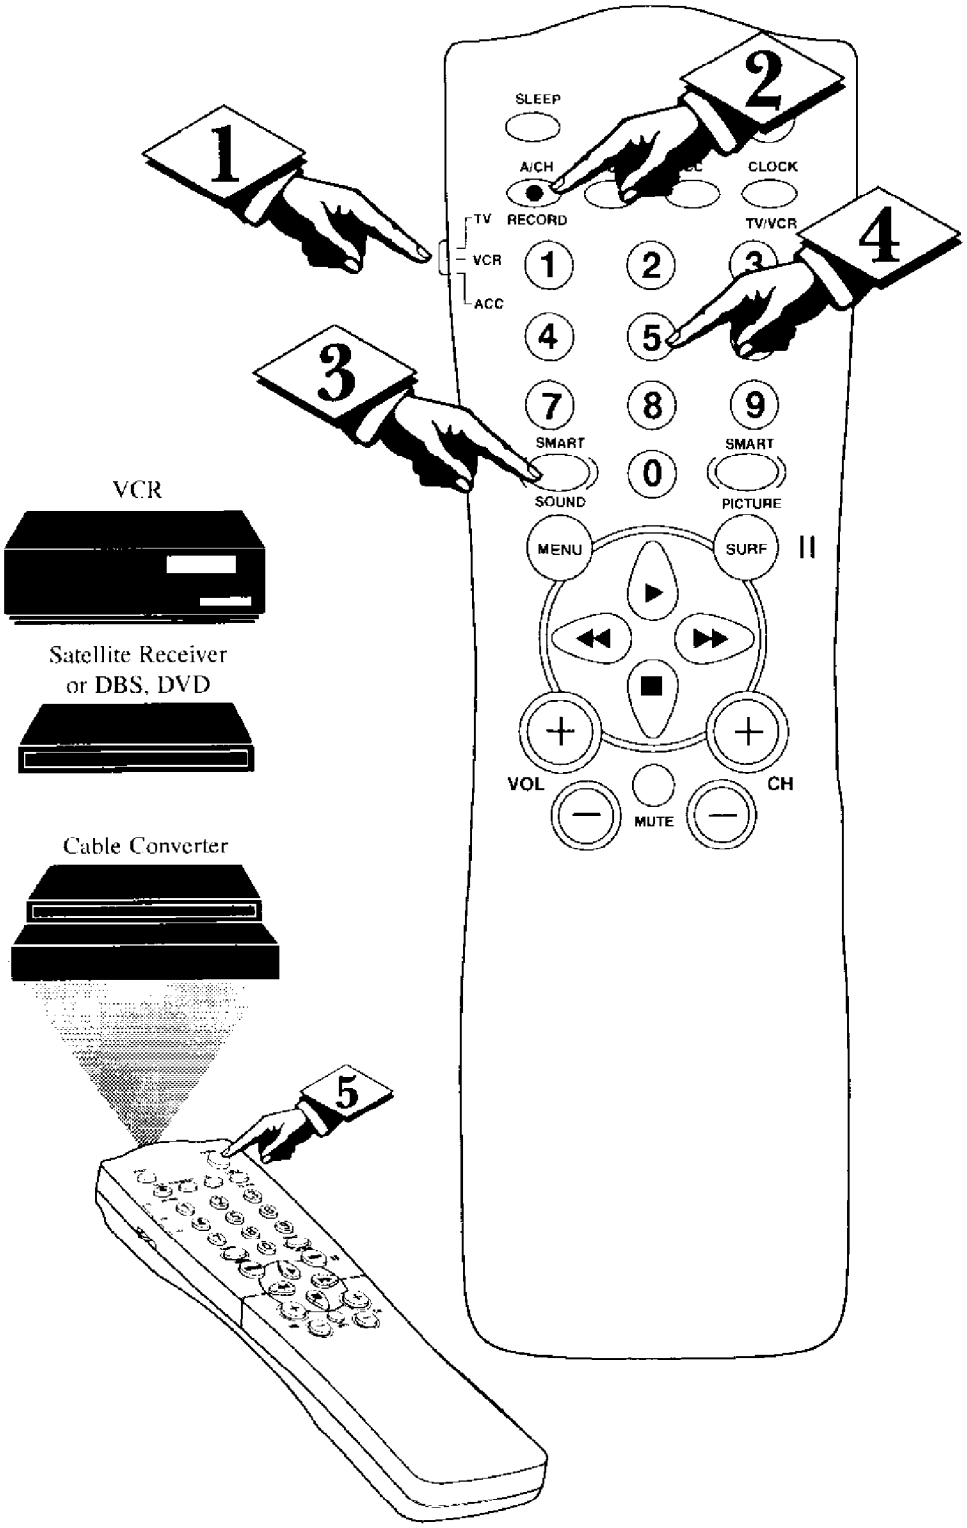

SMART HELP

Remember, if this doesn't work the first time, repeat steps using the same remote code number.

After a second try and the remote does not operate your device, see if there is another three-digit code number (pages 29-30) listed for your device and repeat the steps above using the new number.

If after repeated attempts the code number method does not work you device, try the **SEARCH METHOD** on page 28.

SETTING THE REMOTE CONTROL TO WORK WITH OTHER DEVICES

Search Method

Your TV remote can be set to work various external devices such as VCRs, Cable Boxes, Satellite Receivers, Dss, DVD, etc. by what is called the search method of remote control programming.

If the "Remote Code" number method shown on page did not set your remote to work your external device, then follow the easy steps listed below.

Please read steps 1-4 before beginning.

BEGIN

1. **Press the POWER button** on the device your are attempting to program to turn it ON.
2. **Place the TV/VCR/ACC Mode Switch** in the proper position.
3. **Press the VCR • RECORD and the SMART SOUND buttons simultaneously** and hold them down.
4. The device will begin to change channels after the remote identifies the correct code. When the channels start to change release the VCR • RECORD and SMART SOUND buttons. The remote should be ready to operate the device.

STOP

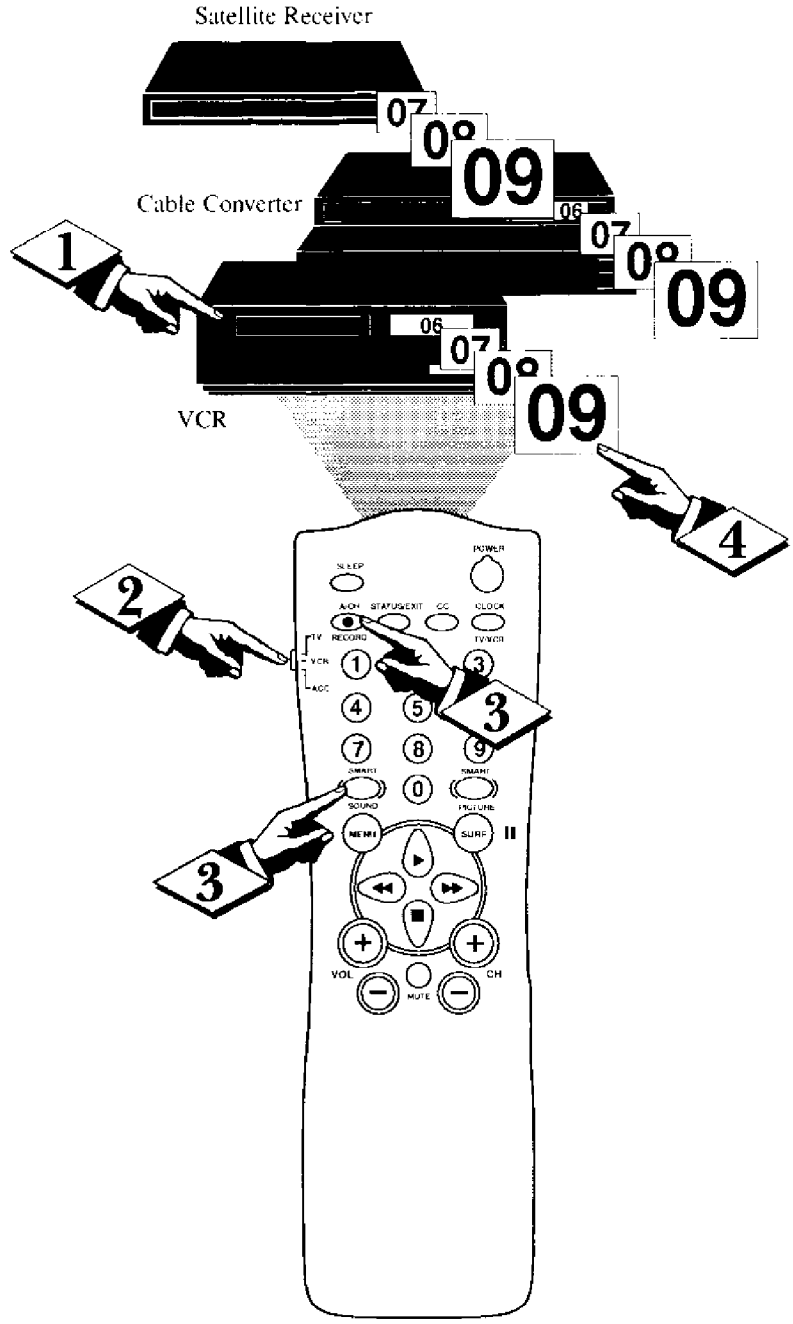

SMART HELP

This method can take up to two minute to preform.

Don't let the device scan up more than five channels. If you do the remote may pass up the right code and another two minute search cycle will have to be repeated.

If no channel change happens within two minutes, repeat steps 1-4. Should a channel change still not occur, the remote will not work the desired device.

REMOTE CONTROL DIRECT ENTRY CODES

VCR	REMOTE CODE NO.
Admiral	.048
Advantz	.358
Adventure	.000
Aiko	.278
Aiwa	.000, 037, 307, 348, 352
Akai	.041, 049, 053, 061, 106, 315
Alba	.352
Amercian High	.035
Amstrad	.325, 332
Asha	.240
Audiovox	.037
Baird	.107
Beaumark	.240
Bell & Howell	.104
Blaupunkt	.003, 006, 154
Brandt	.187, 320, 321
Broksonic	.121, 184, 211, 295, 361
Bush	.352
CCE	.072, 278
Calix	.037
Canon	.035
Capehart	.020
Carver	.081, 146
Citizen	.037, 278
Colt	.072
Combitach	.352
Craig	.037, 047, 072, 240, 271
Curtis Mathes	.035, 041, 060
Cybermax	.051, 240
Daewoo	.020, 045, 276
Daytron	.020
Denon	.042
Dynatech	.000
Electrophonic	.037
Emerex	.032
Emerson	.000, 002, 036, 037, 043, 061, .068, 088, 121, 164, 208, 209, .211, 212, 278, 295, 361, 479
Ferguson	.107, 320, 321
Fisher	.047, 054, 066, 104
Fuji	.033, 035
Funai	.000
GE	.035, 060, 065, 202
Garrard	.000
Go Video	.232, 279, 432
Gold Star	.037, 038
Gradiente	.000, 406
Grundig	.003, 007, 195, 347
HI-Q	.047
Harley Davidson	.000
Harman/Kardon	.038, 075
Harwood	.068, 072
Headquarter	.046
Hinari	.004, 352
Hitachi	.000, 004, 041, 042, .065, 105, 168, 235
Ingersol	.004
JVC	.008, 041, 067, 208, 384, 486
Jensen	.041
KEC	.037, 278
KLH	.072
Kenwood	.038, 041, 067, 384
Kodak	.035, 037
LXI	.037
Lloyd's	.000, 206
Loewe	.004
Logik	.004, 072
MEI	.035
MGA	.043, 061
MGN Technology	.240
MTC	.000, 240
Magnavox	.000, 035, 081, 146, 181
Marta	.037
Matsui	.004, 348, 352
Matsushita	.035, 162, 454
Memmorex	.307
Memorex	.000, 035, 037, 039, 046, .047, 048, 104, 240, 266, 307
Metz	.003, 347
Minolta	.042, 105
Mitsubishi	.043, 061, 067, 075, 173, 443
Motorola	.035, 048
Multitech	.000, 072
NAD	.058
NEC	.036, 040, 041, 067, 104
Nikko	.037
Nikon	.034, 253
Noblex	.240
Nordmende	.297, 320, 321
Okano	.346
Olympus	.035, 226
Optimus	.037, 048, 058, 104, .162, 432, 454
Optonica	.062
Orion	.004, 295, 348, 352, 479
Panasonic	.035, 077, 162, 225, .226, 378, 454
Penney	.035, 037, 038, 040, .042, 065, 105
Pentax	.042, 065, 105
Philco	.035
Philips	.035, 062, 081, 110, 403
Pilot	.037
Pioneer	.058, 067
Portland	.020
Profax	.322
Profitronic	.240
Protec	.072
Pulsar	.039, 051
Quarter	.046
Quartz	.046
Quasar	.035, 077, 162, 454
RCA	.042, 060, 065, 077, .105, 106, 149, 202
Radio Shack	.000, 037
Radix	.037
Randex	.037
Realistic	.000, 035, 037, 045, 047 .048, 062, 066, 104
Ricoh	.034, 253
Runco	.039
SEG	.322
SEI	.004
STS	.042
Saba	.297, 320, 321
Saisho	.004
Salora	.075
Samsung	.045, 051, 053, 240
Sanky	.039, 048
Sansui	.000, 041, 067, 271
Sanyo	.046, 047, 104, 240, 268
Saville	.352
Scott	.043, 045, 121, 164, 211, 212
Sears	.000, 035, 037, 042, 046, .047, 054, 066, 104, 105
Sharp	.046, 062
Shintom	.072
Shogun	.051, 240
Shoral	.004
Siemens	.003
Singer	.072
Sinudyne	.004
Sony	.000, 011, 022, 032, 033, .034, 035, 253, 275
Sunkel	.348
Sunpak	.253
Sylvania	.000, 035, 043, 081, 103, 110
Symphonic	.000
TMK	.036, 208, 240
Tatung	.041
Teac	.000, 041
Technics	.035, 162
Teknika	.000, 035, 037
Telefunken	.187, 320, 321
Tansal	.322
Thomas	.000
Thomson	.320
Toshiba	.043, 045, 066, 212, 366
Totavision	.037, 240
Towada	.322
Unitech	.240
Universum	.325
Vactor	.045
Vactor Research	.038, 040
Video Concepts	.040, 045, 061
Videosonic	.240
Wards	.000, 035, 042, 047, 048, 060, 062, .072, 081, 149, 161, 212, 240
XR-1000	.000, 035, 072
Yamaha	.038
Zenith	.000, 033, 034, 039

CABLE CONVERTOR	REMOTE CODE NO.
ABC	.001, 003, 007, 008, .011, 013, 014, 017
Aliegio	.153
Andover	.544
Antronix	.022
Archer	.022, 153
Balcor	.056
British Telecom	.105
Cable Star	.056
Cablatenna	.022
Cabletime	.161, 271, 377, 448
Cableview	.022
Century	.153
Citizen	.153
Clyde	.086
Colour Voice	.025, 031
Comtec	.274
Comtronics	.040
Contec	.019
Cryptovision	.600
Deceat	.423

Remote Control Direct Entry Codes

CABLE CONVERTOR	REMOTE CODE NO.
Eastern	.002, 274
Everquest	.015, 040
Filmnet	.443
Focus	.400
France Telecom	.451
GC Electronics	.056
GEC	.086
Ganard	.153
Gemini	.015, 070, 242
General Instrument	.011, 276, 476
Gold Star	.040
Grundig	.529
Hamlin	.009, 020, 034, 259
Hitachi	.011
Hytex	.007
Jasco	.153
Jerrold	.003, 011, 012, 014, .015, 024, 276, 476
M.N.E.T.	.443
MNet	.443
Macon	.033
Magnavox	.027, 032, 334
Memorex	.000
Movie Time	.063
NSC	.063, 070
Oak	.007, 019
Optimus	.021
Panasonic	.000, 021, 107
Paragon	.000
Philips	.025, 027, 031, 153, 242, 290, 334
Pioneer	.533, 753
Popular Mechanics	.400
Pulsar	.000
RCA	.021
Radio Shack	.015
Recoton	.400
Regal	.020, 259
Regency	.002
Rembrandt	.011, 070
Runco	.000
SL Marx	.040
Salora	.382
Samsung	.040
Satbox	.375
Scientific Atlanta	.008, 017, 477
Signal	.015, 040
Signature	.011
Sprucer	.021
Star Sight	.542
Starcom	.003, 015
Stargate	.015, 040
Starquest	.015
Sylvania	.001
TV85	.063
Tandy	.258
Tele+1	.443
Teleservice	.281
Teleview	.040
Texscan	.001
Timeless	.274
Tocom	.012, 013, 059
Toshiba	.000
Tudl	.286
Tusa	.015
Unike	.022, 153
United Artists	.007
United Cable	.003
Universal	.022, 056, 153, 191
Videoway	.250
Viewstar	.027, 063, 258
Visi Cable+	.461
Westminster	.105
Wolsey Gaine	.544
Zenith	.000, 054, 525
Zentek	.400

DBS	REMOTE CODE NO.
Alpha Star	.772
Echostar	.775
HTS	.775
Hitachi	.819
Hughes Network System	.749
Jerrold	.627
Magnavox	.722, 724
Memorex	.724
Panasonic	.701
Philips	.722, 724
Primestar	.627
RCA	.566
Sony	.639
Toshiba	.790
Uniden	.724

Satellite	REMOTE CODE NO.
AST	.351
Akai	.515
Alba	.352, 515, 613
Aldea	.288
Amstrad	.080, 252, 345, 461, 509, 689
Ankaro	.220, 288, 369
Anitron	.183
Armstrong	.243
Astra	.108
Avalon	.396
Axis	.369
BT	.515, 668
Beko	.189
Best	.369
Boca	.243, 513
Bush	.067
Cambridge	.344, 515
Channel Master	.362
Commlink	.288
Connexions	.396
Conrad	.607
Crown	.243
DDC	.362
DNT	.396
Echostar	.396
Farguson	.067, 183, 189, 336
Fidelity	.252
Finiux	.108, 397
Fuba	.369, 396
G-Bat	.183
Galaxis	.286
Gooding	.571
Grundig	.173, 189, 571, 750
Hinari	.183
Hirschmann	.397, 573
Houston	.668
Huth	.220, 243, 268
ITT	.108
Intervision	.592
JVC	.515, 571
Kathrein	.092, 504, 622, 658
La Sat	.513, 607
Lennox	.592
Lupus	.369
Luxor	.108, 573
Manhatten	.592
Maspro	.092, 336, 750
Matsui	.571
Mediamarkt	.248
Minerva	.571
Mintec	.576
Morgan's	.243, 513
Newhaus	.220
Nikko	.360, 713
Nokia	.108, 397, 573
Nordmende	.362
Orbitech	.501
Pace	.067, 183, 336, 455, 791
Paliadium	.571
Palsat	.501
Philips	.200, 292, 571, 750
Phonotrend	.288, 592
Plasmatic	.442
Proset	.288
Quadral	.362, 628
RFT	.220, 288
Radix	.396
SAT	.351, 461
SEG	.369
Saba	.336
Salora	.108
Satec	.183
Schwaiger	.183, 504
Seemann	.396, 578, 626
Skymaster	.288, 626
Sony	.704
Star Trak	.421
Strong	.421
Sunstar	.513
Tantec	.336
Techni Sat	.262, 501
Teleka	.243, 613
Tonna	.668
Triad	.351
Universum	.571
Vtech	.351
Wisi	.351, 396

DVD	REMOTE CODE NO.
Kenwood	.534
Mitsubishi	.521
Panasonic	.490
Philips	.539
Pioneer	.550
RCA	.522
Sony	.552
Toshiba	.503

USING THE REMOTE'S VCR BUTTONS

When using the TV remote with a VCR, first make certain it is set to control your VCR (by the REMOTE CODE or SEARCH method).

BEGIN

1. **Set the TV/VCR/ACC mode switch to VCR** on the remote.
2. **Point the top of the remote** toward the front of the VCR (remote sensor window) when pressing the buttons.

STOP

RECORD BUTTON
Hold the A/CH • RECORD button down to begin a VCR recording.

VCR SYSTEM SWITCH
Set in the VCR position to send remote commands to the VCR.

PLAY BUTTON ▶
Press to begin playback of a video tape.

REWIND BUTTON ◀◀
Press to rewind tapes. For some VCR's the STOP button may have to be pressed first, then REWIND. In playback mode hold down the button to view picture moving rapidly in reverse.

STOP BUTTON ■
Press to stop the motion of a tape in playback, rewind, fast forward, etc.

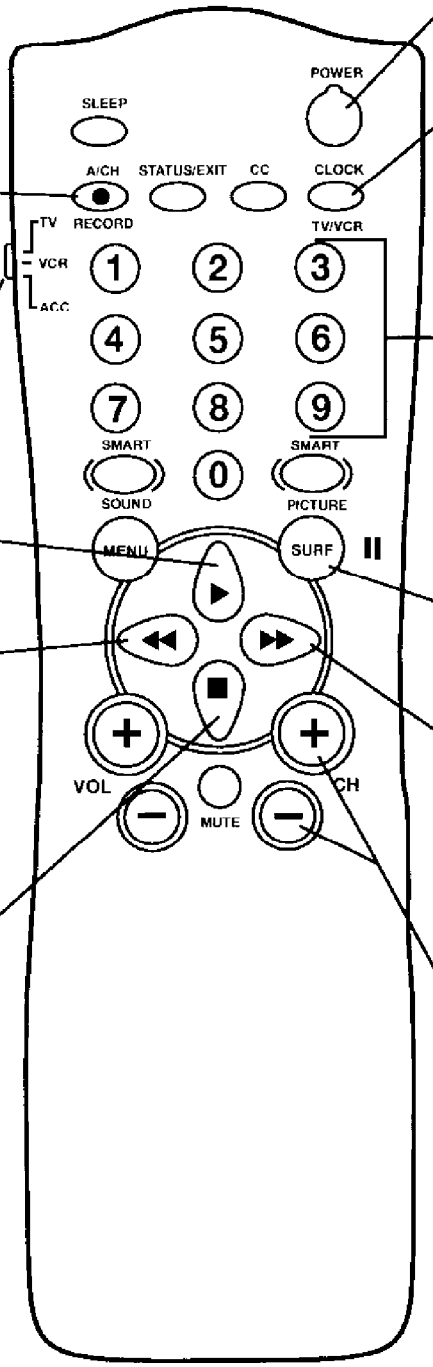

POWER BUTTON
Press to turn the VCR ON and OFF.

TV/VCR BUTTON
Press while in the VCR mode (VCR indicator on the front of the unit will light) to view the playback of a tape. Press again to place in the TV position (VCR indicator light will go off) to view one program while recording another program. When used in the TV mode, the TV/VCR/CLOCK button will access the TV's Clock menu options.

NUMBER BUTTON
Press buttons for direct VCR channel selections.

PAUSE BUTTON II
Press to temporarily stop the tape during a playback or recording. Press again to release Pause.

FAST FORWARD BUTTON ▶▶
Press to rapidly advance the tape. For some VCR's you may need to press the STOP button first, then the FAST FORWARD button. In playback mode hold the button down to view the picture moving rapidly in the forward direction.

CHANNEL + & – BUTTONS
Press to scan up or down through the VCR channel numbers

SMART HELP

Remember, the VCR buttons on the remote will not operate your VCR if those features are not found on your VCR remote control.

Note: All VCR functions (particularly Search, Rewind, Fast Forward, etc.) will operate the same as with the original VCR remote control provided with the VCR.

DISASSEMBLY PROCEDURE

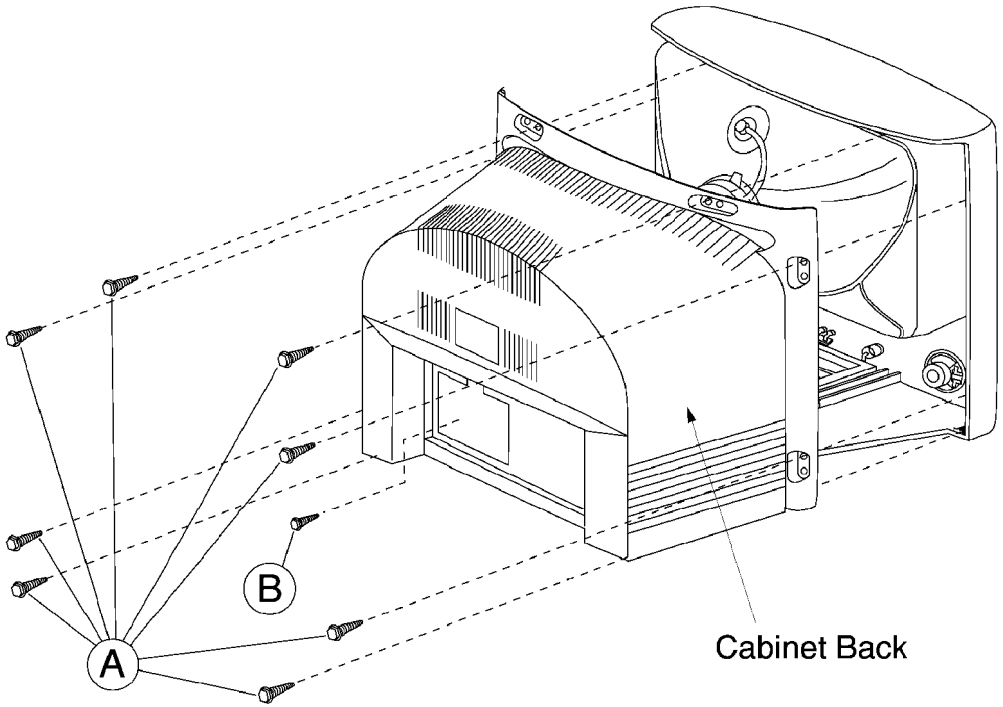

ILLUSTRATION 1
Cabinet Back

Step 1 Remove eight 1/4 inch screws (A).
Step 2 Remove one 3/16 inch screw (B). (Number of screws depends on Jack Panel)
Step 3 Remove Cabinet Back.

(Display Cabinet Back Removal Illustration)

(Display Main Chassis Removal Illustration)

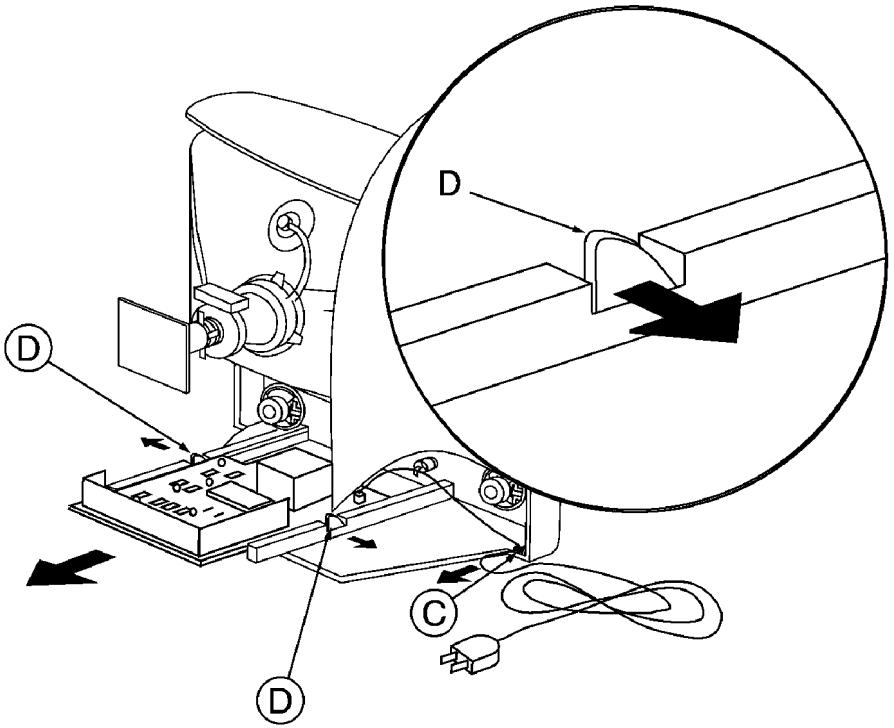

ILLUSTRATION 2
Main Chassis

Step 4 Remove AC Power Cord from Cabinet Front, by sliding tension bushing out of slot. (C)

Step 5 Release Main Chassis by pulling two tabs (D) out away from chassis.

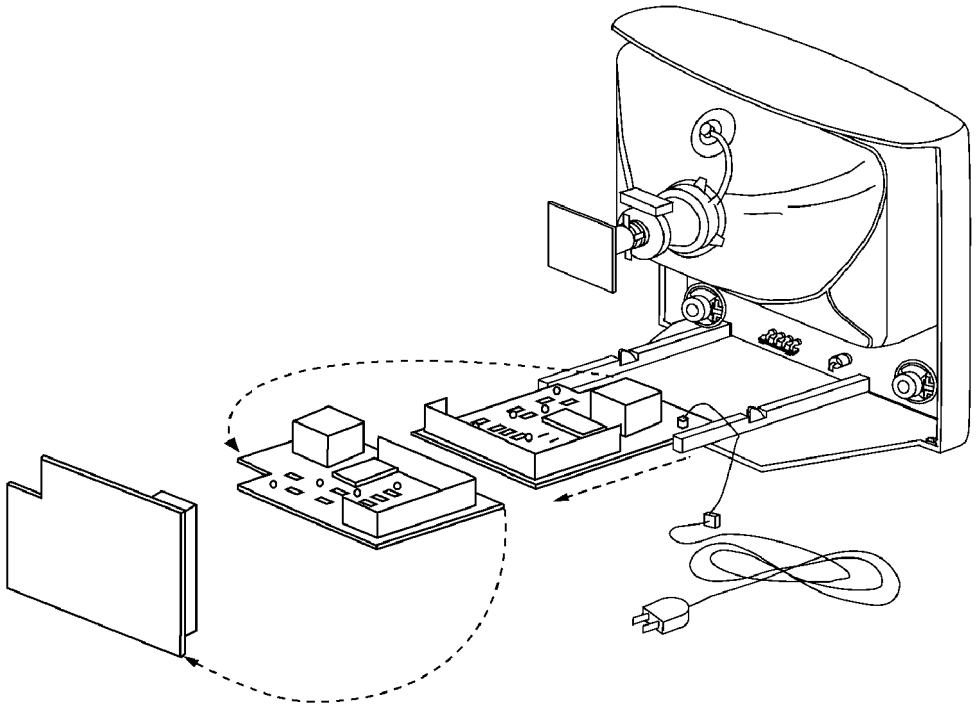

(Display Service Position Illustration)

ILLUSTRATION 3
SERVICE POSITION

Step 6 Slide Chassis back out of unit.
Step 7 Rotate Chassis counter clockwise 1/4 turn.
Step 8 Position Chassis on its side.

SERVICE ADJUSTMENTS

Required Tools For Servicing:

Isolation Transformer
Multimeter
Oscilloscope
High Voltage (100:1) Oscilloscope Probe
Sencore VG91 Universal Video Generator

Service Adjustment Notes:

Unless Otherwise Specified:

1. All service adjustments are ”hot“ voltagewise. For maximum safety, ensure the use of properly insulated tools.
2. Refer to the F8 Main Chassis Printed Circuit Board for location of test points and adjustable components.
3. Grid Locations (Ex.: D-2) next to the reference numbers for components refer to the Main Chassis Printed Circuit Board.

Caution: The F8 chassis incorporates a ”hot“ ground system. Always use a separate isolation transformer when applying power to the exposed chassis.

Focus Adjustment

1. Tune the set to a local or cable station.
2. Adjust the Focus Control (located on the upper part of the flyback transformer) for best picture details at high light conditions.

Degaussing the Television

1. Position the television so that the screen faces the direction it will be facing when in use.
2. Ensure the set is turned off.
3. Move a degaussing coil in a circular motion slowly around the sides and front of the set.
4. Withdraw the degaussing coil at least six feet from the television before disconnecting it from its power source.

Service Modes:

Introduction

1. There are three service modes used in the F8 chassis. They are:
    a. SDM - Service Default Mode
    b. SAM - Service Alignment Mode
    c. CSM - Customer Service Mode
2. The Service Default Mode (SDM) is a technical aid for the service technician. It is used for setting of options, reading error codes, and erasing error codes. This mode displays the Run Timer, Software Version, and current option settings. Service Default Mode (SDM) also establishes a fixed, repeatable setting of controls to allow measurements to be made. On screen display is kept at a minimum to reduce the cluttering of waveforms with unwanted information.
3. The Service Alignment Mode (SAM) is used to make tuning adjustments, align the white tone, adjust the picture geometry, and make sound adjustments.
4. The Customer Service Mode shows error codes and information on the TV operation settings. The servicer can instruct the customer to enter CSM by telephone and read off the information displayed. This helps the servicer to diagnose problems and failures in the TV set before making a service call.
5. When in a service mode, "SDM" (for Service Default Mode) or ”SAM“ (for Service Alignment Mode) or ”CSM“ (for Customer Service Mode) will be displayed (in green) in the top right corner of the screen. All other On Screen Display (except highlighted items in SDM or SAM) will be in red.
6. It will be memorized in the EEPROM that the TV set is in SDM or SAM. This is necessary because the TV must show up in SDM or SAM again after an AC power interrupt.
7. When the television is in SAM or SDM, all normal features (such as volume control and direct channel access) are available.

EEPROM Replacement or Defective EEPROM

After replacing a EEPROM (or with a defective/no EEPROM) default settings will be used that enable the set to start up and that allow access to the Service Default Mode and Service Alignment Mode.

Service unfriendly modes

In the service modes, a number of modes/features are ignored since they interfere with diagnosing or repairing a set. These are ”service unfriendly modes.“
”Ignoring“ means that the event that is triggered is not executed; the setting remains unchanged (Example: Timer OFF: 8:00 PM; the set will not switch OFF in service mode at 8:00PM, but the setting will remain).
The service unfriendly modes are:

- (Sleep) timer
- Blue mute
- Auto switch off (when there is no video signal identified)
- Hotel or hospital mode
- Smart lock or blocking by V-chip
- Skipping and/or blanking of ”Not Favorite“ channels
- Automatic storing of Personal Preset settings
- Automatic user menu time-out (menu switches back or OFF automatically)

Service Default Mode (SDM)

1. The Service Default Mode (SDM), sets the option codes and bytes of the set, and displays the error codes (the Power LED begins blinking procedure for error code display, if errors are detected). SDM also overrides software protections.
   The Service Default Mode (SDM) must be used when taking voltages and waveforms.
2. To enter the Service Default Mode, press the following key sequence on the remote control transmitter:
   0-6-2-5-9-6-Menu
   Do not allow the display to time out between entries while keying the sequence.
   SDM can also be entered by pressing the Channel Down and Volume Down keys on the local keyboard simultaneously while in SAM mode.
   When Service Default Mode is entered, the text "SDM" will be displayed in the upper right corner of the screen.
3. When Service Default Mode is entered, the Power LED will begin blinking to display any detected error codes, the set automatically tunes to Channel 3 (61.25 MHz), and service unfriendly modes are disabled. All customer controls are set to predetermined values.
4. When the unit is operating in Service Default Mode, all normal on-screen displays are suppressed and replaced by a special service display. A sample SDM display is shown below.

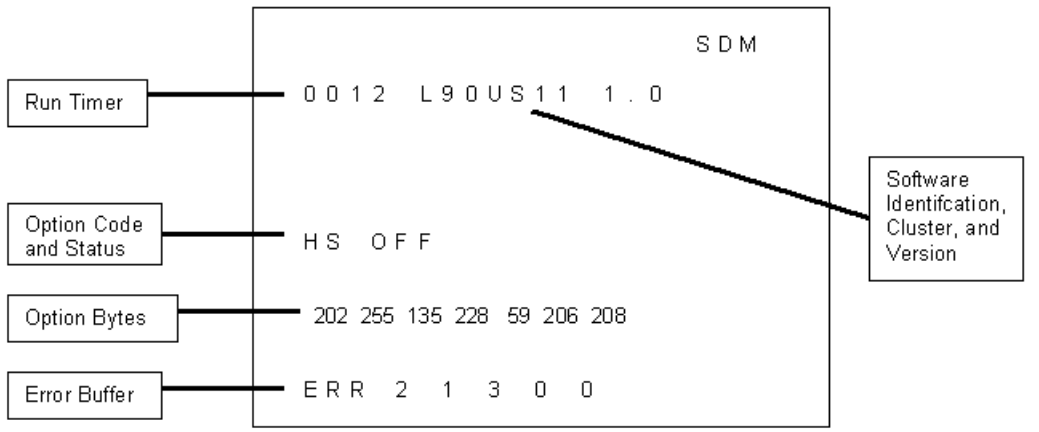

5. To select an option code or option byte in SDM, use the Menu Up or Menu Down keys on the remote control.
6. To change the value of an option code, use the Menu Left or Menu Right keys.
7. To change the value of an option byte, enter the new value using the numeric keys on the remote control.
8. Press the Status button on the remote control to toggle the OSD (except ”SDM“) ON and OFF to prevent the OSD from interfering with measurements and oscilloscope waveforms.
9. Press the Menu button on the remote control while in SDM to switch the software to a Virtual Customer Mode; the text "SDM" will still be displayed in the upper right corner of the screen. In this mode, all customer menu adjustments to the set can be made. From the Virtual Customer Mode, press the Menu button to return to the SDM display.

10. To exit the Service Default Mode and erase the error codes, turn the unit off with the Power button on the remote control then unplug the AC cord.
11. To exit the Service Default Mode and save the error codes, unplug the AC cord to turn off the set. When the set is turned on again, the Service Default Mode will still be active.

Explanation of Display:

Run Timer

The run timer counts the normal operation hours, not the standby hours. The actual value of the run timer is displayed in SDM and CSM. The run timer displays hours in hexadecimal format. This display will increment based on the amount of time the set has been on. The timer will also be incremented one hour each time the set is turned on.

Software Identification, Cluster, and Version

The software identification, cluster, and version will be shown in the service main menu display.
These numbers consist of the last part of the customer identification printed on the IC package; the screen will show ”AAABBC-X.Y“. (Example: L90US11 1.0)

- AAA is the engineering project name (Ex: L90 = L9.0).
- BB is a function specification indicating specific functionality or a region (Ex: US). Processors with the same engineering project name and function name are interchangeable, except for the languages they support.
- C is the language cluster number within the ”BB“ software version (Ex: 11 = English/Spanish/French)
- X is the main version number (Ex: 1)
- Y is the sub version number (Ex: 0)
- the main version number is updated with a major change of specification (incompatible with the previous software version)
- the sub version number is updated with a minor change (backwards compatible with the previous versions)
- if the main version number changes, the new version number is written in the EEPROM
- if the main version number changes, the default settings are loaded
- if the sub version number changes, the new version number is written in the EEPROM
- if the EEPROM is fresh, the software identification, version and cluster will be written to EEPROM
- **Note:** a new micro controller is considered to be compatible if it works instead of the old software and the functionality is not significantly changed.

Error Buffer

Error codes are required to indicate failures in the television. For intermittent complaints, always check the error buffer. A unique error code is available for:

- activated protection (error codes 1, 2, and 3)
- failing I^2C device
- general I^2C error
- RAM failure (e.g. internal RAM of microprocessor (IC 7600)

Other error codes are:

- Signal processor (IC 7250) start-up error
- EEPROM check-sum error

The last five errors, remembered in the EEPROM, are shown in the service menu. This is called the error buffer. The error that is found last is displayed on the left, except when protection (1 to 3) is active. Errors 1, 2, and 3 are often shown at the right of the error buffer display whenever they are detected.

Example 1:
Suppose the display shows: 8 – 11 – 2– 0 – 0
With 2 displayed at the right of the error buffer, high beam current protection is active.
Example 2:
Suppose the display shows: 11 – 4 – 5– 3 – 0
With 3 displayed at the right of the error buffer, vertical protection is active.

The following error codes have been defined:

Error Code Table:

0	= No error
1	= X-Ray / overvoltage protection active
2	= High beam current (BCI) protection active
3	= Vertical protection active
4	= I²C error while communicating with the sound processor (IC 7833)
5	= Signal processor (IC 7250) start-up error
6	= I²C error while communicating with the signal processor IC (IC 7250)
7	= General I²C error *****
8	= Internal RAM error micro controller
9	= EEPROM Configuration error (Checksum error)
10	= I²C error, EEPROM error
11	= I²C error, PLL tuner

Note: I²C = (SCL/SDA)

***** General I²C error means: no I²C device is responding to the particular I²C bus. Possible causes: SCL short circuit to GND, SDA short circuit to GND, SCL short circuit to SDA, SDA open circuit (at IC 7600), SCL open circuit (at IC 7600)

Reading Error Codes

Error codes are displayed in the following ways:

1. By SDM display or CSM display
2. By blinking Power LED

1. If the on screen display is working, enter SDM or CSM and read the error buffer display.
2. If the on screen display is **not** working, do the following:
   a. Remove AC power
   b. Use a jumper to connect pin M24 to pin M25 at IC 7601 (D-3)
   c. Apply AC power; read the error codes (see LED Sequence List below)
   d. If there is no LED indication, take the following steps as needed:
      Power on
      Press 0–6–2–5–9–6–Menu on the remote control

   Note: Some indications take 30 seconds or longer to appear on the LED.
3. LED Sequence List:
   a. Wait for long LED on (1.5 seconds)
   b. Count the following on flashes (individual errors are separated by 1.5 seconds LED off)

   Example:



4. Displayed error codes are saved by removing the AC power. Displayed error codes are erased by pressing the power button on the remote control or local keyboard.

Option Code and Status Table

The following options in SDM can be identified:
Note: All options may not be available in some sets.

OPTION	OP	VALUES
System	SY	SS (This option is not used in US models)
Option Byte 1 Option Byte 2 Option Byte 3 Option Byte 4 Option Byte 5 Option Byte 6 Option Byte 7	OB1 OB2 OB3 OB4 OB5 OB6 OB7	Option Bytes 1 through 7 are used to set 8 options simultaneously with one byte (value can be keyed in with numerical buttons on remote control when the byte is highlighted). Values = 0 – 255 See the Chassis Feature Listing to see the values for Option Bytes 1 through 7. These values can be used to set the option package for a particular model.
Slider Bar Value Display	DP	OFF/ON
Animated Menu	AM	OFF/ON
Hospital Mode	HS	OFF/ON
Hotel Mode	HT	OFF/ON
Demo Mode	DM	OFF/ON
Games Mode	GM	OFF/ON
Clock (Volatile)	CK	OFF/ON
Child Lock	CL	OFF/ON
V-Chip	VC	OFF/ON
V-Chip Block Unrated	VU	OFF/ON

Block No Rating (V-Chip)	VN	OFF/ON
Smart Sound	SS	OFF/ON
Smart Picture	SP	OFF/ON
Remote Control Type	RC	OFF = RC0702/04 remote control / ON = All other remote controls
Channel Select Time Window	TW	OFF = 2-second time window / ON = 5-second time window
Surf	SF	OFF/ON
Video Mute (Channel Change)	VM	OFF/ON
Tuner Type	TN	OFF = Philips tuner / ON= ALPS tuner
Fine Tuning	FT	OFF/ON
AV1	XT	OFF/ON
AV2	2X	OFF/ON
Auto Cable Detect	CD	OFF/ON
Blue Mute	BM	OFF/ON
No Ident (Auto Standby)	NI	OFF/ON
Noise Reduction	NR	OFF/ON
Contrast Plus	CP	OFF/ON
Color Temperature	CT	OFF/ON
East-West Functions	EW	OFF/ON (This option is not used in US models)
Video Processor Standby	BS	OFF/ON
Video Processor Auto Startup	AS	OFF/ON
Bass/Treble Control/Boost	BT	OFF/ON
Incredible Surround	IS	OFF/ON
Volume Limiter	VL	OFF/ON
Ultra Bass	UB	OFF/ON
Automatic Volume Leveller (AVL)	LV	OFF/ON
SAP - Mono/Stereo	DU	OFF/ON
Audio Out (Fixed/Variable)	AO	OFF/ON
Sound Type	ST	BG/I/DK/M (Should remain on M)
Sound Board	SB	DB = DBX/SAP (BTSC) EC = BTSC stereo (No SAP) MA = Mono All MS = Bi Sonic (Mono by tuner, stereo by A/V jacks)

Option SY : System

Function: Set the multi system hardware configuration

Values: SS (This option is not used in US models)

OB 1 – OB 7 : Option Byte 1 – Option Byte 7

Function: Set 8 options simultaneously with one byte
(value can be keyed in with numerical buttons on remote control)

Values: 0 – 255

Option DP : Slider Bar Value Display

Function: Enable/disable slider bar value display in customer menu

Values: OFF = Disable slider bar value display
ON = Enable slider bar value display

Option AM : Animated Menu

Function: Enable/disable animated menu

Values: OFF = Disable animated menu display
ON = Enable animated menu display

Option HS : Hospital Mode

Function: Enable/disable the possibility to enter hospital mode
Values: OFF = Disabled, hospital mode cannot be entered
ON = Enabled, hospital mode can be entered

Option HT : Hotel Mode

Function: Enable/disable the possibility to enter hotel mode
Values: OFF = Disabled, hotel mode cannot be entered
ON = Enabled, hotel mode can be entered

Option DM : Demo Mode

Function: Enable/disable the possibility to enter demo mode
Values: OFF = Disabled, demo mode is not active
ON = Enabled, demo mode is active

Option GM : Games Mode

Function: Enable/disable games function
Values: OFF = Disabled, games command is ignored
ON = Enabled, games command is processed

Option CK : Clock (Volatile)

Function: Enable/disable clock function
Values: OFF = Disabled, clock menu not available
ON = Enabled, clock menu available

Option CL : Child Lock

Function: Enable/disable child lock function
Values: OFF = Disabled, child lock menu not available
ON = Enabled, child lock menu available

Option VC : V-Chip

Function: Enable/disable v-chip function (customer menu item Smartlock)
Values: OFF = Disabled, v-chip menu (customer menu item Smartlock) Not available
ON = Enabled, v-chip menu (customer menu item Smartlock) available

Option VU : V-Chip Block Unrated

Function: Enable/disable V-Chip block unrated (in Smartlock menu)
Values: OFF = Disabled, V-Chip block unrated (in Smartlock menu) not available
ON = Enabled, V-Chip block unrated (in Smartlock menu) available

Option VN : Block No Rating (V-Chip)

Function: Enable/disable block no rating V-Chip (in Smartlock menu)
Values: OFF = Disabled, block no rating V-Chip (in Smartlock menu) not available
ON = Enabled, block no rating V-Chip (in Smartlock menu) available

Option SS : Smart Sound

Function: Enable/disable smart sound function
Values: OFF = Disabled, Smart Sound command is ignored
ON = Enabled, Smart Sound command is processed

Option SP : Smart Picture

Function: Enable/disable smart picture function
Values: OFF = Disabled, Smart Picture command is ignored
ON = Enabled, Smart Picture command is processed

Option RC : Remote Control Type

Function: Choose the type of remote control to be used
Values: OFF = RC0702/04 remote control
ON = All other remote controls

Note: If changed, this option can only be returned to the original setting by option byte correction.

Option TW : Channel Select Time Window

Function: Select time window for channel selection
Values: OFF = 2-second time window for channel selection
ON = 5-second time window for channel selection

Option SF : Surf

Function: Enable/disable the possibility to enter surf mode
Values: OFF = Disabled, customer menu item Surf not available and A/CH command alternates channels
ON = Enabled, customer menu item Surf available and A/CH command surfs or alternates channels

Option VM : Video Mute (Channel Change)

Function: Enable/disable video mute during channel change
Values: OFF = Disabled, no video mute during channel change
ON = Enabled, video muted during channel change

Option TN : Tuner Type

Function: Choose the tuner type that is configured in the hardware
Values: OFF = Philips tuner (A Philips tuner will have the Philips name embossed on the side)
ON = ALPS tuner (An ALPS tuner will **not** have the Philips name embossed on the side)

Option FT : Fine Tuning

Function: Enable/disable fine tuning
Values: OFF = Customer menu item fine tuning disabled
ON = Customer menu item fine tuning enabled

Option XT : AV1

Function: Enable/disable external input source 1 (Ext 1)
Values: OFF = Disabled, external input source 1 (Ext 1) not available
ON = Enabled, external input source 1 (Ext 1) available

Option 2X : AV2

Function: Enable/disable external input source 2 (Ext 2)
Values: OFF = Disabled, external input source 2 (Ext 2) not available
ON = Enabled, external input source 2 (Ext 2) available

Option CD : Auto Cable Detect

Function: Enable/disable automatic detection of Cable/Broadcast during autostore.
Values: OFF = Disabled, autostore uses the selected Cable/Broadcast setting
ON = Enabled, autostore will detect and set Cable/Broadcast mode

Option BM : Blue Mute

Function: Enable/disable blue mute when no television station signal is present
Values: OFF = Disabled, no blue mute when no television station signal is present
ON = Enabled, blue mute active when no television station signal is present

Option NI : No Ident (Auto Standby)

Function: Enable/disable automatic switch to standby after 10 minutes when no television station signal is present

Values: OFF = Disabled, no automatic switch to standby
ON = Enabled, set switches to standby after 10 minutes when no television station signal is present

Option NR : Noise Reduction

Function: Enable/disable noise reduction function

Values: OFF = Disabled, customer menu item Noise Reduction not available
ON = Enabled, customer menu item Noise Reduction available

Option CP : Contrast Plus

Function: Enable/disable contrast plus function

Values: OFF = Disabled, customer menu item Contrast Plus not available
ON = Enabled, customer menu item Contrast Plus available

Option CT : Color Temperature

Function: Enable/disable color temperature function

Values: OFF = Disabled, customer menu item Color Temperature not available
ON = Enabled, customer menu item Color Temperature available

Option EW : East-West Functions

Function: Enable/disable east-west control function

Values: OFF = Disabled, east-west alignment not available in SAM (EWW, EWP, EWC, EWT)
ON = Enabled, east-west alignment available in SAM (EWW, EWP, EWC, EWT)

Option BS : Video Processor Standby

Function: Enable/disable video processor standby

Values: OFF = Disabled, video processor standby is not active
ON = Enabled, video processor standby is active

Option AS : Video Processor Auto Startup

Function: Enable/disable video processor auto-startup

Values: OFF = Enabled, video processor is in auto-startup mode
ON = Disabled, video processor is switched on under control of microcontroller

Option BT : Bass/Treble Control/Boost

Function: Enable/disable bass and treble function

Values: OFF = Disabled, customer menu items Bass and Treble not available
ON = Enabled, customer menu items Bass and Treble available

Option IS : Incredible Surround

Function: Enable/disable incredible surround function

Values: OFF = Disabled, incredible surround function not available
ON = Enabled, incredible surround function available

Option VL : Volume limiter

Function: Enable/disable volume limiter

Values: OFF = Disabled, customer menu item Volume Limiter not available
ON = Enabled, customer menu item Volume Limiter available

Option UB : Ultra Bass

Function: Enable/disable ultra bass function

Values: OFF = Disabled, ultra bass function not available
ON = Enabled, ultra bass function available

Option LV : Automatic Volume Leveler (AVL)

Function: Enable/disable automatic volume leveler function

Values: OFF = Disabled, customer menu item AVL not available
ON = Enabled, customer menu item AVL available

Option DU : SAP

Function: Set SAP configuration (sets with DBX stereo system only)

Values: OFF = Disabled, stereo/SAP not available
ON = Enabled, stereo/SAP available

Option AO : Audio Out (Fixed/Variable)

Function: Set audio output type (where present)

Values: OFF = Fixed audio out
ON = Variable audio out (always on)

Option ST : Sound Type

Function: Set the sound type

Values: BG PAL system
I PAL system
DK PAL system
M Default for USA

Option SB : Sound Board

Function: Set the sound board configuration

Values: DB = DBX/SAP (BTSC)
EC = BTSC stereo (No SAP)
MA = Mono All
MS = BiSonic (Mono from tuner, Stereo from A/V jacks)

Service Alignment Mode (SAM)

1. The Service Alignment Mode (SAM) is used to make tuning adjustments, align the white tone, adjust the picture geometry, and make sound adjustments.
2. To enter the Service Alignment Mode (SAM), press the following key sequence on the remote control transmitter:
   0-6-2-5-9-6-Status
   Do not allow the display to time out between entries while keying the sequence.
   SAM can also be entered by pressing the Channel Down and Volume Down keys on the local keyboard simultaneously while in SDM mode.
   When Service Alignment Mode is entered, the text "SAM" will be displayed in the top right corner of the screen.
3. When Service Alignment Mode is entered, service unfriendly modes are disabled. The following volatile SAM item values are set:
   - AKB = 0
   - VSD = 0
   - AFW = 275 kHz
   - SBL = 0
4. When the unit is operating in Service Alignment Mode, all normal on-screen displays are suppressed and replaced by a special service display. The first screen seen upon entering SAM is the ”top level SAM menu.“ The service technician must return to the top level SAM menu before exiting with a power-off command.
   A sample SAM top level menu display is shown below.

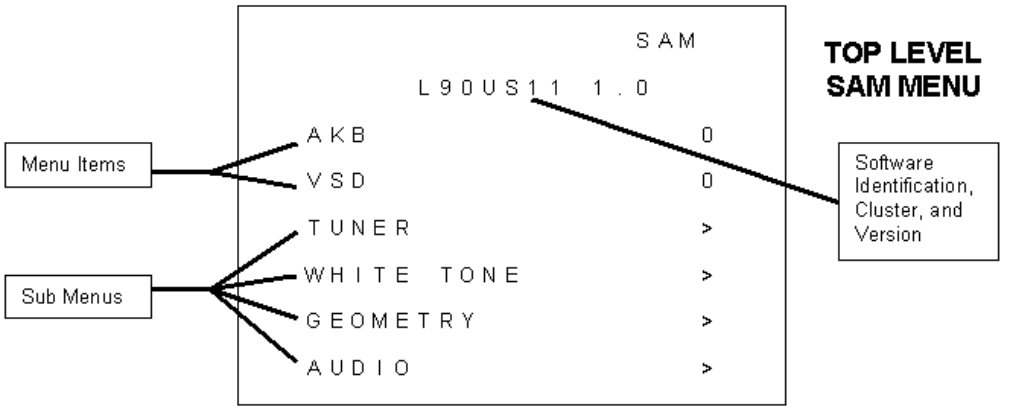

Explanation of top level SAM menu display:
The Software Identification, Cluster, and Version are explained in the Service Default Mode section under ”Explanation of Display.“
The Menu Items and Sub Menus are explained below.
Note: The ”Audio“ sub menu will not be seen on screen when Service Alignment Mode is first entered. Use the Menu Up and Menu Down buttons on the remote control to view all menu items and sub menu choices.

5. To select a menu item or a sub menu in SAM, use the Menu Up or Menu Down keys on the remote control to highlight the item or menu you wish to adjust.

6. To change the value of a highlighted SAM menu item (AKB or VSD), use the Menu Left or Menu Right keys on the remote control.
7. To enter a highlighted SAM sub menu, use the Menu Left or Menu Right keys.
   After entering the sub menu, use the Menu Up or Menu Down to select an item within the sub menu.
   Use the Menu Left or Menu Right keys to change the value of the selected item.
   Press the Menu button to return to the top level SAM menu.
8. Press the Menu button on the remote control while in SAM to switch the software to a Virtual Customer Mode; the text "SAM" will still be displayed in the upper right corner of the screen. In this mode, all customer menu adjustments to the set can be made. From the Virtual Customer Mode, press the Menu button to return to the SAM Menu.
9. Press the Status button on the remote control to toggle the OSD (except ”SAM“) ON and OFF.
10. To exit the Service Alignment Mode, turn the set off with the Power button on the remote control. To turn off the set without exiting SAM (or erasing any stored error codes), unplug the AC cord. When the set is powered on again, the Service Alignment Mode will still be active.
    Note: When SAM is exited or a power interrupt occurs, the volatile SAM items AKB, VSD, AFW, and SBL will be reset to their original values.

Main Menu

The SAM main menu contains the following items:

- AKB
- VSD
- Tuner sub menu
- White Tone sub menu
- Geometry sub menu
- Audio sub menu

Menu: **MAIN**		**Values**	**Remarks**
AKB	Black current loop (Auto Kine Bias)	OFF/ON (0/1)	
VSD	Vertical scan disable	OFF/ON (0/1)	
TUNER		**>**	
WHITE TONE		**>**	
GEOMETRY		**>**	
AUDIO		**>**	

Tuner sub menu

The tuner sub menu contains the following items:

- IF-PLL
- AFW
- AGC
- YD
- CL
- AFA and AFB

The items AFA and AFB cannot be selected; they are for monitoring purposes only.
The item values are stored in EEPROM if this sub menu is left.
A sample display of the Tuner sub menu is shown below.

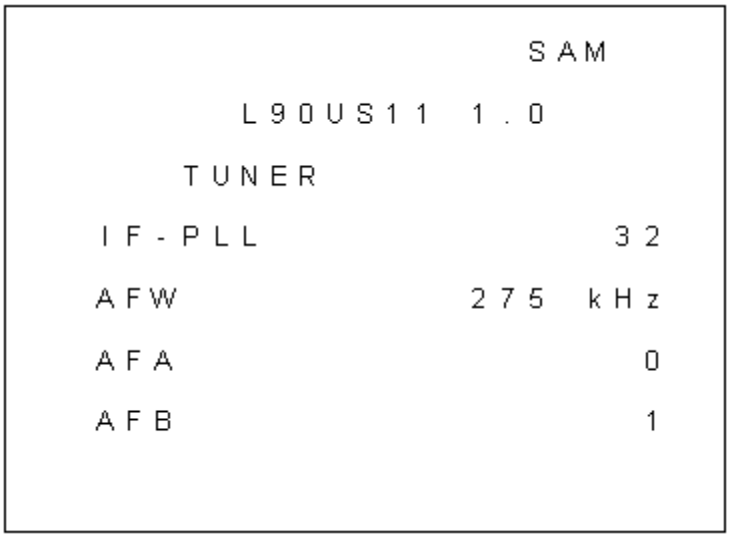

Sub Menu: **TUNER**		**Values**	**Remarks**
IF-PLL	IF-PLL alignment	0 – 127	This adjustment is auto-aligned (no action required)
AFW	AFC window	125/275 kHz	Always set to 275 kHz
AGC	AGC takeover point	0 – 63	See below
YD	Y-delay adjustment	0 – 15	Always set to 12 (no effect)
CL	Cathode drive level	0 – 7	Always set to 4
AFA		0 / 1	read only, not accessible
AFB		0 / 1	read only, not accessible

Tuner Adjustment:

AGC Takeover Point (AGC):

1. Enter the Service Alignment Mode (SAM) by pressing the following key sequence on the remote control transmitter:
   0-6-2-5-9-6-Status
   Do not allow the display to time out between entries while keying the sequence.
2. From the top level SAM menu, use the Menu Up/Down keys to highlight the Tuner sub menu.
3. Use the menu left/right keys to enter the Tuner sub menu.
4. In the Tuner sub menu, use the Menu Up/Down keys to highlight AGC.
5. Use the Menu Right key to raise the value of AGC until snow appears in the picture.
6. Then use the Menu Left/Right keys to reduce AGC value until the snow disappears.
   a. AGC values between 10 and 20 are nominal.
   b. Single digit AGC values may cause overload.
7. Upon completion of Tuner adjustment, press the Menu button to return to the top level SAM menu.

White Tone sub menu

The white tone sub menu contains the following items:

- Normal Red
- Normal Green
- Normal Blue
- Delta Cool Red
- Delta Cool Green
- Delta Cool Blue
- Delta Warm Red
- Delta Warm Green
- Delta Warm Blue

Note: Delta values are only used in models with the item ”Color Temperature“ in the customer menu.

OSD is kept to a minimum in this menu, in order to make white tone alignment possible.
The item values are stored in EEPROM if this sub menu is left.
The Contrast Plus feature (black stretch) is set to OFF when the White Tone sub menu is entered.
A sample display of the White Tone sub menu is shown below.

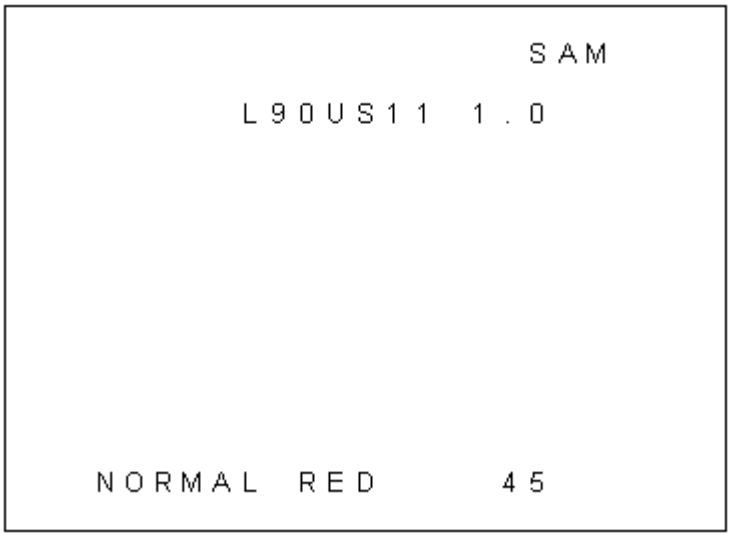

Sub Menu: **WHITE TONE**		**Value Range**	**Remarks**
NORMAL			Starting Values:
	NORMAL RED	0 – 63	45
	NORMAL GREEN	0 – 63	32
	NORMAL BLUE	0 – 63	39
COOL		**Default Value**	
	DELTA COOL RED	–2	Delta values are a change of the normal values. These start at the default values, and are set to achieve cool and warm steps of color temperature in the customer menu. Standard factory settings are given as the default values.
	DELTA COOL GREEN	0	
	DELTA COOL BLUE	+6	
WARM			
	DELTA WARM RED	+2	
	DELTA WARM GREEN	0	
	DELTA WARM BLUE	–7	

White Tone Adjustments:

Note: The following procedure was performed with a Sencore VG91 Universal Video Generator providing grey scale bars.

1. Enter the Service Alignment Mode (SAM) by pressing the following key sequence on the remote control transmitter:
   0-6-2-5-9-6-Status
   Do not allow the display to time out between entries while keying the sequence.
2. From the top level SAM menu, use the Menu Up/Down keys to highlight the White Tone sub menu.
3. Use the Menu Left/Right keys to enter the White Tone sub menu.
4. Set the VG91 Generator as follows: STD TV Ch. 3, RF-IF Range set to HI, RF-IF Level set to NORMAL (1), Video Pattern = Raster, R-G-B raster controls OFF.
5. Connect the RF output of the generator to the Television Antenna Input, and adjust the VG91 level to remove any snow from the raster.
6. Turn off chroma at generator and leave grey scale bars.
7. From the White Tone sub-menu, use the Menu Up/Down keys to select Normal Red, Normal Green, or Normal Blue. Then use the Menu Left/Right keys to adjust the values to obtain the best white balance.
8. A reasonable starting point for NORMAL is:
   Normal Red=45, Normal Green=32, Normal Blue=39
9. After NORMAL is set, use the same method to set DELTA COOL and DELTA WARM as offsets.
   A reasonable starting point for DELTA COOL is:
   Delta Cool Red=(–2), Delta Cool Green=0, Delta Cool Blue=+6
   A reasonable starting point for DELTA WARM is:
   Delta Warm Red=+2, Delta Warm Green=0, Delta Warm Blue=(-7)
10. After the values are set, or if no changes are required, press Menu to return to the top level SAM menu.

Geometry sub menu

OSD is kept to a minimum in this sub menu in order to make picture geometry adjustments possible.
The item values are stored in EEPROM if this sub menu is left.
The value of item Service Blanking (SBL) is not stored in EEPROM, and it is set to OFF when the geometry sub menu is exited.
A sample display of the Geometry sub menu is shown below.

The picture geometry sub menu contains the following items:

Sub Menu:	GEOMETRY	Values	Remarks
VAM	Vertical amplitude	0 – 63	
VSL	Vertical slope	0 – 63	
SBL	Service blanking	ON/OFF	
HSH	Horizontal shift	0 – 63	
EWW	E-W width	0 – 63	Only available in models with an East-West Panel (Diode Modulator)
EWP	E-W parabola/width	0 – 63	Only available in models with an East-West Panel (Diode Modulator)
EWT	E-W trapezium	0 – 63	Only available in models with an East-West Panel (Diode Modulator)
EWC	E-W corner parabola	0 – 63	Only available in models with an East-West Panel (Diode Modulator)
H60	Delta HSH for 60 Hz	0 – 15	Not used
V60	Delta VAM for 60 Hz	0 – 15	Not used
VSC	Vertical S-Correction	0 – 63	
VSH	Vertical shift	0 – 63	

Geometry Adjustments:

Notes:
1. The following Geometry adjustments were performed with a Sencore VG91 Universal Video Generator.
2. Set the VG91 Generator as follows: STD TV Ch. 3, RF-IF Range set to HI, RF-IF Level set to NORMAL (1), Video Pattern = Raster, R-G-B raster controls OFF, crosshatch or center cross pattern as required.
3. Connect the RF output of the generator to the Television Antenna Input, and adjust the VG91 level to remove any snow from the raster.

Vertical Shift (VSH):

1. Enter the Service Alignment Mode (SAM) by pressing the following key sequence on the remote control transmitter:
   0-6-2-5-9-6-Status
   Do not allow the display to time out between entries while keying the sequence.
2. From the top level SAM menu, use the Menu Up/Down keys to highlight the Geometry sub menu.
3. Use the Menu Left/Right keys to enter the Geometry sub menu.
4. In the Geometry sub-menu, use the Menu Up/Down keys to select VAM.
5. Input a center cross pattern to the antenna/cable input terminal.
6. Using the Menu Left/Right keys, adjust VSH so that the horizontal bar is properly centered, top to bottom.
7. If other Geometry adjustments are needed, proceed to the necessary adjustment using the Menu Up/Down buttons.
8. Upon completion of Geometry adjustments, press the Menu button to return to the top level SAM menu.

Vertical Amplitude (VAM):

1. Enter the Service Alignment Mode (SAM) by pressing the following key sequence on the remote control transmitter:
   0-6-2-5-9-6-Status
   Do not allow the display to time out between entries while keying the sequence.
2. From the top level SAM menu, use the Menu Up/Down keys to highlight the Geometry sub menu.
3. Use the Menu Left/Right keys to enter the Geometry sub menu.
4. In the Geometry sub-menu, use the Menu Up/Down keys to select VAM.
5. Input a crosshatch pattern to the antenna/cable input terminal.
6. Using the Menu Left button, reduce the value so that the picture does not fill the entire screen.
7. Use the Menu Up/Down keys to select VSH (Vertical Shift) from the Geometry sub-menu and, using the Menu Left/Right keys, center the picture on the screen, top to bottom.
8. Using the cursor up/down keys, select VAM from the Geometry sub-menu, and use the Menu Right key to increase the value to obtain a slight overscan.

9. If other Geometry adjustments are needed, proceed to the necessary adjustment using the Menu Up/Down buttons.
10. Upon completion of Geometry adjustments, press the Menu button to return to the top level SAM menu.

Horizontal Shift (HSH):

Note: This adjustment centers the video on the raster. It does not move the raster.

1. Enter the Service Alignment Mode (SAM) by pressing the following key sequence on the remote control transmitter:
   0-6-2-5-9-6-Status
   Do not allow the display to time out between entries while keying the sequence.
2. From the top level SAM menu, use the Menu Up/Down keys to highlight the Geometry sub menu.
3. Use the Menu Left/Right keys to enter the Geometry sub menu.
4. In the Geometry sub-menu, use the Menu Up/Down keys to select HSH.
5. Input a center cross pattern to the antenna/cable input terminal.
6. Using the Menu Left/Right keys, adjust HSH so that the vertical bar is properly centered, left to right.
7. If other Geometry adjustments are needed, proceed to the necessary adjustment using the Menu Up/Down keys.
8. Upon completion of Geometry adjustments, press the Menu button to return to the top level SAM menu.

Vertical Slope (VSL):

1. Enter the Service Alignment Mode (SAM) by pressing the following key sequence on the remote control transmitter:
   0-6-2-5-9-6-Status
   Do not allow the display to time out between entries while keying the sequence.
2. From the top level SAM menu, use the Menu Up/Down keys to highlight the Geometry sub menu.
3. Use the Menu Left/Right keys to enter the Geometry sub menu.
4. In the Geometry sub-menu, use the Menu Up/Down keys to select VSL.
5. Input a crosshatch pattern to the antenna/cable input terminal.
6. Using the Menu Left/Right keys, adjust VSL so that the squares at the bottom of the screen are equal in size to the squares at the top of the screen.
7. If other Geometry adjustments are needed, proceed to the necessary adjustment using the Menu Up/Down keys.
8. Upon completion of Geometry adjustments, press the Menu button to return to the top level SAM menu.

Vertical S-Correction (VSC):

1. Enter the Service Alignment Mode (SAM) by pressing the following key sequence on the remote control transmitter:
   0-6-2-5-9-6-Status
   Do not allow the display to time out between entries while keying the sequence.

2. From the top level SAM menu, use the Menu Up/Down keys to highlight the Geometry sub menu.
3. Use the Menu Left/Right keys to enter the Geometry sub menu.
4. In the Geometry sub-menu, use the Menu Up/Down keys to select VSC.
5. Input a crosshatch pattern to the antenna/cable input terminal.
6. Using the Menu Left/Right keys, adjust VSC so that the squares at the center of the screen are equal in size to the squares at the top and bottom of the screen.
7. If other Geometry adjustments are needed, proceed to the necessary adjustment using the Menu Up/Down keys.
8. Upon completion of Geometry adjustments, press the Menu button to return to the top level SAM menu.

Service Blanking (SBL):

Service Blanking provides a straight cutoff line in the center of the raster. It is useful when centering the raster. It can also be used in adjusting the yoke and setting vertical size and linearity.

1. Enter the Service Alignment Mode (SAM) by pressing the following key sequence on the remote control transmitter:
   0-6-2-5-9-6-Status
   Do not allow the display to time out between entries while keying the sequence.
2. From the top level SAM menu, use the Menu Up/Down keys to highlight the Geometry sub menu.
3. Use the Menu Left/Right keys to enter the Geometry sub menu.
4. In the Geometry sub-menu, use the Menu Up/Down keys to select SBL.
5. Use the Menu Left/Right keys to toggle SBL ON or OFF.
6. With SBL on, VSH can be used to center the raster on the fiduciary marks (the small notches in the phosphor on the right and left edge of the CRT). These are absolute center.
7. If other Geometry adjustments are needed, proceed to the necessary adjustment using the Menu Up/Down keys.
8. Upon completion of Geometry adjustments, press the Menu button to return to the top level SAM menu.

Delta HSH for 60Hz (H60):

Note: This adjustment should not be changed from the factory preset value (10).

Delta VAM for 60Hz (V60):

Note: This adjustment should not be changed from the factory preset value (5).

Note: The following GEOMETRY adjustments can only be performed on models containing an East-West Panel (Diode Modulator).

East-West Width (EWW):

1. Enter the Service Alignment Mode (SAM) by pressing the following key sequence on the remote control transmitter:
   0-6-2-5-9-6-Status
   Do not allow the display to time out between entries while keying the sequence.
2. From the top level SAM menu, use the Menu Up/Down keys to highlight the Geometry sub menu.
3. Use the Menu Left/Right keys to enter the Geometry sub menu.
4. In the Geometry sub menu, use the Menu Up/Down keys to select EWW.
5. Input a crosshatch pattern to the antenna/cable input terminal.
6. Use the Menu Left key to reduce the value of EWW so that the picture does not fill the entire screen.
7. Use the Menu Up/Down keys to select HSH (Horizontal Shift) from the Geometry sub menu and, using the Menu Left/Right keys, center the picture on the screen.
8. Use the Menu Up/Down keys to select EWW from the Geometry sub menu, and use the Menu Right key to increase the value to obtain a slight overscan.

Note: Remember, adjusting EWW will affect other horizontal adjustments.

9. If other Geometry adjustments are needed, proceed to the necessary adjustment using the Menu Up/Down keys.
10. Upon completion of Geometry adjustments, press the Menu button to return to the top level SAM menu.

East-West Parabola/Width (EWP):

1. Enter the Service Alignment Mode (SAM) by pressing the following key sequence on the remote control transmitter:
   0-6-2-5-9-6-Status
   Do not allow the display to time out between entries while keying the sequence.
2. From the top level SAM menu, use the Menu Up/Down keys to highlight the Geometry sub menu.
3. Use the Menu Left/Right keys to enter the Geometry sub menu.
4. In the Geometry sub menu, use the Menu Up/Down keys to select EWP.
5. Input a crosshatch pattern to the antenna/cable input terminal.
6. Use the Menu Left/Right keys to adjust the value of EWP.
7. This adjusts the top and bottom of the right and left side of the raster, adjusting the raster by “bending” it out or in.
8. This adjustment should be set so that the screen appears to be straight and “flat.”
9. If other Geometry adjustments are needed, proceed to the necessary adjustment using the Menu Up/Down keys.
10. Upon completion of Geometry adjustments, press the Menu button to return to the top level SAM menu.

East-West Trapezium (EWT):

1. Enter the Service Alignment Mode (SAM) by pressing the following key sequence on the remote control transmitter:
   0-6-2-5-9-6-Status
   Do not allow the display to time out between entries while keying the sequence.
2. From the top level SAM menu, use the Menu Up/Down keys to highlight the Geometry sub menu.
3. Use the Menu Left/Right keys to enter the Geometry sub menu.
4. In the Geometry sub menu, use the Menu Up/Down keys to select EWT.
5. Input a crosshatch pattern to the antenna/cable input terminal.
6. Use the Menu Left/Right keys to adjust the value of EWT.
7. This balances the width at the top of the screen to the width at the bottom of the screen.
8. This adjustment should be set so the top and bottom of the screen are of equal width.
9. If other Geometry adjustments are needed, proceed to the necessary adjustment using the Menu Up/Down keys.
10. Upon completion of Geometry adjustments, press the Menu button to return to the top level SAM menu.

East-West Corner Parabola (EWC):

1. Enter the Service Alignment Mode (SAM) by pressing the following key sequence on the remote control transmitter:
   0-6-2-5-9-6-Status
   Do not allow the display to time out between entries while keying the sequence.
2. From the top level SAM menu, use the Menu Up/Down keys to highlight the Geometry sub menu.
3. Use the Menu Left/Right keys to enter the Geometry sub menu.
4. In the Geometry sub menu, use the Menu Up/Down keys to select EWC.
5. Input a crosshatch pattern to the antenna/cable input terminal.
6. Use the Menu Left/Right keys to adjust the value of EW CORNER.
7. This adjustment affects the very corner sections of the raster, and acts as a “touch-up” of the EWP (East-West Parabola/Width) adjustment.
8. This adjustment should be set so the corners of the screen are straight and equal in size.
9. If other Geometry adjustments are needed, proceed to the necessary adjustment using the Menu Up/Down keys.
10. Upon completion of Geometry adjustments, press the Menu button to return to the top level SAM menu.

Audio sub menu

The audio sub menu item values are stored in EEPROM if this sub menu is left.
A sample display of the Audio sub menu is shown below.

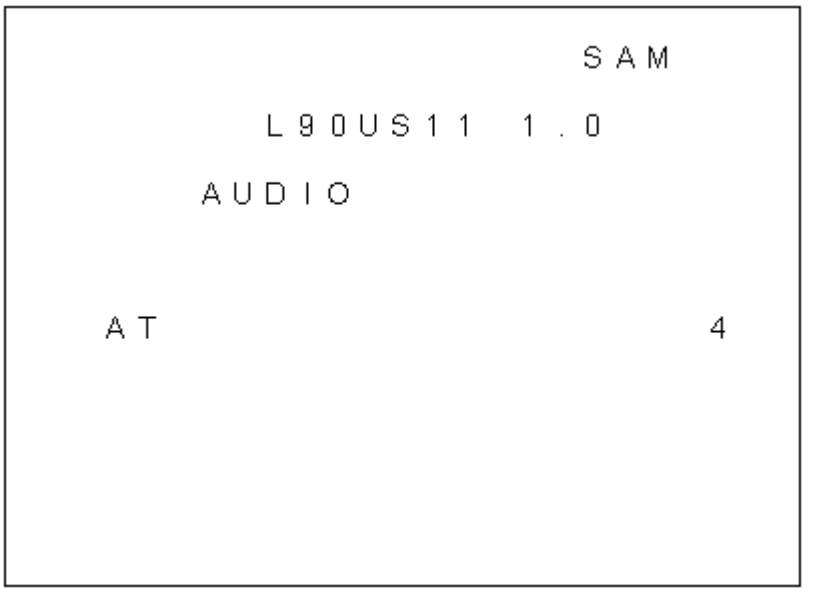

The Audio sub menu contains the following item on stereo chassis:

Sub Menu: **AUDIO**		**Values**	**Remarks**
AT	Attack time at AVL	1 – 4	Normal setting is 4.

Audio Adjustment:

Attack Time at AVL (AT):

1. Enter the Service Alignment Mode (SAM) by pressing the following key sequence on the remote control transmitter:
   0-6-2-5-9-6-Status
   Do not allow the display to time out between entries while keying the sequence.
2. From the top level SAM menu, use the Menu Up/Down keys to highlight the Audio sub menu.
3. Use the Menu Left/Right keys to enter the Audio sub menu.
4. Use the Menu Left/Right keys to adjust the value of AT.
5. Set the volume of AT to 4.
6. Upon completion of Audio adjustment, press the Menu button to return to the top level SAM menu.

Convergence and Purity Adjustments

Notes:

1. The following adjustments were performed with a Sencore VG91 Universal Video Generator.
2. Set the VG91 Generator as follows: STD TV Ch. 3, RF-IF Range set to HI, RF-IF Level set to NORMAL (1), Video Pattern = Raster, R-G-B raster controls OFF, Mode Switch set to L+R, Audio Frequency set to 300Hz, and 0 Pilot (max. CCW).
3. Connect the RF output of the generator to the Television Antenna Input, and adjust the VG91 level to remove any snow from the raster.

Pre-Convergence Procedure

Note: The degaussing procedure should be performed prior to this adjustment.

1. Place the multi-pole Purity and Convergence Assembly with the 2-Y pole purity rings directly in the gap between the G2 and G3 (focus) grids as shown in the "**Convergence and Purity Assembly**" graphic.

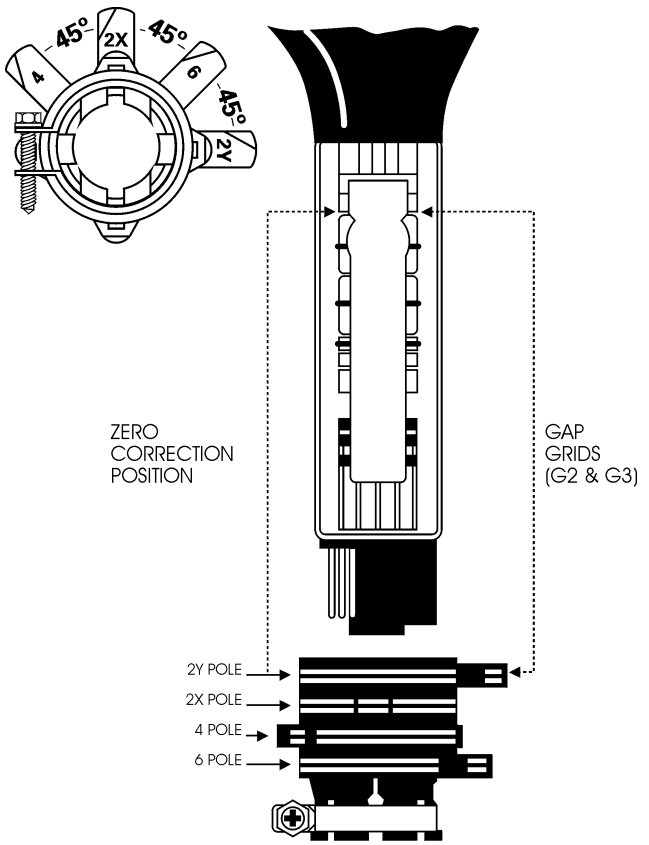

CONVERGENCE & PURITY ASSEMBLY

2. Enter Service Alignment Mode (refer to Service Alignment Mode section).
3. Apply a center cross or crosshatch pattern to the antenna/cable input terminal.
4. Select the White Tone sub-menu by pressing the Menu Up/Down keys on the remote control so that White Tone is highlighted.
5. Use the Menu Left/Right keys to enter the White Tone sub-menu.
6. Use Menu Up/Down keys to toggle between the options. Be sure to record the values of all options (Normal Red/Green/Blue, Delta Cool Red/Green/Blue, and Delta Warm Red/Green/Blue).
7. Use the Menu Up/Down keys to select Normal Green, and use the Menu Left key to set Normal Green to minimum.
8. Loosen the yoke clamp screw, pull the yoke back, and remove the three yoke wedges.
9. Slide the yoke all the way forward so that it rests against the bell of the CRT.
10 Tighten the yoke clamp screw so that the yoke does not drop away from the bell of the CRT.
11. Slowly spread, and if necessary, rotate the 2-Y pole purity rings so that the red and blue lines are at least parallel and preferably coincide at the 6:00 and 12:00 positions as shown in the "**2Y Spread and 2Y Rotate**" graphic.

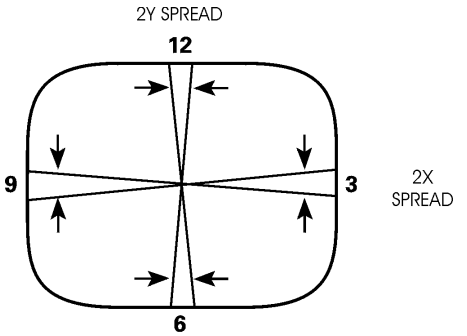

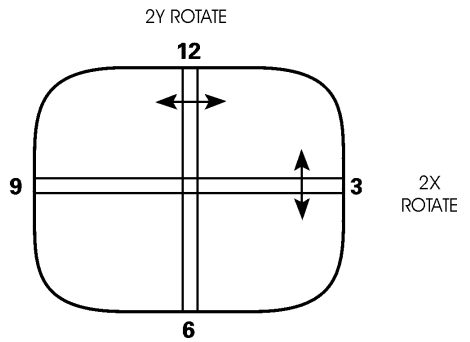

12. Proceed to the Color Purity Adjustment.

Color Purity Adjustment

1. Connect a solid white pattern signal to the antenna/cable input terminal.
2. Use the Menu Up/Down keys to select Normal Blue, and use the Menu Left key to set Normal Blue to minimum.
3. Use the Menu Up/Down keys to select Normal Red, and use the Menu Right key to set Normal Red to maximum.
4. Slowly spread the 2-X pole purity rings to center the red portion of the screen, leaving the same amount of green on one side of the screen as blue on the other side.
5. Tighten the yoke clamp screw slightly so that the yoke may be moved with some friction.
6. Proceed to the Static Center Convergence Adjustment.

Static Center Convergence Adjustment

1. Apply a center cross or crosshatch pattern to the antenna/cable input terminal and observe the screen to ensure that the yoke is not tilted. If necessary, rotate the yoke to obtain a level raster.
2. Use the Menu Up/Down keys to select Normal Blue, and use the Menu Right key to set Normal Blue to maximum.
3. Slowly spread, and if necessary, rotate the 4-pole magnetic rings to converge red and blue lines at the center of the screen.
4. Use the Menu Up/Down keys to select Normal Green, and use the Menu Right key to set Normal Green to maximum.
5. Slowly spread, and if necessary, rotate the 6-pole magnetic rings to converge red/blue on green lines at the center of the screen.
6. Repeat steps three and five for optimum performance.
7. Proceed to the Dynamic Edge Convergence Adjustment.

Dynamic Edge Convergence Adjustment

Note: To secure the correct position of the deflection yoke, three rubber wedges are used. They are ultimately to be placed as shown in Figure 3c or Figure 4c.

1. Apply a crosshatch pattern to the antenna/cable input terminal.
2. Use the Menu Up/Down keys to select Normal Green, and use the Menu Left key to set Normal Green to minimum.
3. Tilt the yoke up and down to converge the red and blue vertical lines at the 6:00 and 12:00 positions and the red and blue horizontal lines at the 3:00 and 9:00 positions (refer to Figure 5). When the correct position has been found, place a rubber wedge between the yoke and the CRT. If the yoke is tilted up, place wedge one as shown in Figure 3a; if it is tilted down, place wedge one as shown in Figure 4a.
4. Tilt the yoke to the left and right to find the point of best possible convergence of the red and blue lines at the edges, top and bottom of the screen as shown in Figure 6. When the correct position is located, place wedges two and three as shown in Figure 3b or Figure 4b.
5. Remove wedge one and place it in the final position as shown in Figure 3c or Figure 4c.
6. Use the Menu Up/Down keys to select Normal Green, and use the Menu Right key to set Normal Green to maximum.



Fig. 3a



Fig. 3b



Fig. 3c



Fig. 4a



Fig. 4b



Fig. 4c

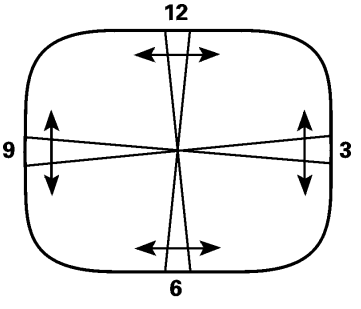

Figure 5

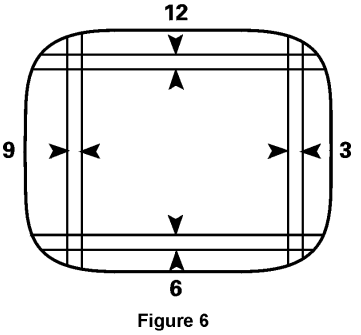

Figure 6

7. Proceed to the White Balance Setup.

Master Screen (VG2)/ White Balance Setup:

1. With the set OFF, rotate VG2 (located on the lower part of the flyback transformer) counterclockwise.
2. Use the Power Button (on the remote control or the local keyboard) to turn the set ON, without a signal, and rotate VG2 clockwise until snow is visible.
3. Enter Service Alignment Mode (refer to Service Alignment Mode section).
4. Enter the Virtual Customer Menu by pressing the Menu button on the remote and set brightness and picture to 31 and color to 0.
5. Apply an NTSC color bar signal to the antenna/cable input terminal and tune to the active channel.
6. Connect an oscilloscope, 20V per division and 10uSec time base, to pin 6 of the CRT Socket. Observe the stairstep pattern while adjusting VG2.

Hint: Counterclockwise adjustment will compress bottom of stairstep pattern. Clockwise adjustment will compress top of stairstep pattern.

7. Adjust VG2 midway between top and bottom compression.
8. Proceed to White-Tone Adjustments under White Tone sub-menu in the Service Alignment Mode section to complete White Balance Setup.

Customer Service Mode (CSM)

1. The Customer Service Mode (CSM) is used to retrieve data on the TV operation settings and stored error codes.
2. To enter the Customer Service Mode, press and hold the Mute button on the remote control and any key on the local keyboard (except ”Power“) for more than 4 seconds. When the set is in Customer Service Mode, the text "CSM" is displayed in the top right corner of the screen.
3. To use this system, the customer is instructed by phone to enter CSM and read off the display that appears. This information is useful to gain insights into failures before traveling to the customer's home.
4. This information can also be used to avoid nuisance trips to the home when the problem is an operational error (example: Closed Caption is on or set is in Hospital Mode).
5. When entering CSM, all disruptive functions are turned off, and service unfriendly modes are ignored. While CSM is active, no changes can be made in settings or functions. When CSM is exited, the TV returns to all prior operational settings.
6. To exit CSM, press any key (on the remote control or local keyboard) except ”Channel Up“ or ”Channel Down.“
   To exit CSM and return the set to normal operation mode, press any key on the local keyboard or the remote control except Channel Up, Channel Down, or Power.
   To exit CSM and turn the set off, press the Power button on either the TV set or the remote control.

7. A sample CSM display is shown below.

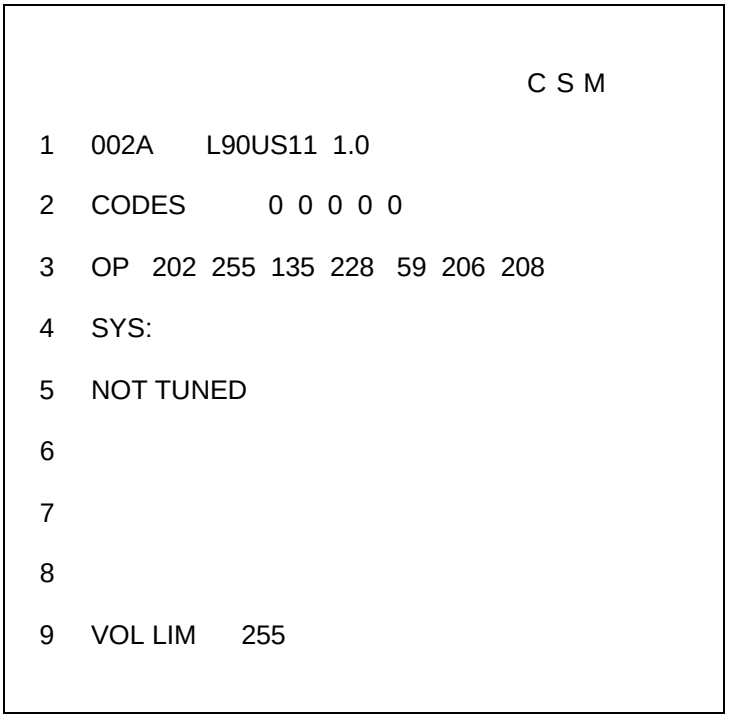

Explanation of CSM Display Screen

The following information is displayed on screen:

- Text ”CSM“ on the first line
- Line number for every line (to make CSM language independent)
- To view multiple CSM pages (such as lines 8 and 9), use the Channel Up or Channel Down keys
- For more information on lines 1, 2, and 3, see SDM section ”Explanation of Display“
- Line 1 displays the run timer and the software identification, cluster, and version
- Line 2 displays the error buffer contents (the word ”error“ is not used on this screen, instead ”codes“ is used)
- Line 3 displays the option code information
- Line 4 displays SYS: (This is not used)
- Lines 5 through 8 display information on active service unfriendly modes
- Line 5 displays the text ”NOT TUNED“ if no television station is tuned
- Line 6 displays the text ”TIMER“ if the sleep timer or ”on“ timer is active
- Line 7 displays the text ”LOCKED“ if one or more channels or presets is locked via child lock
- Line 8 displays the text ”HOSPITAL“ if hospital mode is active, or ”HOTEL“ if hotel mode is active

- If the volume limiter is active, line 9 displays the text ”VOL LIM“ and the set value of the volume limiter. If the volume limiter is inactive, the displayed value will be 255 (the maximum volume allowed).

CSM Flow Chart

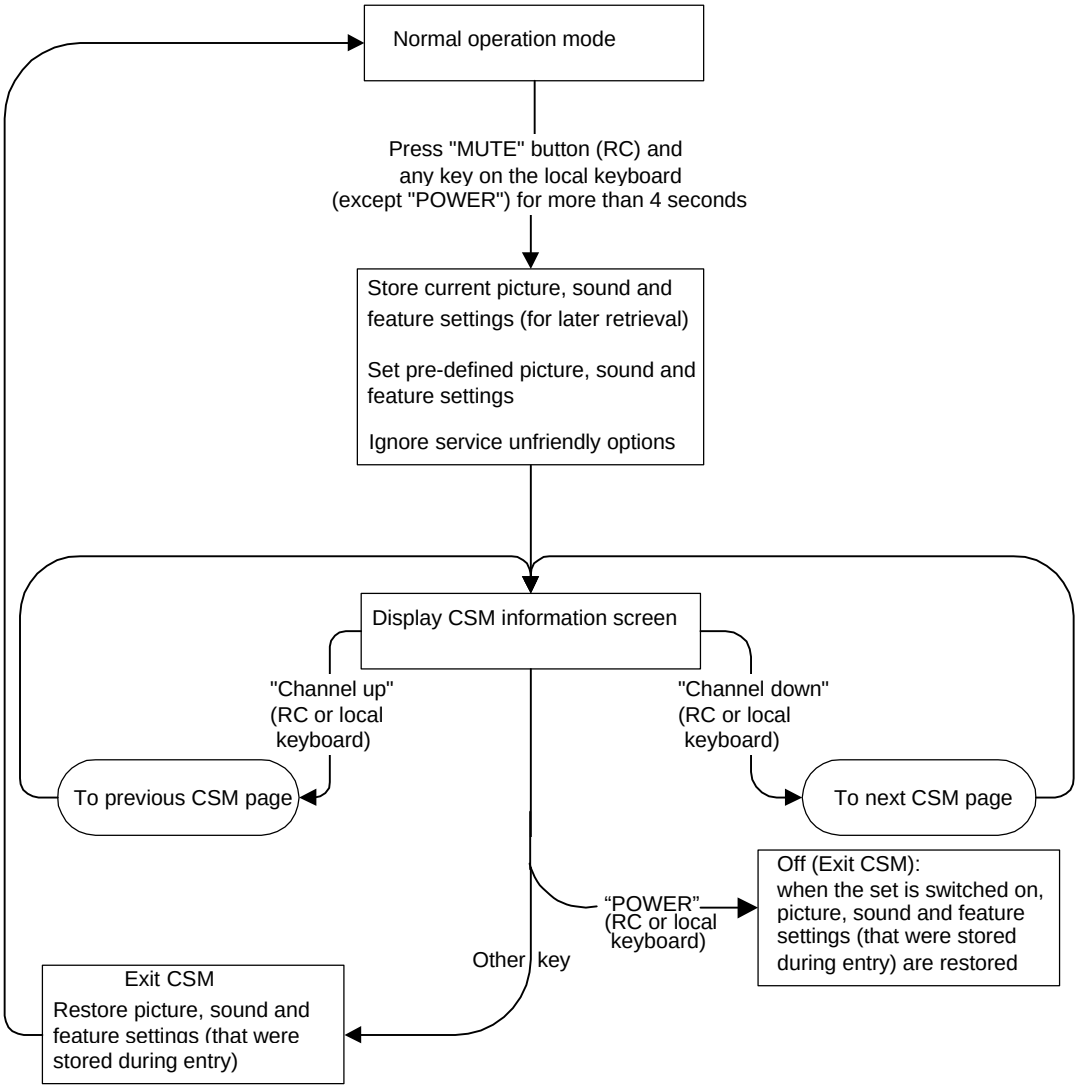
Normal operation mode
Press "MUTE" button (RC) and any key on the local keyboard (except "POWER") for more than 4 seconds
Store current picture, sound and feature settings (for later retrieval)
Set pre-defined picture, sound and feature settings
Ignore service unfriendly options
Display CSM information screen
"Channel up" (RC or local keyboard)
"Channel down" (RC or local keyboard)
To previous CSM page
To next CSM page
“POWER” (RC or local keyboard)
Off (Exit CSM): when the set is switched on, picture, sound and feature settings (that were stored during entry) are restored
Other key
Exit CSM
Restore picture, sound and feature settings (that were stored during entry)

F8 CHASSIS INTRODUCTION

The F8 chassis is a leader TV chassis produced by Philips Consumer Electronics Company for the 1999 model year. The F8 chassis is used in sets with 25“ and 27“ screen sizes. The F8 chassis is a global design and is oriented front to rear, or ”north to south“, as it has been called. The F8 chassis tuning system features 181 channels with on-screen display (OSD). The main tuning system uses a tuner, a microcomputer IC, and a memory IC mounted on the main chassis. The microcomputer communicates with the memory IC, the customer keyboard, remote receiver, U/V tuner, signal processor IC and the audio output IC via the I^2C bus. The memory IC retains the settings for favorite stations, customer-preferred settings, and service/factory data.

The F8 chassis uses a Very Large Scale (VLSI) Integrated Circuit for signal processing. This IC performs video IF, sound IF processing, AGC control, horizontal and vertical drive and synchronization, also luminance/chrominance processing. The on-screen graphics and closed caption decoding are done within the microprocessor, and then sent to the signal processor IC to be added to the main signal.

The F8 chassis utilizes a switch mode power supply for the main voltage source. The chassis has a hot chassis ground reference on the primary side of the power supply, and a cold ground reference on the secondary side of the power supply and the rest of the chassis. **ALWAYS USE AN ISOLATION TRANSFORMER WHEN SERVICING THIS CHASSIS FOR YOUR SAFETY.**

SIGNAL FLOW DESCRIPTION

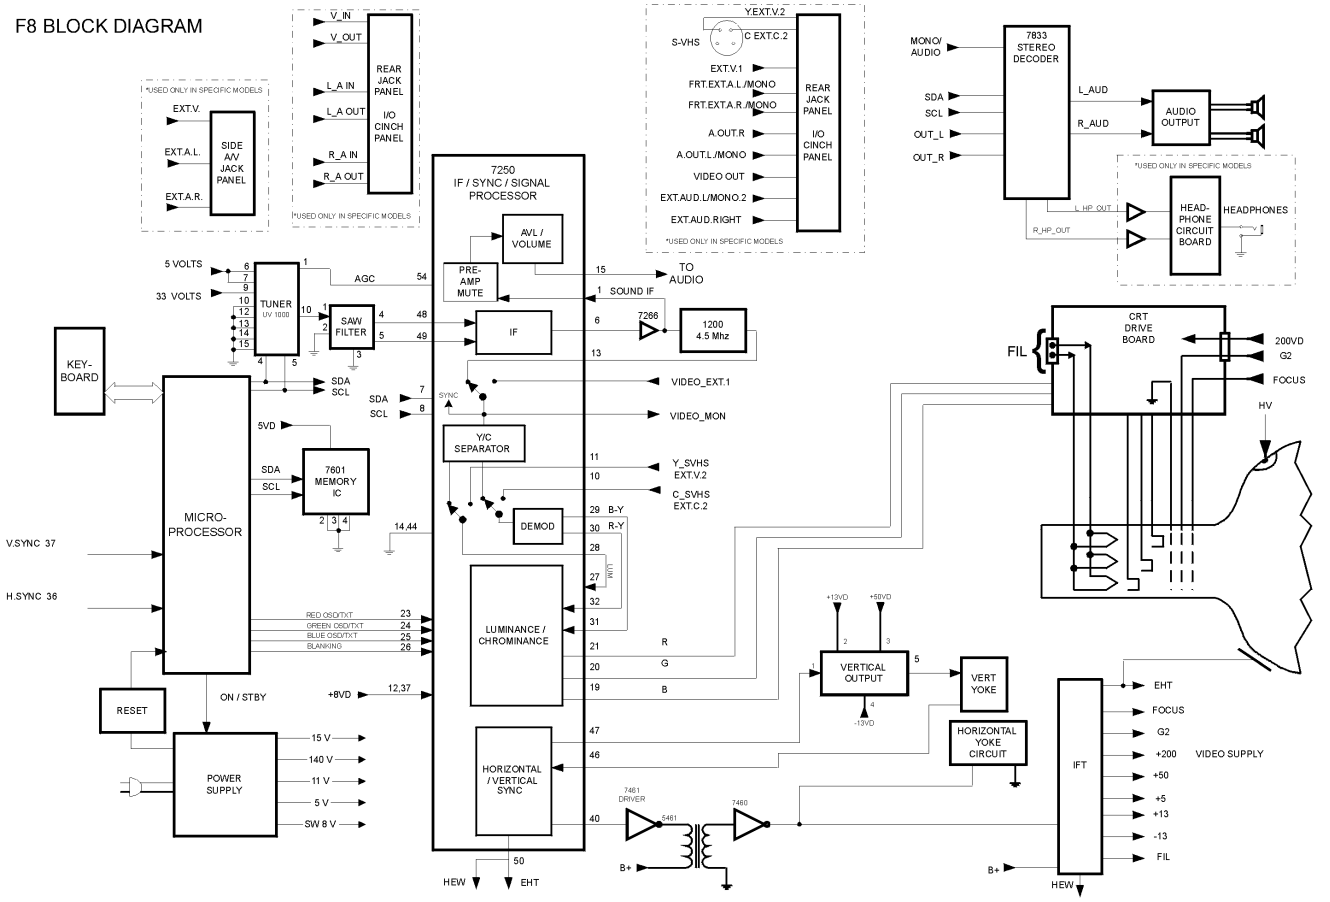

Signal Flow Block Diagram

The incoming RF signal is applied to the U/V tuner where the 45.75 MHz IF signal is developed and amplified. The IF signal then exits the tuner from pin11to pass through the SAW filter, (1003). The shaped signal is then applied to IC 7250, the IF processor. The automatic gain control (AGC) is performed in IC 7250 and applied to the U/V tuner at pin1. An automatic fine tuning signal (AFT) is also generated in the IC and then routed to the tuning system via the I^2C bus, to provide frequency correction as needed.

The IF signal exits IC 7250 at pin 6, the audio and video signals are separated and each processed accordingly. The sound IF signal enters IC 7250 at pin 1, while the video re-enters at pin 13. The audio signal passes through the pre-amp, volume control and volume limiting circuits before application to the final audio stages.

The video signal entering at pin 13, is separated into its luminance and chrominance components, and exits at pins 21, 20, and 19 as R, G, and B respectively. The R G B signals are sent to the CRT DRIVE board, amplified and applied to the CRT pins as drive. Drive and cutoff controls for the CRT are also located on this board.

Brightness, Picture, Sharpness, Color and Tint control voltages are varied by the microprocessor, IC 7600 through individual control lines. IC 7600 also controls selected inputs, as selected by the consumer. Video and audio muting are an internal function of IC 7250. Automatic volume limiting also takes place inside this IC.

Vertical and Horizontal drive signals are also developed inside IC 7250. Vertical drive exits the IC from pin 47, while Horizontal drive exits at pin 40. These signals are a product of a Voltage Controlled Oscillator Circuit (VCO) and divider network located inside the chip. Vertical drive is applied to pin 1 of IC 7401, amplified, shaped, and output from pin 5 where it is applied to the vertical winding of the yoke. A feedback signal is returned to pin 46 of IC 7250. The vertical sync pulse is also applied to the microprocessor, IC 7600, to pin 37 for On-Screen Display and Closed-Captioning synchronization. The horizontal drive signal exits IC 7250 from pin 40 and is applied to Q 7461, the horizontal driver transistor. The signal is amplified and coupled to the base circuit of Q 7460, the horizontal output transistor. The H.O.T. drives the Integrated Flyback Transformer, which provides high voltage, screen voltage, focus, G-2, and filament voltages for the CRT. A scan-derived power supply is also provided by the IFT. It supplies -13 volts, +13 volts, +50 volts, a secondary +5 volt supply, and a +200 volt source for video drive. The secondary of the IFT is monitored by safety circuits and is tied back to the microprocessor and signal-processing IC’s to turn the set off if a problem should occur.

POWER SUPPLY DESCRIPTION

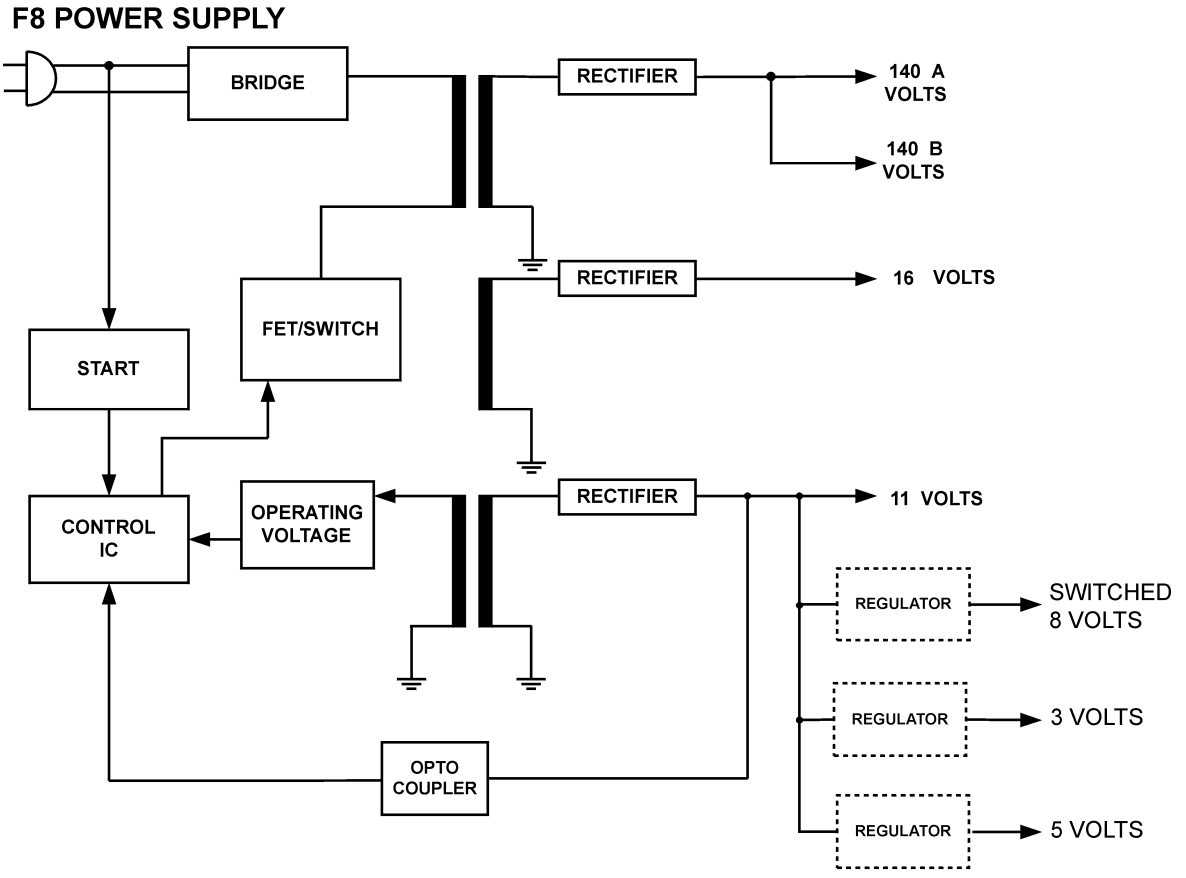

Power Supply Block Diagram

The F8 chassis family uses a free-running switch-mode power supply with a single controller IC. As AC power is applied to the set, approximately 160volts DC is developed by the bridge rectifiers and fed to the primary winding of the power transformer, then to the FET switch. The start voltage for the power supply is taken from the hot leg of the AC input. This voltage goes to controller IC 7520. A separate operating voltage is developed from the power transformer, rectified, and applied to IC 7520. The power supply is on all the time; there is no standby mode. The set is turned on and off by the microprocessor switching the +8 volt regulator on and off. The +8 volt is the supply voltage for the signal processor. IC7520 is regulated by means of a feedback circuit, monitoring the +11 volt secondary line. Any voltage variations are reflected back to the controller IC 7520 through an Opto-Coupler IC and change the operating frequency of the power supply as needed.
REMEMBER TO USE AN ISOLATION TRANSFORMER WHEN SERVICING THIS CHASSIS.

Complete Circuit Description

When AC is applied, current flow through the Bridge Rectifier circuit causes two simultaneous events to occur:

1. Capacitor 2508 begins to charge to 160 volts DC.
2. Capacitor 2540 begins to charge to 14.5 volts DC.

When capacitor 2508 is fully charged, 160 volts is applied to the drain of 7518, through transformer 5545. When capacitor 2540 is fully charged, 14.5 volts is applied to pin 1 of 7520. This voltage will cause 7520 to begin oscillating and putting out a pulse train on pin 3. These pulses will cause 7518 to conduct which will cause a field to build up in the primary winding of transformer 5545. When this field collapses, a field will be induced in the secondary windings. Pins 8 and 9 of 5545 will output to diode 6540, which will rectify the pulses. Capacitor 2540 will filter the pulses and provide approximately 12.5
volts to pin 1 of 7520. This now becomes the RUN voltage for 7520.

Feedback control is accomplished by monitoring the 140 volt line. The 140 volt, +VBATT supply is sent through resistor 3571 to pin 3 of the Programmable Regulator IC, 7570. This regulator will turn on at 2.5 volts DC. Current will then begin to flow through the diode portion of the Opto-Isolator IC, 7581. The intensity of light caused by this current flow will then control the conduction of the transistor portion of 7581. The voltage appearing on pin 4 of 7581 is then monitored by pin 14 of 7520 where it is compared to a 2.5 volt reference voltage. Changes felt on pin 14 will control the width of the pulses coming out of pin 3. These pulse changes will determine the “on” time of 7518.

Video Signal Paths

Tuner Video

RF signals are received at the RF input connector on the tuner. From there they are amplified and sent to the IF circuits within the tuner. The IF signal is amplified and output on pin 11 and sent to the SAW filter, 1003, for shaping prior to being input to pins 48 and 49 of the Signal Processor IC,
7250.

AGC voltage is generated in 7250 along with AFT information. The AGC is output on pin 54 and enters the tuner on pin 1. The AFT information is sent to the micro via the IIC bus. AFT and Tuning information are then sent from the micro to the tuner where they enter at pins 4 and 5.

After processing, Composite Video exits 7250 at pin 6 and is buffered by transistor 7266. It is then sent through filter 1201 to remove any audio component. From there, it re-enters 7250 on pin 13.

Once inside 7250, the signal is split in two directions. It is demodulated, processed and output as Luminance, R-Y and B-Y on pins 28, 29 and 30.
From there it re-enters 7250 on pins 27, 31 and 32. It is also directly passed through from pin 13 to pin 38 where it is output and split, once again, in two directions. WE WILL RETURN TO THIS PATH LATER.

After entering at pins 27, 31 and 32 they are mixed with the signals for OSD or Closed Captioning coming from the micro, into pins 23, 24, 25 and 26. After being processed by the matrix circuit they are output to the CRT Panel on pins 18, 19, 20 and 21.

The signals then enter IC7330 for amplification, output on pins 7, 8 and 9 to the CRT socket and then to the CRT.

Now, back to where our Video exited 7250 at pin 38 and split in two directions. The first path is from pin 38 through buffer transistor 7134 to 0223, the Video Output Jack. The second path is from pin 38 through buffer transistor 7258 to pin 23 of the microprocessor. This video is used for OSD and Graphics.

External Video

External Video enters at 0223F, the Video Input Jack. From there it is routed to pin 17 of 7250. At this point it is treated the same as Tuner Video.

SVHS

SVHS enters the Jack Panel at S_VHS connector, 1071-A and the Y and C signals are sent to IC7250, pins 10 and 11. Once the Y and C components enter 7250 they are processed the same as any other video/chroma.

Audio Signal Paths

The composite signal coming out of pin 6 of IC7250 is buffered by 7266 and sent through Jumper 4214. Then it goes through a video stripping network consisting of capacitor 2850, resistor 3850, inductor 5833, and capacitor 2887. Here, the video component is stripped and only the audio IF is allowed to be applied to pin 58 of the Audio Decoder IC, 7833. After processing, the left and right audio signals are output on pins 28 and 29 and sent to the Audio Output IC, 7950.

IC7950 amplifies the left and right audio, outputs them on pins 8 & 10 and 11 & 13 and sends them to the Headphone/Speaker circuit. This circuit determines which output medium will be used. If there is not a set of headphones plugged into the Headphone Jack (0232), the left and right audio are sent to the speaker connector, 0234. If there is a set of headphones connected, the audio will be sent through the headphones only.

In Mono versions, the Audio IF is taken from pin 6 of 7250, buffered by 7266 and sent to transistor 7000 for amplification. It then passes through the bandpass filter, 1001, and enters IC7250 on pin 1. The signal is processed and exits on pin 15. From there it is sent to pin 55 of IC 7833, processed and output on pin 29. From there it goes to pin 3 of IC7950 where it is amplified and output on pins 11 and 13. This Mono signal is then applied to the Headphone/Speaker circuit on the L+ and L- lines. If there is no headphone connected, the output will be to connector 0215.

External audio is applied to the Jack Panel and sent to pins 49 and 50 of IC7833 where it is processed and output on pins 28 and 29 and from there on, treated the same as any other audio.

Volume control and muting is accomplished from pin 2 of the microprocessor to pin 7 of the audio output IC.

Sweep Circuits

Horizontal Circuit

The horizontal drive pulse is internally generated in IC7250 and is output on pin 40. This pulse is amplified by transistor 7461 and transformer coupled by 5461 to the base of the Horizontal Output, 7460, where it is amplified.

Shaping takes place in the collector circuit (C2463 and C2465), which results in a perfectly timed 825 volt peak-to-peak pulse to drive the deflection yoke and the flyback transformer.

The Flyback Transformer secondary windings produce 10 working voltages:

VlotAux-11V, VlotAux+11V and VlotAux+50V all supply power to the vertical output IC, 7401.

The 187 volt VideoSupply, the filament voltage, Screen voltage (VG2) and Focus voltage all go to the CRT board.

The EHT voltage goes to the anode connection on the CRT.

The VT_Supply and the VlotAux+5V Supply both go to the Tuner. The VT_Supply is zenered down to 33 volts for tuning voltage and the VlotAux+5V supply acts as B+ for the Tuner and also becomes the +5 volt supply. The VlotAux+5V supply also provides voltage to the Audio Circuits.

Vertical Circuit

The vertical drive signals are internally generated in IC7250 and are output on pins 46 and 47. From there they are sent to the Vertical Output IC, 7401, pins 1 and 7.

Inside the IC, the waveforms are amplified, shaped and output on pins 5 and 6. The output on pin 5 is the waveform that drives the yoke and provides feedback to the IC. The output on pin 6 is the Vertical Synchronization pulse that is sent to pin 37 of the microprocessor.

Microprocessor

The Microprocessor IC, 7600, is powered by a 3.3 volt source (3V3). This voltage is derived from the Regulator transistor, 7603. Transistor 7603 is fed from the Vaux, 11 volt supply in the power supply.

The microprocessor communicates with the memory IC, 7601, the Signal Processor IC, 7250, the IR receiver, 7680, the Audio Decoder IC, 7833, the Audio Output IC, 7950, the U/V tuner and the customer keyboard.

Reset is accomplished shortly after AC is applied. Transistor 7604 is delayed in turning on by the network consisting of Zener Diode, 6607, and Resistors 3635 and 3636. This delay is enough to allow the 3.3 volt B+ to the microprocessor come up and through resistor 3634, place a high on pin 43 (Reset). After the delay, transistor 7604 is turned on causing pin 43 to go low.

Closed Captioning and On Screen Graphics are generated inside the microprocessor and sent to the Signal Processor to be added to the main signal. Synchronization for these processes is provided by feeding Horizontal and Vertical pulses into the micro on pins 36 and 37.

Protection circuits on the main board all tie into the base of Transistor 7605. When any one of the protection circuits output a high, it is felt on the base of 7605. When 7605 is
turned on, pin 16 of 7600 is brought low which tells the micro to shut the set down.

Shutdown Circuits

Three of the shutdown protection circuits are derived from pins 7 and 10 of the Flyback Transformer.

If the voltage on the filament line (pin 7) goes too low, transistor 7482 will turn on and apply a positive voltage to the P9StbyOn+Protn line.

If the voltage on the filament line (pin 7) goes too high, transistor 7462 will turn on causing transistor 7463 to turn on and apply a positive voltage to the HEW_Protn line.

If the beam current (pin 10) becomes excessive, the voltage on the EHT line will go toward the negative direction. This action will cause transistor 7481 to turn on and place a positive voltage on the P9StbyOn+Protn line.

For sets having East West correction circuitry, pin 10 of 5545 is being monitored by transistor 7470. Transistors 7470, 7481 and 7482 all control transistor 7605. In the event of a problem, 7605 will bring pin 16 of the Microprocessor, 7600 low, shutting the set down.

How to Check an Opto-Isolator

Procedure

Using a basic diagram taken from the F8 schematic, we are going to determine whether or not IC7581 is functioning properly.

Step #1

Apply the positive lead of a variable DC power supply to the positive terminal of capacitor 2561. Connect the negative lead of the power supply to pin 1 of IC7570. *By connecting them this way we are able to use resistors 3685 and 3575 as protection for IC7570.*

Step #2

Apply the positive lead of an ohm meter to pin 5 and the negative lead to pin 4 of 7581. Set the ohmmeter to the 2K scale or greater.

Step #3

Slowly increase the DC voltage from 0 to 5 volts. If the IC is good, you will see the reading on the ohmmeter start decreasing as the voltage approaches 5 volts. CAUTION: Do not exceed 5 volts DC.

How to Check a Programmable Regulator IC

Procedure

Using a basic diagram taken from the F8 schematic, we are going to determine whether or not IC7570 is functioning properly.

Step #1

Apply the positive lead of a variable DC power supply to pin 3 of IC7570 and the negative lead to cold (chassis) ground.

Step #2

Apply the positive lead of your DVM to pin 1 of IC7570 and the negative lead to cold ground.

Step #3

Slowly increase the DC voltage from 0 to 2.5 volts. If the IC is good, you will begin to see a DC voltage reading on your DVM as soon as the applied DC voltage is 2.5 volts.

F8
Troubleshooting
Dead Set 1

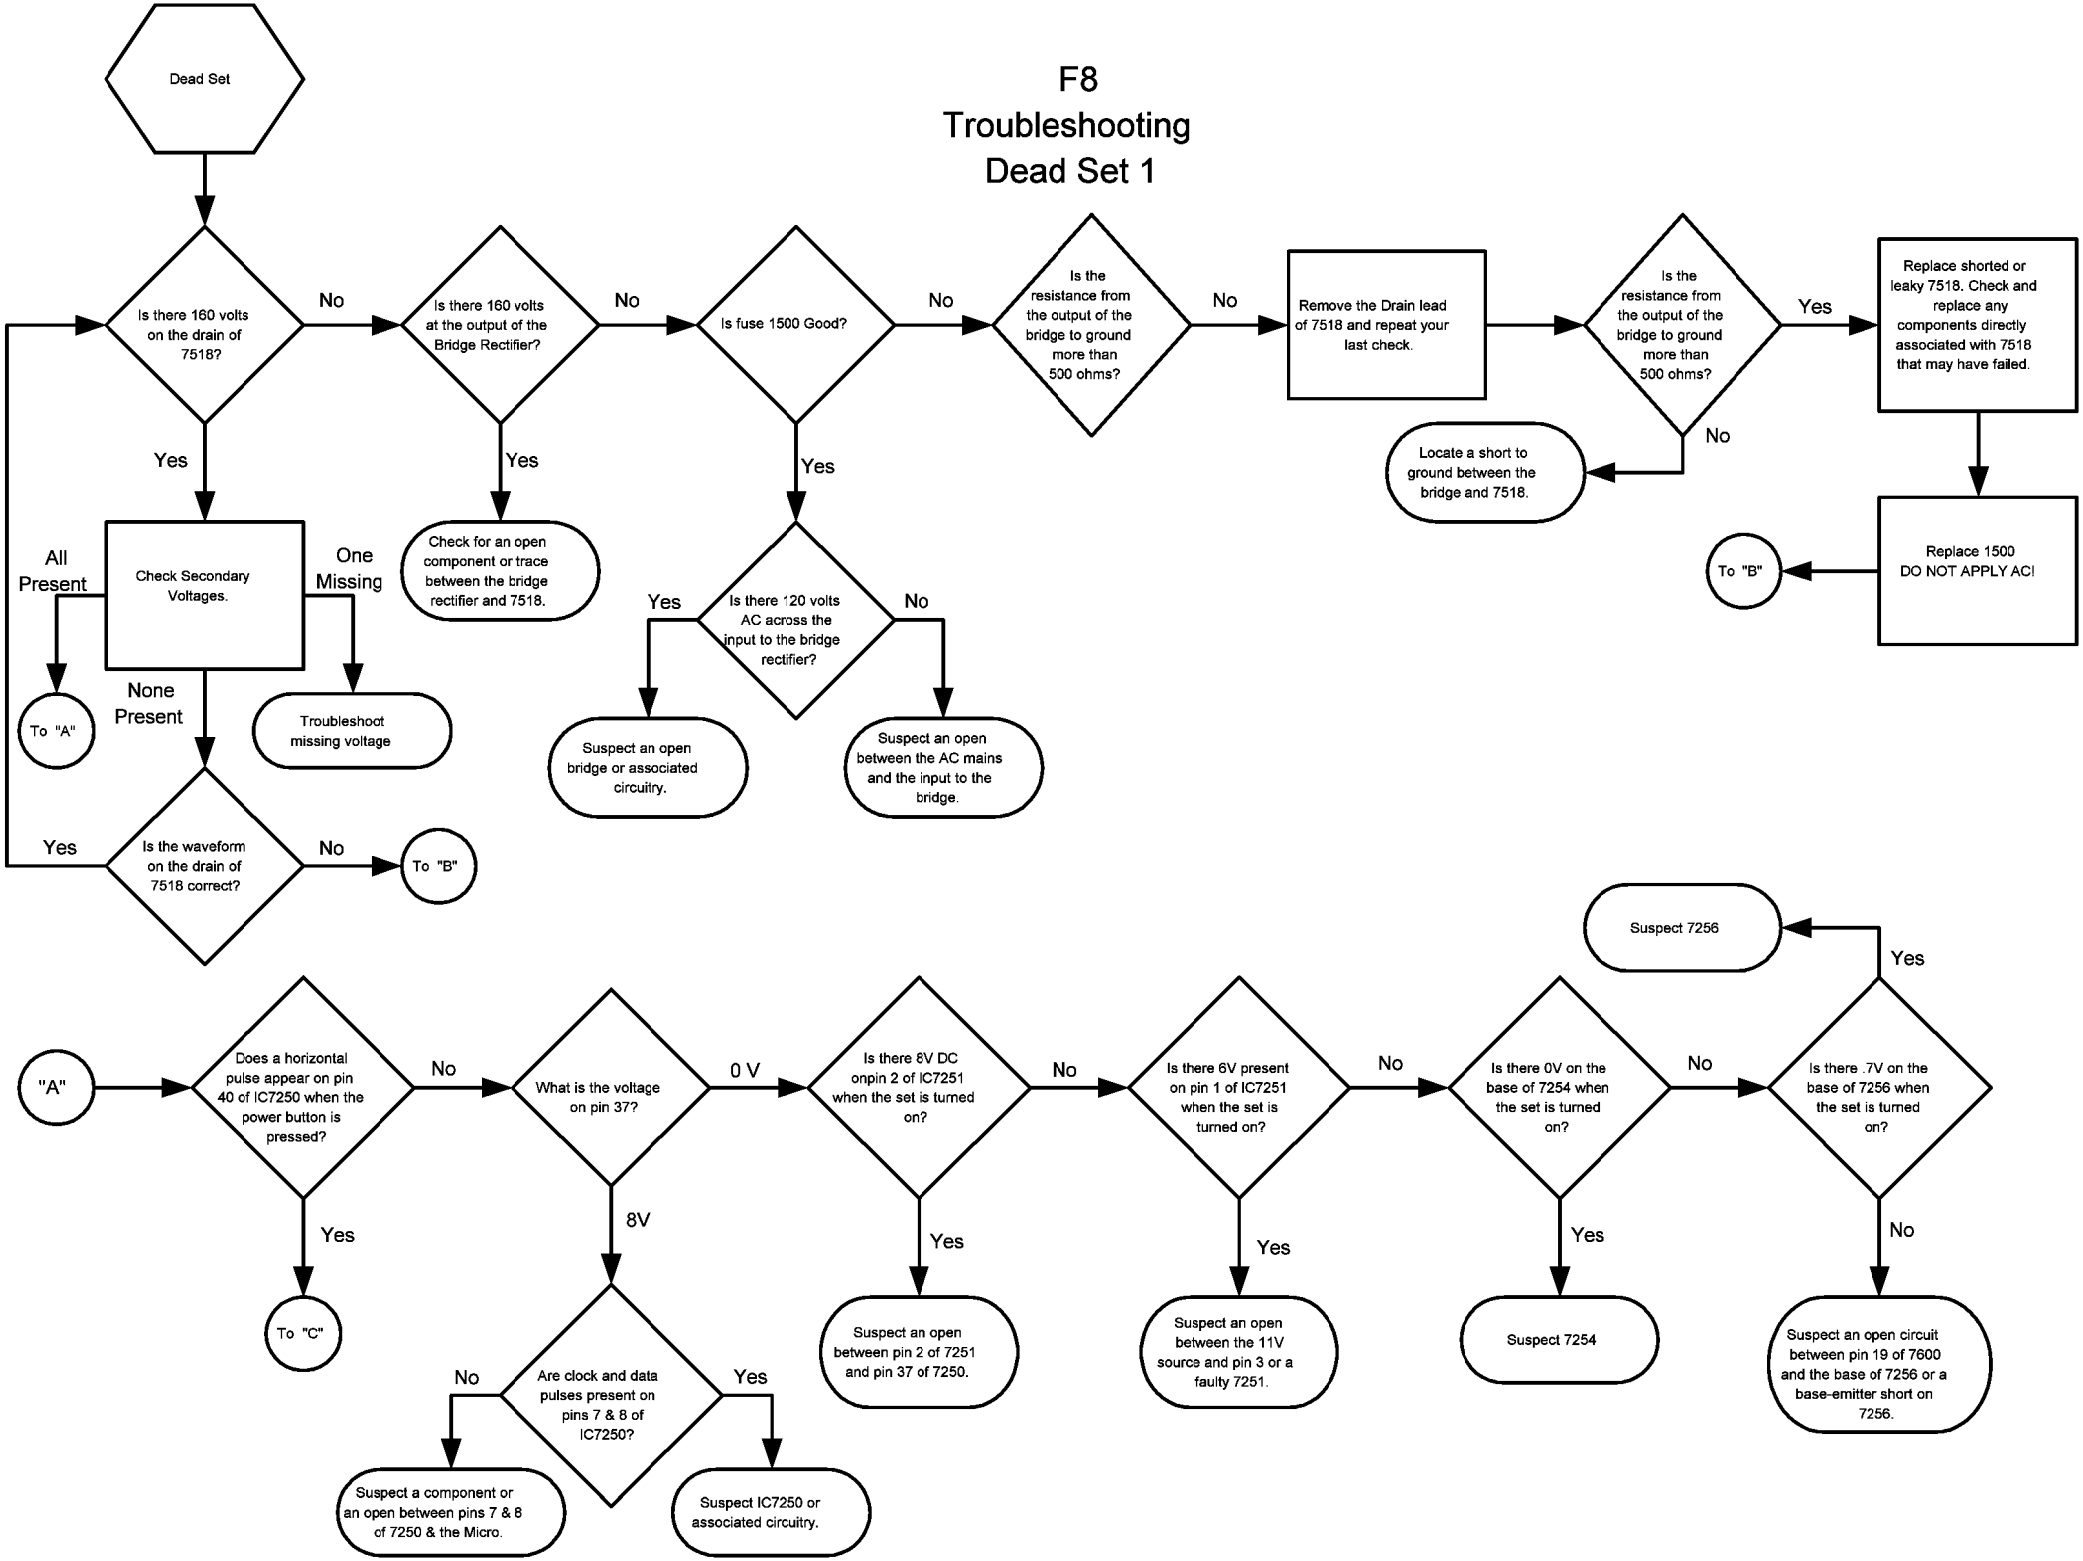
Dead Set
Is there 160 volts on the drain of 7518?
No
Is there 160 volts at the output of the Bridge Rectifier?
No
Is fuse 1500 Good?
No
Is the resistance from the output of the bridge to ground more than 500 ohms?
No
Remove the Drain lead of 7518 and repeat your last check.
Is the resistance from the output of the bridge to ground more than 500 ohms?
Yes
Replace shorted or leaky 7518. Check and replace any components directly associated with 7518 that may have failed.
No
Locate a short to ground between the bridge and 7518.
Replace 1500 DO NOT APPLY AC!
To "B"
Yes
Check Secondary Voltages.
All Present
One Missing
None Present
To "A"
Troubleshoot missing voltage
Yes
Check for an open component or trace between the bridge rectifier and 7518.
Yes
Is there 120 volts AC across the input to the bridge rectifier?
Yes
No
Suspect an open bridge or associated circuitry.
Suspect an open between the AC mains and the input to the bridge.
Yes
Is the waveform on the drain of 7518 correct?
No
To "B"
"A"
Does a horizontal pulse appear on pin 40 of IC7250 when the power button is pressed?
No
What is the voltage on pin 37?
0 V
Is there 6V DC onpin 2 of IC7251 when the set is turned on?
No
Is there 6V present on pin 1 of IC7251 when the set is turned on?
No
Is there 0V on the base of 7254 when the set is turned on?
No
Is there .7V on the base of 7256 when the set is turned on?
Yes
Suspect 7256
Yes
To "C"
8V
Yes
Suspect an open between pin 2 of 7251 and pin 37 of 7250.
Yes
Suspect an open between the 11V source and pin 3 or a faulty 7251.
Yes
Suspect 7254
No
Suspect an open circuit between pin 19 of 7600 and the base of 7256 or a base-emitter short on 7256.
No
Are clock and data pulses present on pins 7 & 8 of IC7250?
Yes
No
Suspect a component or an open between pins 7 & 8 of 7250 & the Micro.
Suspect IC7250 or associated circuitry.

F8 Troubleshooting Dead Set 2

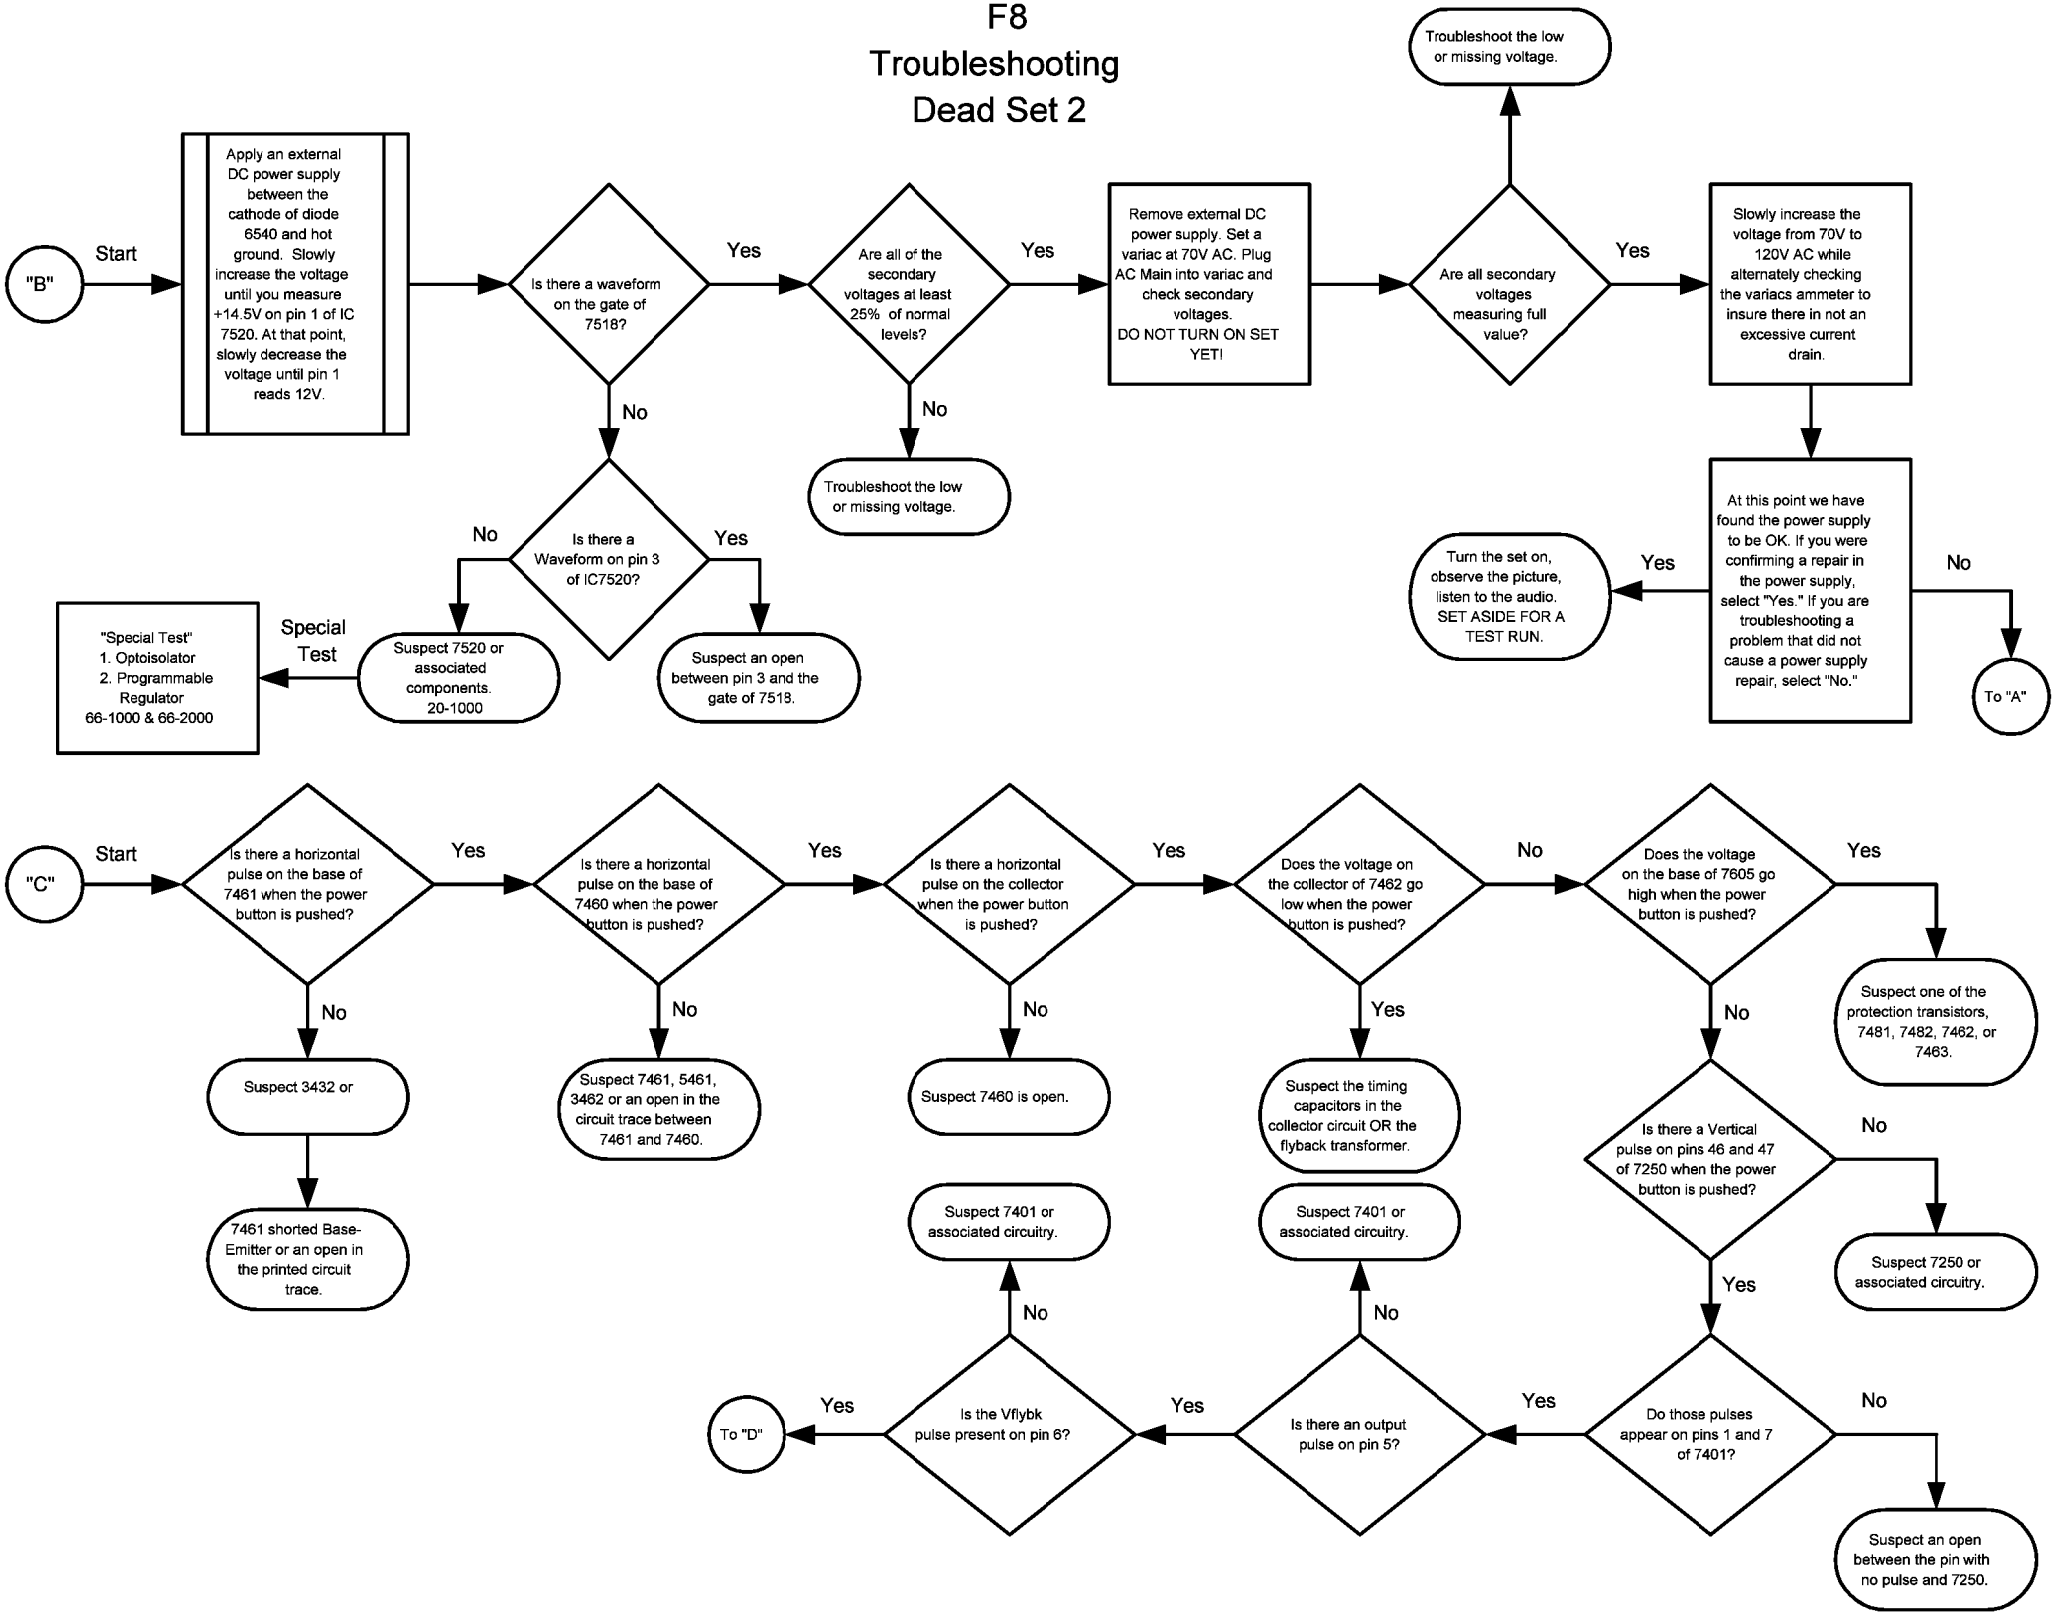
Start
"B"
Apply an external DC power supply between the cathode of diode 6540 and hot ground. Slowly increase the voltage until you measure +14.5V on pin 1 of IC 7520. At that point, slowly decrease the voltage until pin 1 reads 12V.
Is there a waveform on the gate of 7518?
Yes
No
Are all of the secondary voltages at least 25% of normal levels?
Yes
No
Troubleshoot the low or missing voltage.
Remove external DC power supply. Set a variac at 70V AC. Plug AC Main into variac and check secondary voltages.
DO NOT TURN ON SET YET!
Are all secondary voltages measuring full value?
Yes
Troubleshoot the low or missing voltage.
Slowly increase the voltage from 70V to 120V AC while alternately checking the variacs ammeter to insure there in not an excessive current drain.
At this point we have found the power supply to be OK. If you were confirming a repair in the power supply, select "Yes." If you are troubleshooting a problem that did not cause a power supply repair, select "No."
Yes
Turn the set on, observe the picture, listen to the audio. SET ASIDE FOR A TEST RUN.
No
To "A"
Is there a Waveform on pin 3 of IC7520?
No
Yes
Suspect 7520 or associated components. 20-1000
Suspect an open between pin 3 and the gate of 7518.
Special Test
"Special Test"
1. Optoisolator
2. Programmable Regulator
66-1000 & 66-2000
Start
"C"
Is there a horizontal pulse on the base of 7461 when the power button is pushed?
Yes
No
Suspect 3432 or
7461 shorted Base-Emitter or an open in the printed circuit trace.
Is there a horizontal pulse on the base of 7460 when the power button is pushed?
Yes
No
Suspect 7461, 5461, 3462 or an open in the circuit trace between 7461 and 7460.
Is there a horizontal pulse on the collector when the power button is pushed?
Yes
No
Suspect 7460 is open.
Does the voltage on the collector of 7462 go low when the power button is pushed?
No
Yes
Suspect the timing capacitors in the collector circuit OR the flyback transformer.
Does the voltage on the base of 7605 go high when the power button is pushed?
Yes
No
Suspect one of the protection transistors, 7481, 7482, 7462, or 7463.
Is there a Vertical pulse on pins 46 and 47 of 7250 when the power button is pushed?
No
Yes
Suspect 7250 or associated circuitry.
Do those pulses appear on pins 1 and 7 of 7401?
Yes
No
Suspect an open between the pin with no pulse and 7250.
Is there an output pulse on pin 5?
Yes
No
Suspect 7401 or associated circuitry.
Is the Vflybk pulse present on pin 6?
Yes
No
Suspect 7401 or associated circuitry.
To "D"

F8
Troubleshooting
Dead Set 3

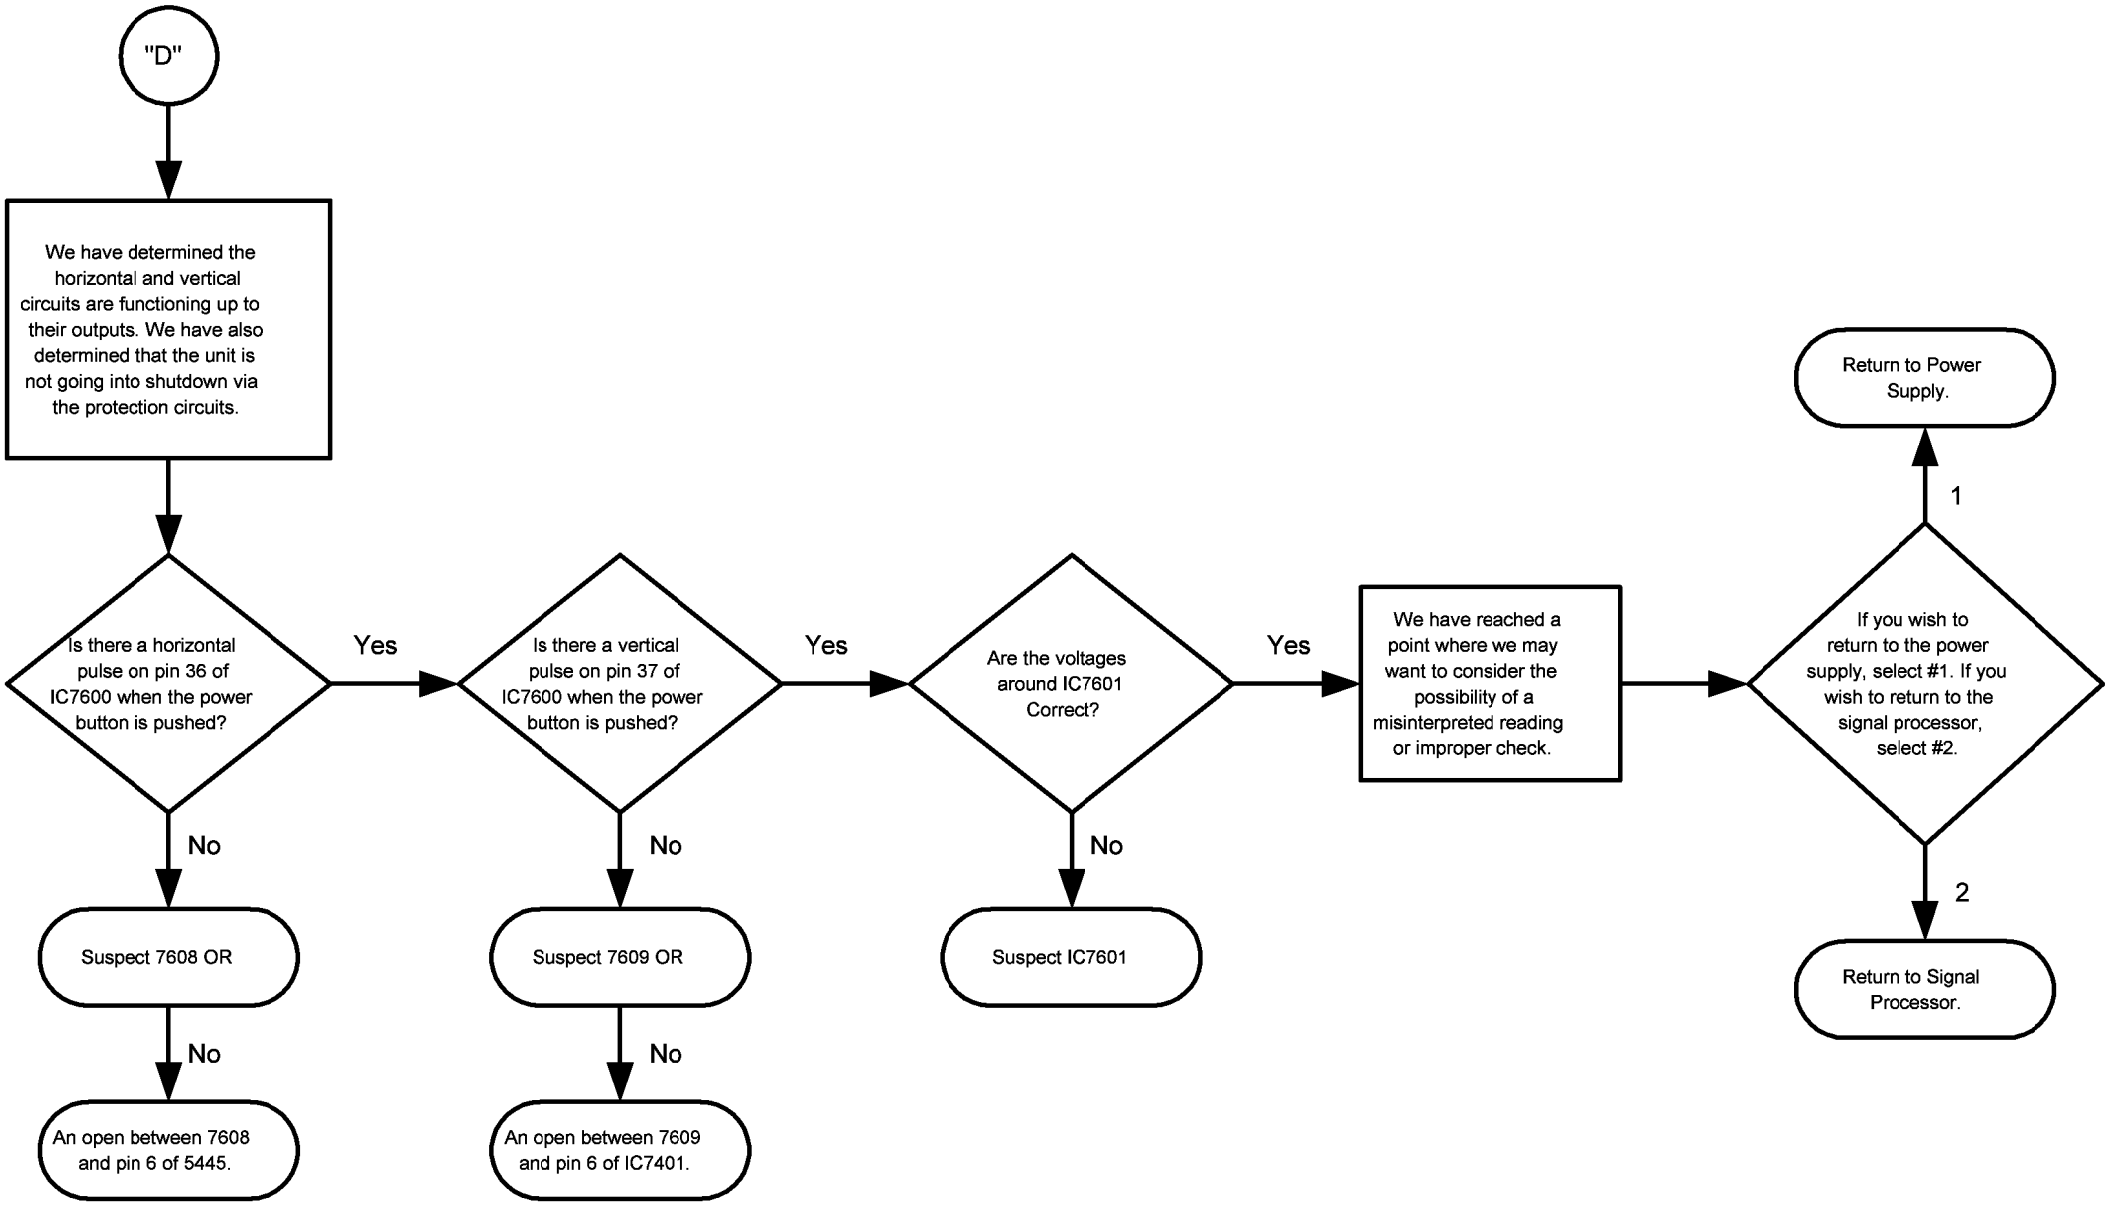
"D"
We have determined the horizontal and vertical circuits are functioning up to their outputs. We have also determined that the unit is not going into shutdown via the protection circuits.
Is there a horizontal pulse on pin 36 of IC7600 when the power button is pushed?
Yes
No
Suspect 7608 OR
No
An open between 7608 and pin 6 of 5445.
Is there a vertical pulse on pin 37 of IC7600 when the power button is pushed?
Yes
No
Suspect 7609 OR
No
An open between 7609 and pin 6 of IC7401.
Are the voltages around IC7601 Correct?
Yes
No
Suspect IC7601
We have reached a point where we may want to consider the possibility of a misinterpreted reading or improper check.
If you wish to return to the power supply, select #1. If you wish to return to the signal processor, select #2.
1
Return to Power Supply.
2
Return to Signal Processor.

F8
Troubleshooting
No or Weak Audio

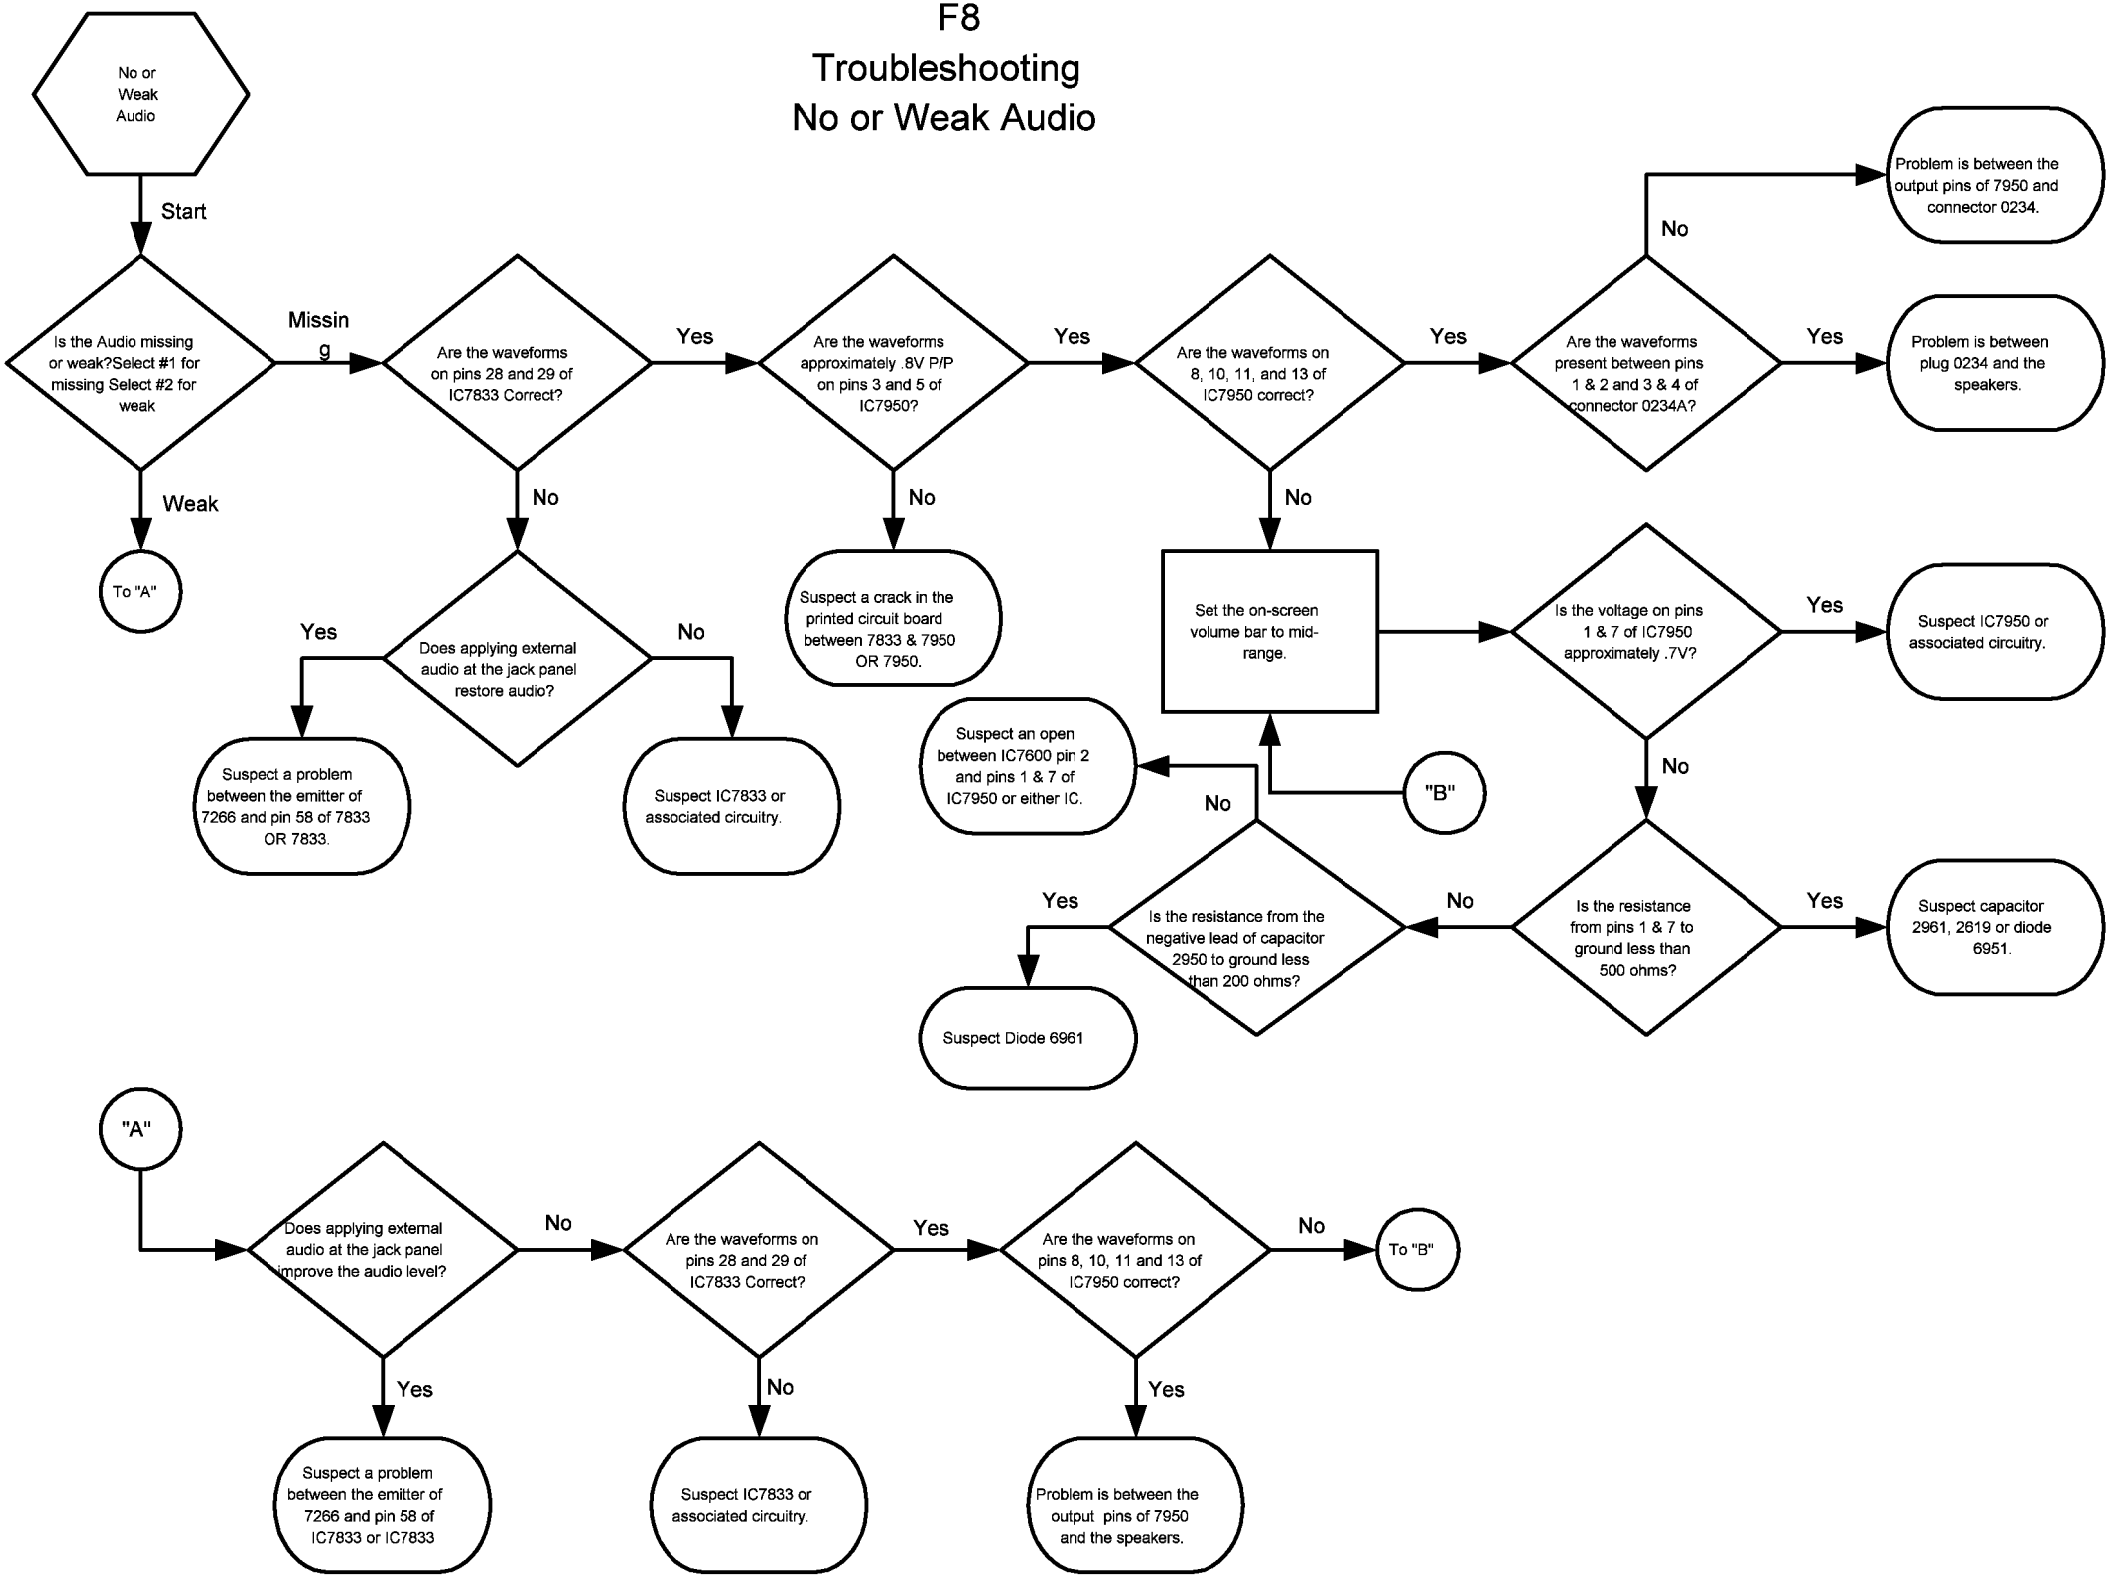
No or Weak Audio
Start
Is the Audio missing or weak?Select #1 for missing Select #2 for weak
Missing
Weak
To "A"
Are the waveforms on pins 28 and 29 of IC7833 Correct?
Yes
No
Does applying external audio at the jack panel restore audio?
Yes
No
Suspect a problem between the emitter of 7266 and pin 58 of 7833 OR 7833.
Suspect IC7833 or associated circuitry.
Are the waveforms approximately .8V P/P on pins 3 and 5 of IC7950?
Yes
No
Suspect a crack in the printed circuit board between 7833 & 7950 OR 7950.
Are the waveforms on 8, 10, 11, and 13 of IC7950 correct?
Yes
No
Set the on-screen volume bar to mid-range.
Is the voltage on pins 1 & 7 of IC7950 approximately .7V?
Yes
No
Suspect IC7950 or associated circuitry.
Suspect an open between IC7600 pin 2 and pins 1 & 7 of IC7950 or either IC.
"B"
Is the resistance from the negative lead of capacitor 2950 to ground less than 200 ohms?
Yes
No
Suspect Diode 6961
Is the resistance from pins 1 & 7 to ground less than 500 ohms?
Yes
No
Suspect capacitor 2961, 2619 or diode 6951.
Are the waveforms present between pins 1 & 2 and 3 & 4 of connector 0234A?
Yes
No
Problem is between plug 0234 and the speakers.
Problem is between the output pins of 7950 and connector 0234.
"A"
Does applying external audio at the jack panel improve the audio level?
Yes
No
Suspect a problem between the emitter of 7266 and pin 58 of IC7833 or IC7833
Are the waveforms on pins 28 and 29 of IC7833 Correct?
Yes
No
Suspect IC7833 or associated circuitry.
Are the waveforms on pins 8, 10, 11 and 13 of IC7950 correct?
Yes
No
Problem is between the output pins of 7950 and the speakers.
To "B"

F8 Troubleshooting "Retrace"

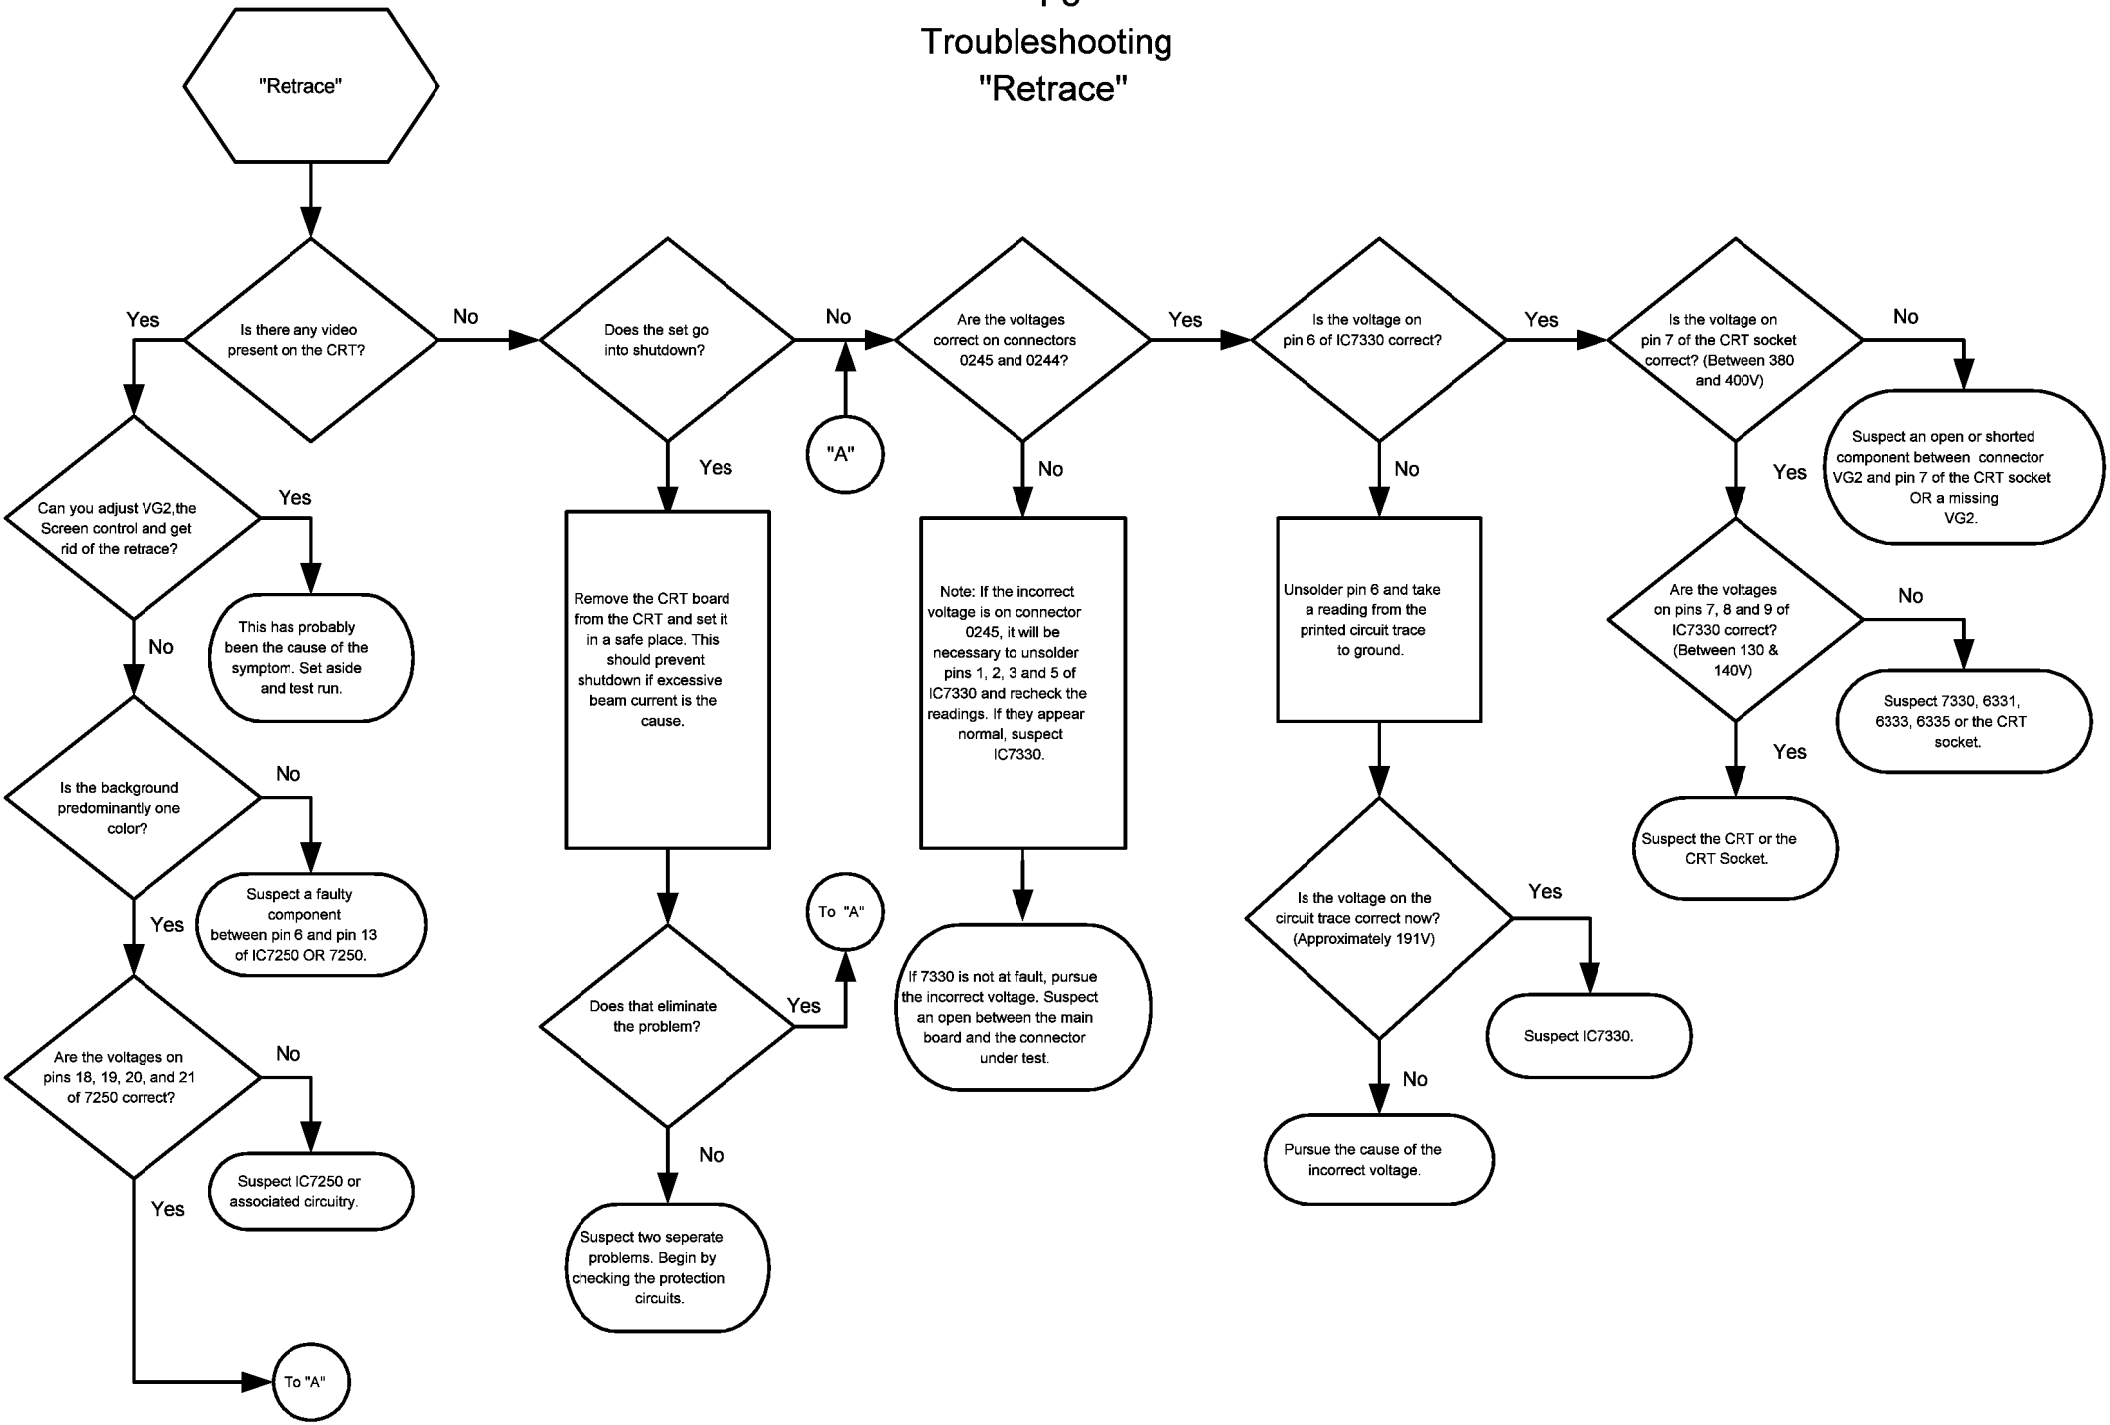
"Retrace"
Is there any video present on the CRT?
Yes
No
Can you adjust VG2,the Screen control and get rid of the retrace?
Yes
This has probably been the cause of the symptom. Set aside and test run.
No
Is the background predominantly one color?
No
Suspect a faulty component between pin 6 and pin 13 of IC7250 OR 7250.
Yes
Are the voltages on pins 18, 19, 20, and 21 of 7250 correct?
No
Suspect IC7250 or associated circuitry.
Yes
To "A"
Does the set go into shutdown?
Yes
Remove the CRT board from the CRT and set it in a safe place. This should prevent shutdown if excessive beam current is the cause.
Does that eliminate the problem?
Yes
To "A"
No
Suspect two seperate problems. Begin by checking the protection circuits.
No
"A"
Are the voltages correct on connectors 0245 and 0244?
No
Note: If the incorrect voltage is on connector 0245, it will be necessary to unsolder pins 1, 2, 3 and 5 of IC7330 and recheck the readings. If they appear normal, suspect IC7330.
If 7330 is not at fault, pursue the incorrect voltage. Suspect an open between the main board and the connector under test.
Yes
Is the voltage on pin 6 of IC7330 correct?
No
Unsolder pin 6 and take a reading from the printed circuit trace to ground.
Is the voltage on the circuit trace correct now? (Approximately 191V)
Yes
Suspect IC7330.
No
Pursue the cause of the incorrect voltage.
Yes
Is the voltage on pin 7 of the CRT socket correct? (Between 380 and 400V)
No
Suspect an open or shorted component between connector VG2 and pin 7 of the CRT socket OR a missing VG2.
Yes
Are the voltages on pins 7, 8 and 9 of IC7330 correct? (Between 130 & 140V)
No
Suspect 7330, 6331, 6333, 6335 or the CRT socket.
Yes
Suspect the CRT or the CRT Socket.

F8
Flowchart
Troubleshooting
"Shutdown"

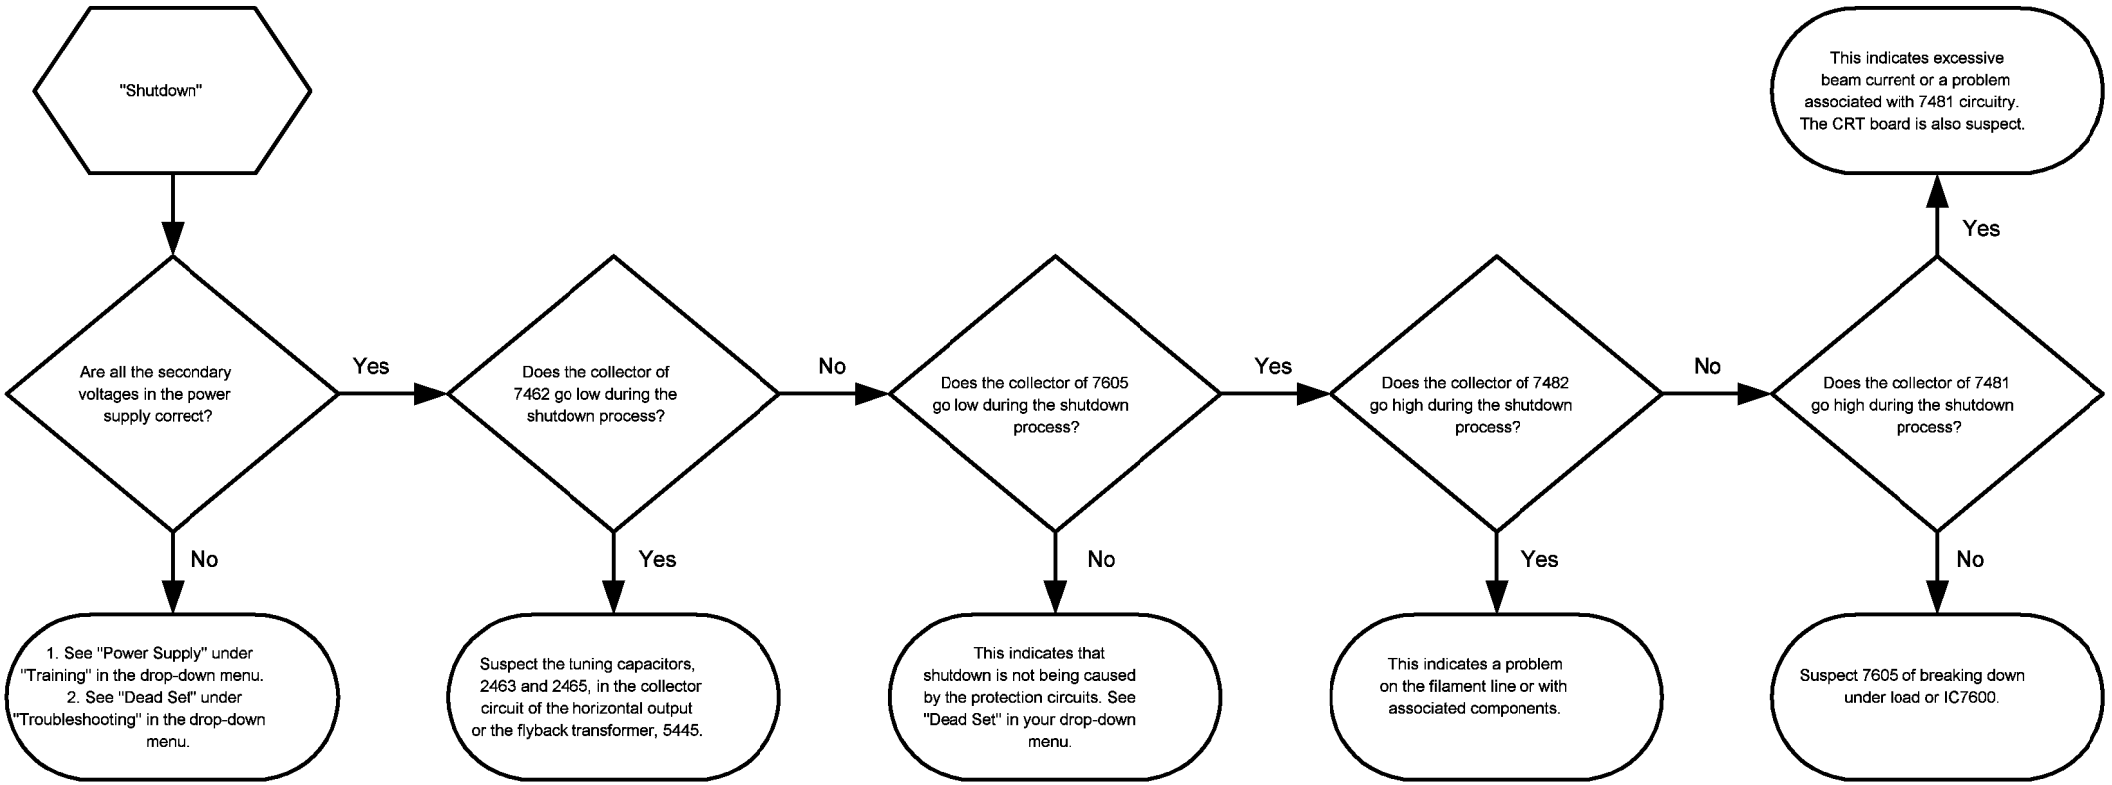
"Shutdown"
Are all the secondary voltages in the power supply correct?
No
1. See "Power Supply" under "Training" in the drop-down menu.
2. See "Dead Set" under "Troubleshooting" in the drop-down menu.
Yes
Does the collector of 7462 go low during the shutdown process?
Yes
Suspect the tuning capacitors, 2463 and 2465, in the collector circuit of the horizontal output or the flyback transformer, 5445.
No
Does the collector of 7605 go low during the shutdown process?
No
This indicates that shutdown is not being caused by the protection circuits. See "Dead Set" in your drop-down menu.
Yes
Does the collector of 7482 go high during the shutdown process?
Yes
This indicates a problem on the filament line or with associated components.
No
Does the collector of 7481 go high during the shutdown process?
No
Suspect 7605 of breaking down under load or IC7600.
Yes
This indicates excessive beam current or a problem associated with 7481 circuitry. The CRT board is also suspect.

MAIN CHASSIS WAVEFORM NOTES:

UNLESS OTHERWISE SPECIFIED:
ALL WAVEFORMS WERE TAKEN UNDER THE FOLLOWING CONDITIONS:

- LINE VOLTAGE MAINTAINED AT 120VAC, 60Hz VIA AN ISOLATION TRANSFORMER.
- SET IN SDM (SERVICE DISPLAY MODE). TO ENTER SDM, PRESS 0-6-2-5-9-6-MENU ON THE REMOTE CONTROL.
- ALL WAVEFORMS WERE TAKEN FROM MODEL TS2774-C101.
- ALL WAVEFORMS WERE TAKEN WITH AN NTSC SIGNAL GENERATOR DELIVERING 10mVp-p AT THE ANTENNA INPUT.
- SWEEP TIME/CM SETTINGS ARE SHOWN WITH THE FIGURES IN THE CALIBRATED POSITION.
- THE ACTUAL SWEEP TIMES AND VOLTAGES PRESENT ARE SHOWN WHEREVER POSSIBLE.
- COMPOSITE VIDEO SIGNALS ARE SHOWN WITHOUT SWEEP TIME AND VOLTAGES PRESENT BECAUSE THESE SIGNALS HAVE VARIABLE SWEEP TIMES AND VOLTAGES.
- A HIGH VOLTAGE OSCILLOSCOPE PROBE (100:1) IS NEEDED TO MEASURE THE WAVEFORM AT THE HORIZONTAL OUTPUT TRANSISTOR (PART # 7460).
- THE DESIGNATORS A1a THROUGH V6c, SHOWN IN ENCLOSED BOXES, CORRESPOND TO THE WAVEFORM PHOTOGRAPHS.

AUDIO WAVEFORM NOTES:

THESE NOTES APPLY ONLY TO THE AUDIO WAVEFORMS (A1a THROUGH A3d).
AUDIO WAVEFORMS WERE TAKEN UNDER THE FOLLOWING CONDITIONS:

- ALL WAVEFORMS WERE TAKEN WITH A LEADER LMS-238 SOUND GENERATOR CONNECTED AT THE ANTENNA INPUT, WITH THE FOLLOWING SETTINGS:
- INT FREQUENCY SET TO 1kHz
- STEREO (L+R), PILOT ON
- VIF/RF OUTPUT AT CHANNEL 3
- ALL WAVEFORMS WERE TAKEN FROM MODEL TS2774C101.
- TELEVISION SET TO CHANNEL 3 IN NORMAL MODE.
- DO NOT MUTE THE SET.
- SET THE TELEVISION VOLUME AT 40.
- THE SPEAKERS MAY BE DISCONNECTED AT CONNECTOR #0234 (BOARD LOCATION B-1) IF THE AUDIO OUTPUT CAUSES A DISTRACTION TO THE SERVICER.

25F8(7583)


P1
pkpk=46.7V, freq=63.5kHz
20.0V MTB 5.00us


P2
pkpk=2.01V, freq=38.7kHz
500mV MTB 10.0us


P3
pkpk=413V
200V MTB 5.00us


P4
pkpk=46.7V
20.0V MTB 5.00us


L1
pkpk=845mV, freq=15.7kHz
200mV MTB 20.0us


L2
pkpk=14.1V, freq=15.7kHz
5.00V MTB 20.0us


L3
pkpk=825V
400 V MTB 20.0us


L4
pkpk=113V, freq=15.7kHz
50.0V MTB 20.0us


L5
pkpk=27.2V, freq=15.7kHz
5.00V MTB 20.0us


L6
pkpk=12.7V, freq=15.7kHz
5.00V MTB 20.0us

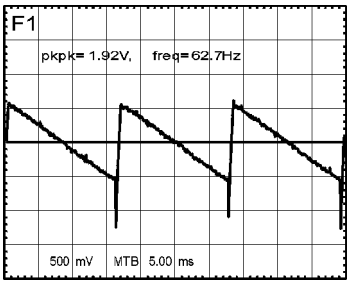
F1
pkpk=1.92V, freq=62.7Hz
500 mV MTB 5.00 ms


F2
pkpk=1.21V, freq=61.7Hz
500mV MTB 5.00ms


F3
pkpk=66.7V, freq=60.0Hz
20.0V MTB 5.00ms


L1
pkpk=845mV, freq=15.7kHz
200mV MTB 20.0us


F2
pkpk=1.21V, freq=61.7Hz
500mV MTB 5.00ms


S1
pkpk=5.71V, freq=15.7kHz
2.00V MTB 20.0us

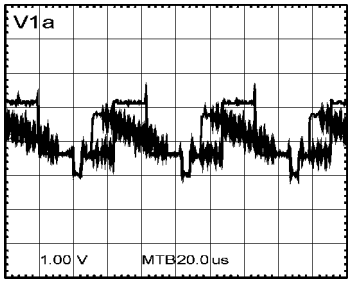
V1a
1.00 V MTB20.0us

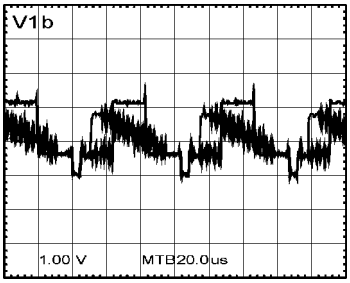
V1b
1.00 V MTB20.0us

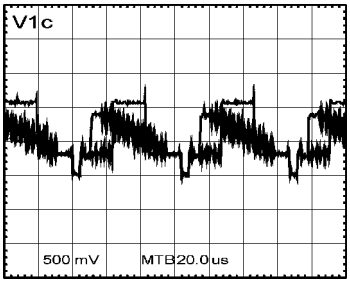
V1c
500 mV MTB20.0us

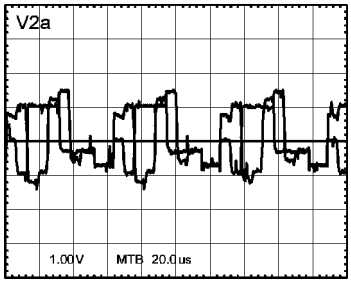
V2a
1.00V MTB 20.0us

25F8(7583)

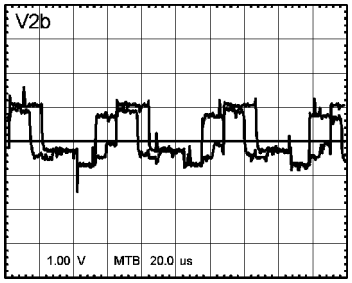
V2b
1.00 V MTB 20.0 us

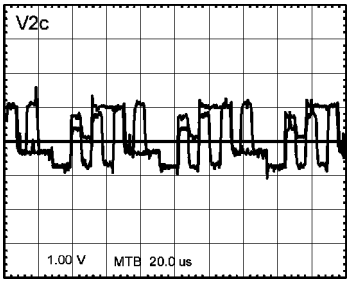
V2c
1.00 V MTB 20.0 us

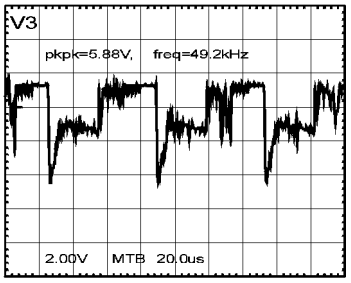
V3
pkpk=5.88V, freq=49.2kHz
2.00V MTB 20.0us

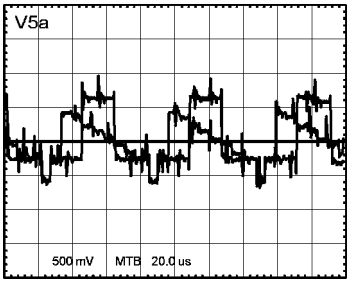
V5a
500 mV MTB 20.0 us

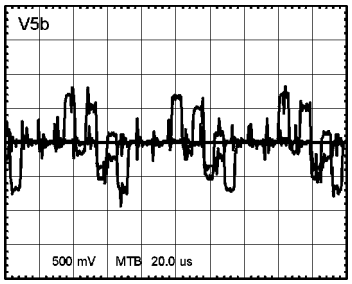
V5b
500 mV MTB 20.0 us

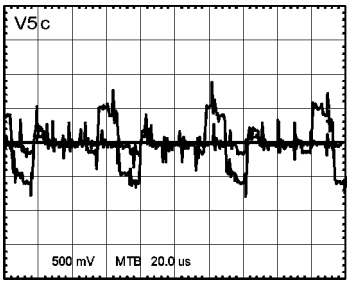
V5c
500 mV MTB 20.0 us


C1
pkpk=3.42V, freq=12.1 Mhz
1.00 V MTB 20.0ns


C2
pkpk=5.40V, freq=14.8kHz
2.00 V MTB 20.0us

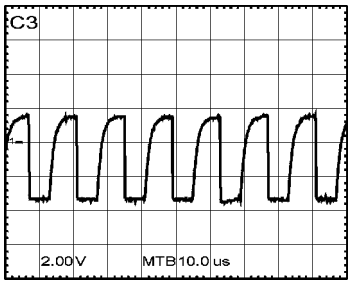
C3
2.00V MTB 10.0 us

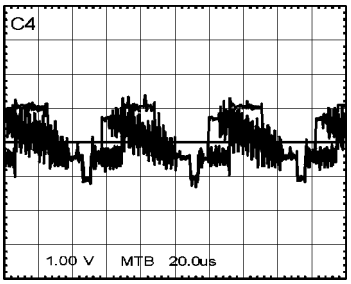
C4
1.00 V MTB 20.0us


C5
pkpk=5.24V, freq=59.9Hz
2.00V MTB 5.00ms


C6
pkpk=5.15V, freq=15.7kHz
2.00V MTB 20.0us

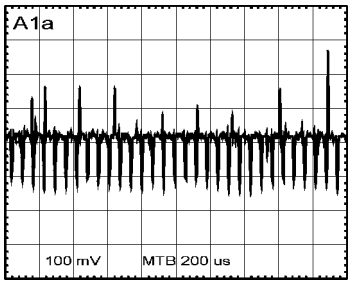
A1a
100 mV MTB 200 us

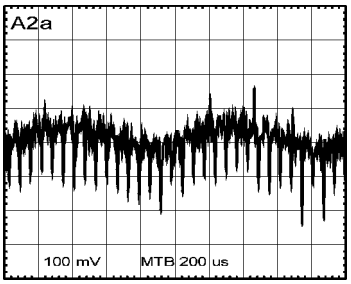
A2a
100 mV MTB 200 us

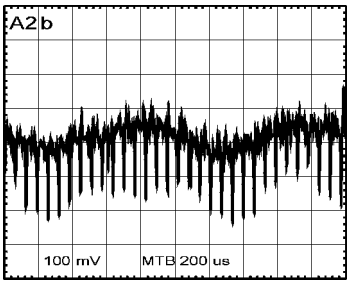
A2b
100 mV MTB 200 us

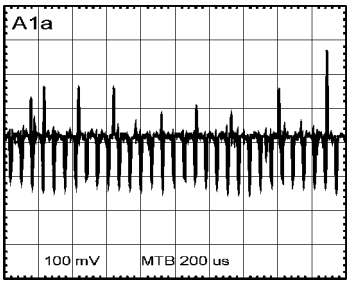
A1a
100 mV MTB 200 us

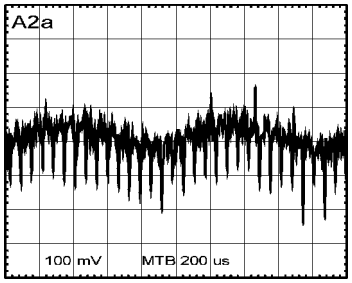
A2a
100 mV MTB 200 us

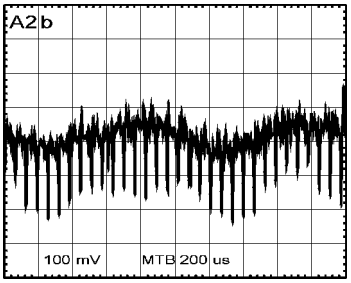
A2b
100 mV MTB 200 us

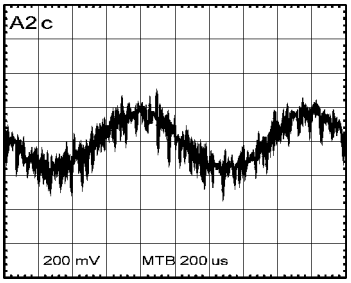
A2c
200 mV MTB 200 us

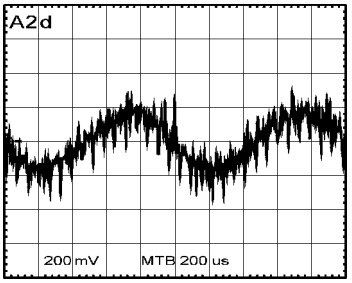
A2d
200 mV MTB 200 us

25F8(7583)

A3a

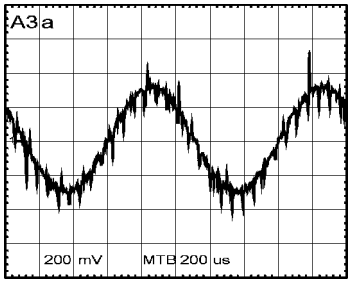

A3b

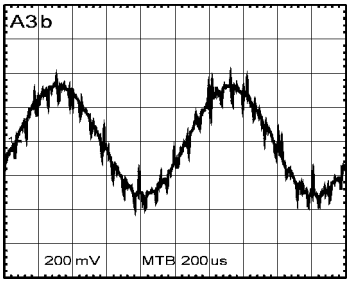

A3c

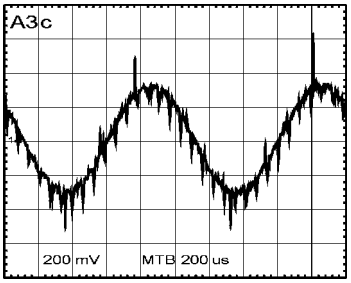

A3d

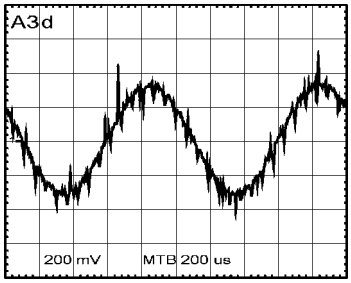

V4a

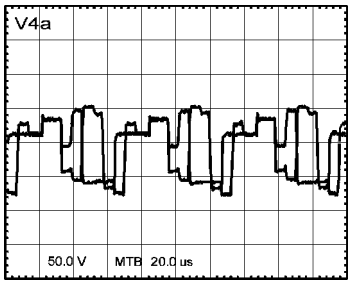

V4b

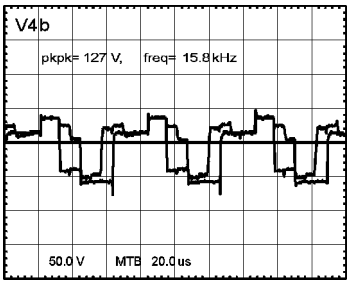

V4c

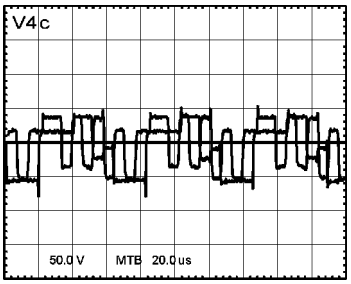

V6a

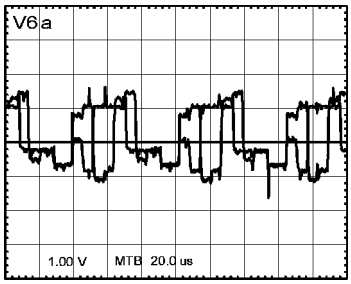

V6b

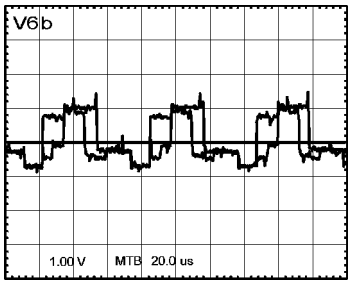

V6c

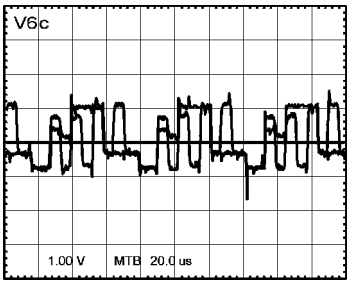

1

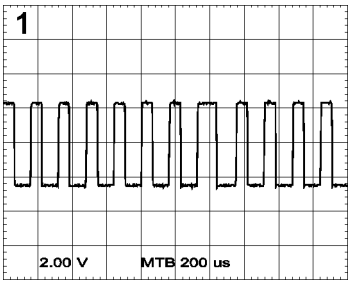

2

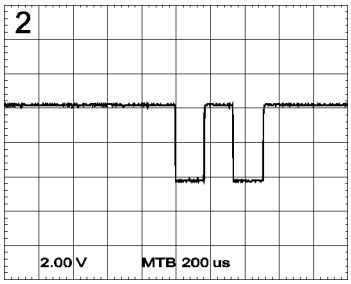

3

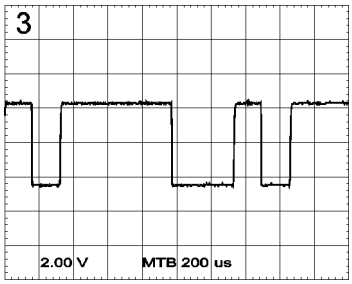

4

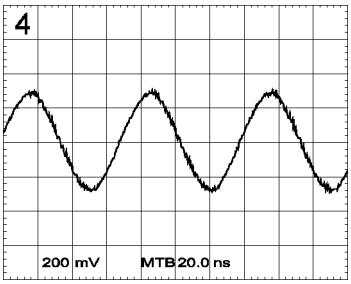

5

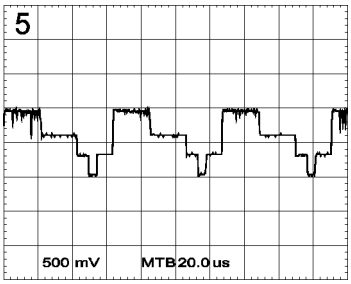

6

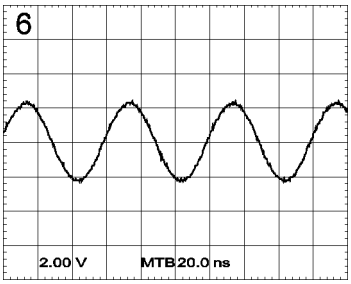

7

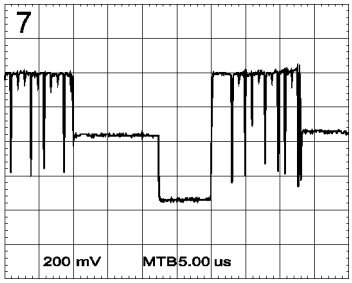

MAIN CHASSIS SCHEMATIC NOTES:

UNLESS OTHERWISE SPECIFIED:

1. ALL VOLTAGES AND WAVEFORMS WERE TAKEN UNDER THE FOLLOWING CONDITIONS:
   - LINE VOLTAGE MAINTAINED AT 120VAC, 60Hz VIA AN ISOLATION TRANSFORMER.
   - SET IN SDM (SERVICE DISPLAY MODE). To enter SDM, press 0-6-2-5-9-6-Menu on the remote control.
   - ALL VOLTAGES WERE TAKEN FROM MODEL TS2774C101.
2. ALL WAVEFORMS WERE TAKEN WITH AN NTSC SIGNAL GENERATOR DELIVERING 10mVp-p AT THE ANTENNA INPUT.
3. ON VOLTAGE CHARTS:
   - VOLTAGES IN THE "Signal" COLUMN WERE TAKEN WITH AN NTSC SIGNAL GENERATOR DELIVERING 10mVp-p AT THE ANTENNA INPUT.
   - VOLTAGES IN THE "No Signal" COLUMN WERE TAKEN WITH NO SIGNAL APPLIED.
   - VOLTAGES IN THE "Standby" COLUMN WERE TAKEN WITH THE SET IN STANDBY MODE (Power supplied to the chassis, set turned off).
4. ALL VOLTAGES ARE POSITIVE DC WITH RESPECT TO GROUND IN THAT SECTION OF THE CHASSIS, AND MAY VARY DUE TO NORMAL PRODUCTION TOLERANCES.
5. COMPONENT AND SPECIAL SYMBOLS:
   * INDICATES A COMPONENT WHICH WILL VARY DEPENDING ON SCREEN SIZE, PRODUCTION DATES, AND OPTION FEATURES INSTALLED. PLEASE SEE THE REPLACEMENT PARTS LIST FOR SPECIFIC PART INFORMATION.
   • INDICATES A COMPONENT IS AN SMD ”CHIP“ TYPE COMPONENT, AND AS SUCH WILL BE LOCATED ON THE BOTTOM Side OF THE CBA.
6. A HIGH VOLTAGE OSCILLOSCOPE PROBE (100:1) IS NEEDED TO MEASURE THE WAVEFORM AT THE HORIZONTAL OUTPUT TRANSISTOR (PART # 7620).
7. SPARK GAPS SHOWN ON THE CRT SCHEMATIC ARE INTERNAL TO THE CRT SOCKET.
8. THE NUMBERS 1a THROUGH 38b, SHOWN IN ENCLOSED BOXES, CORRESPOND TO THE WAVEFORM PHOTOGRAPHS.
9. FOR VOLTAGE, WATTAGE, AND TOLERANCE RATINGS OF RESISTORS AND CAPACITORS, PLEASE SEE THE ELECTRICAL REPLACEMENT PARTS LIST.
10. INDICATES PCE REPLACEMENT PART NUMBER ONLY.

F8 Wiring Diagram (Model PPC927 C201 Shown)

** Optional Panels (Certain Models Only)*

** More Optional Panels (Not Shown)*
A10602 OCV TV Module
A10680 Channel One Card
A10758 Provideo Card
A10759 Provideo Jack Panel
A10777 Interface Module
A10654 Scan Converter Jack Panel
A10797 ITV Scan Card

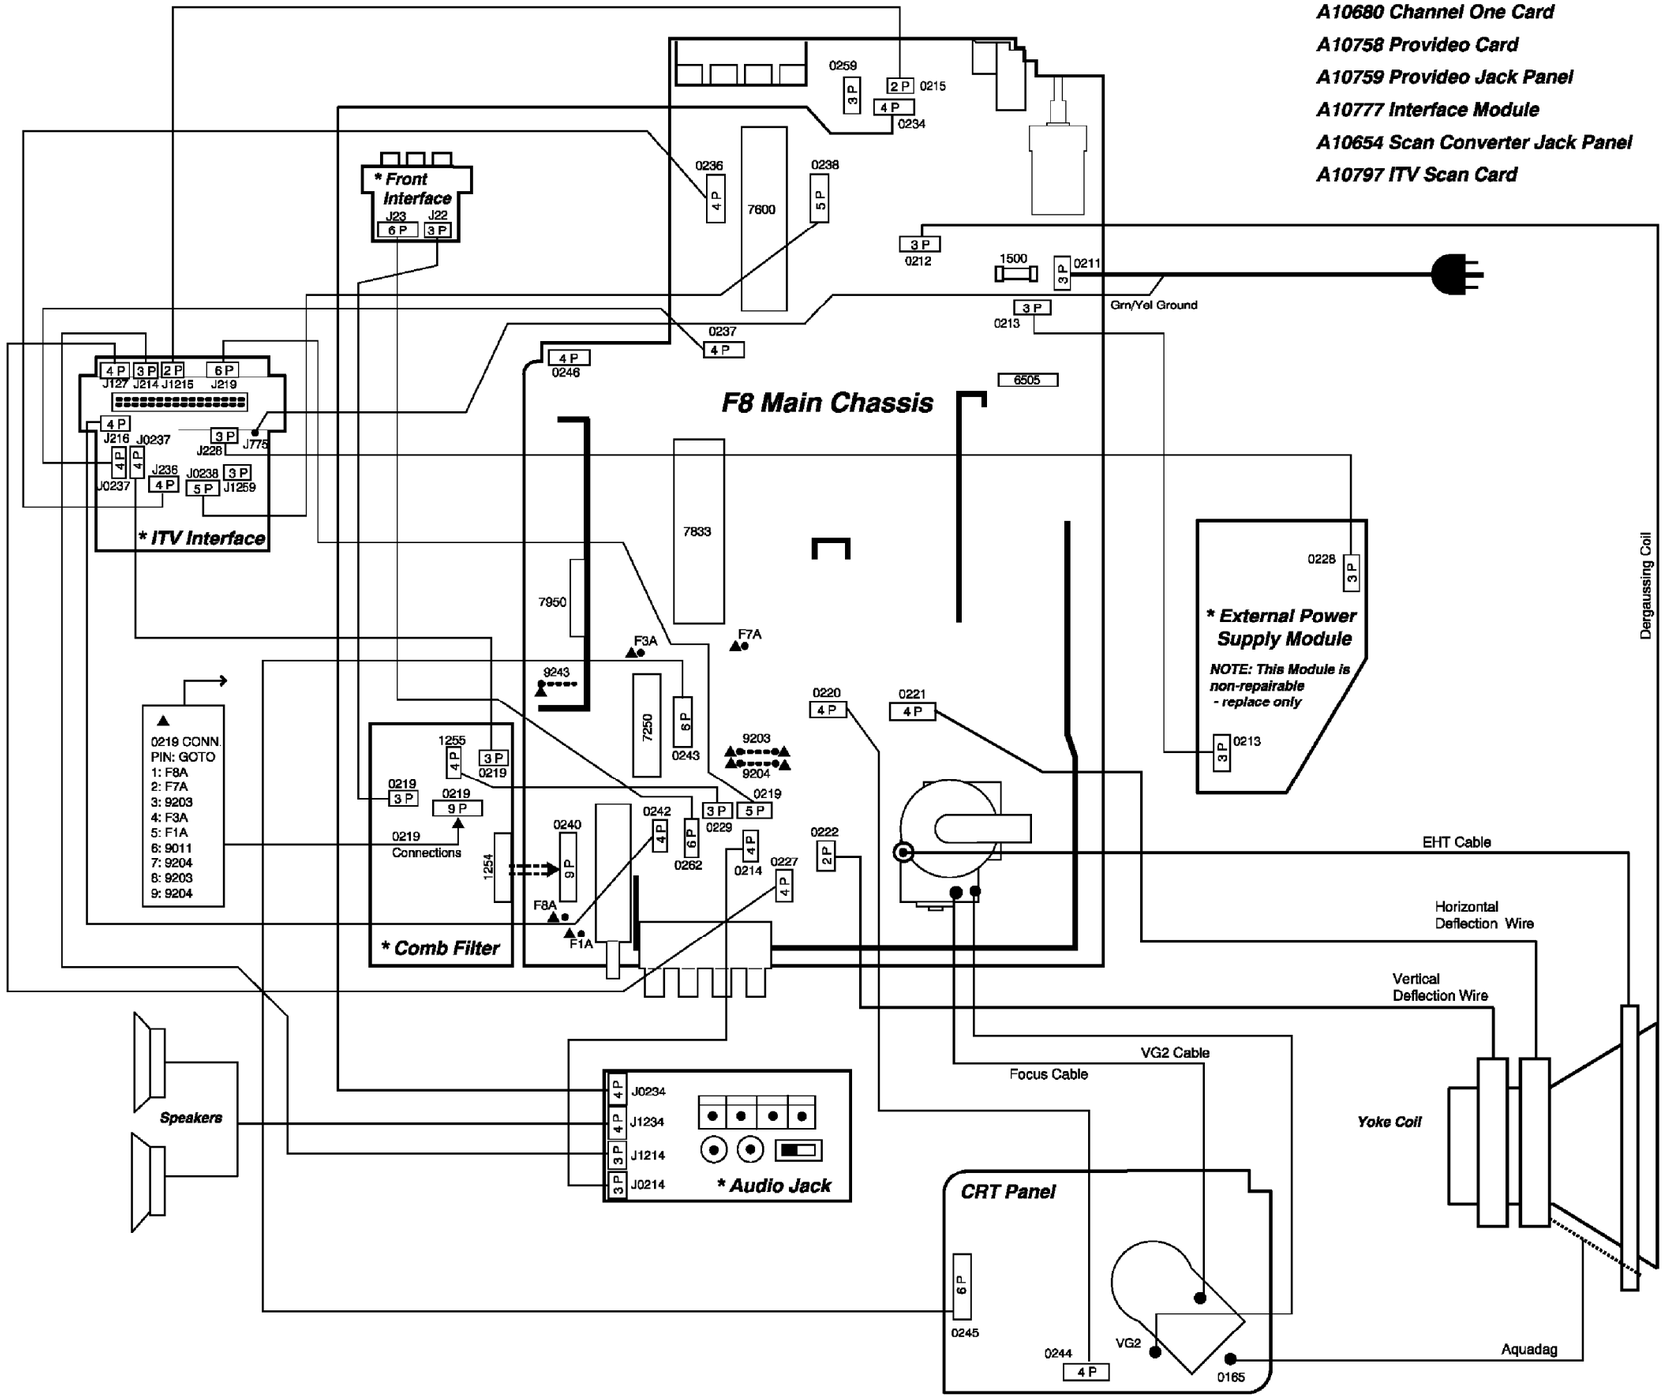

All Models (7583) - OVERALL FUNCTION

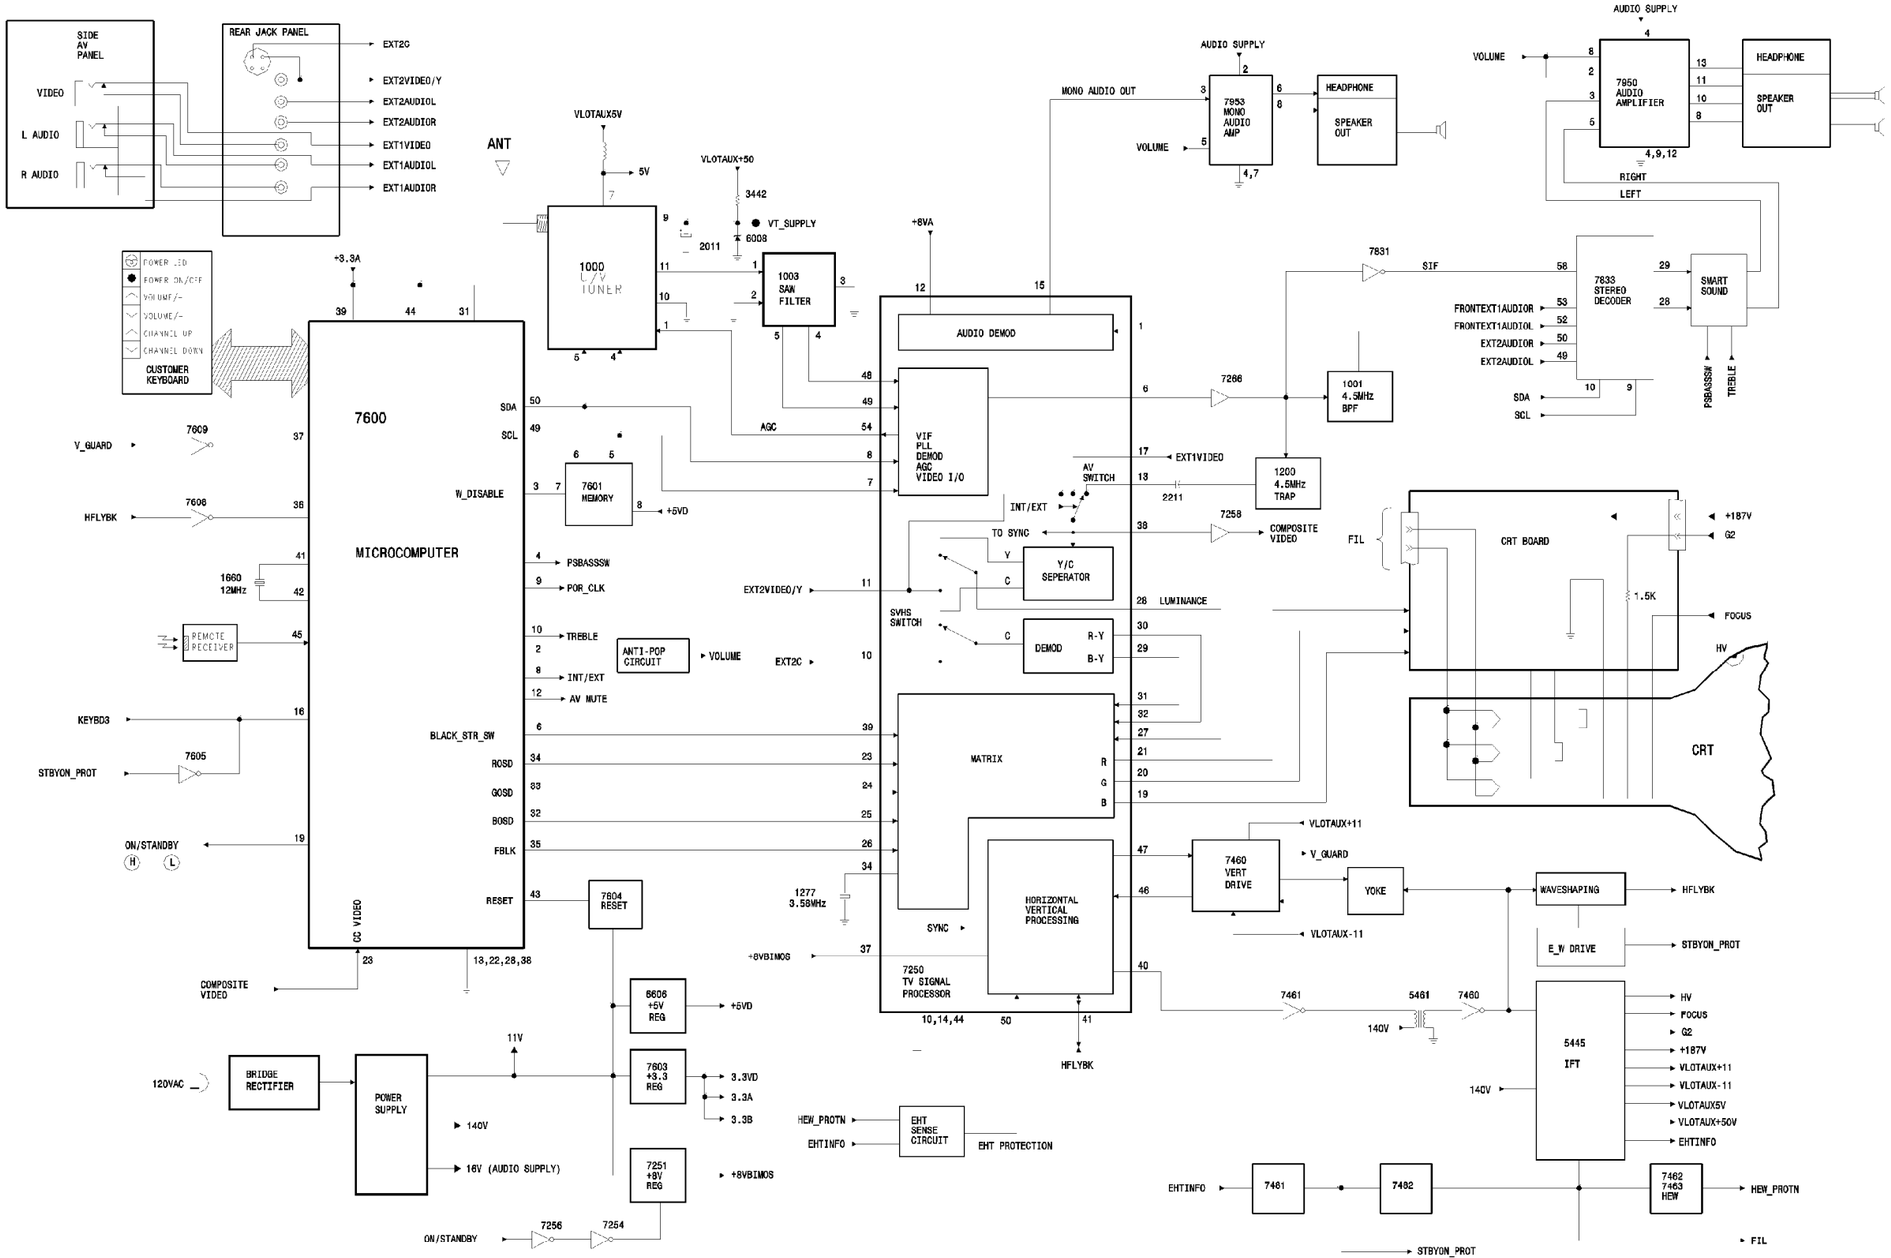

A1 POWER SUPPLY

FOR ITEM NR.MARKED WITH *
REFER TO DIVERSITY TABEL AT PAGE 3

100-120V SINGLE RANGE (USA)
170-250V SINGLE RANGE (EURO)
100-250V FULL RANGE (AP,LATAM)

B2P3-VH 0212 DEGAUSSING COIL F453 F454

MAINS_IN_B 9500 F455 MAINS 0211 B2P3-VH 0231 SDKE F456 T4E 250V 1500 F457 F459 MAINS_IN_A 9501 I543

DMF-2405 9508 9503 9507 9502 I510 I511 2500 470n 3505 DSP I512 2501 N/U I503 6501 N/U I531 6500 N/U 3501 470R

3542 4M7 I513 3502 2M2 I514 3530 3K3 6510 BZX79-C20 I544 3529 68R 2529 100n

3510 33K I546 3506 N/U 3507 N/U 9505 2502 I509 2n2 0213 B2P3-VH 2505 2n2 I547 6505 GBU6JL 9506 3515 2R5 I508

3525 33R F462 I545 P1 5552 2524 300p 2517 1n 3517 1K 6514 BZX79-C18 I548

6508 BYD33J 6507 BYD33J I516 3528 100R 3514 820K 3521 330R 3518 0R22 6512 1N5062 6513 1N5062 I530

F469 2506 F468 F486 6515 N/U 6517 N/U 3509 N/U I535 2507 I534 I533 1n5 5518 2510 N/U 2518 470p 2511 6511 BY995C 3511 1K

147V (152.5V) 159V STH8NA60FI 7518 2.9V 0.2V 0V

5516 100MHZ P3 P4 5545 W8019 I536 F463 I537 MRT T1A I538 5572 100MHZ I539 2.5A MRT 1573 6580 6570 EGP20DL F470 16.7V 9509 6582 EGP20DL AudioSupply

I561 5575 100MHZ 1571 I562 6590 EGP20DL 2571 2m2 2577 1m F471 AudioSupplyGnd

F477 I540 2572 I577 5550 N/U I541 2550 I542 +VBATT

I578 5576 100MHZ I550 6550 BY229X-800 5577 F472 F473 5551 27u MainSupply 140V

F475 F476 I576 2562 220p 2551 47u F474 3508

5573 100MHZ I560 6560 EGP20DL I532 MRT T1A 1572 I568 F487 Vaux 2561 1000u F461 F1 RT-01T

VlotAux+11V Reset A7-1 A3-49 A6-49

+VBATT 3543 220K 6542 BAV21 3545 1M 2541 3u3 I556 3544 22K I557 3546 47K I566 Vaux 3547 10K I579 6543 BAS216 I558 7542 BC857B 2542 100u F488 CRT_DISCHARGE

309.7V F467

7591 BC847B 3595 68K 6591 BAS216 3597 100R 7592 BC847B 3598 10K 3599 22K 3596 10K I506 2586 220u I505 I504 3594 22K 1N4148 6584 1N4148 I575 6585 1N4148 I507 3592 10K 0.7V -0.04V 11.4V -0.3V 1580 G5P I501 3503 1e2 7590 BC847B 0.03V 0V

7520 MC44603A

3520 82K I519 2520 82p I520 2531 1n 3536 18K I521 3532 6K8 2532 470p I522 3534 15K 4501 2533 2n2 I524 I523 2534 N/U I525 3537 10K I570 3516 1K I518 3513 180K 3512 15K 2530 1u I517 I574 3518 1K

Rref Vref Iref Vcc 18V Vdem in DEMAGNETICATION MANAGEMENT REFERENCE BLOCK Vref enable SUPPLY & INITIALIZATION BLOCK UVLO1 Vdem out Iref Vosc prot Vc Sync CT OSCILLATOR Vosc BUFFER OUTPUT GND Rstandby Set Q Latch Reset THERMAL SHUTDOWN STANDBY (REDUCED FREQUENCY) Vovp out OVERVOLTAGE MANAGEMENT VOLTAGE FEEDBACK ERROR AMP E/A OUT CURRENT SENSE OVERVOLTAGE PROTECTION FOLDBACK Dmax & SOFT-START CONTROL UVLO1 Vref Iref FOLDBACK INPUT CURRENT SENSE INPUT Soft Start & Dmax

9510 5540 4U7 6540 BAV21 2540 100u 15.6V 2521 3n3 2522 3n3 5521 2U2 2545 1n5 EAR MainSupplyGnd HOT GROUND

15.8V 12.4V 7581 TCDT1101G I529 3585 100R 3576 N/U 2575 100n +VBATT 2.2V 3V I528 3571 150K 2574 N/U I527 3575 100R F483 9.6V (7.4V) 2573 33n I573 3574 33K 3573 2K I559 3572 N/U F484 7570 TL431CLP 2.5V (2.5V) 0V (0V) 3577 10K I549 3578 1K 2576 6n8 3579 1K 3570 15K

0241 AudioSupply Vaux Vaux_1 4999 For Testing

A2 HORIZONTAL DEFLECTION

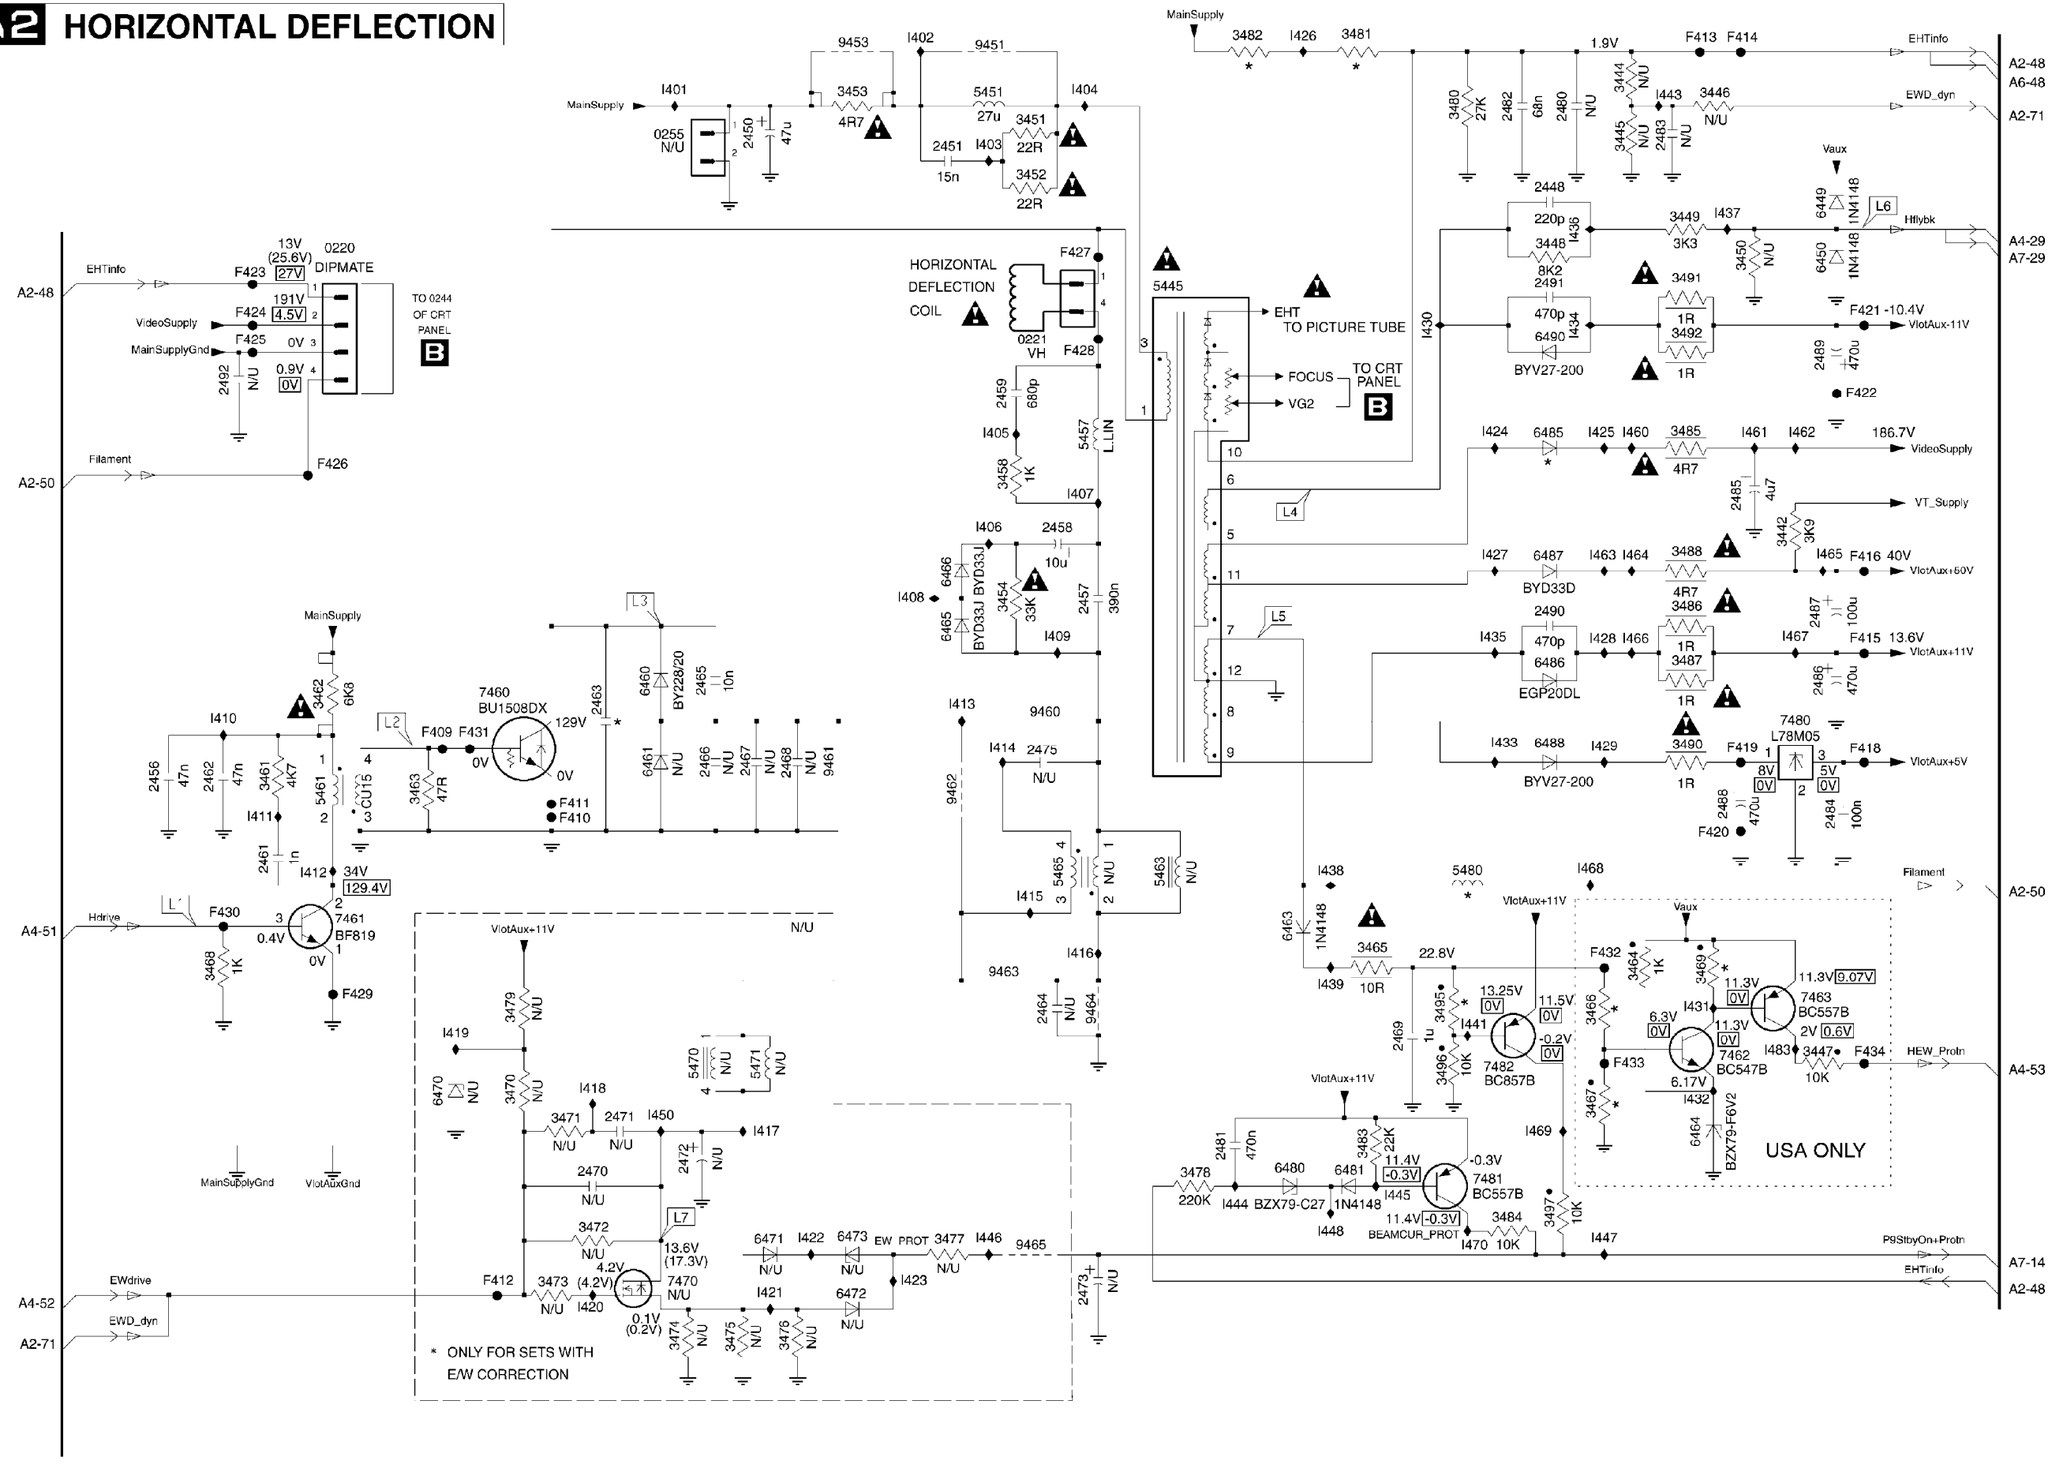

A3 VERTICAL DEFLECTION

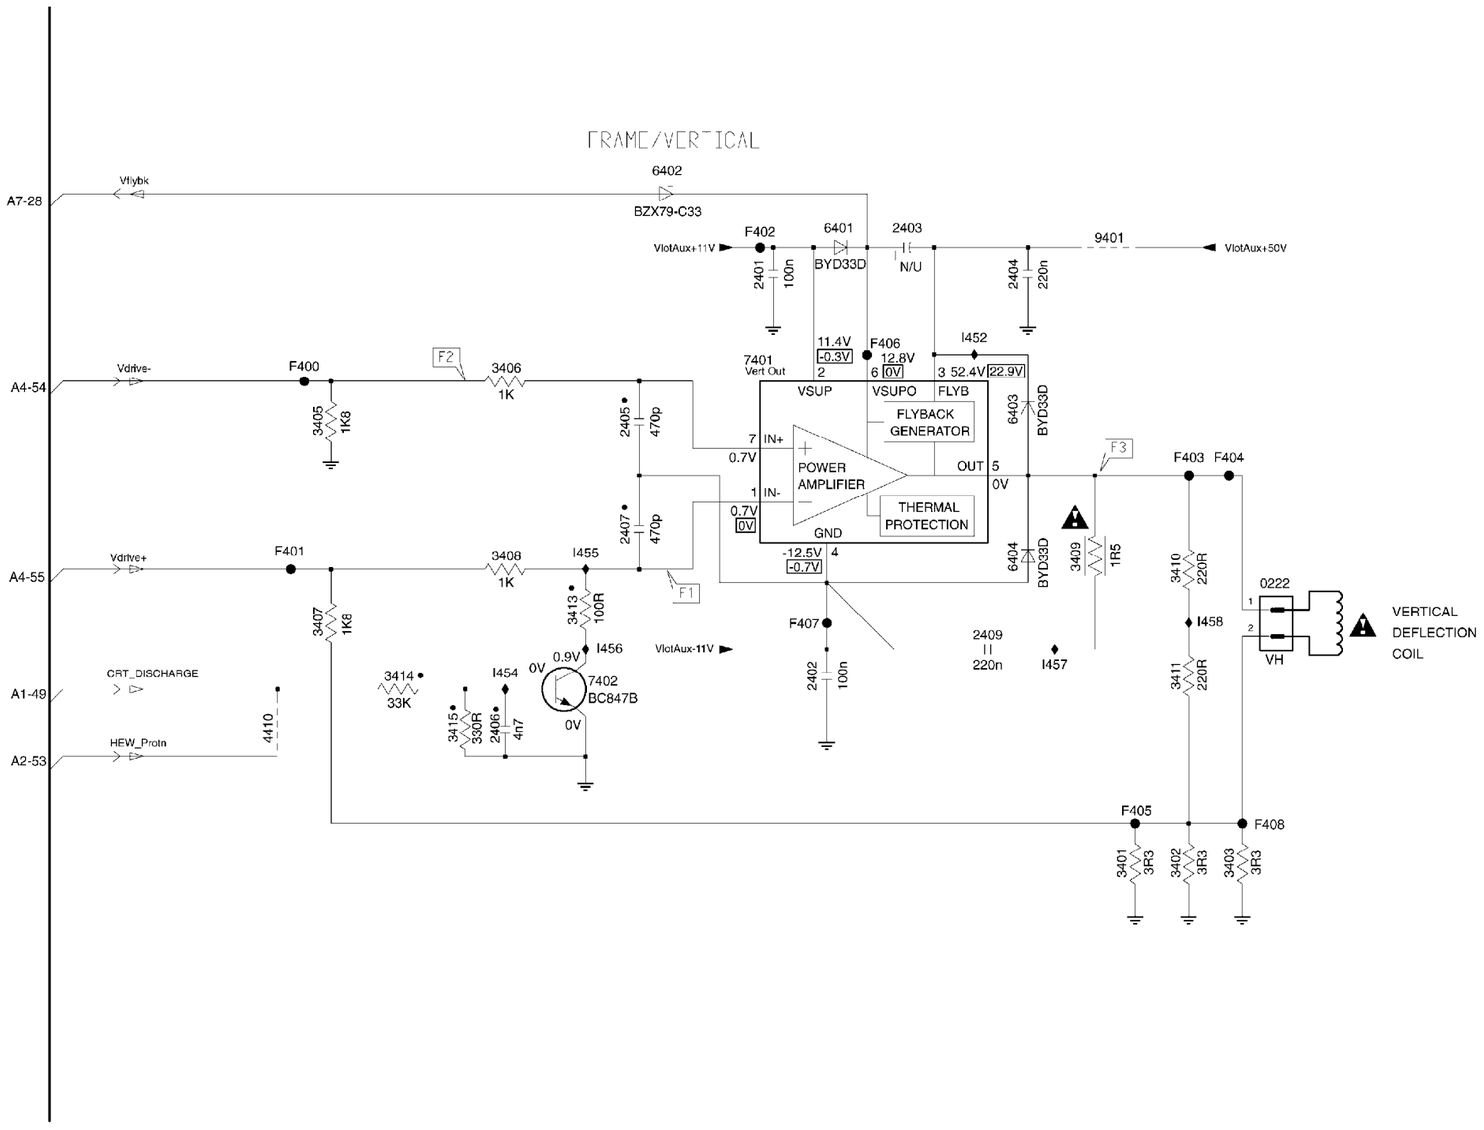



A4 SYNCHRONIZATION

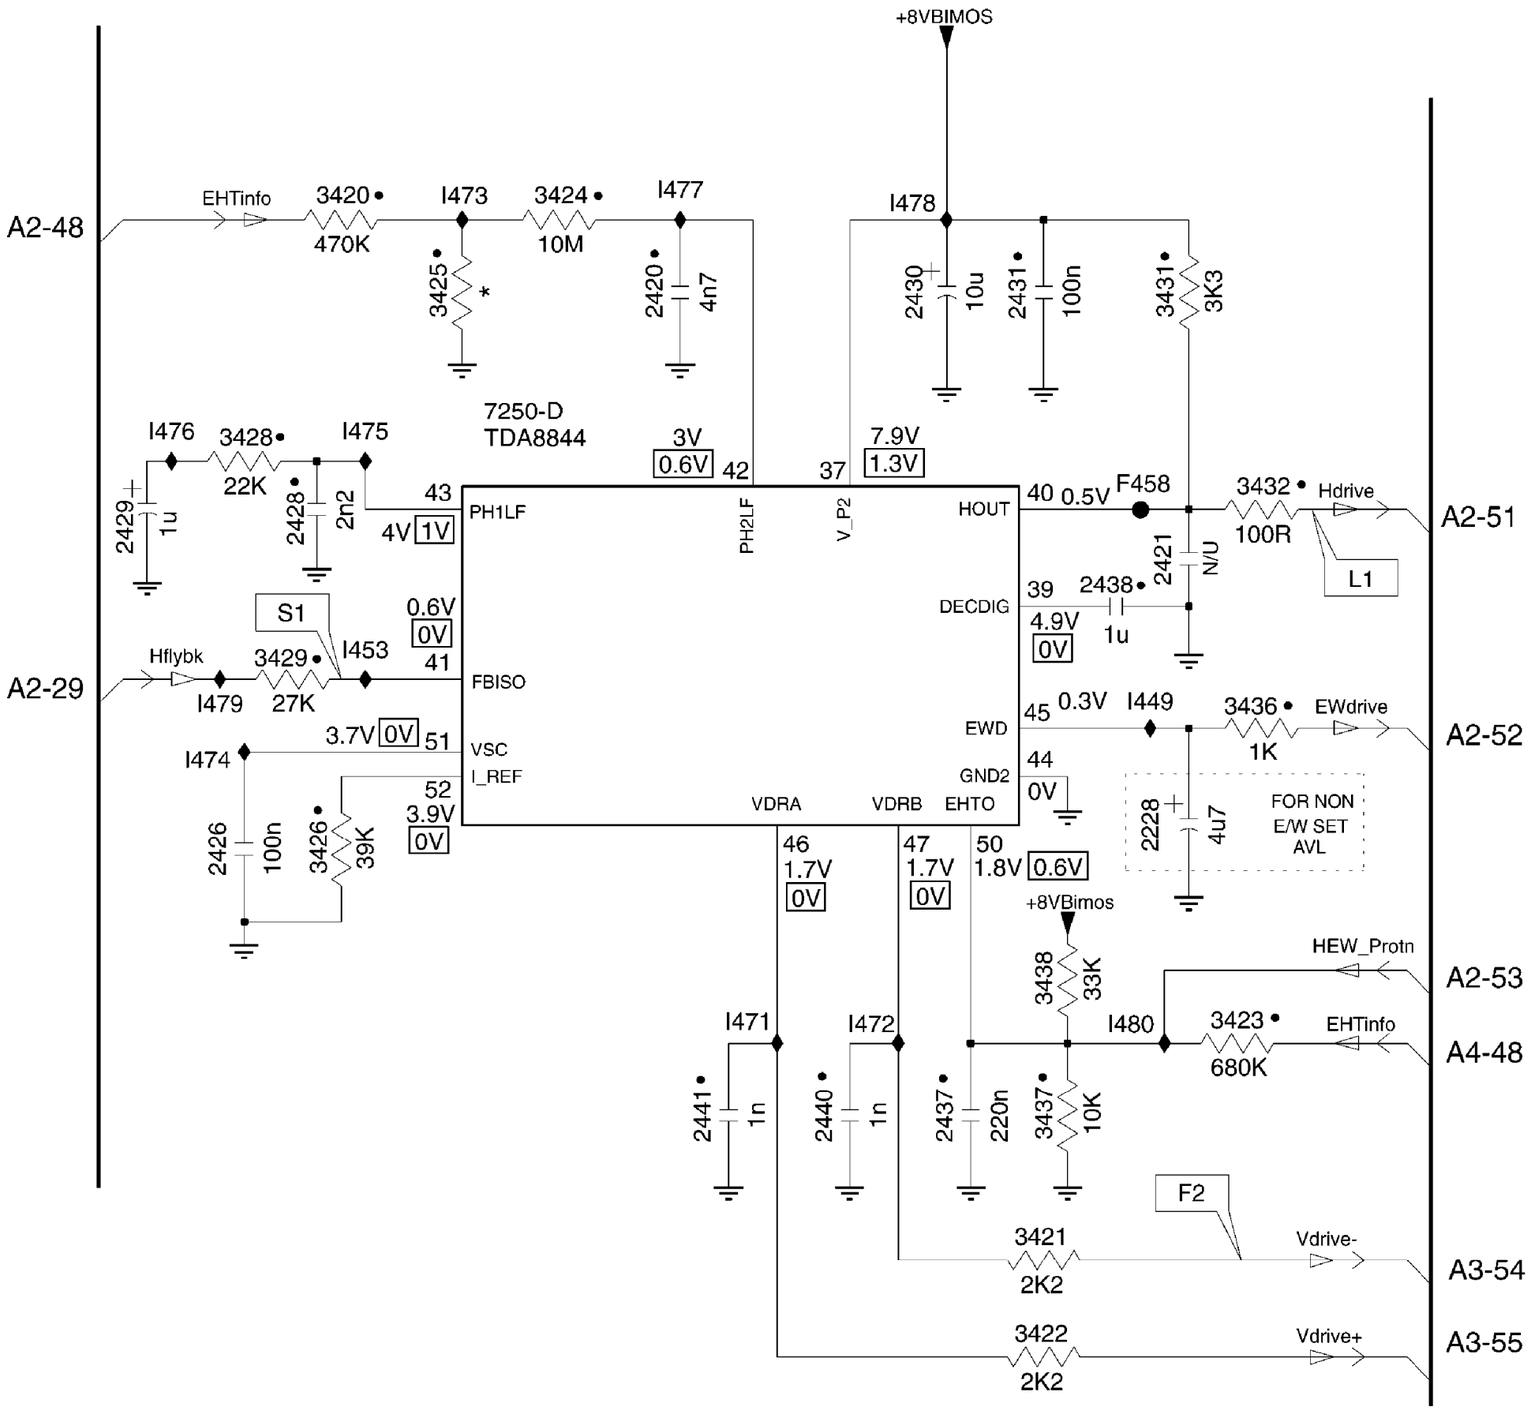

A5 TUNER+VIDEO IF

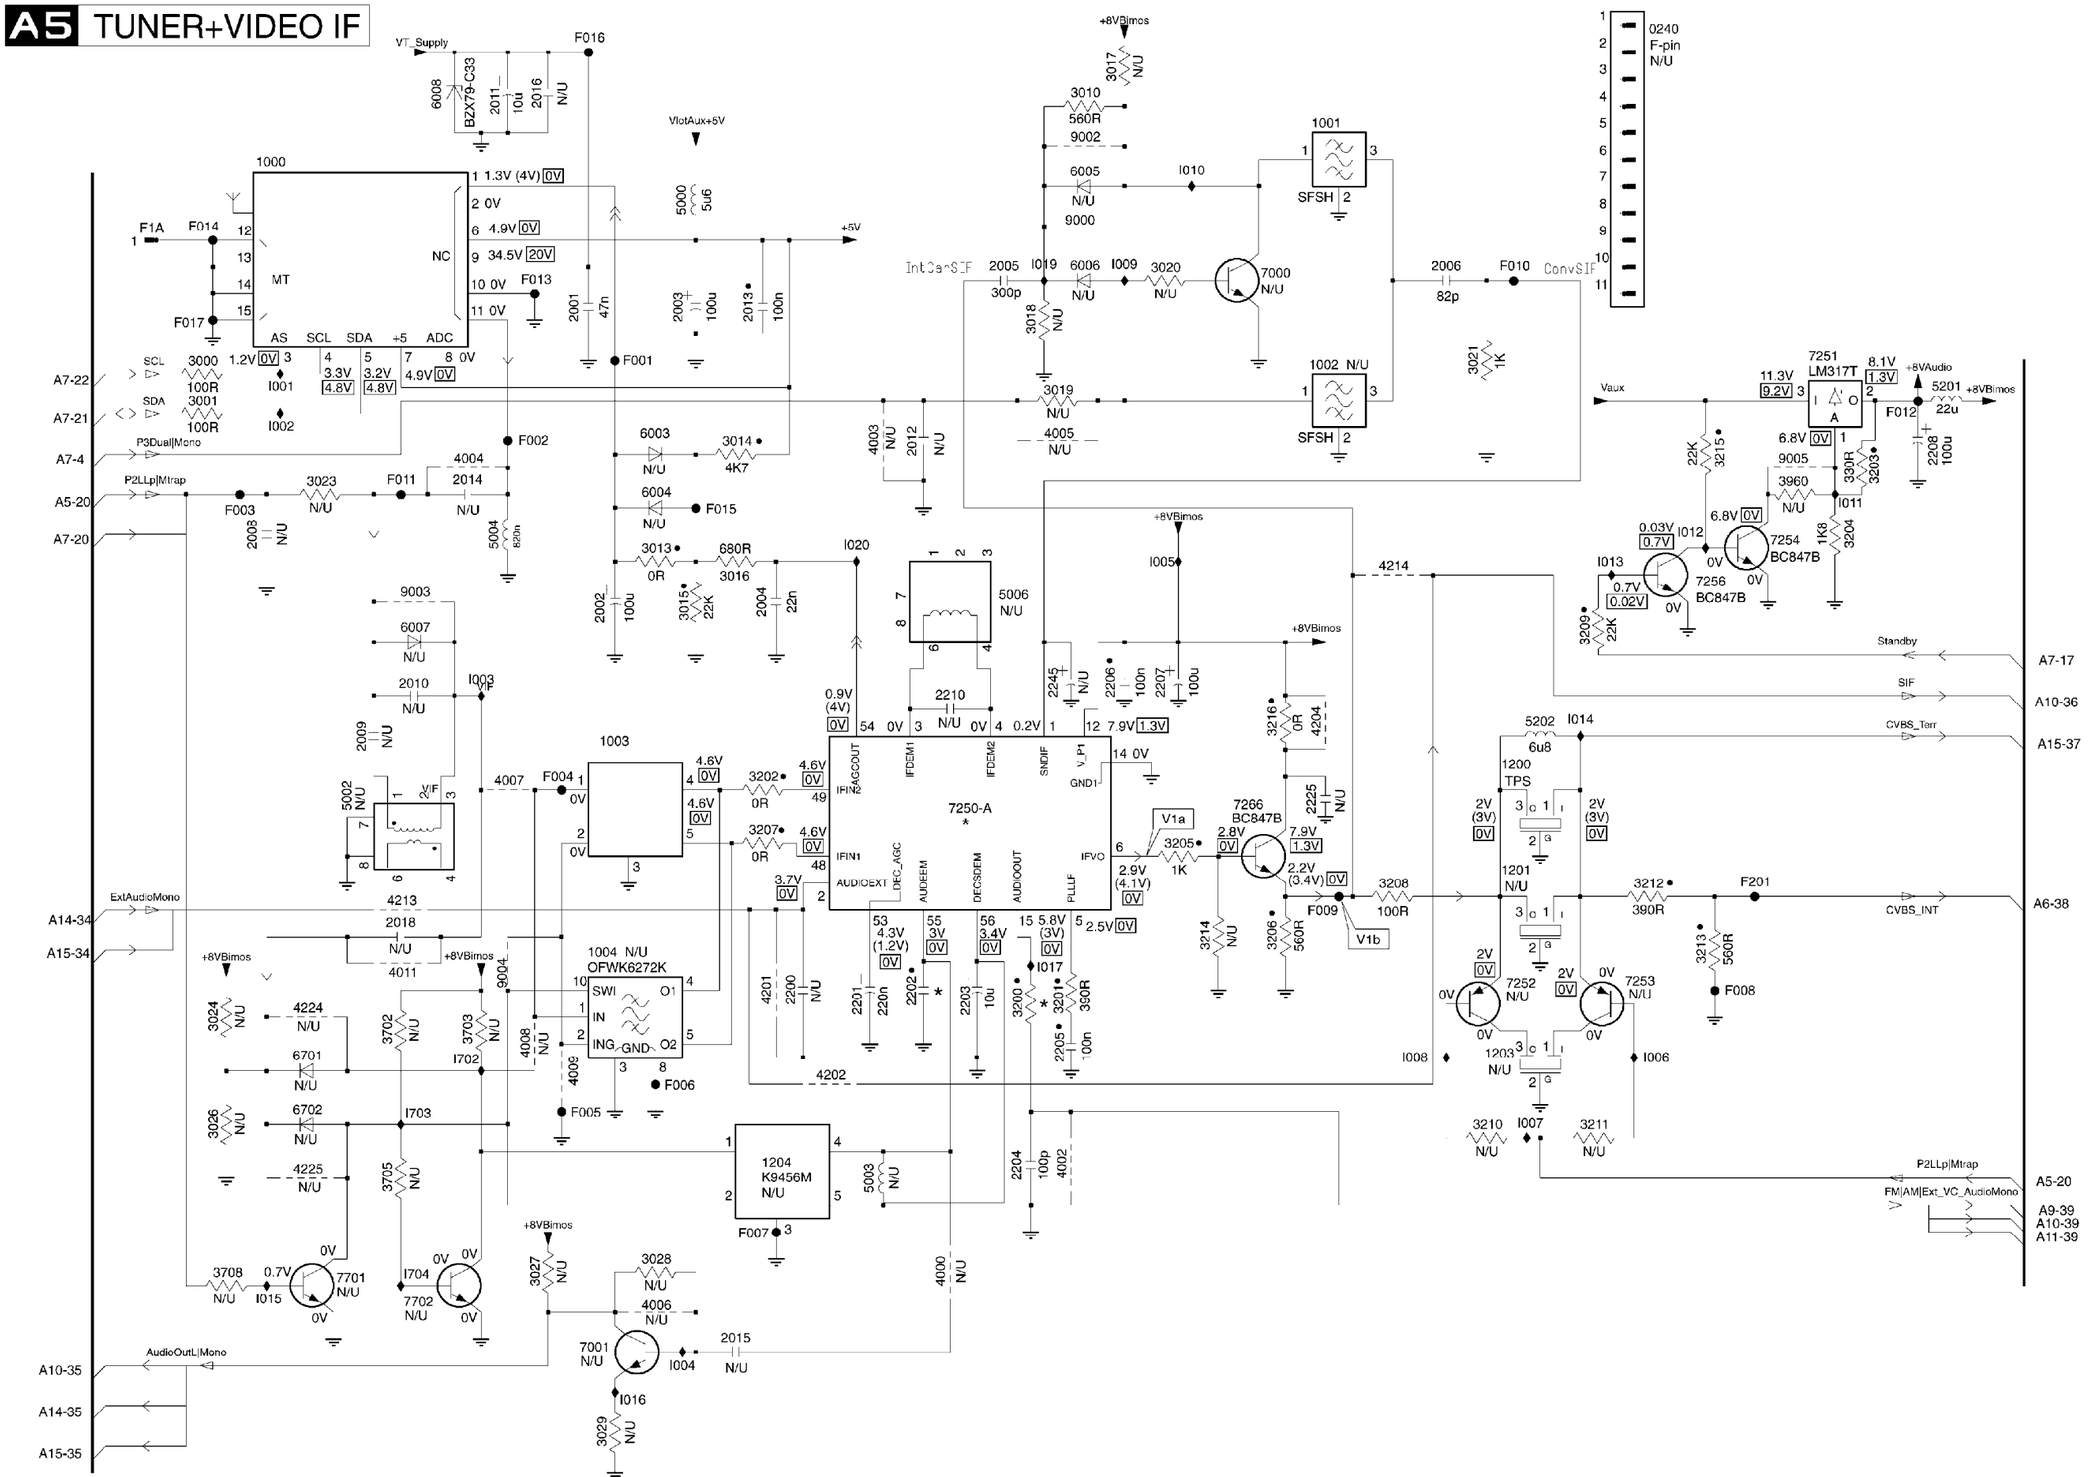

A6 VIDEO PROCESSING

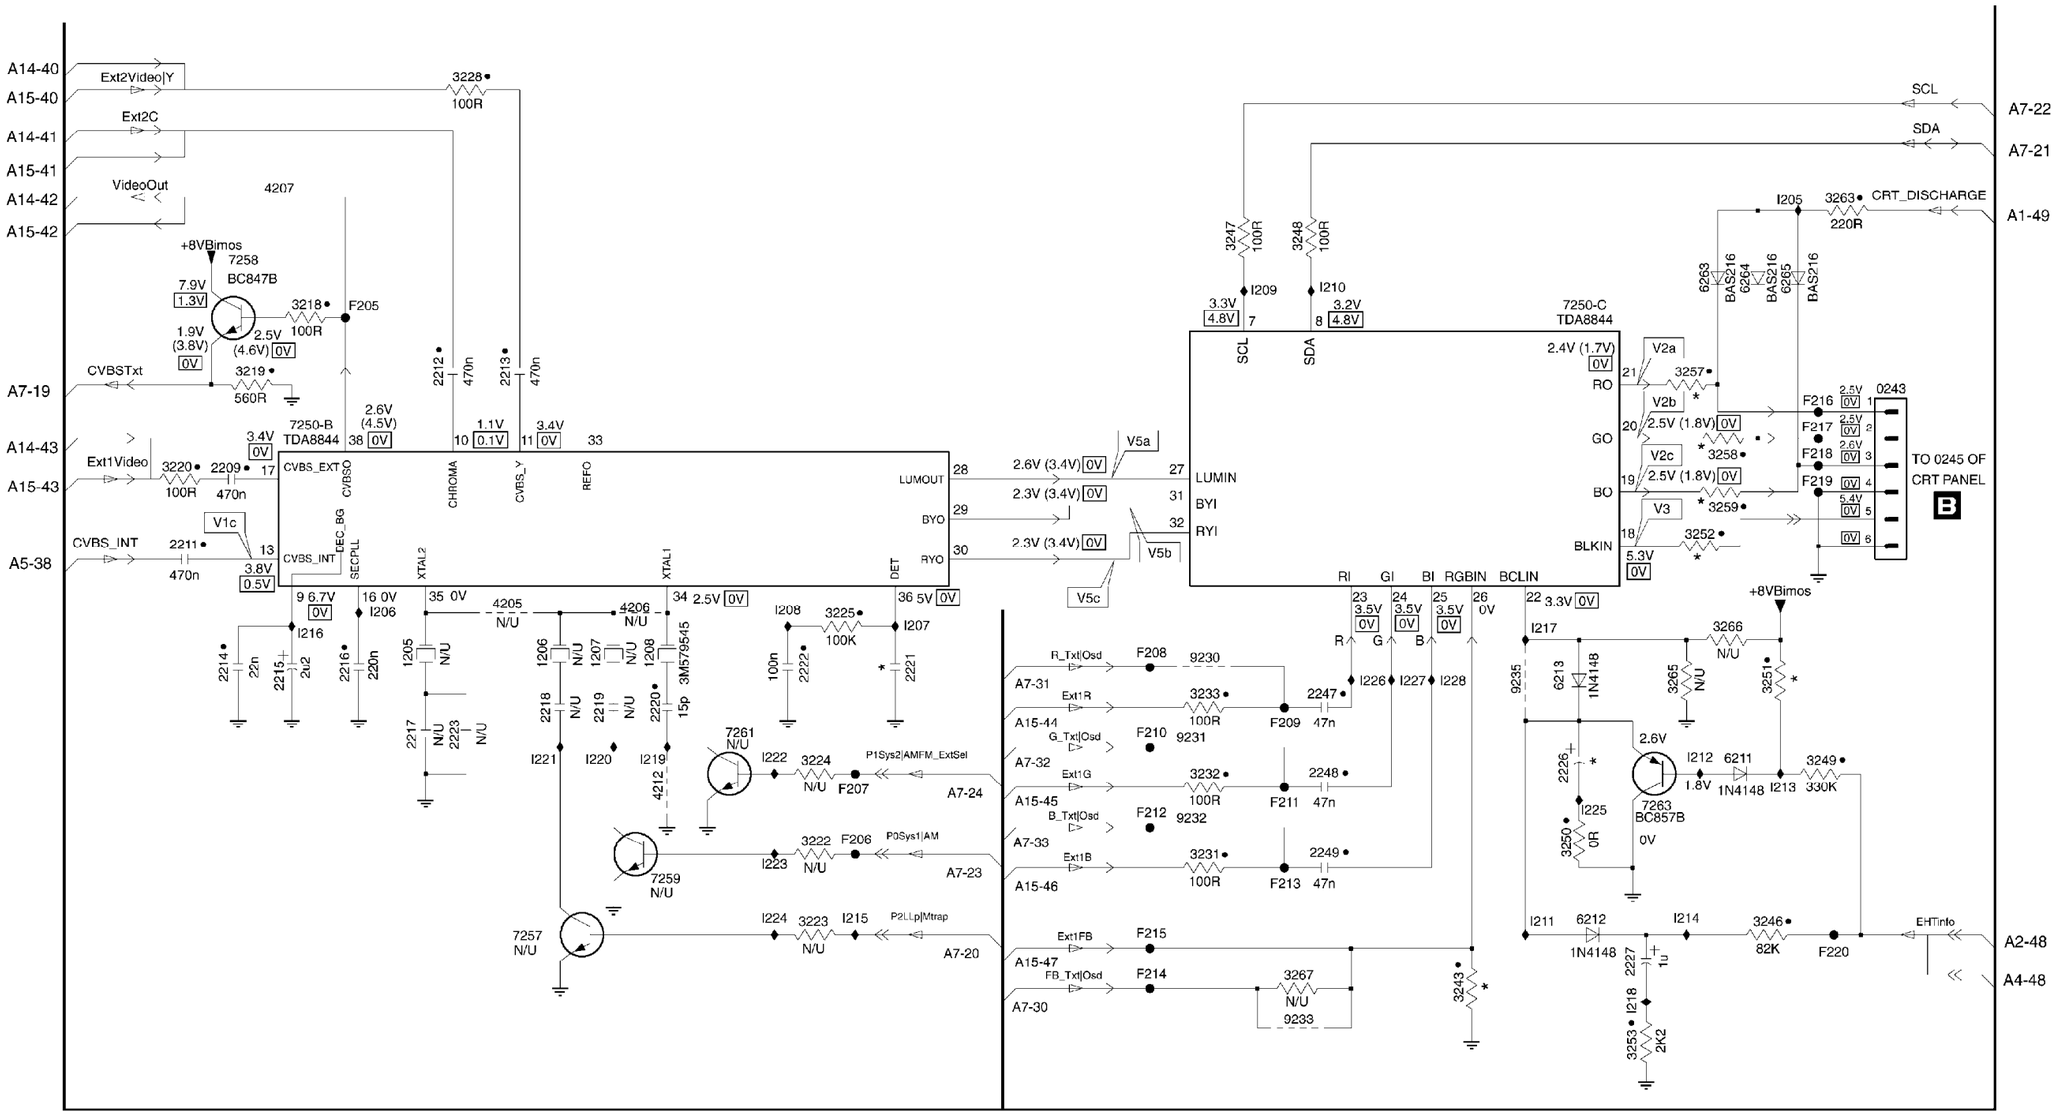

A7 CONTROL

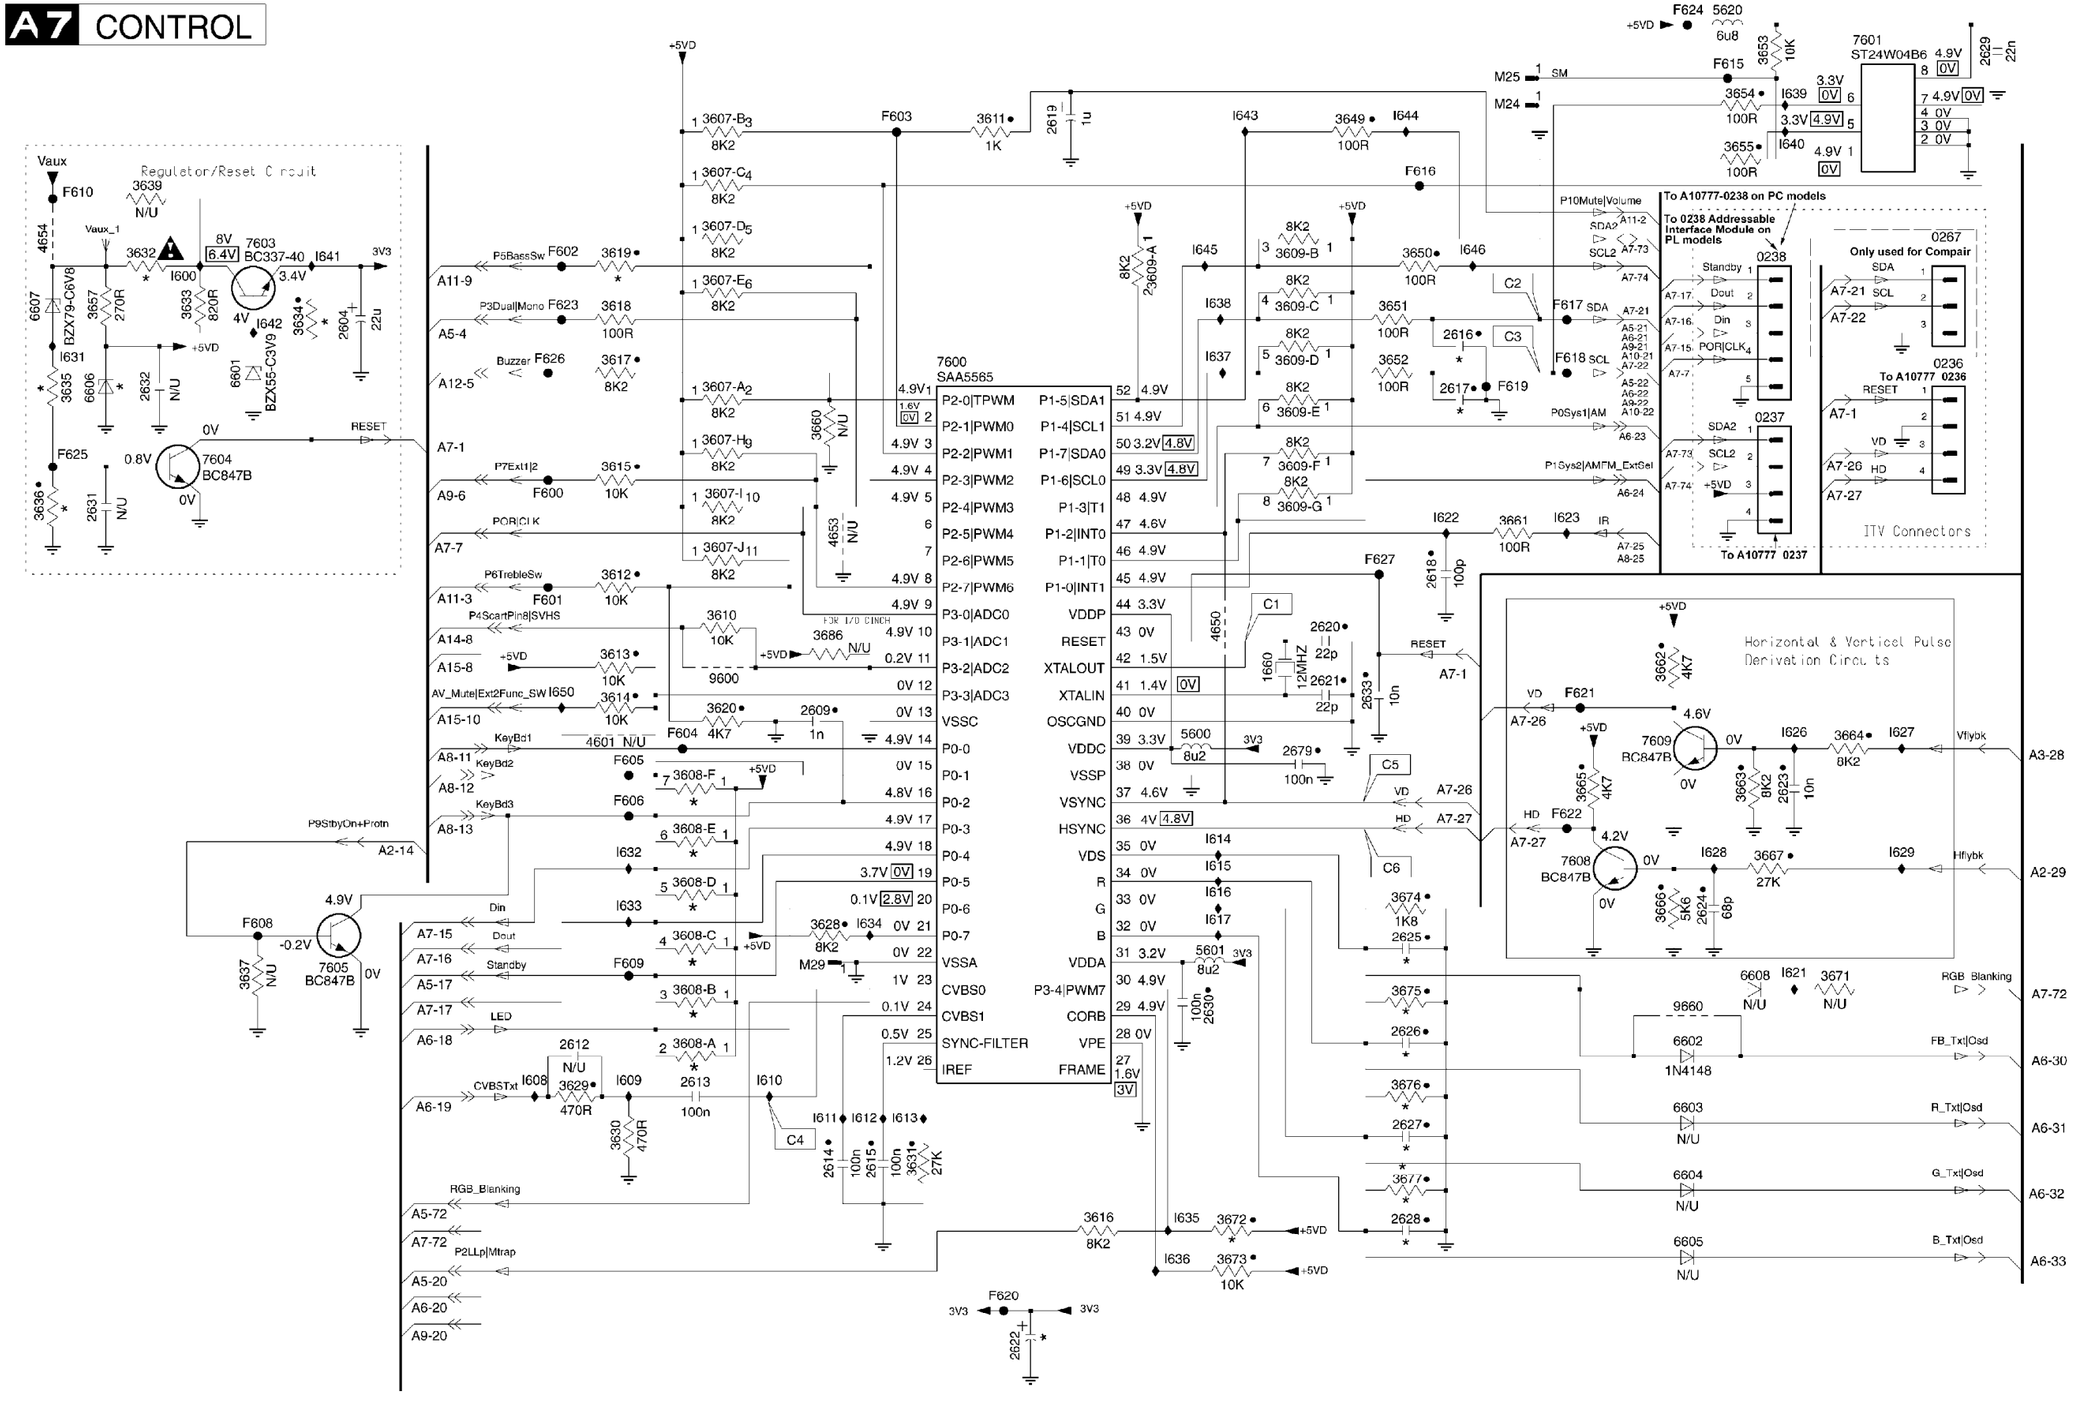
Regulator/Reset Circuit
Vaux
F610
3639 N/U
Vaux_1
3632
8V 6.4V 7603 BC337-40 I641
3.4V
4V I642
3633 820R
3634
3635
3636
3637 N/U
7605 BC847B
7604 BC847B
0.8V
RESET
F625
F608
-0.2V
4.9V
+5VD
3V3
7600 SAA5565
P2-0|TPWM
P2-1|PWM0
P2-2|PWM1
P2-3|PWM2
P2-4|PWM3
P2-5|PWM4
P2-6|PWM5
P2-7|PWM6
P3-0|ADC0
P3-1|ADC1
P3-2|ADC2
P3-3|ADC3
VSSC
P0-0
P0-1
P0-2
P0-3
P0-4
P0-5
P0-6
P0-7
VSSA
CVBS0
CVBS1
SYNC-FILTER
IREF
P1-5|SDA1
P1-4|SCL1
P1-7|SDA0
P1-6|SCL0
P1-3|T1
P1-2|INT0
P1-1|T0
P1-0|INT1
VDDP
RESET
XTALOUT
XTALIN
OSCGND
VDDC
VSSP
VSYNC
HSYNC
VDS
R
G
B
VDDA
P3-4|PWM7
CORB
VPE
FRAME
F603
F602
F623
F626
F600
F601
F604
F605
F606
F609
F627
F624
F615
F616
F617 SDA
F618 SCL
F619
F620
F621
F622
P6BassSw
P3Dual|Mono
Buzzer
P7Ext1|2
POR|CLK
P6TrebleSw
P4ScartPin8|SVHS
KeyBd1
KeyBd2
KeyBd3
AV_Mute|Ext2Func_SW
P9StbyOn+Protn
Din
Dout
Standby
LED
CVBSTxt
RGB_Blanking
P2LLp|Mtrap
P10Mute|Volume
P0Sys1|AM
P1Sys2|AMFM_ExtGel
IR
SDA
SCL
SDA2
SCL2
To A10777-0238 on PC models
To 0238 Addressable Interface Module on PL models
0238
0267
Only used for Compair
0236
To A10777 0236
0237
To A10777 0237
ITV Connectors
Horizontal & Vertical Pulse Derivation Circuits
7601 ST24W04B6
7609 BC847B
7608 BC847B
VD
HD
Vflybk
Hflybk
RESET
1N4148
M25
M24
M29
SM
I600
I601
I602
I603
I604
I605
I606
I607
I608
I609
I610
I611
I612
I613
I614
I615
I616
I617
I621
I622
I623
I626
I627
I628
I629
I632
I633
I634
I635
I636
I637
I638
I639
I640
I643
I644
I645
I646
C1
C2
C3
C4
C5
C6
A5-4
A7-1
A9-6
A7-7
A11-3
A14-8
A15-8
A15-10
A8-11
A8-12
A8-13
A2-14
A7-15
A7-16
A5-17
A7-17
A6-18
A6-19
A5-72
A7-72
A5-20
A6-20
A9-20
A11-9
A12-5
A11-2
A7-73
A7-74
A7-21
A7-22
A7-17
A7-16
A7-15
A7-7
A7-1
A7-79
A7-74
A7-26
A7-27
A6-23
A6-24
A6-25
A6-22
A10-22
A5-22
A6-30
A6-31
A6-32
A6-33
A3-28
A2-29
RGB_Blanking
FB_Txt|Osd
R_Txt|Osd
G_Txt|Osd
B_Txt|Osd
Vflybk
Hflybk

A8 FRONT CONTROL

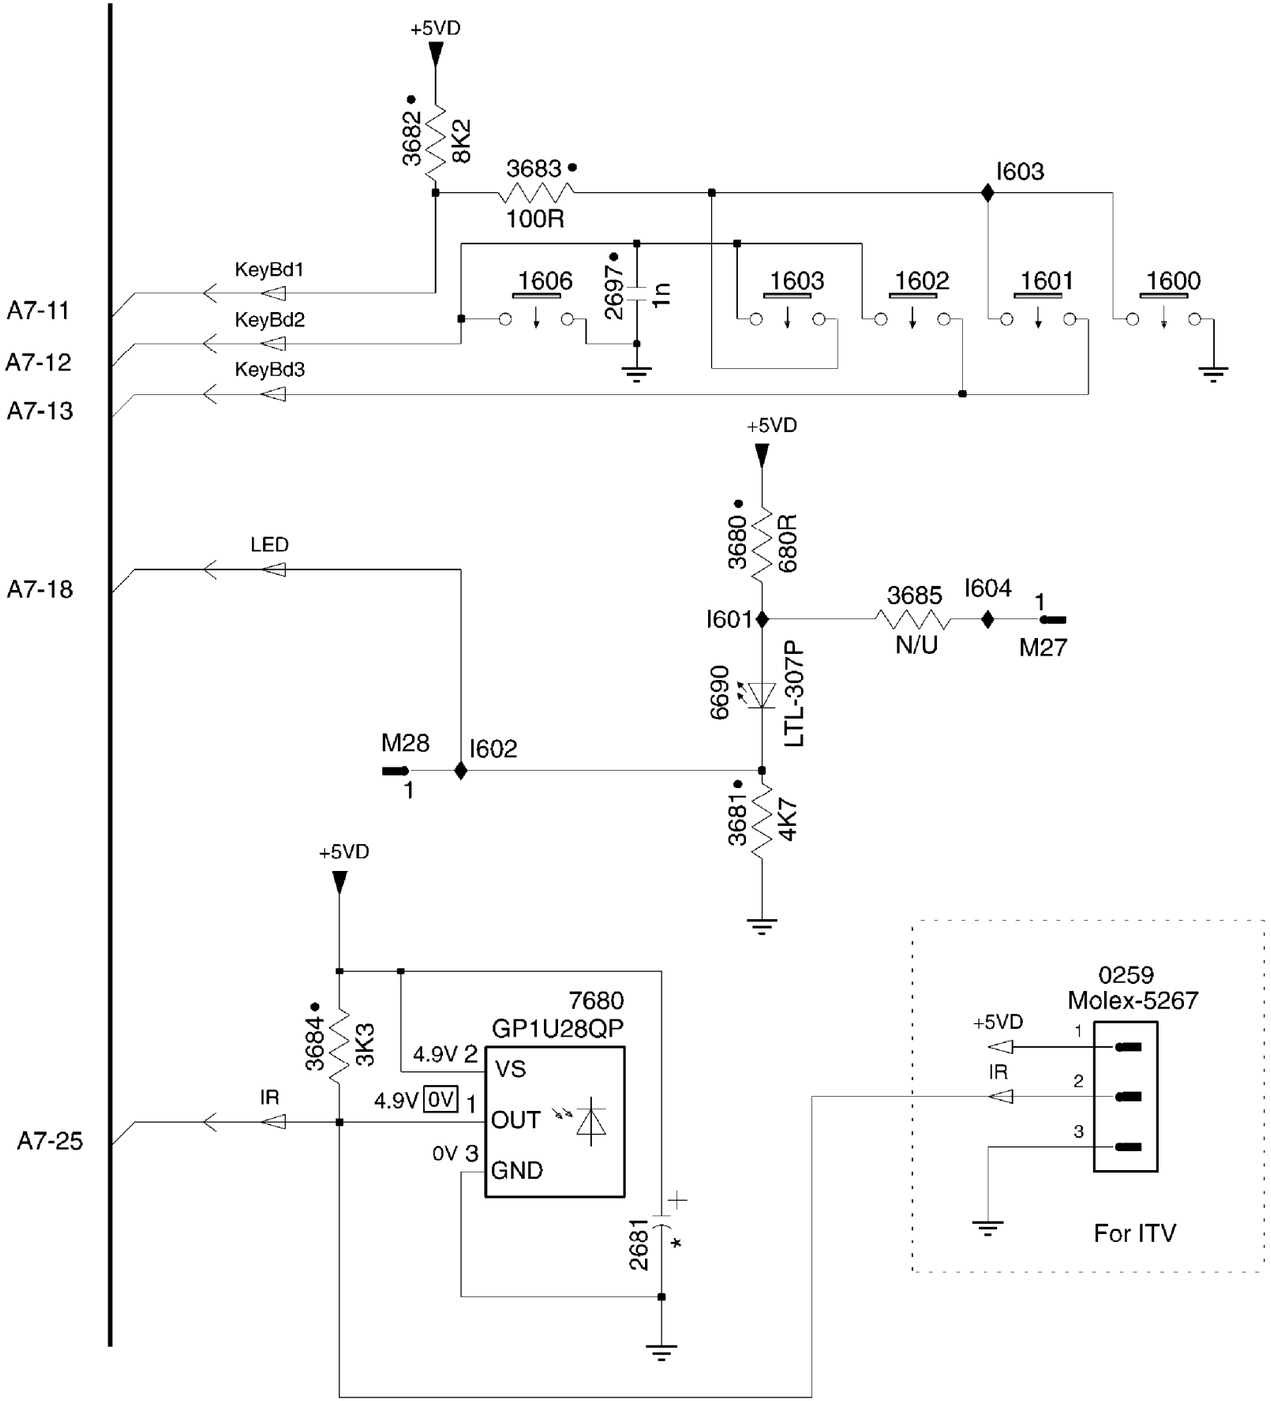

A9 BTSC DECODER

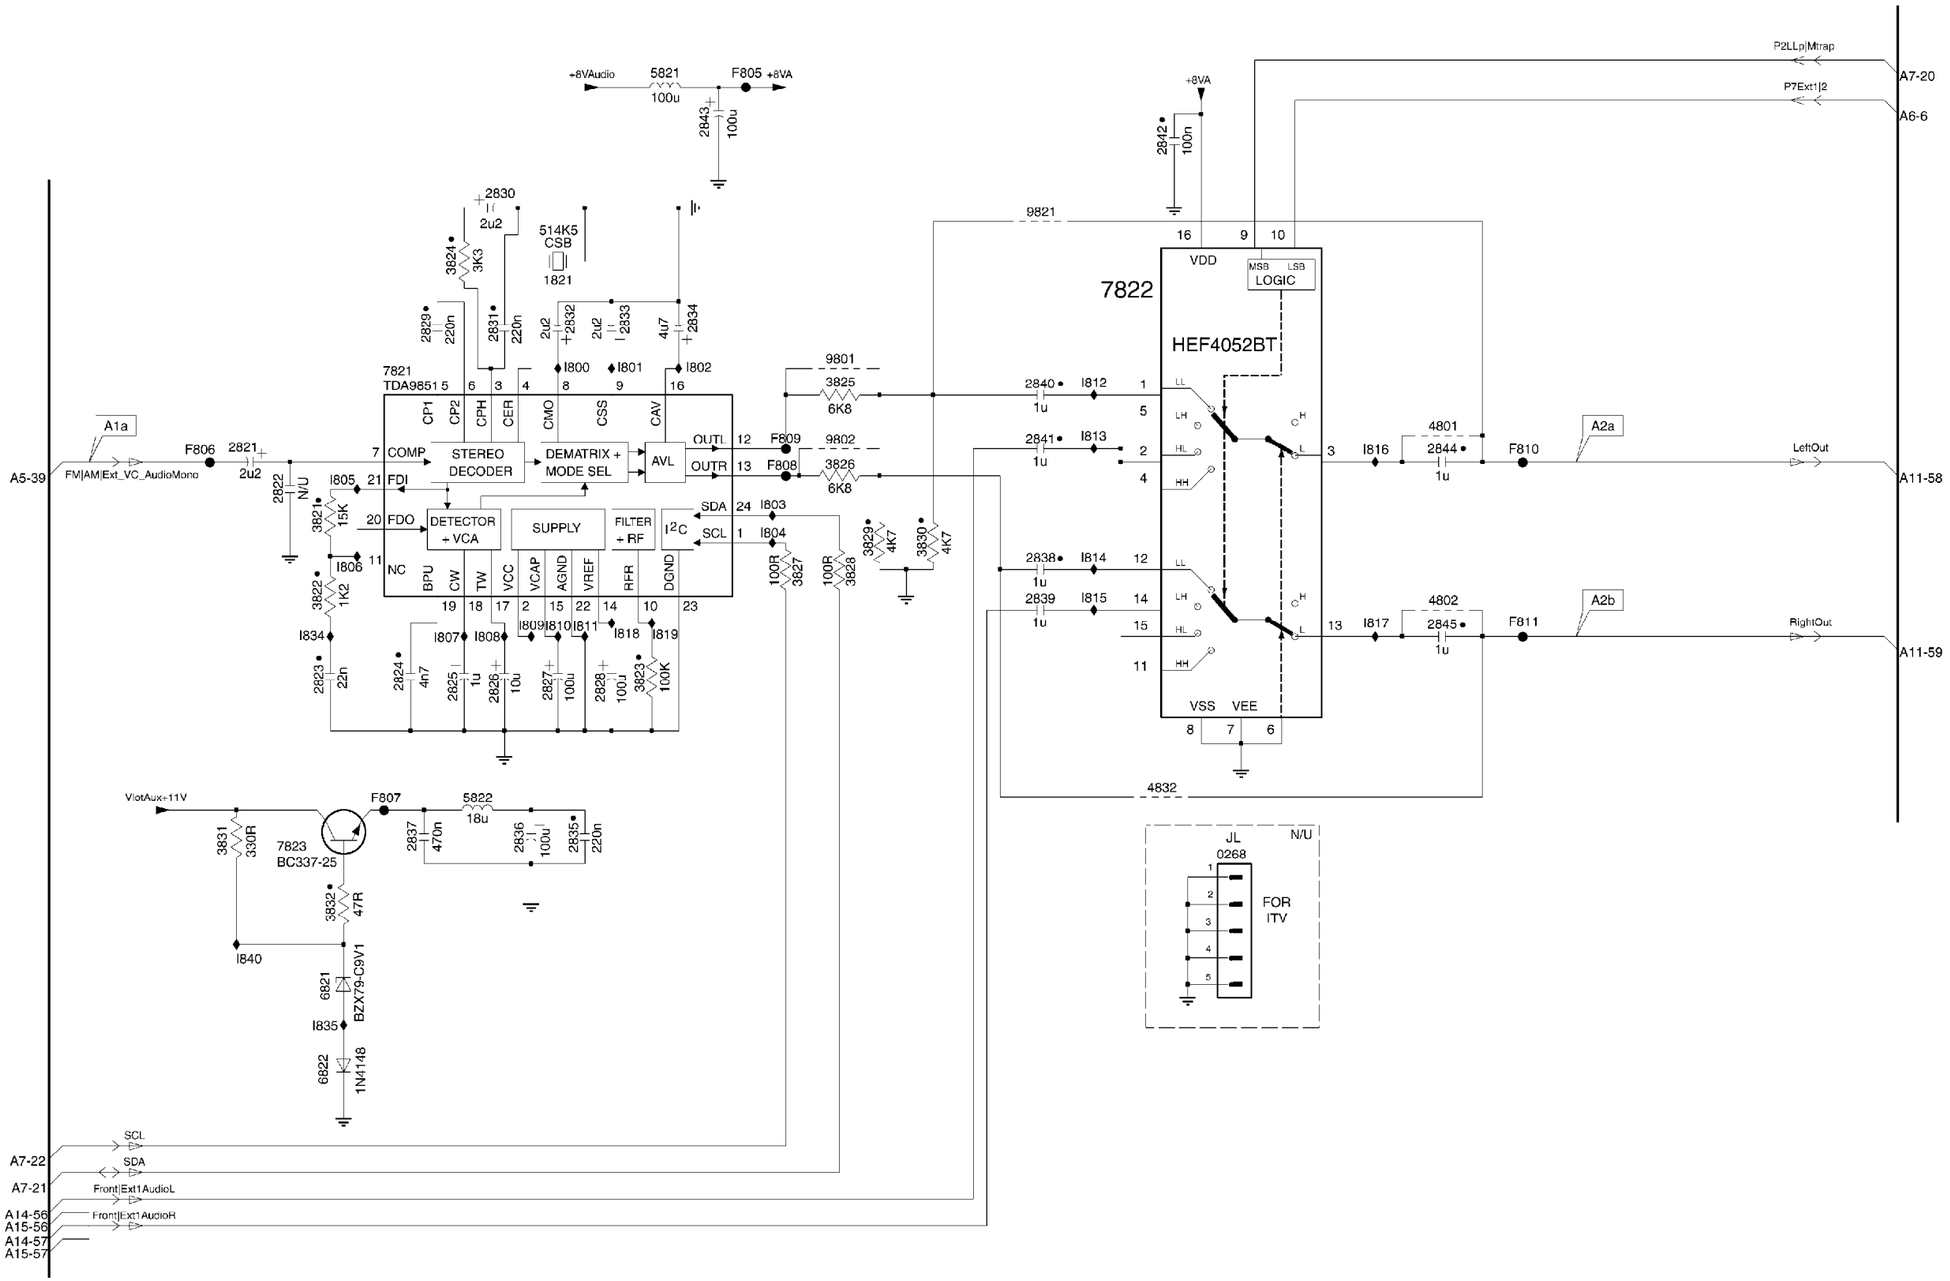

A1 Ø NICAM+2CS DECODER

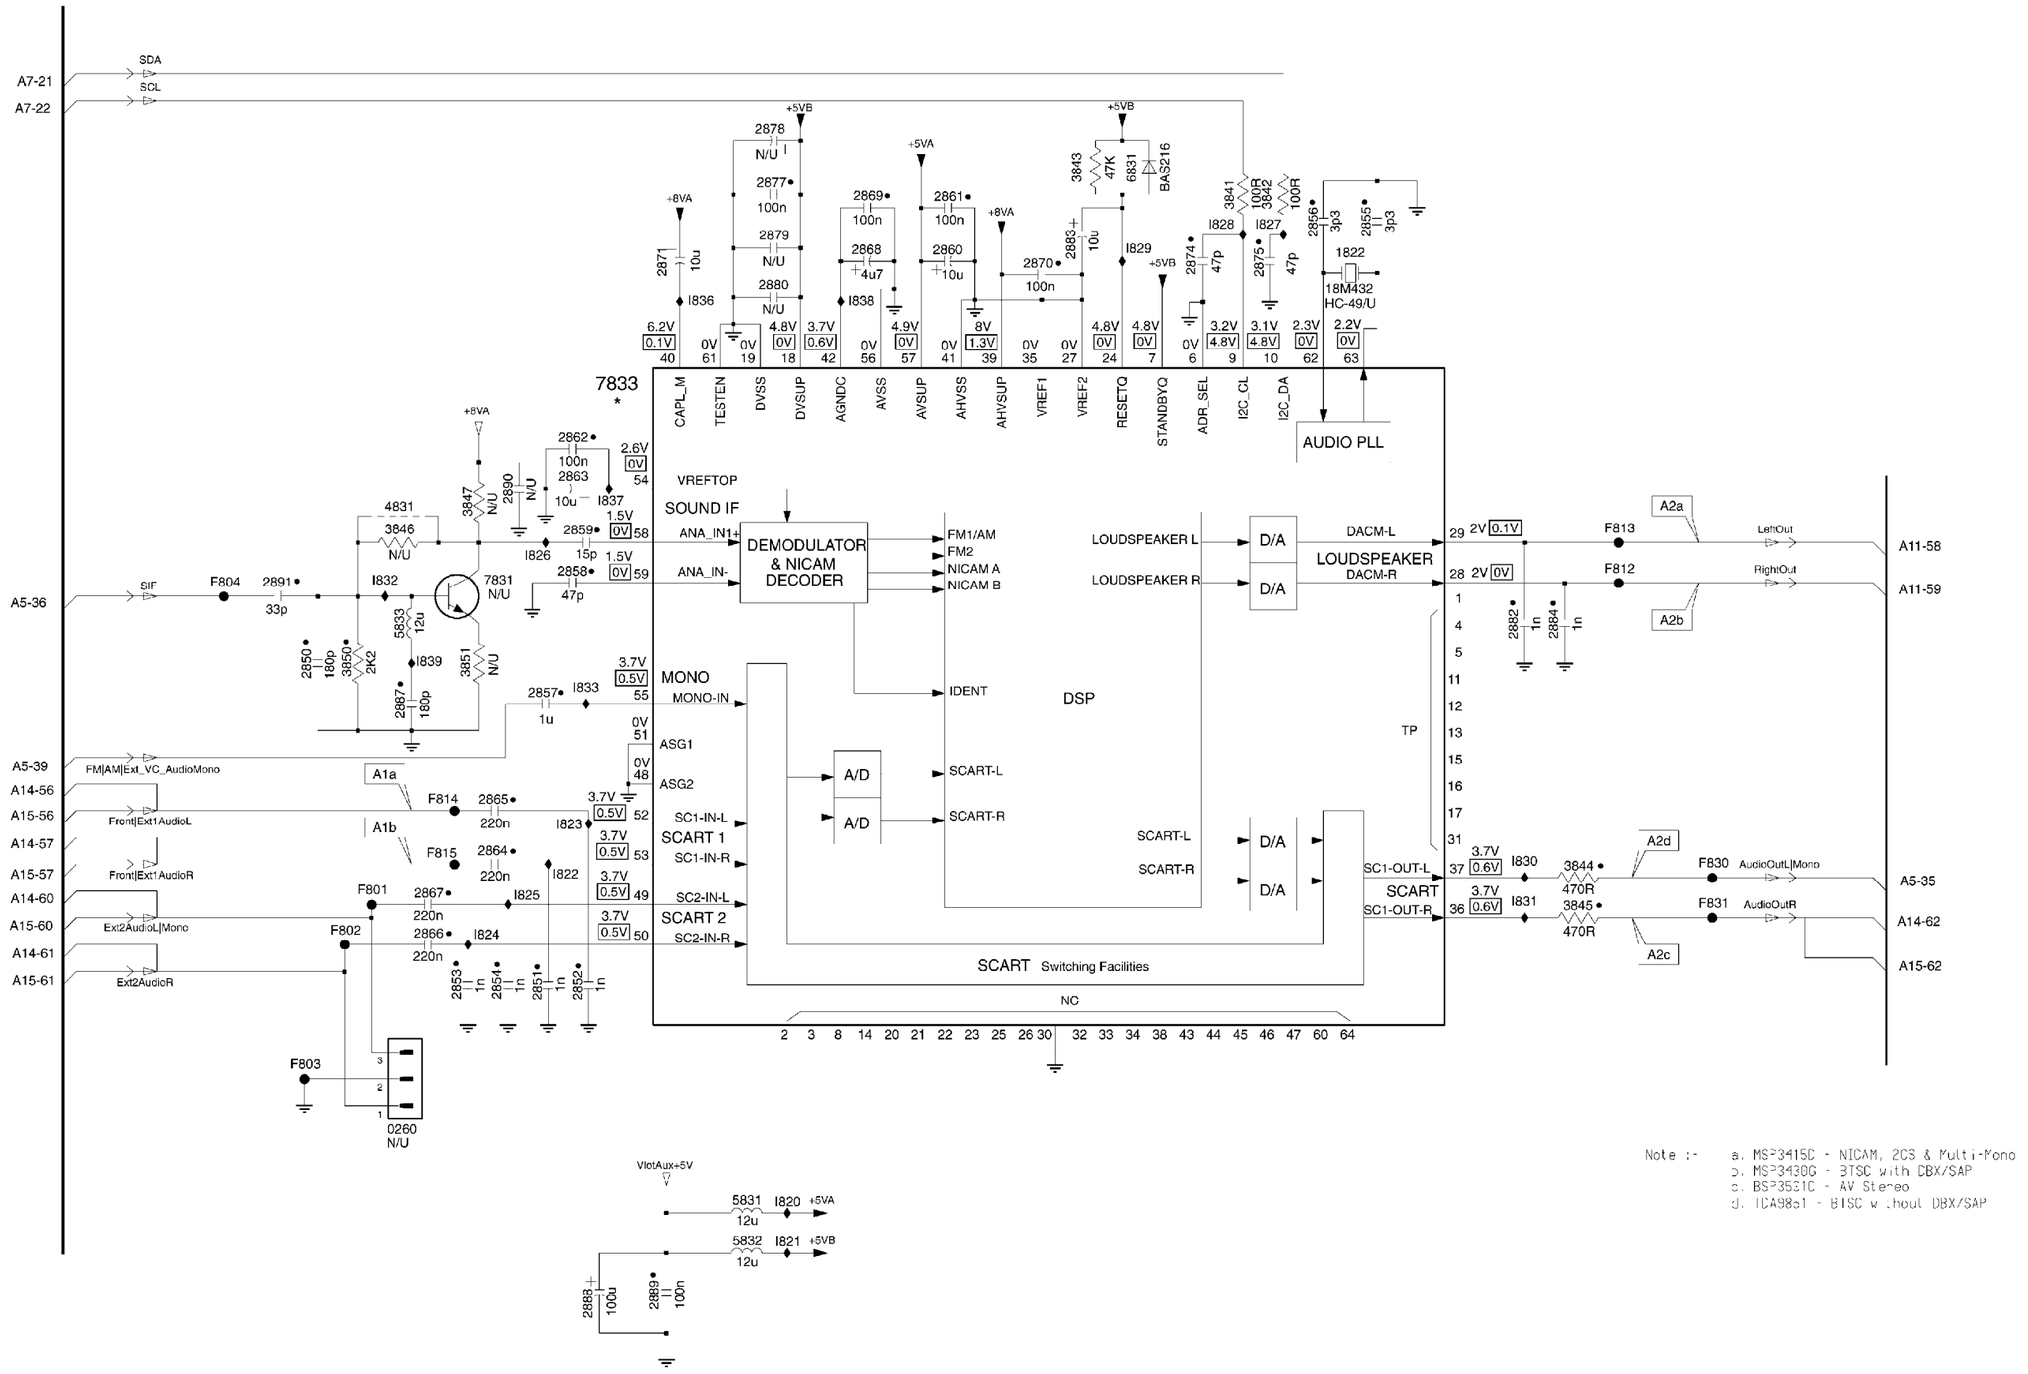

Note :- a. MSP3415C - NICAM, 2CS & Multi-Mono
b. MSP3430G - BTSC with DBX/SAP
c. BSP3531C - AV Stereo
d. TCA9851 - BTSC without DBX/SAP

A1 1 SMART SOUND

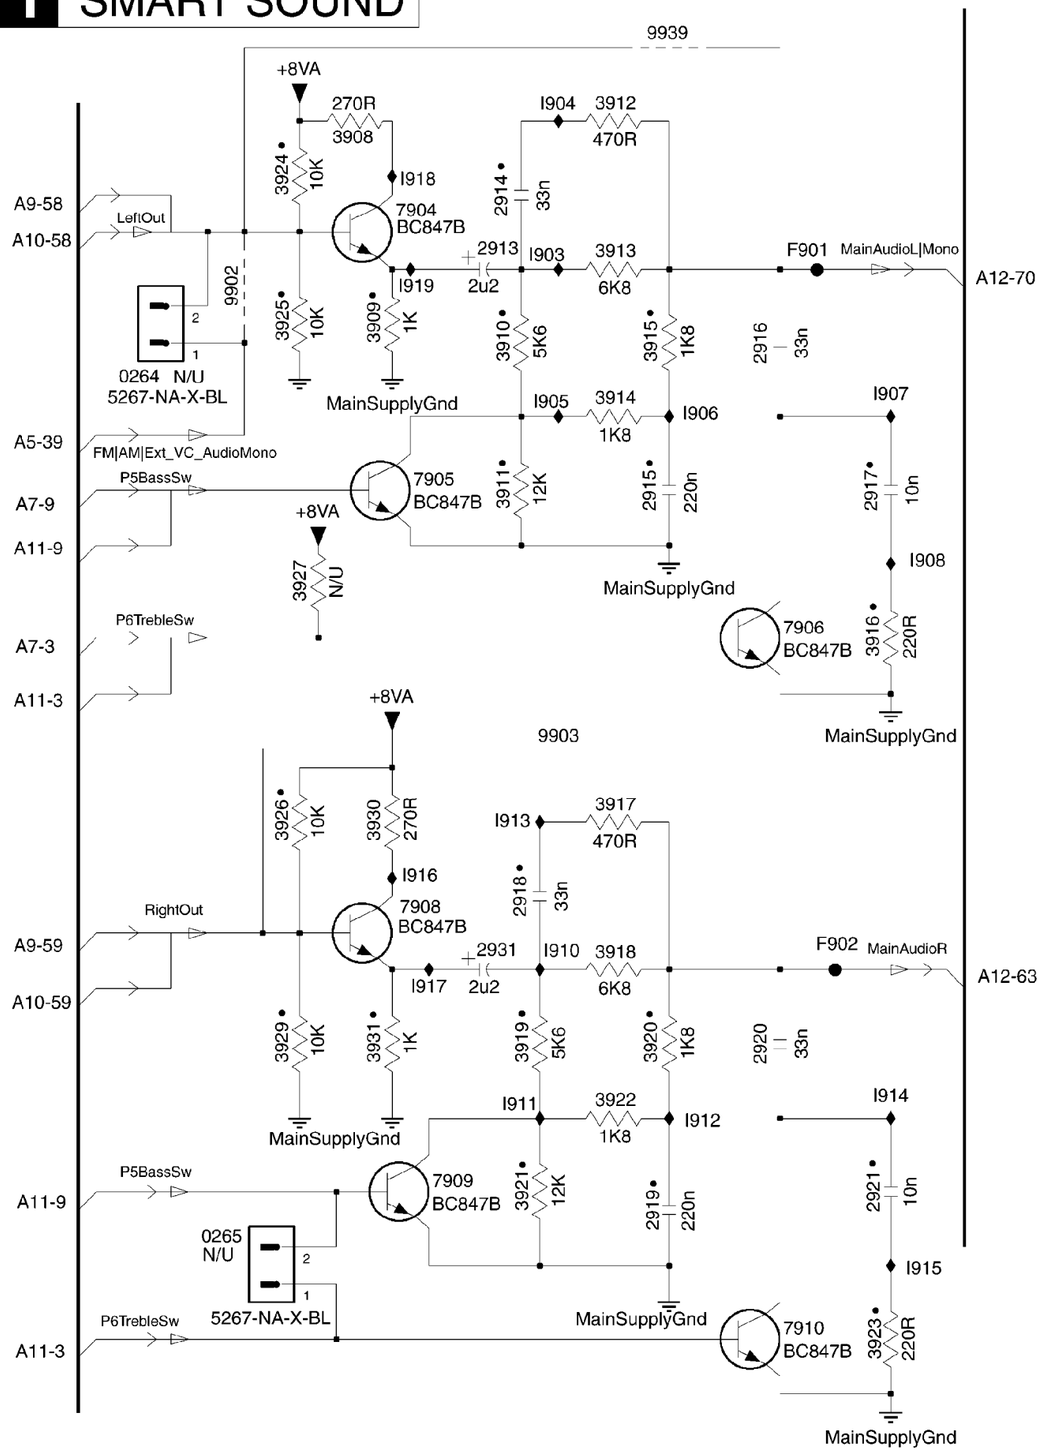

A12 AUDIO AMPLIFIER

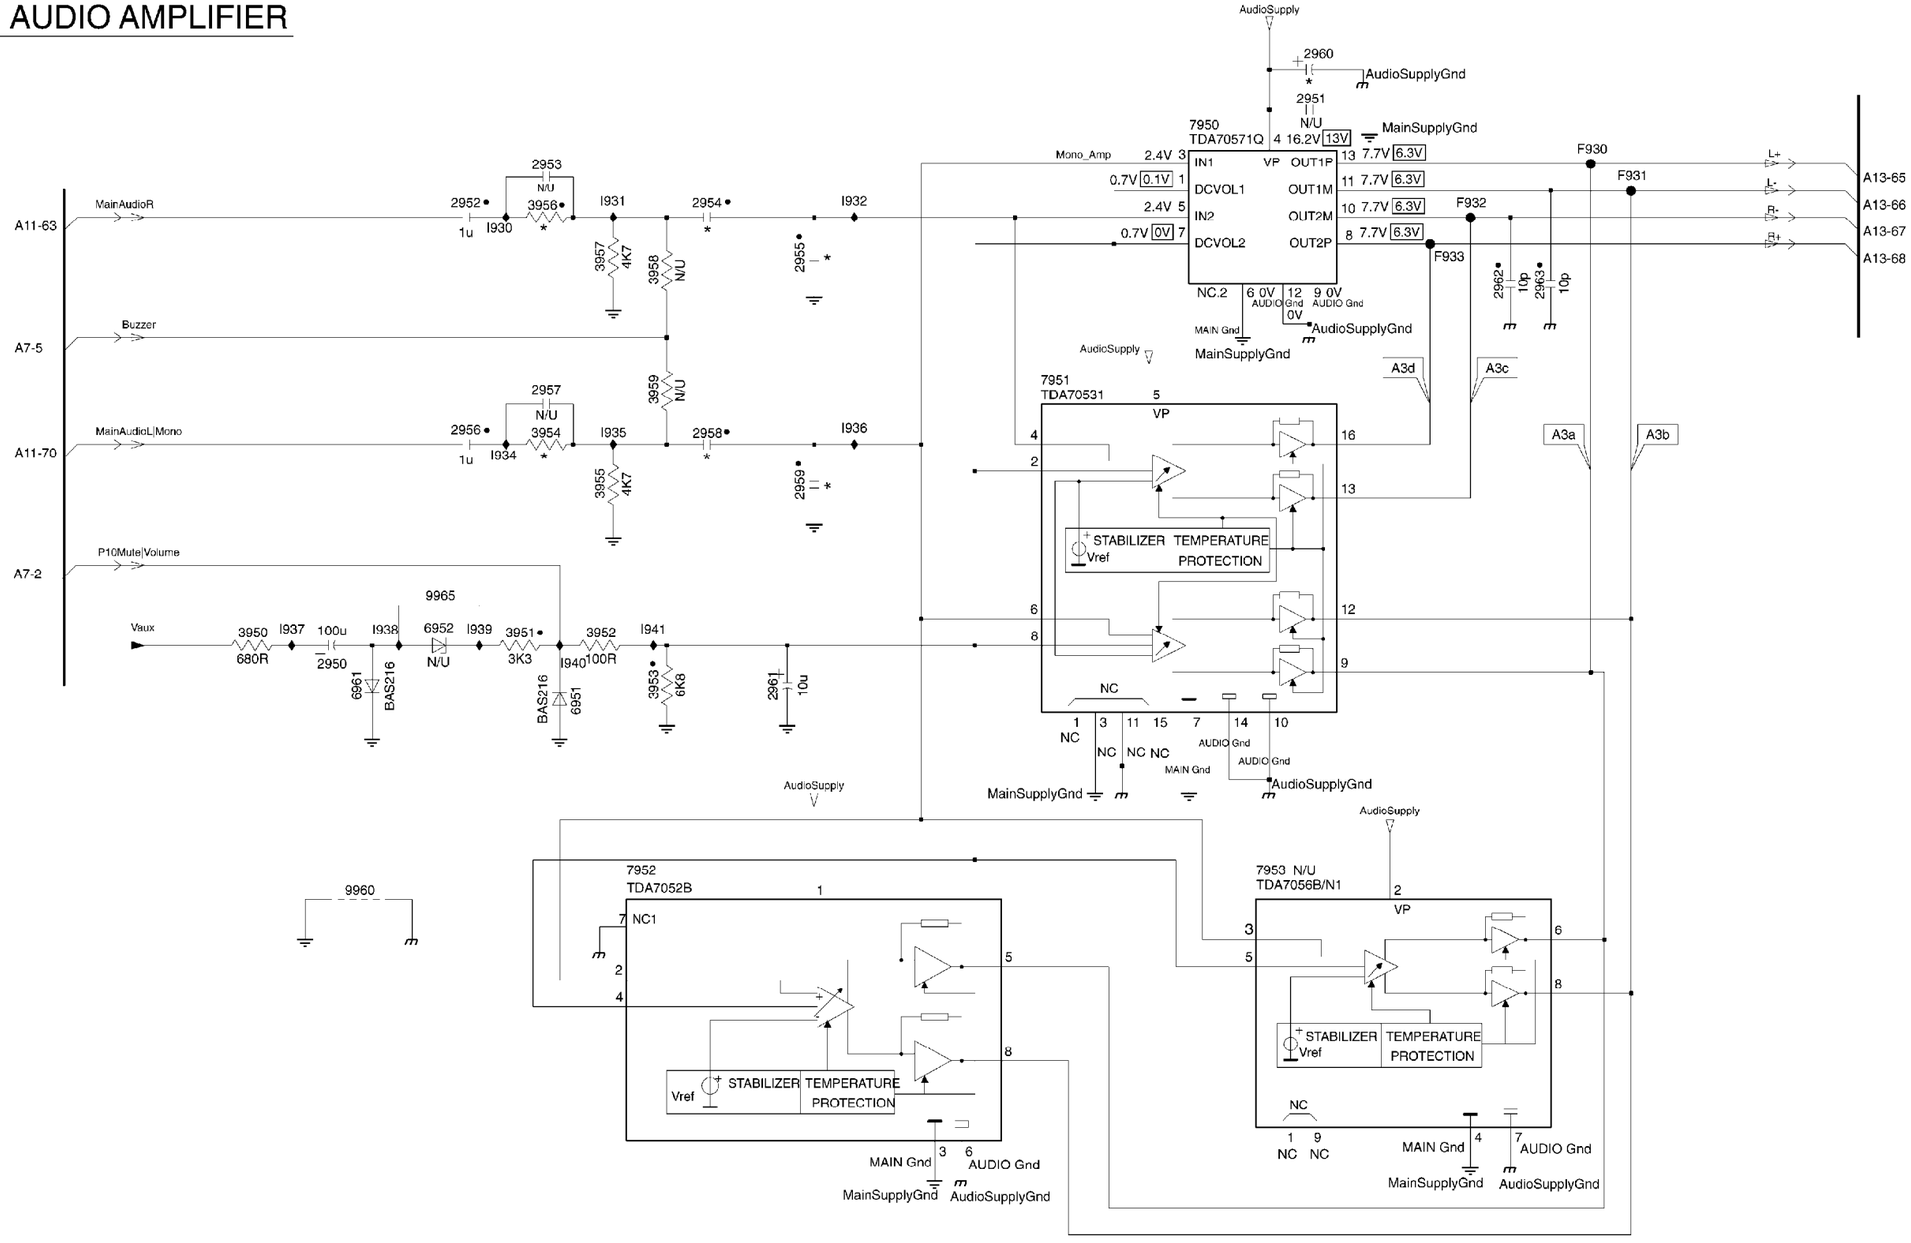

A13 HEADPHONE

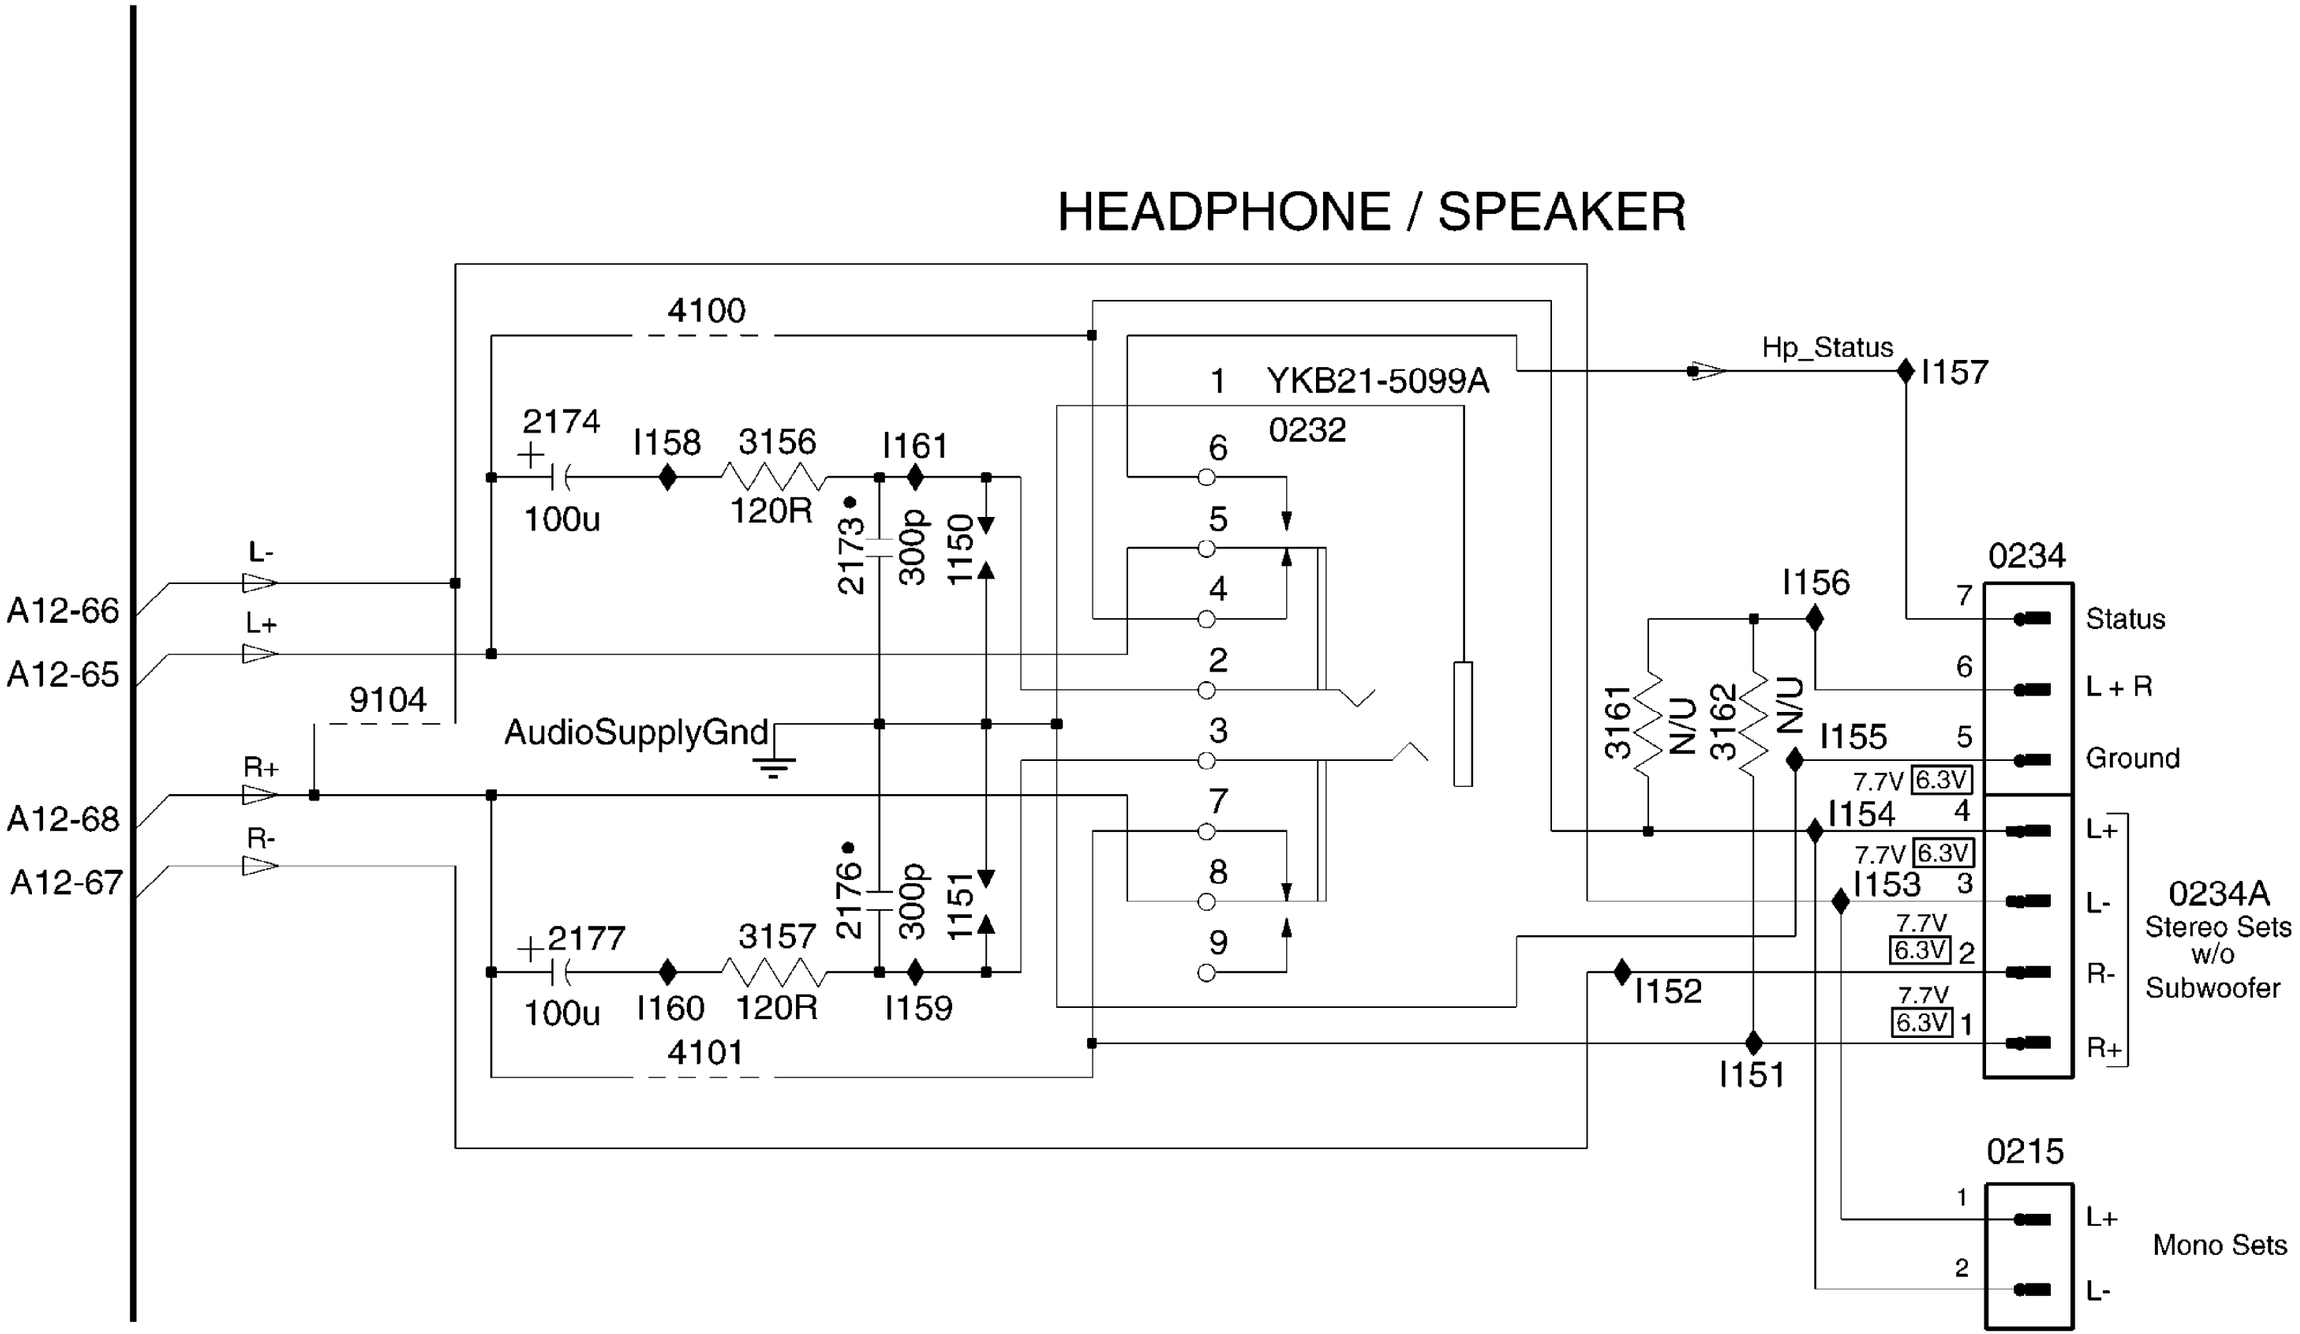

A14 REAR I/O CINCH

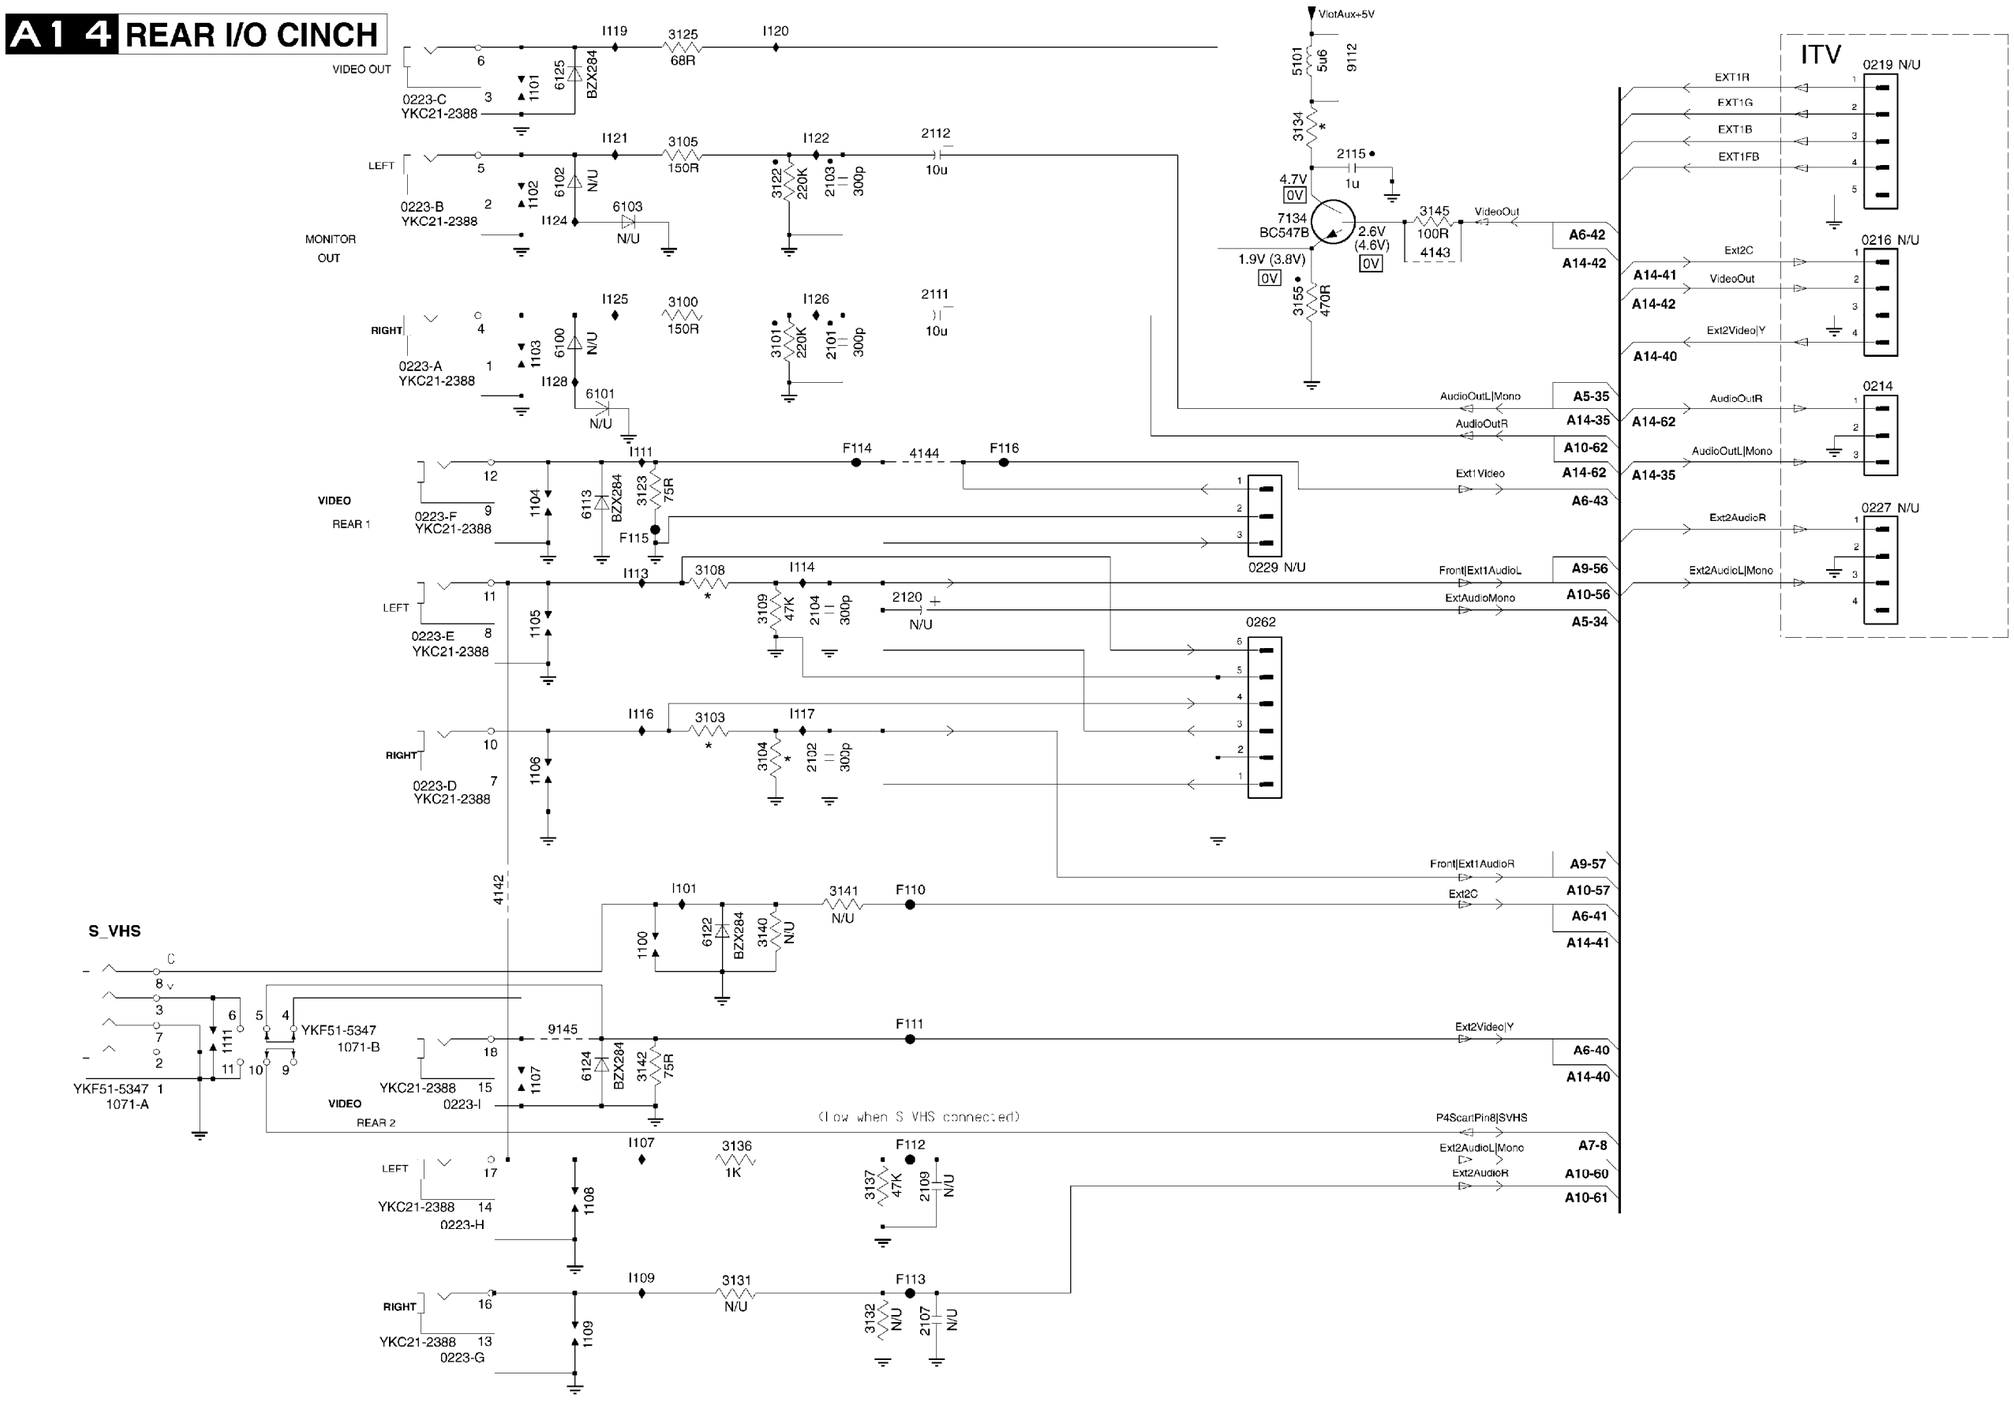

B CRT PANEL

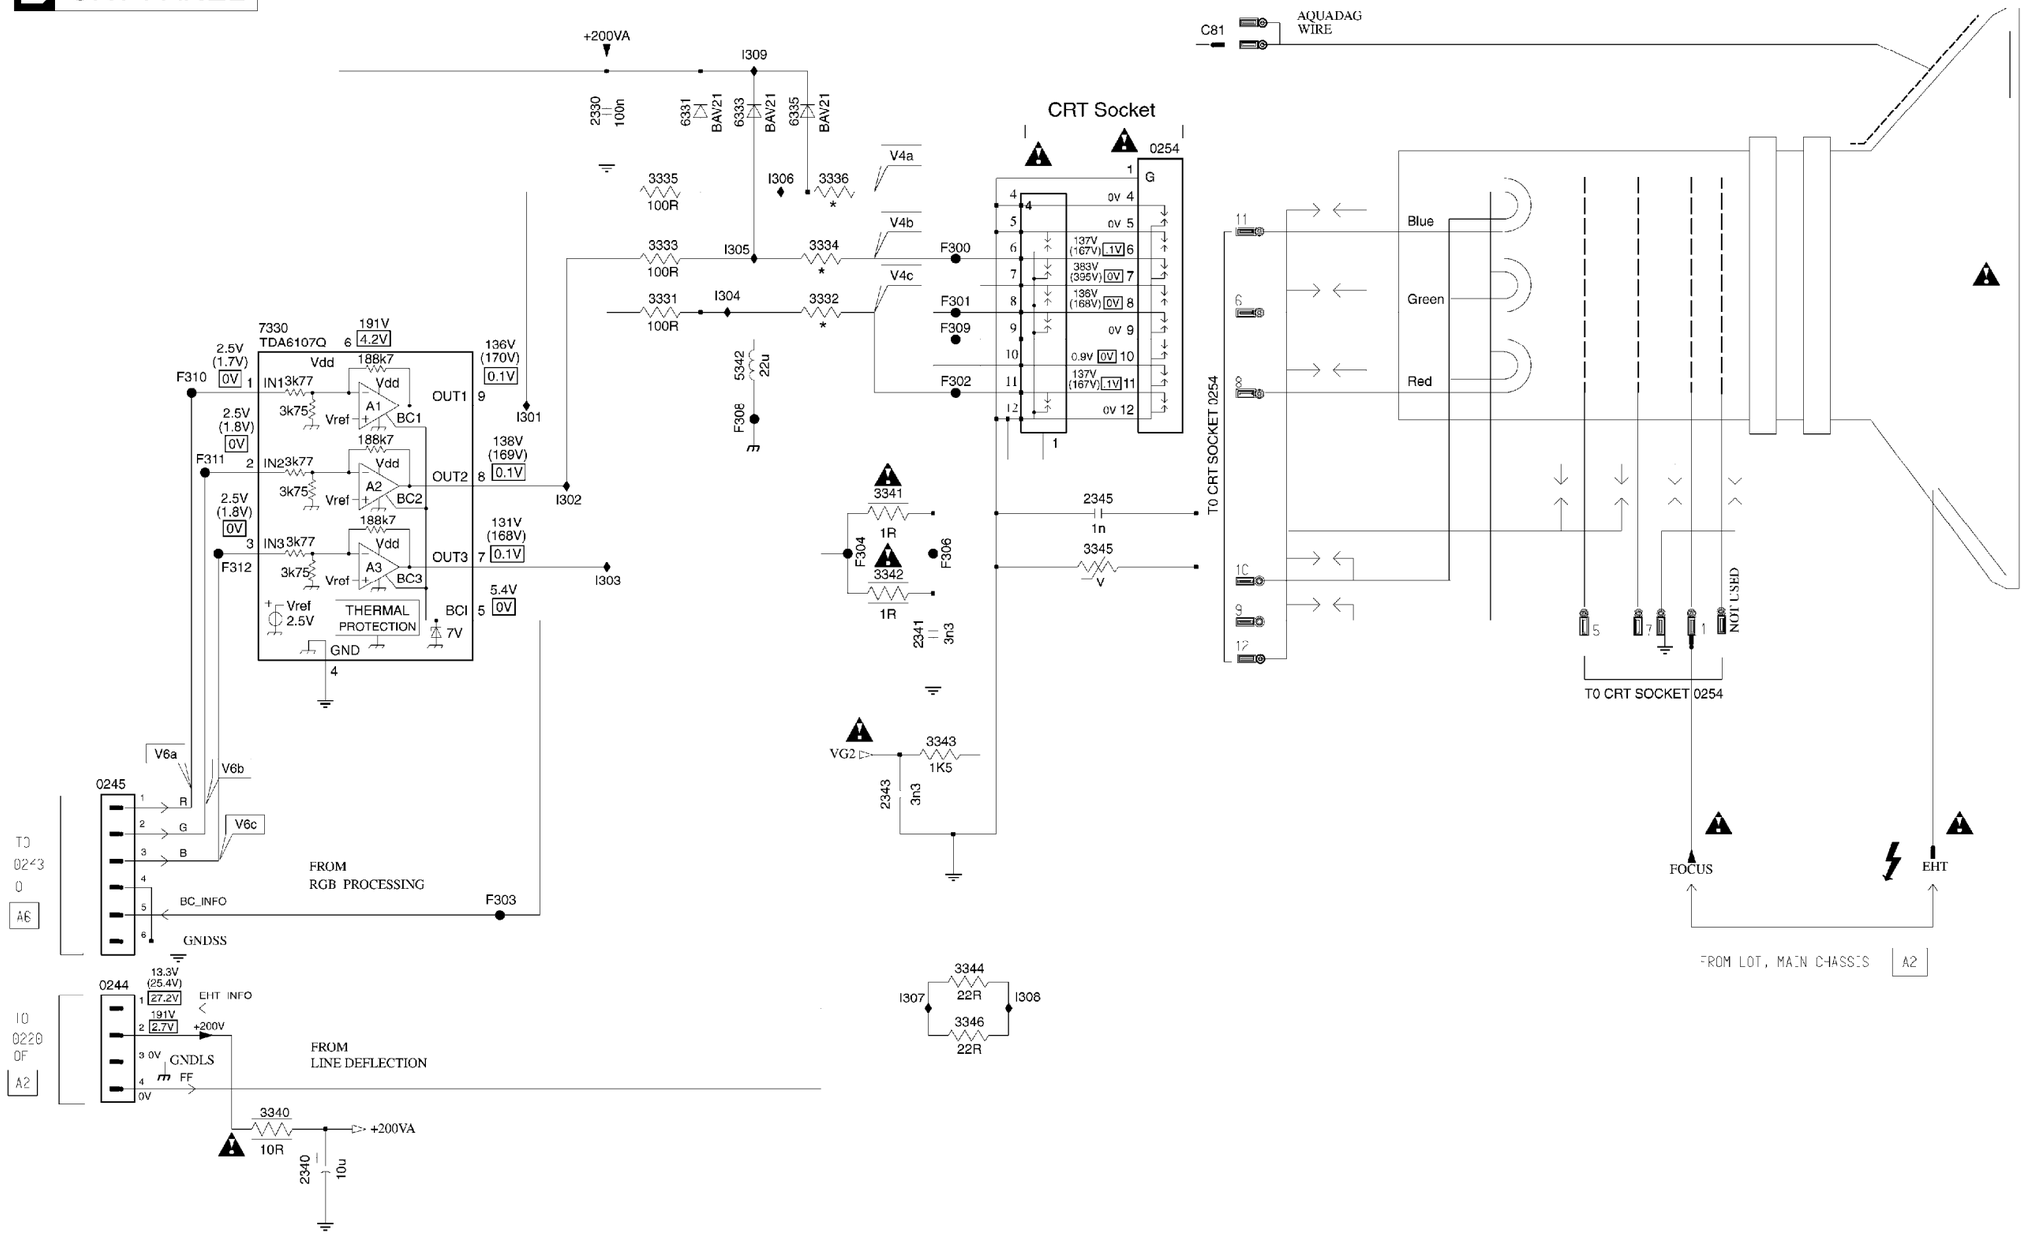
+200VA
I309
2330 100n
6331 BAV21
6333 BAV21
6335 BAV21
CRT Socket
0254
V4a
V4b
V4c
3335 100R
I306
3336 *
3333 100R
I305
3334 *
3331 100R
I304
3332 *
F300
F301
F309
F302
5342 22u
F308
C81
AQUADAG WIRE
Blue
Green
Red
T0 CRT SOCKET 0254
GRESTON
7330 TDA6107Q
191V 4.2V
2.5V (1.7V) 0V
F310
2.5V (1.8V) 0V
F311
2.5V (1.8V) 0V
F312
IN1 3k77
IN2 3k77
IN3 3k77
3k75
Vref
188k7
Vdd
A1
A2
A3
BC1
BC2
BC3
OUT1
OUT2
OUT3
136V (170V) 0.1V
I301
138V (169V) 0.1V
I302
131V (168V) 0.1V
I303
5.4V 0V
BCI
7V
THERMAL PROTECTION
GND
3341 1R
F304
3342
F306
1R
2341 3n3
2345 1n
3345 V
VG2
3343 1K5
2343 3n3
V6a
V6b
V6c
0245
R
G
B
BC_INFO
F303
FROM RGB PROCESSING
GNDSS
TO 0243 0 A6
0244
13.3V (25.4V)
27.2V
191V 2.7V
EHT INFO
+200V
GNDLS
FF
0V
FROM LINE DEFLECTION
TO 0220 OF A2
3340 10R
+200VA
2340 10u
3344 22R
I307
I308
3346 22R
FOCUS
EHT
FROM LOT, MAIN CHASSIS
A2

COMB Filter Panel Schematic (Section 1)

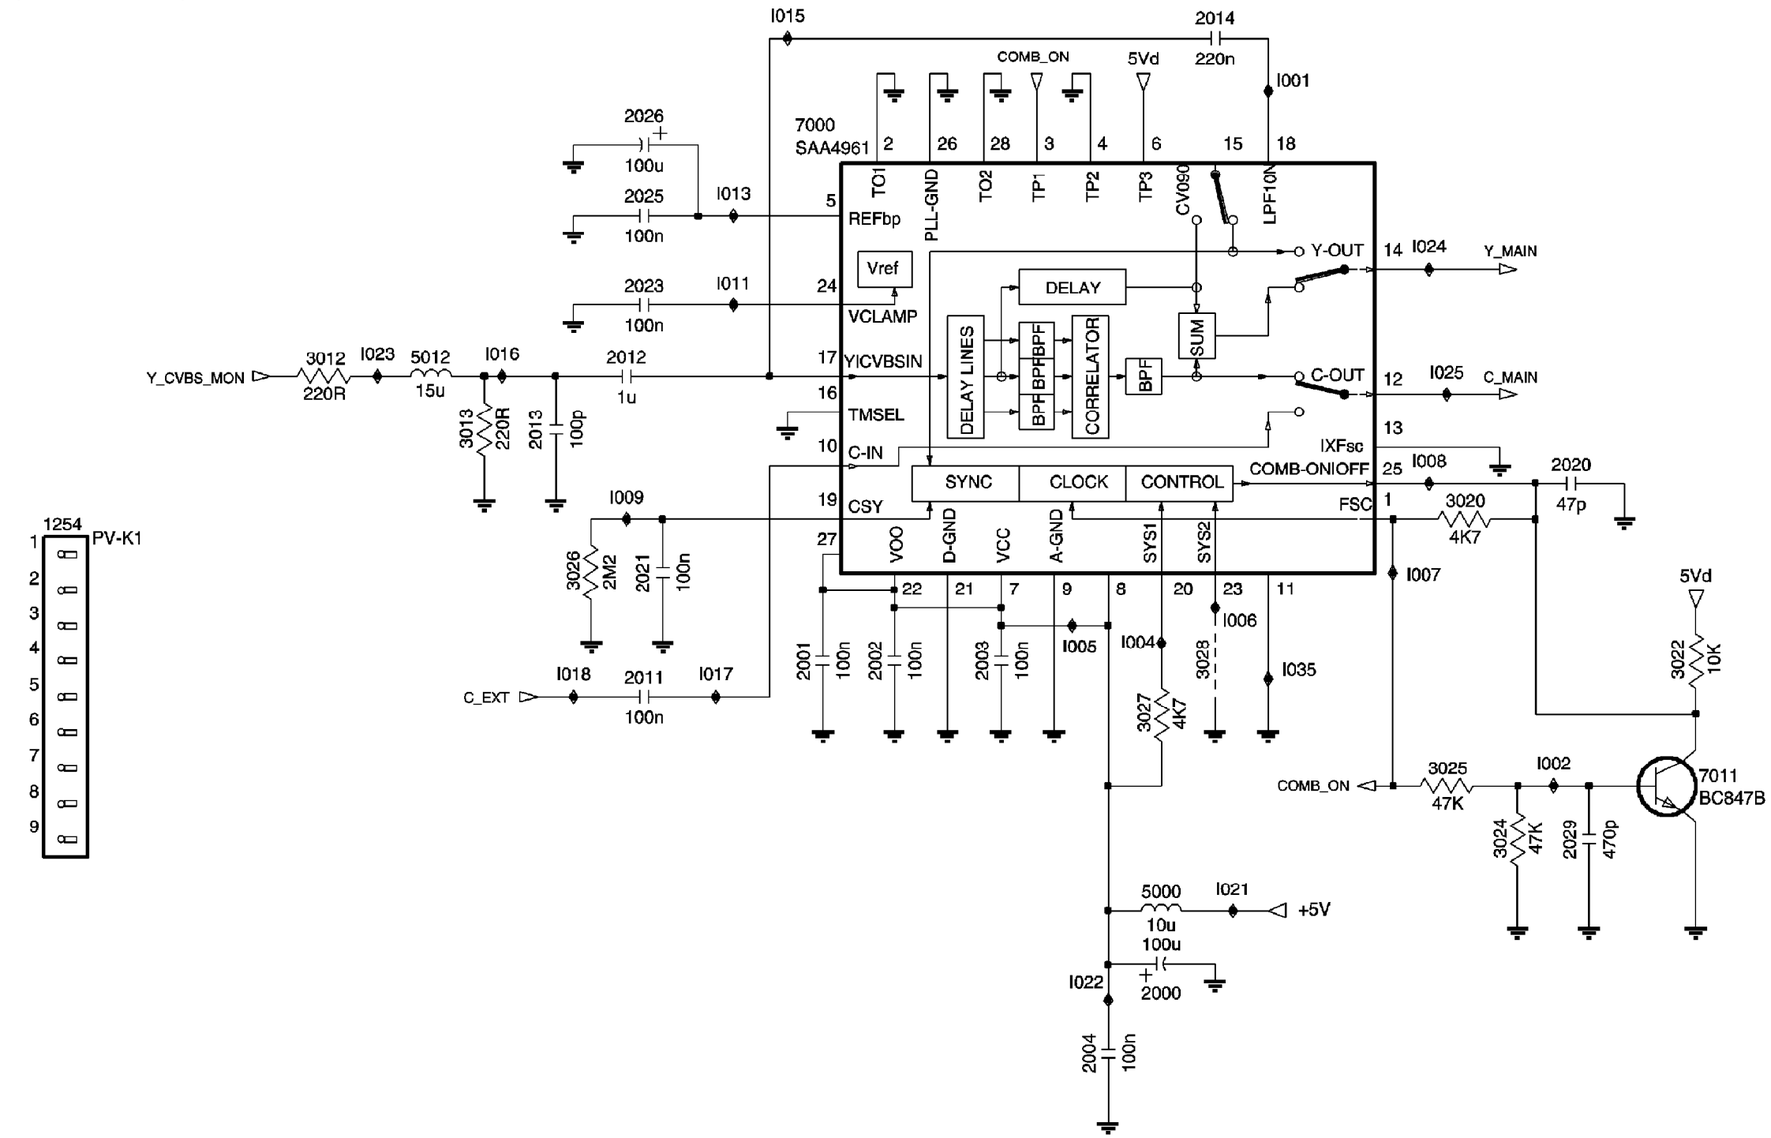

COMB Filter Panel Schematic
(Section 2)

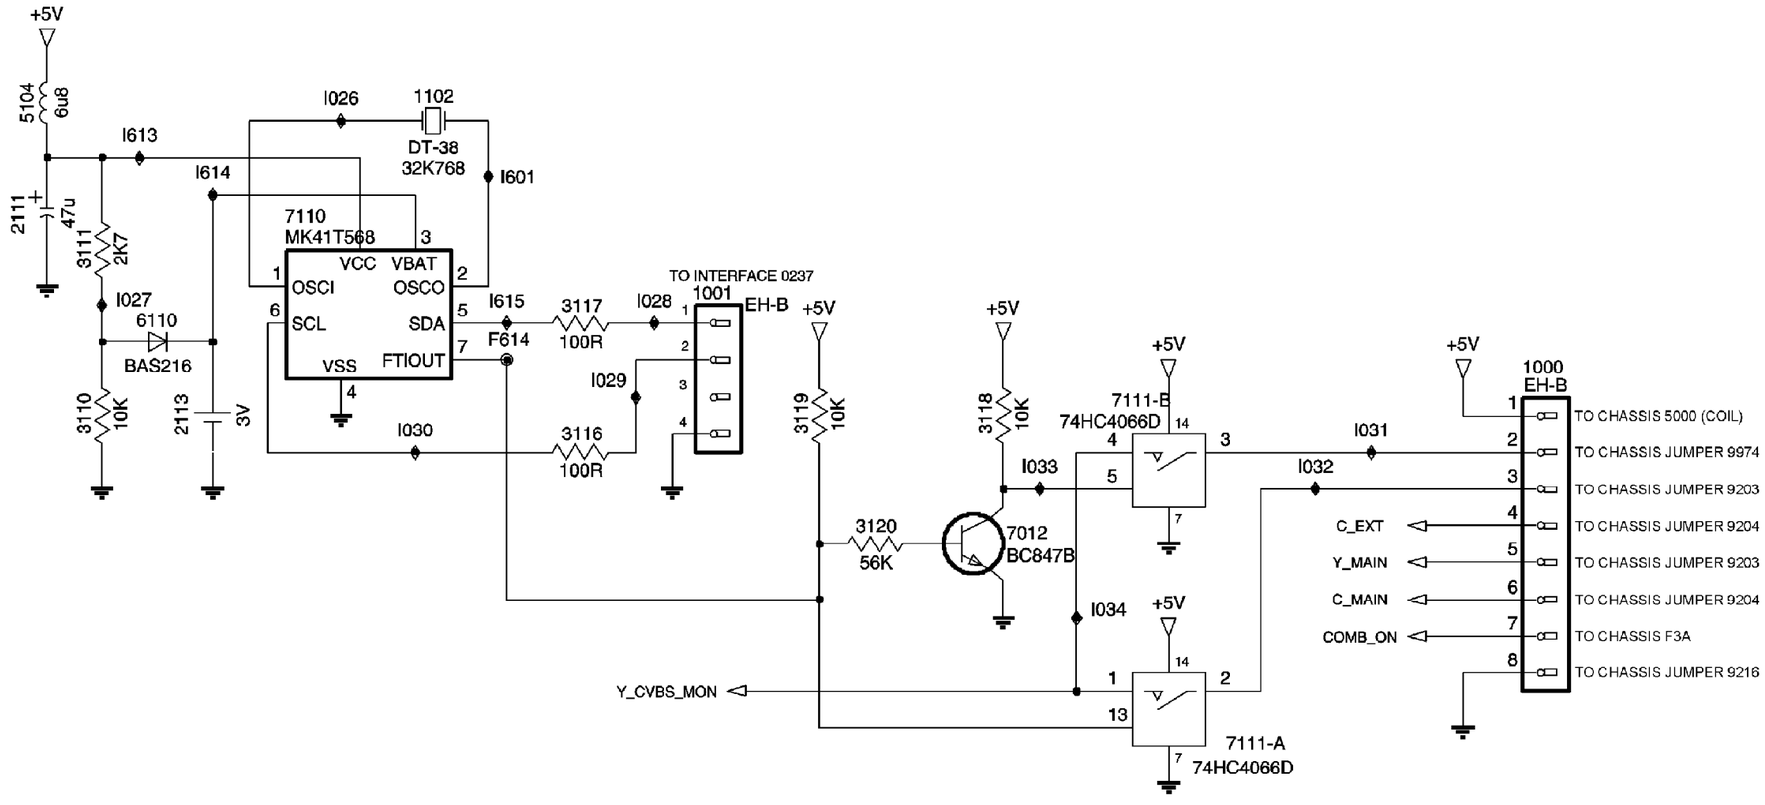

USED ONLY IN MODELS: PC9227C101, CH1927C101, , , SC3925C121, , TC9225C221, CH1927C121, PC9227C121, PCW027C121, SC2927C121, SC3927C121, PA9027C101 (7583) - INTERFACE MODULE - A10777 & A10808
PPC927C201, SC3932C121, PPC932C101, SC2932C121, SC2932C221, PA9027C121, PPC927C121, PPC927C101, PPC932C121, PPC932C221, PA9032C101, PA9036C121,

A10777 Interface Module / A10808 Pro Plus Interface Module

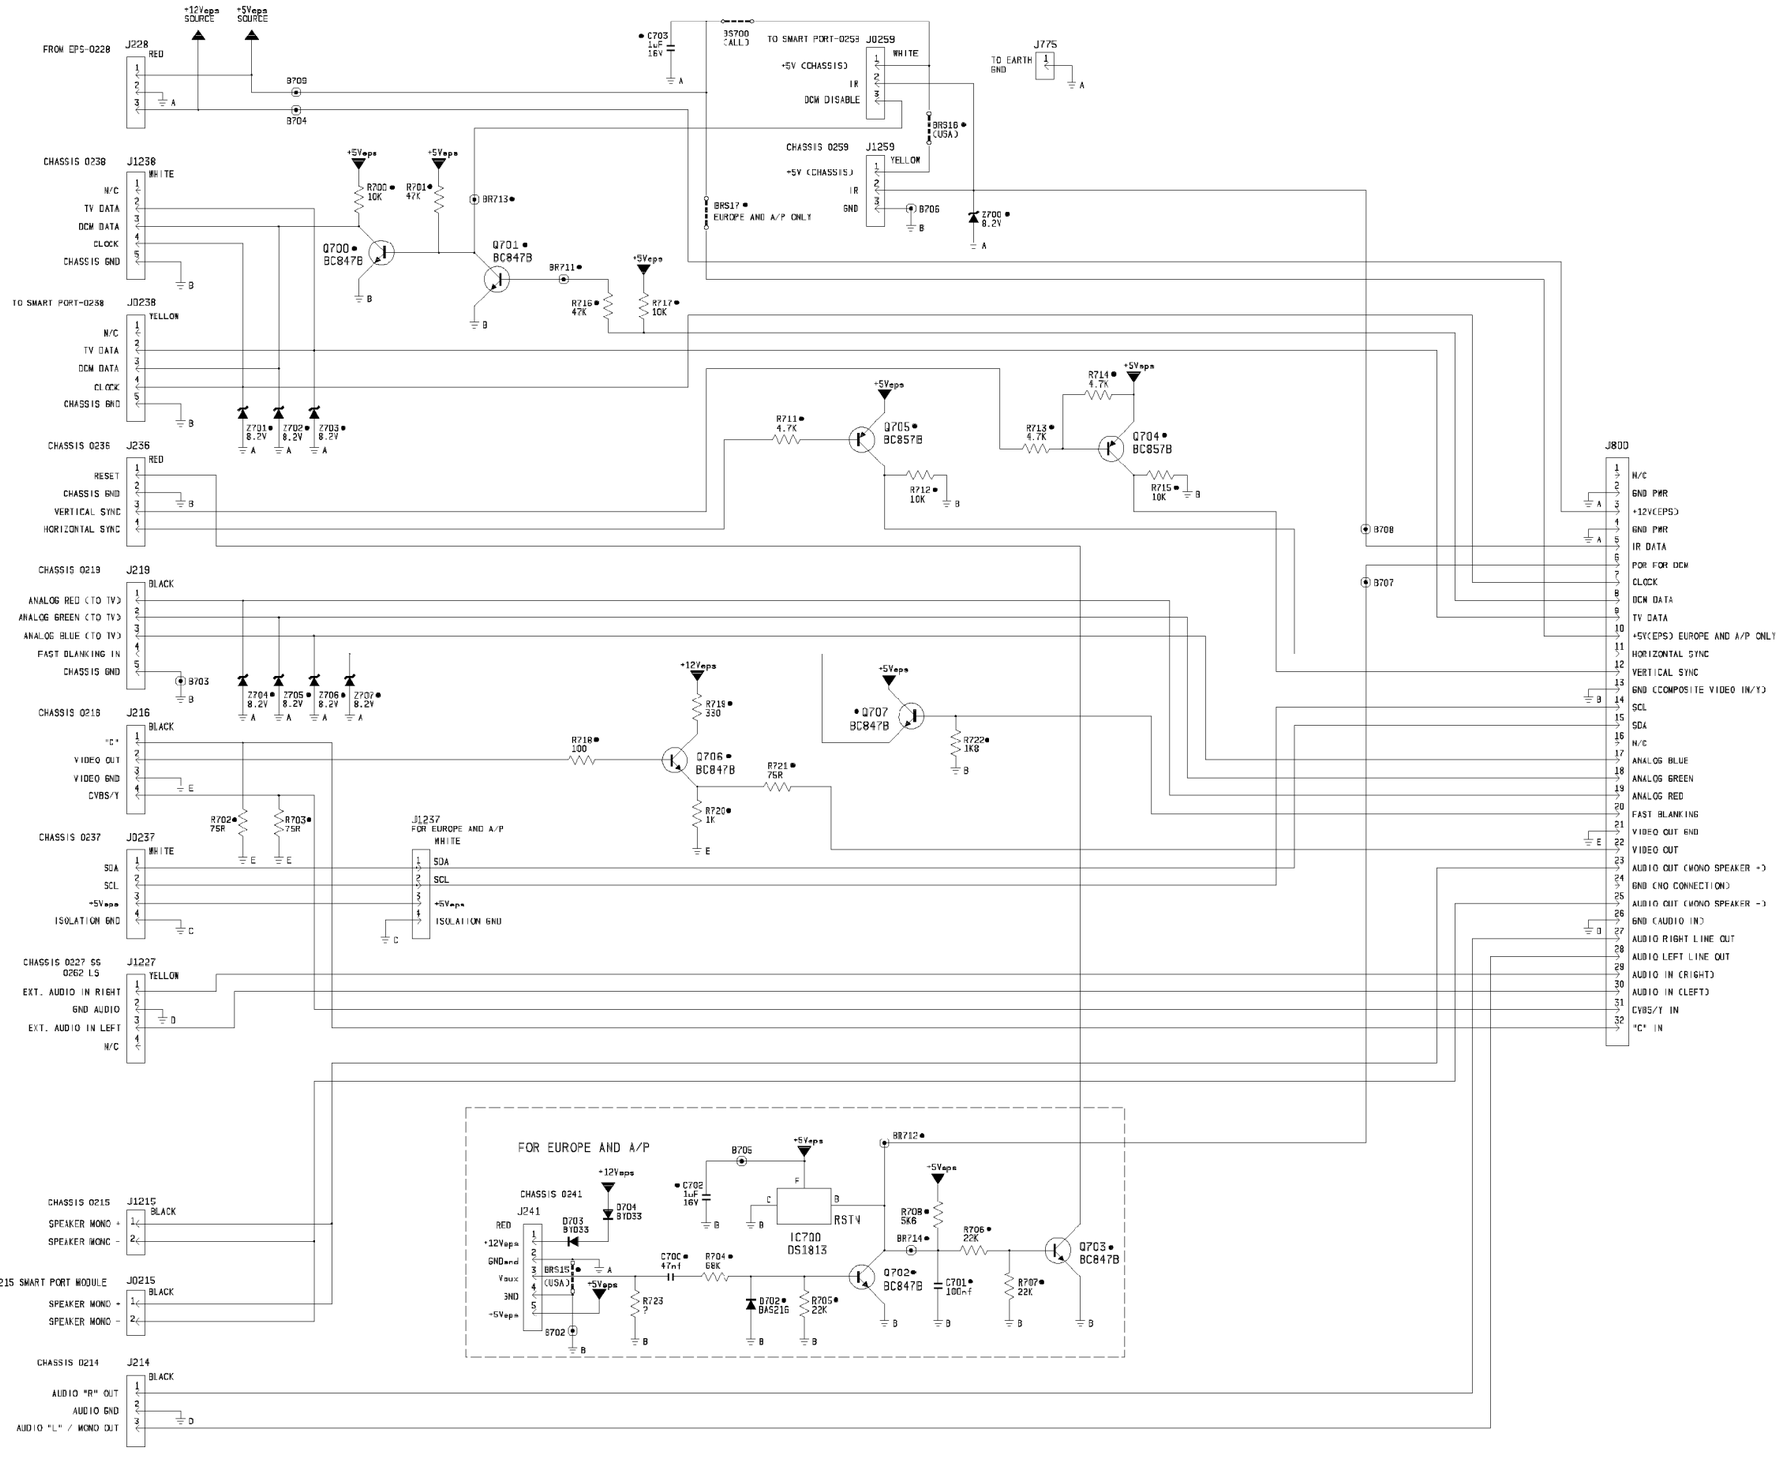

USED ONLY IN MODELS: PA9027C101, PPC927C201, , SC3932C121, PPC932C101, , SC2932C121, SC2932C221, PA9027C121, PPC927C121, PPC927C101, PPC932C121, PPC932C221 (7583) - AUDIO JACK PANEL - A10757
PA9032C101, PA9036C121,

A10757 Audio Jack Panel

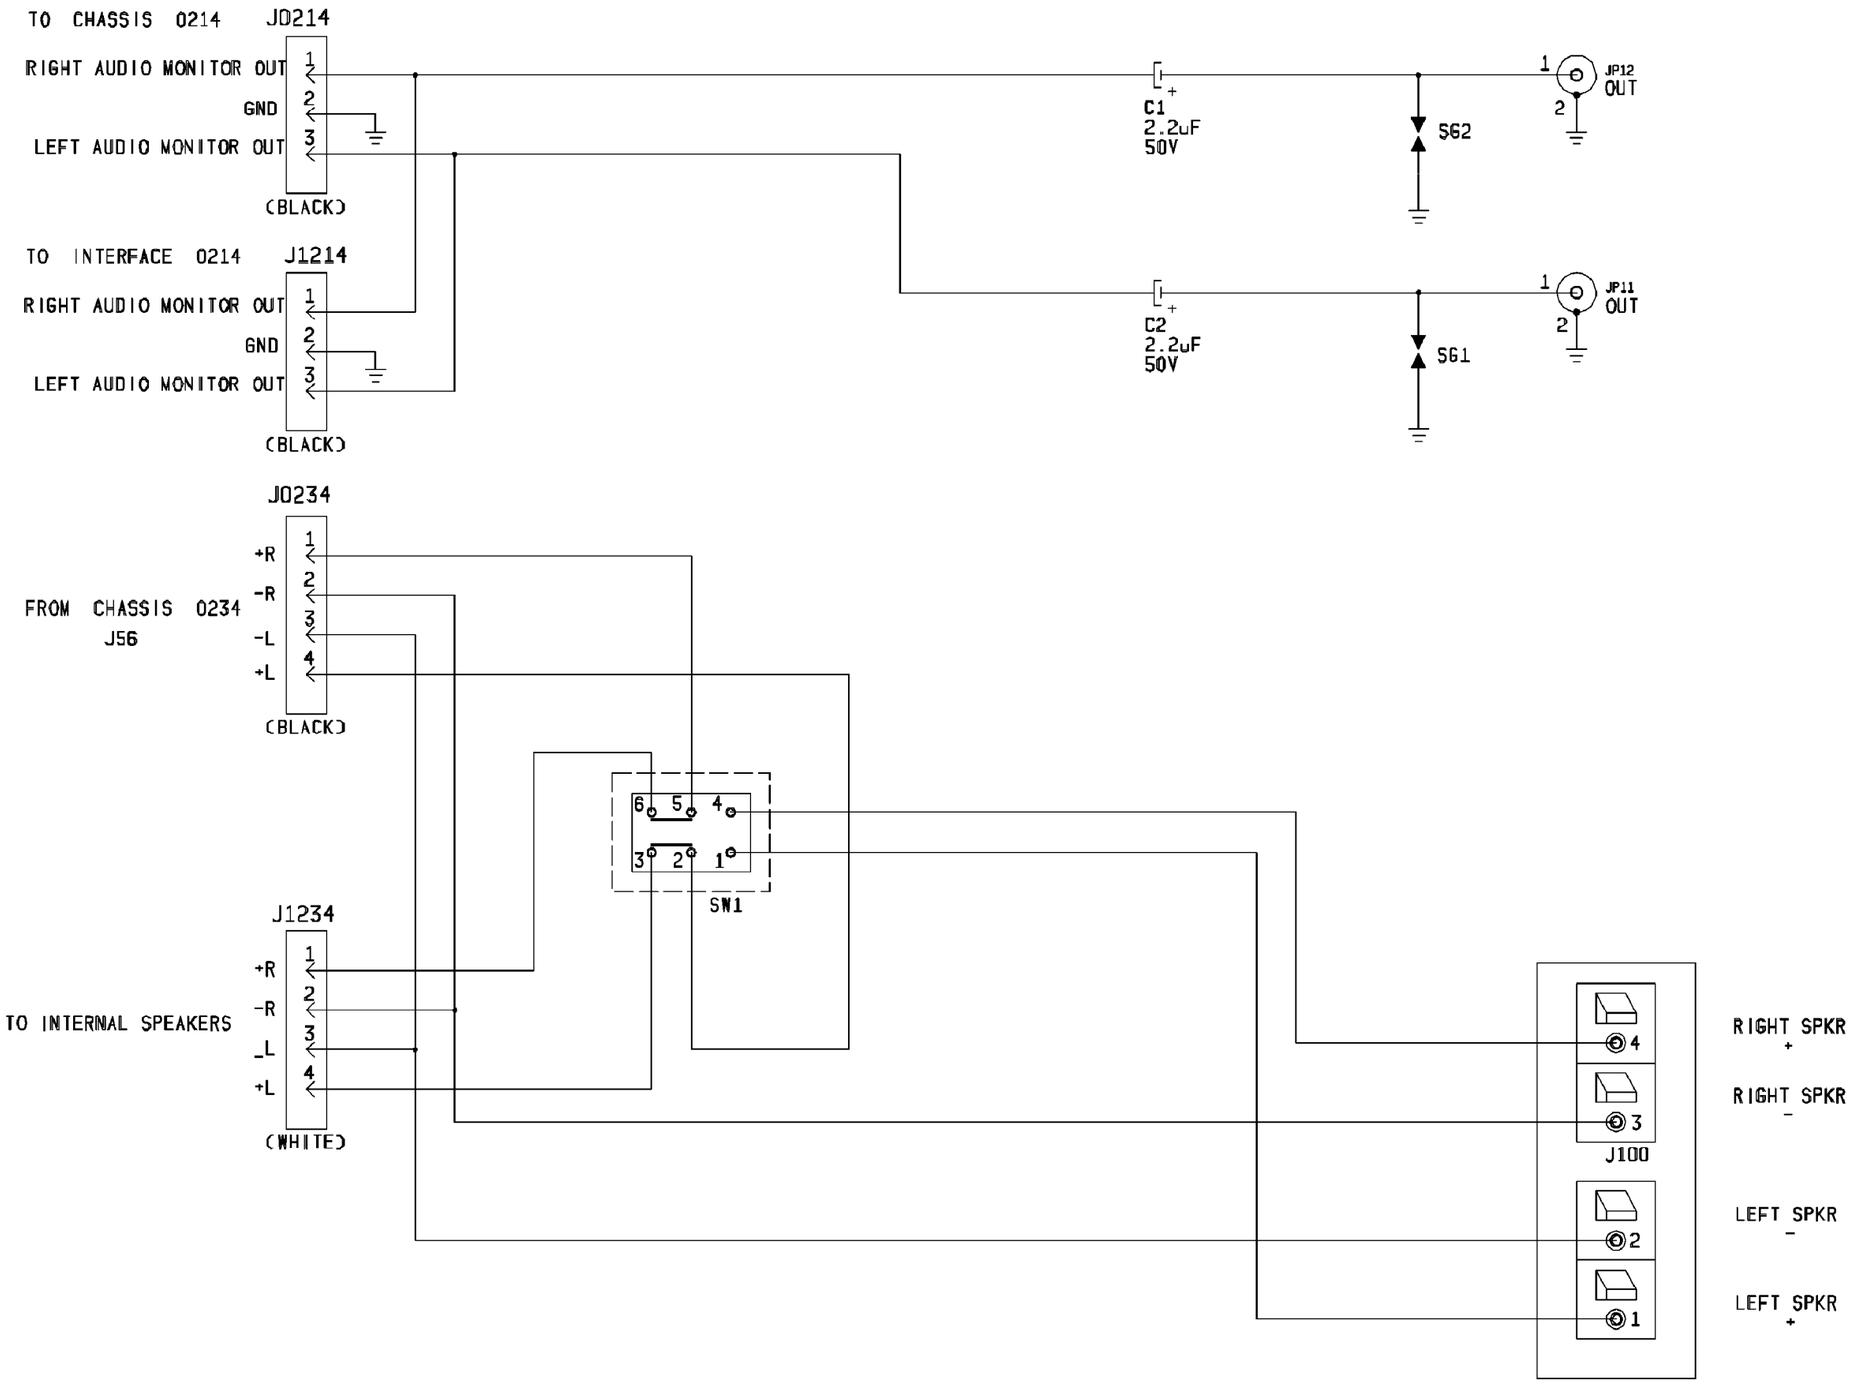

USED ONLY IN MODELS: PA9027C101, SC3932C121, PA9032C101 (7583) - PRO-VIDEO CARD - A10758

A10758 Provideo Card

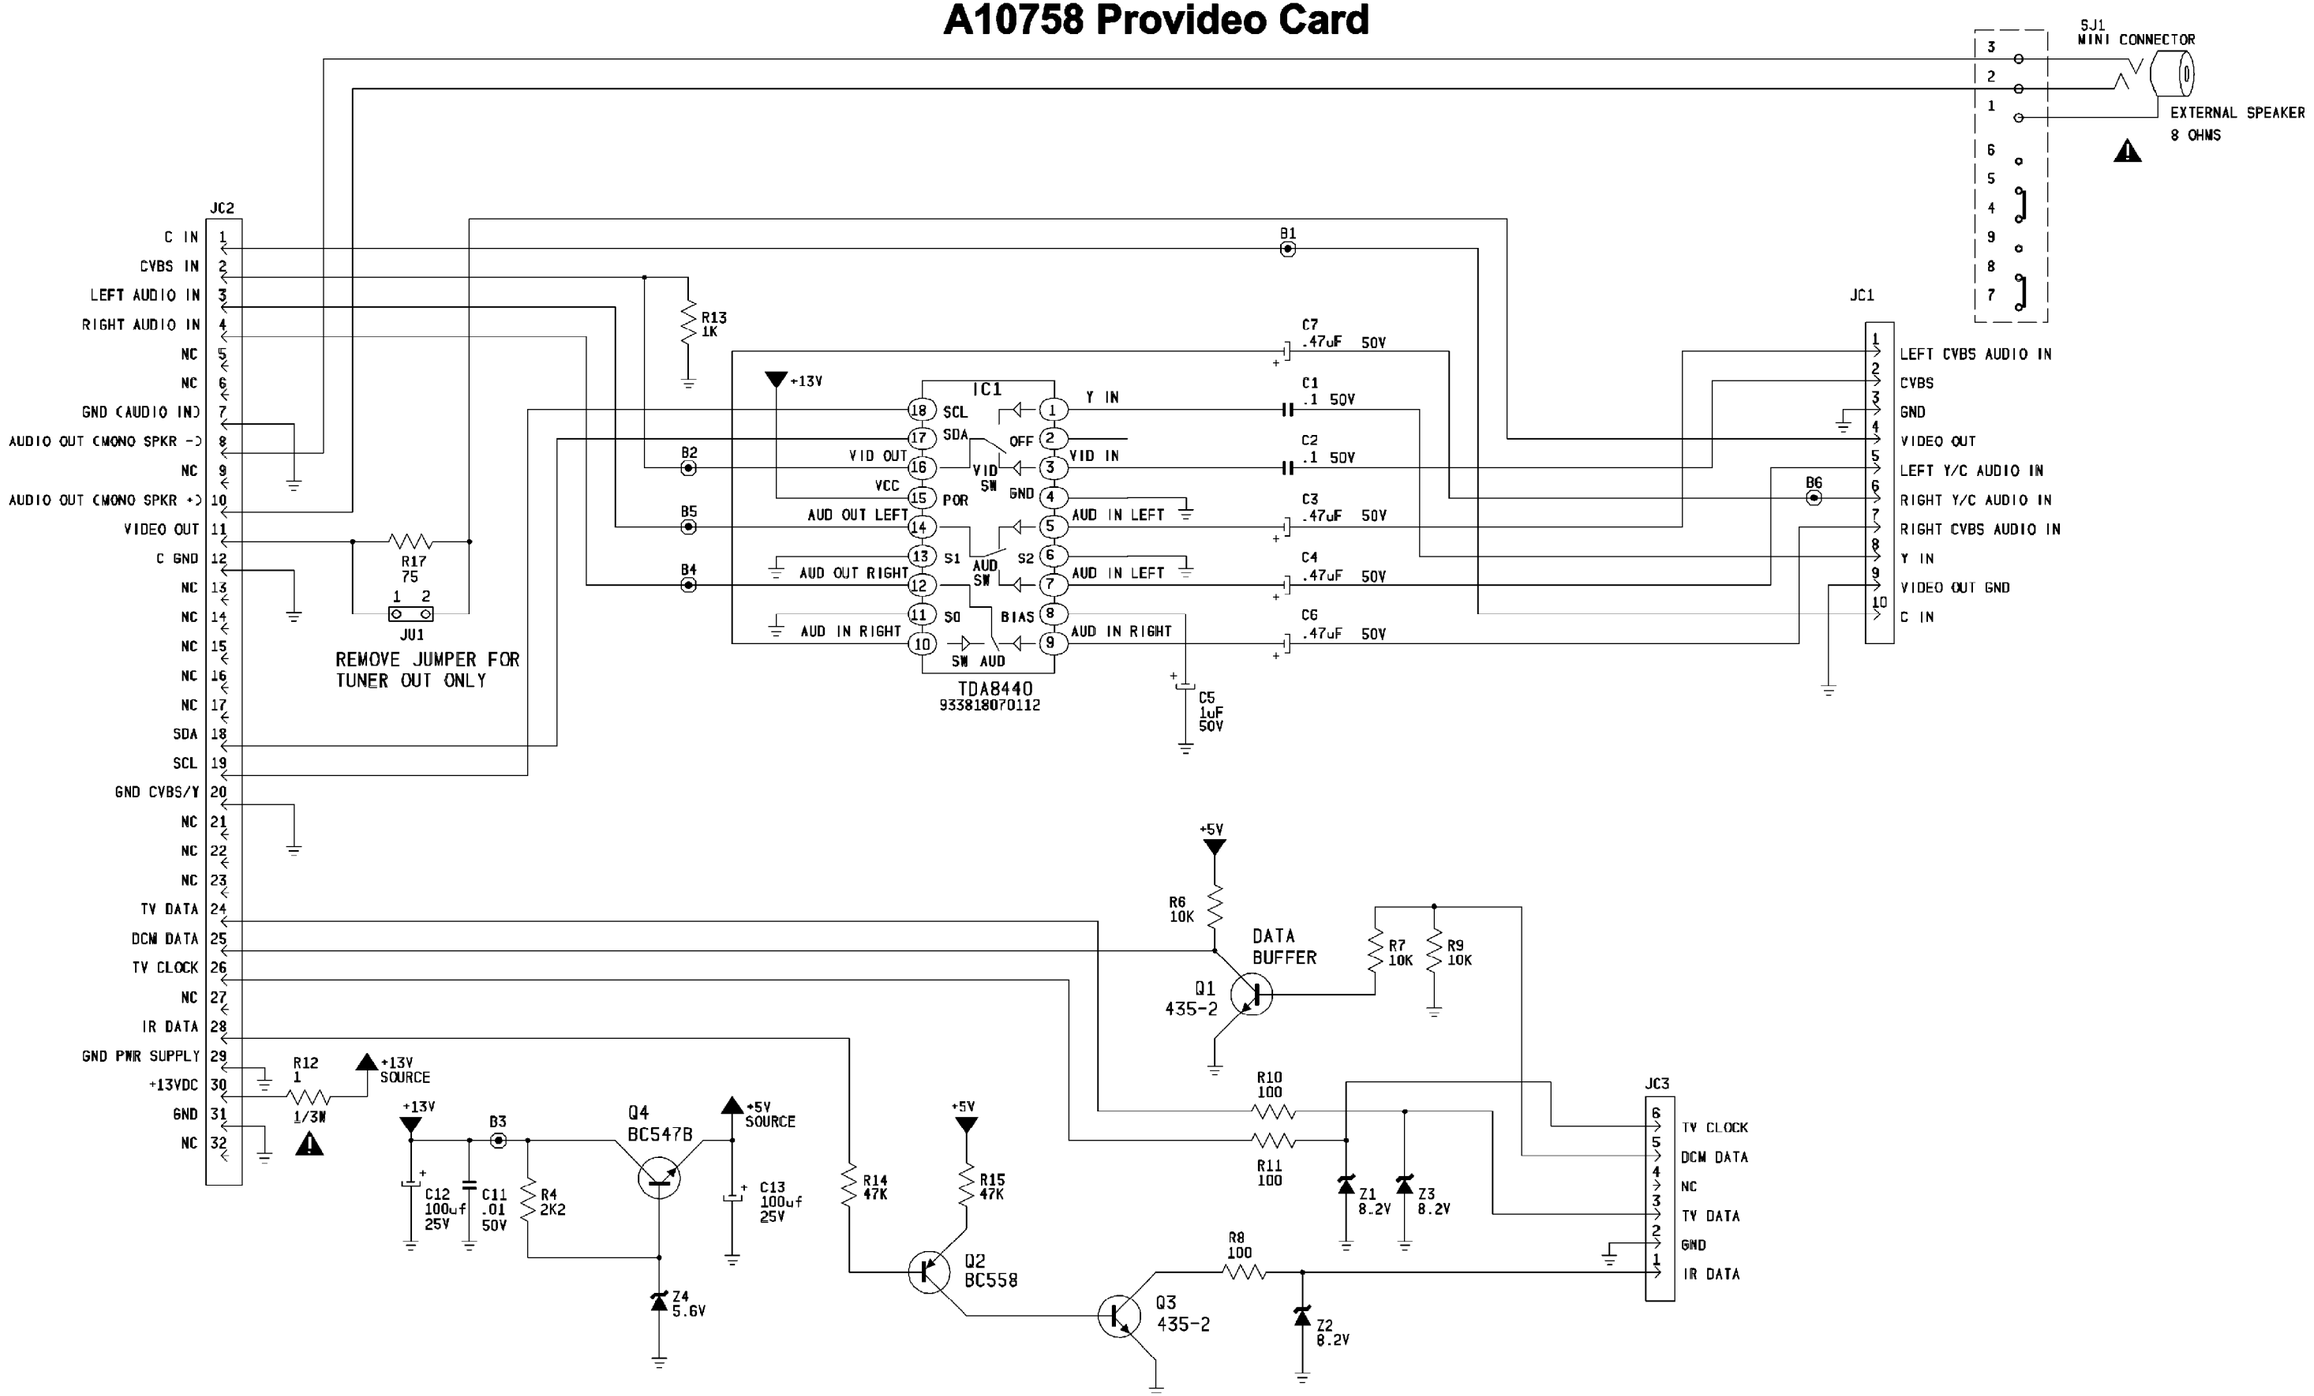

USED ONLY IN MODELS: PA9027C101, SC3932C121, PA9032C101 (7583) - PRO-VIDEO JACK PANEL - A10759

A10759 Provideo Jack Panel

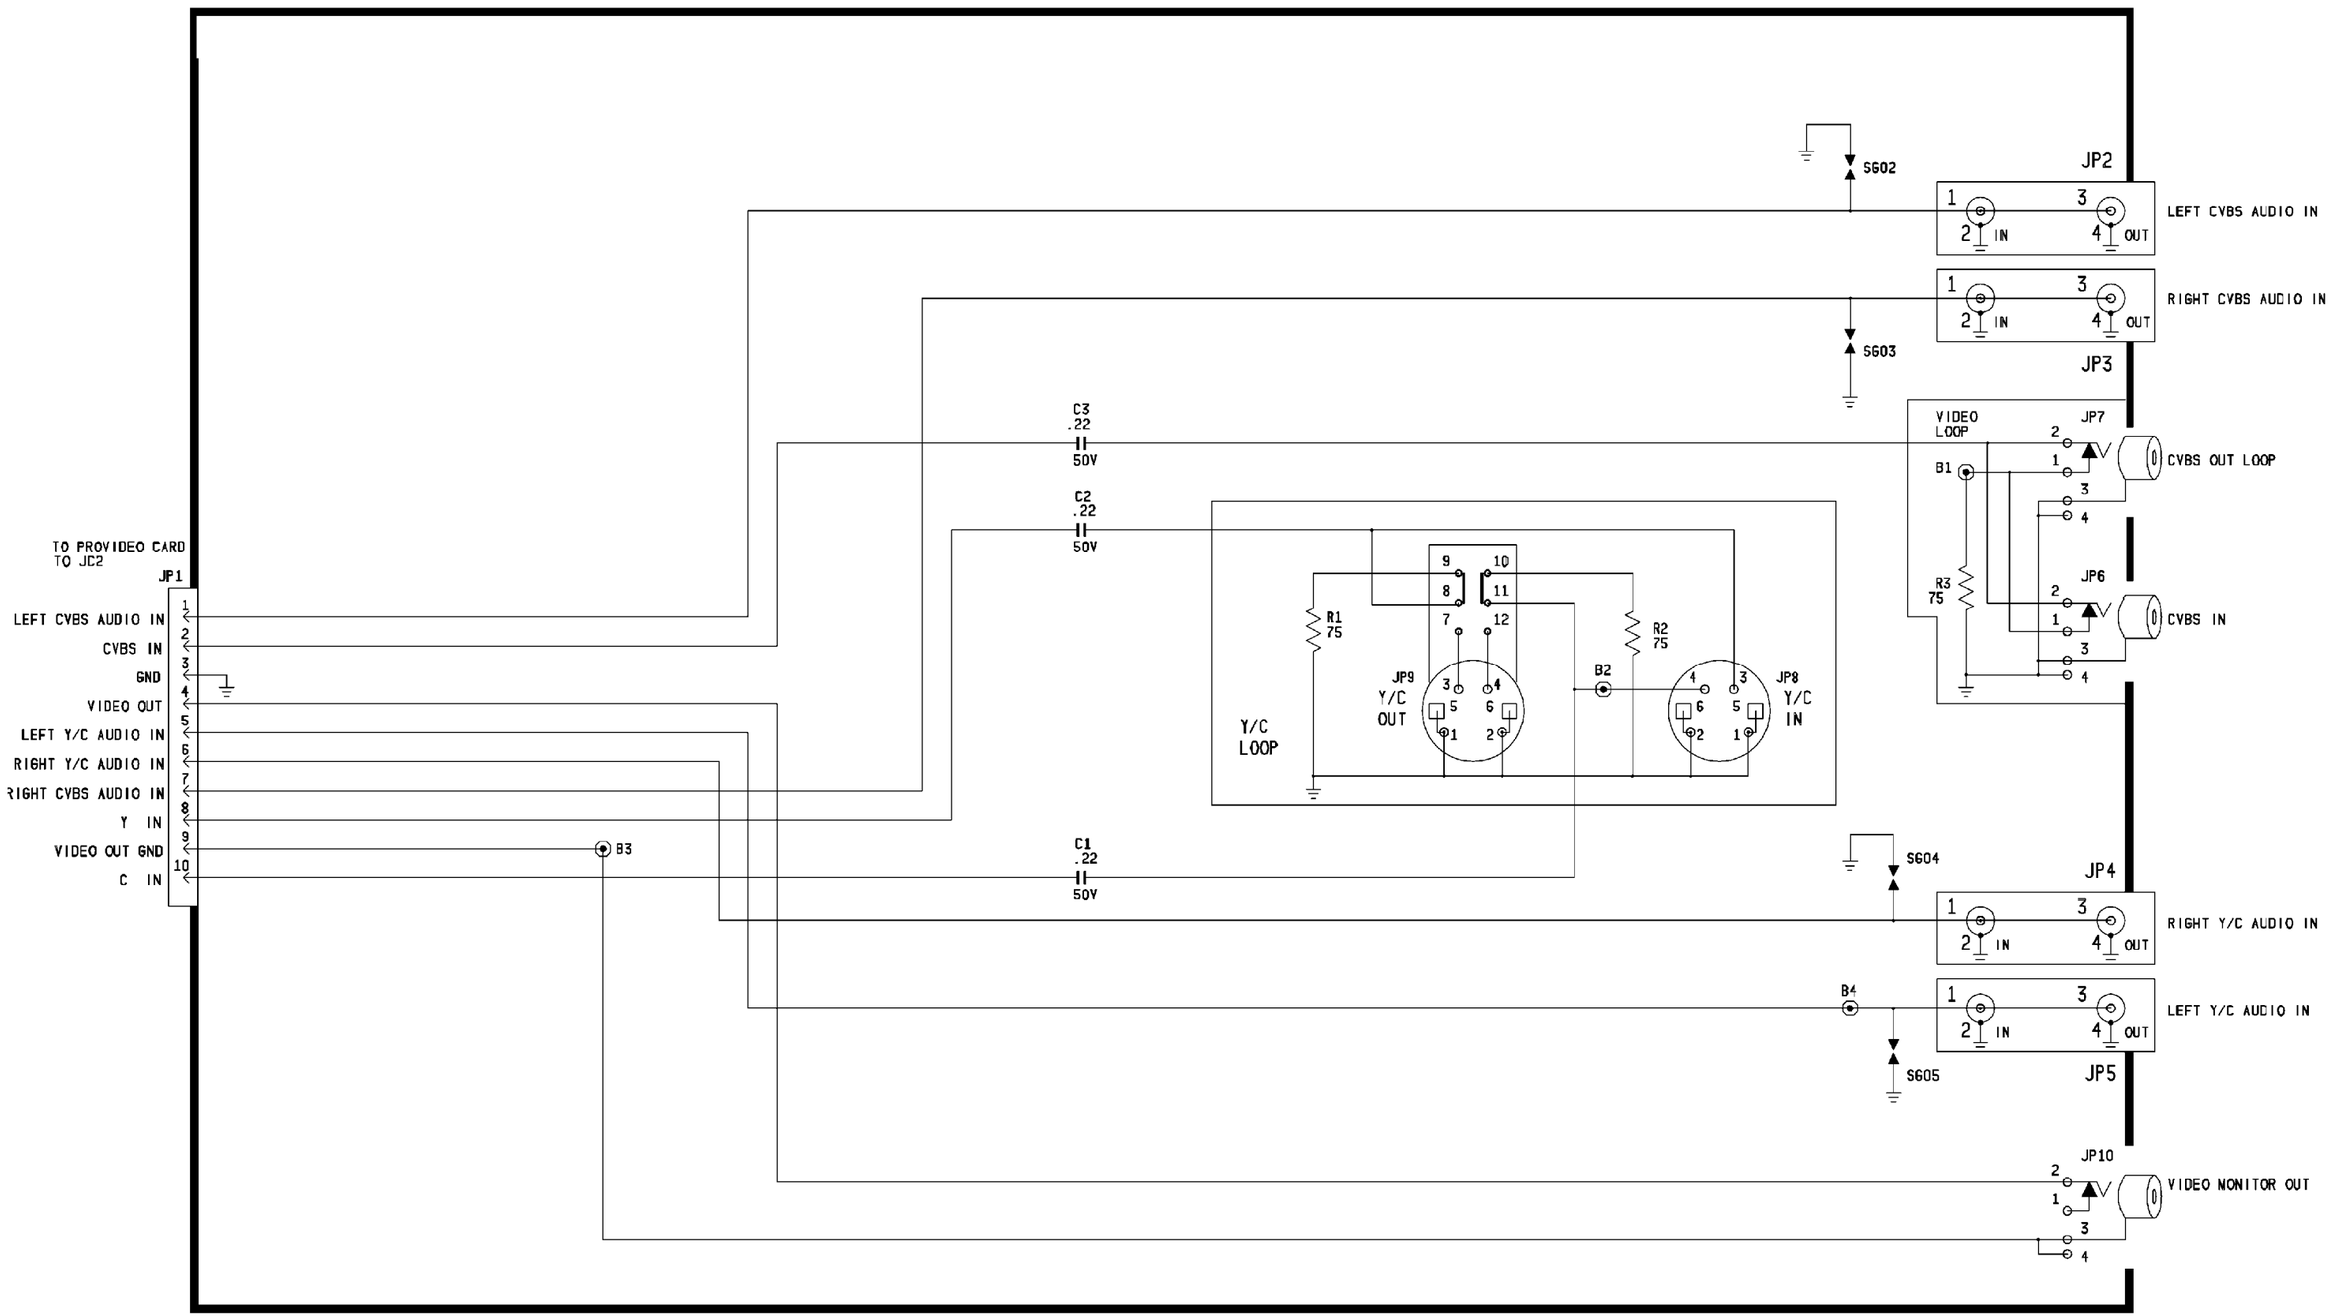

A10778 ITV Front A/V Panel

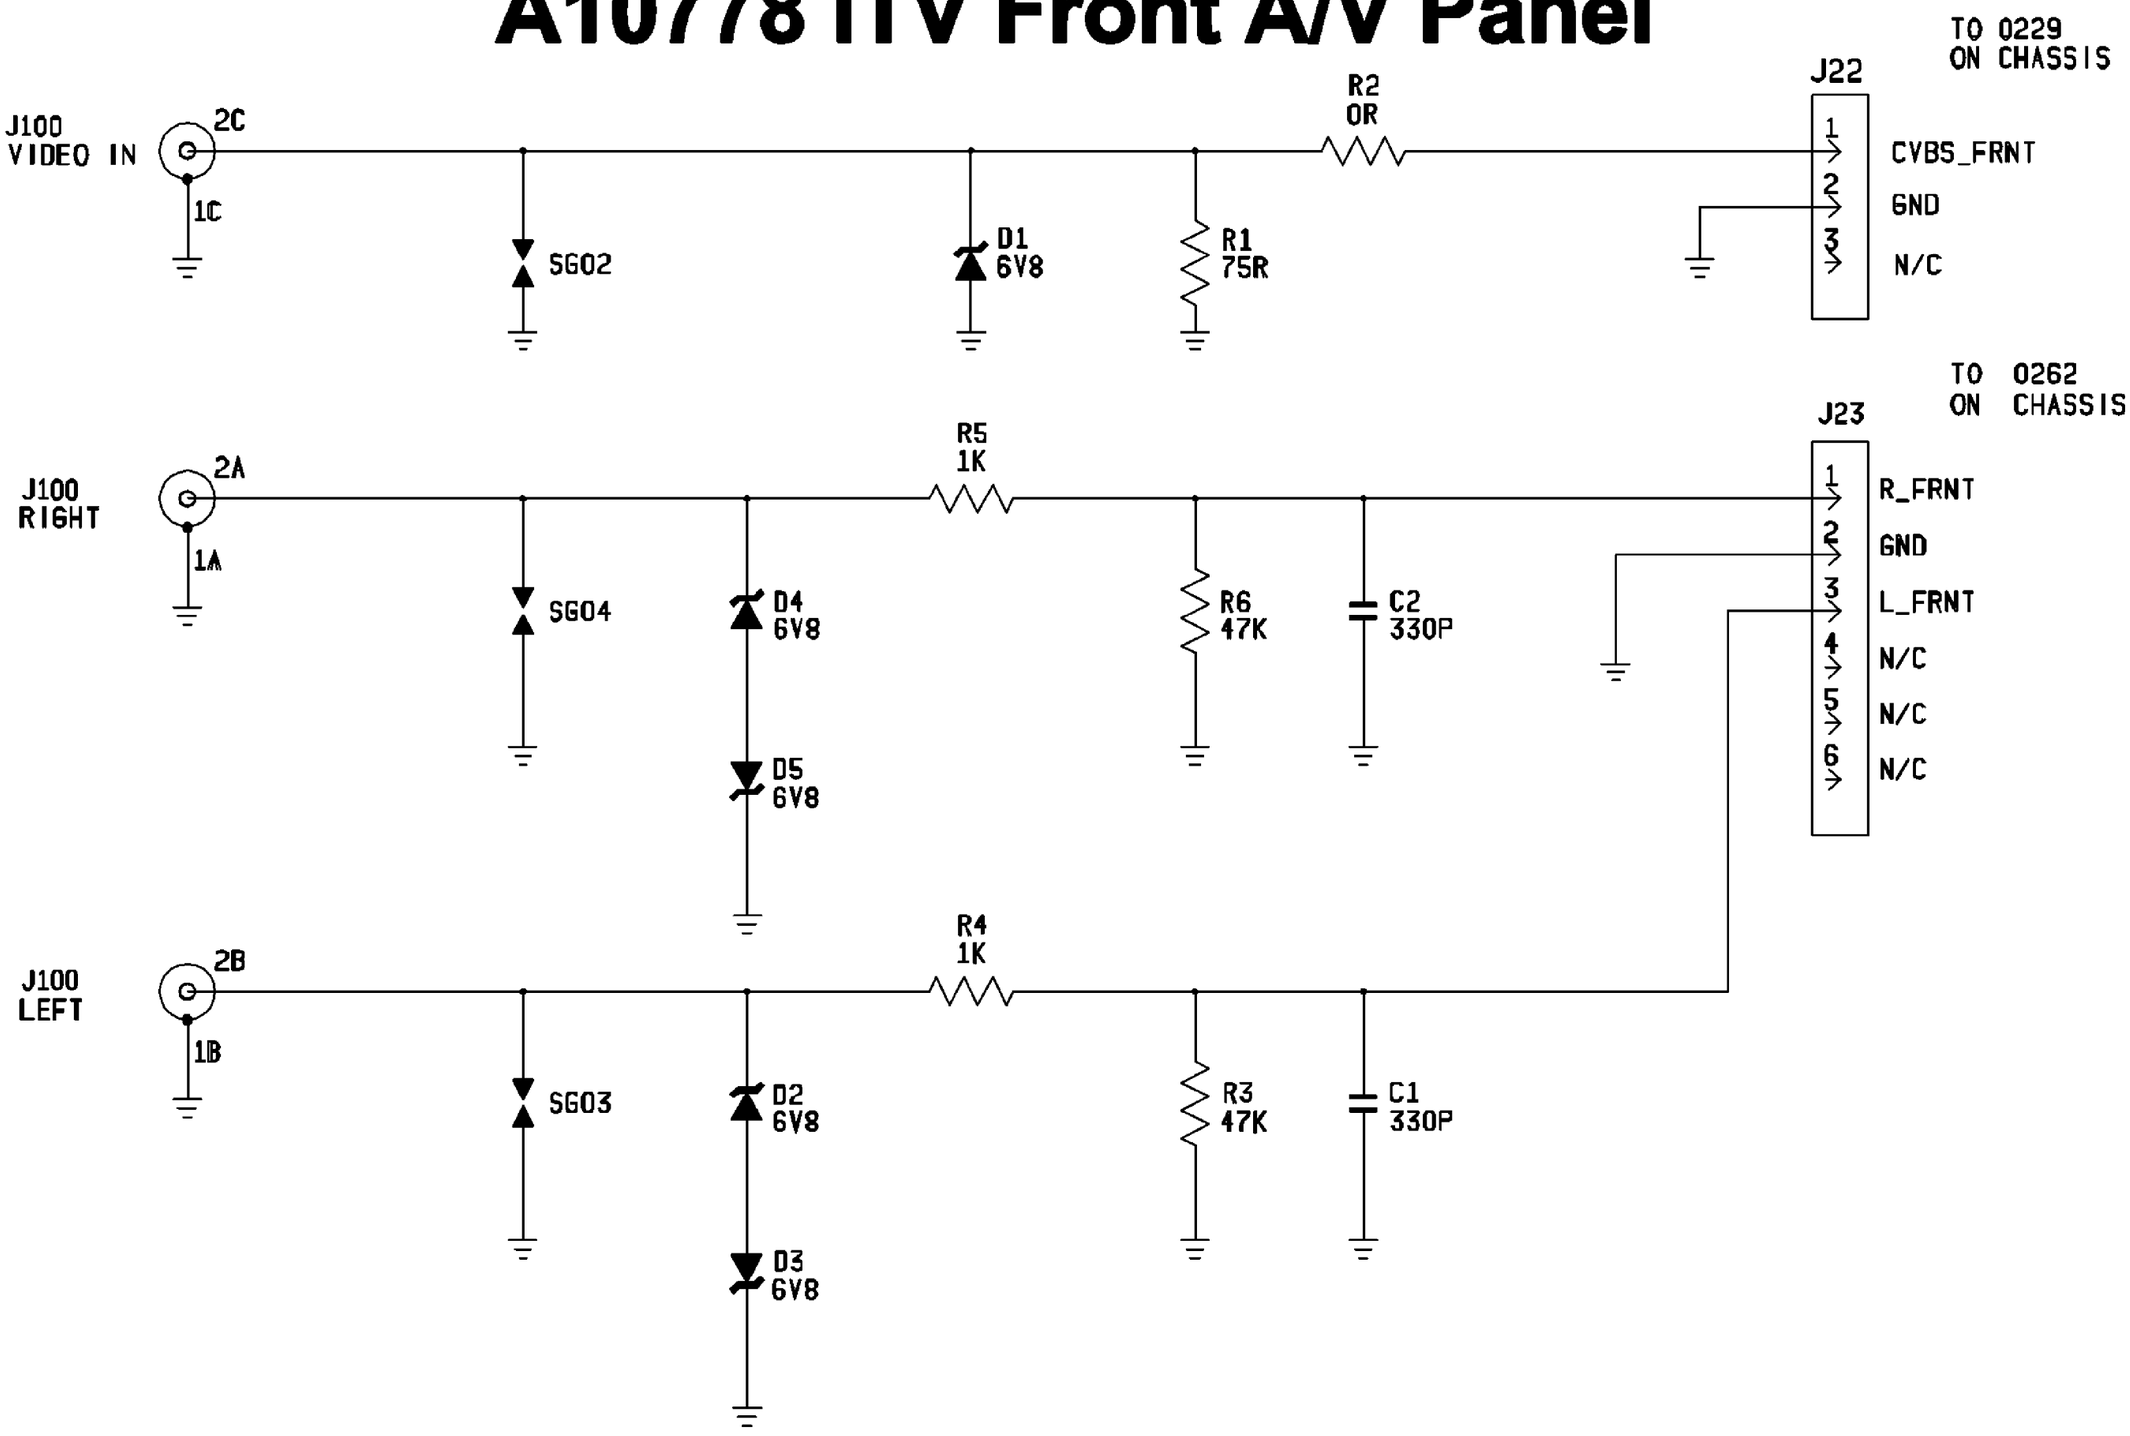

A10680 Channel One Card

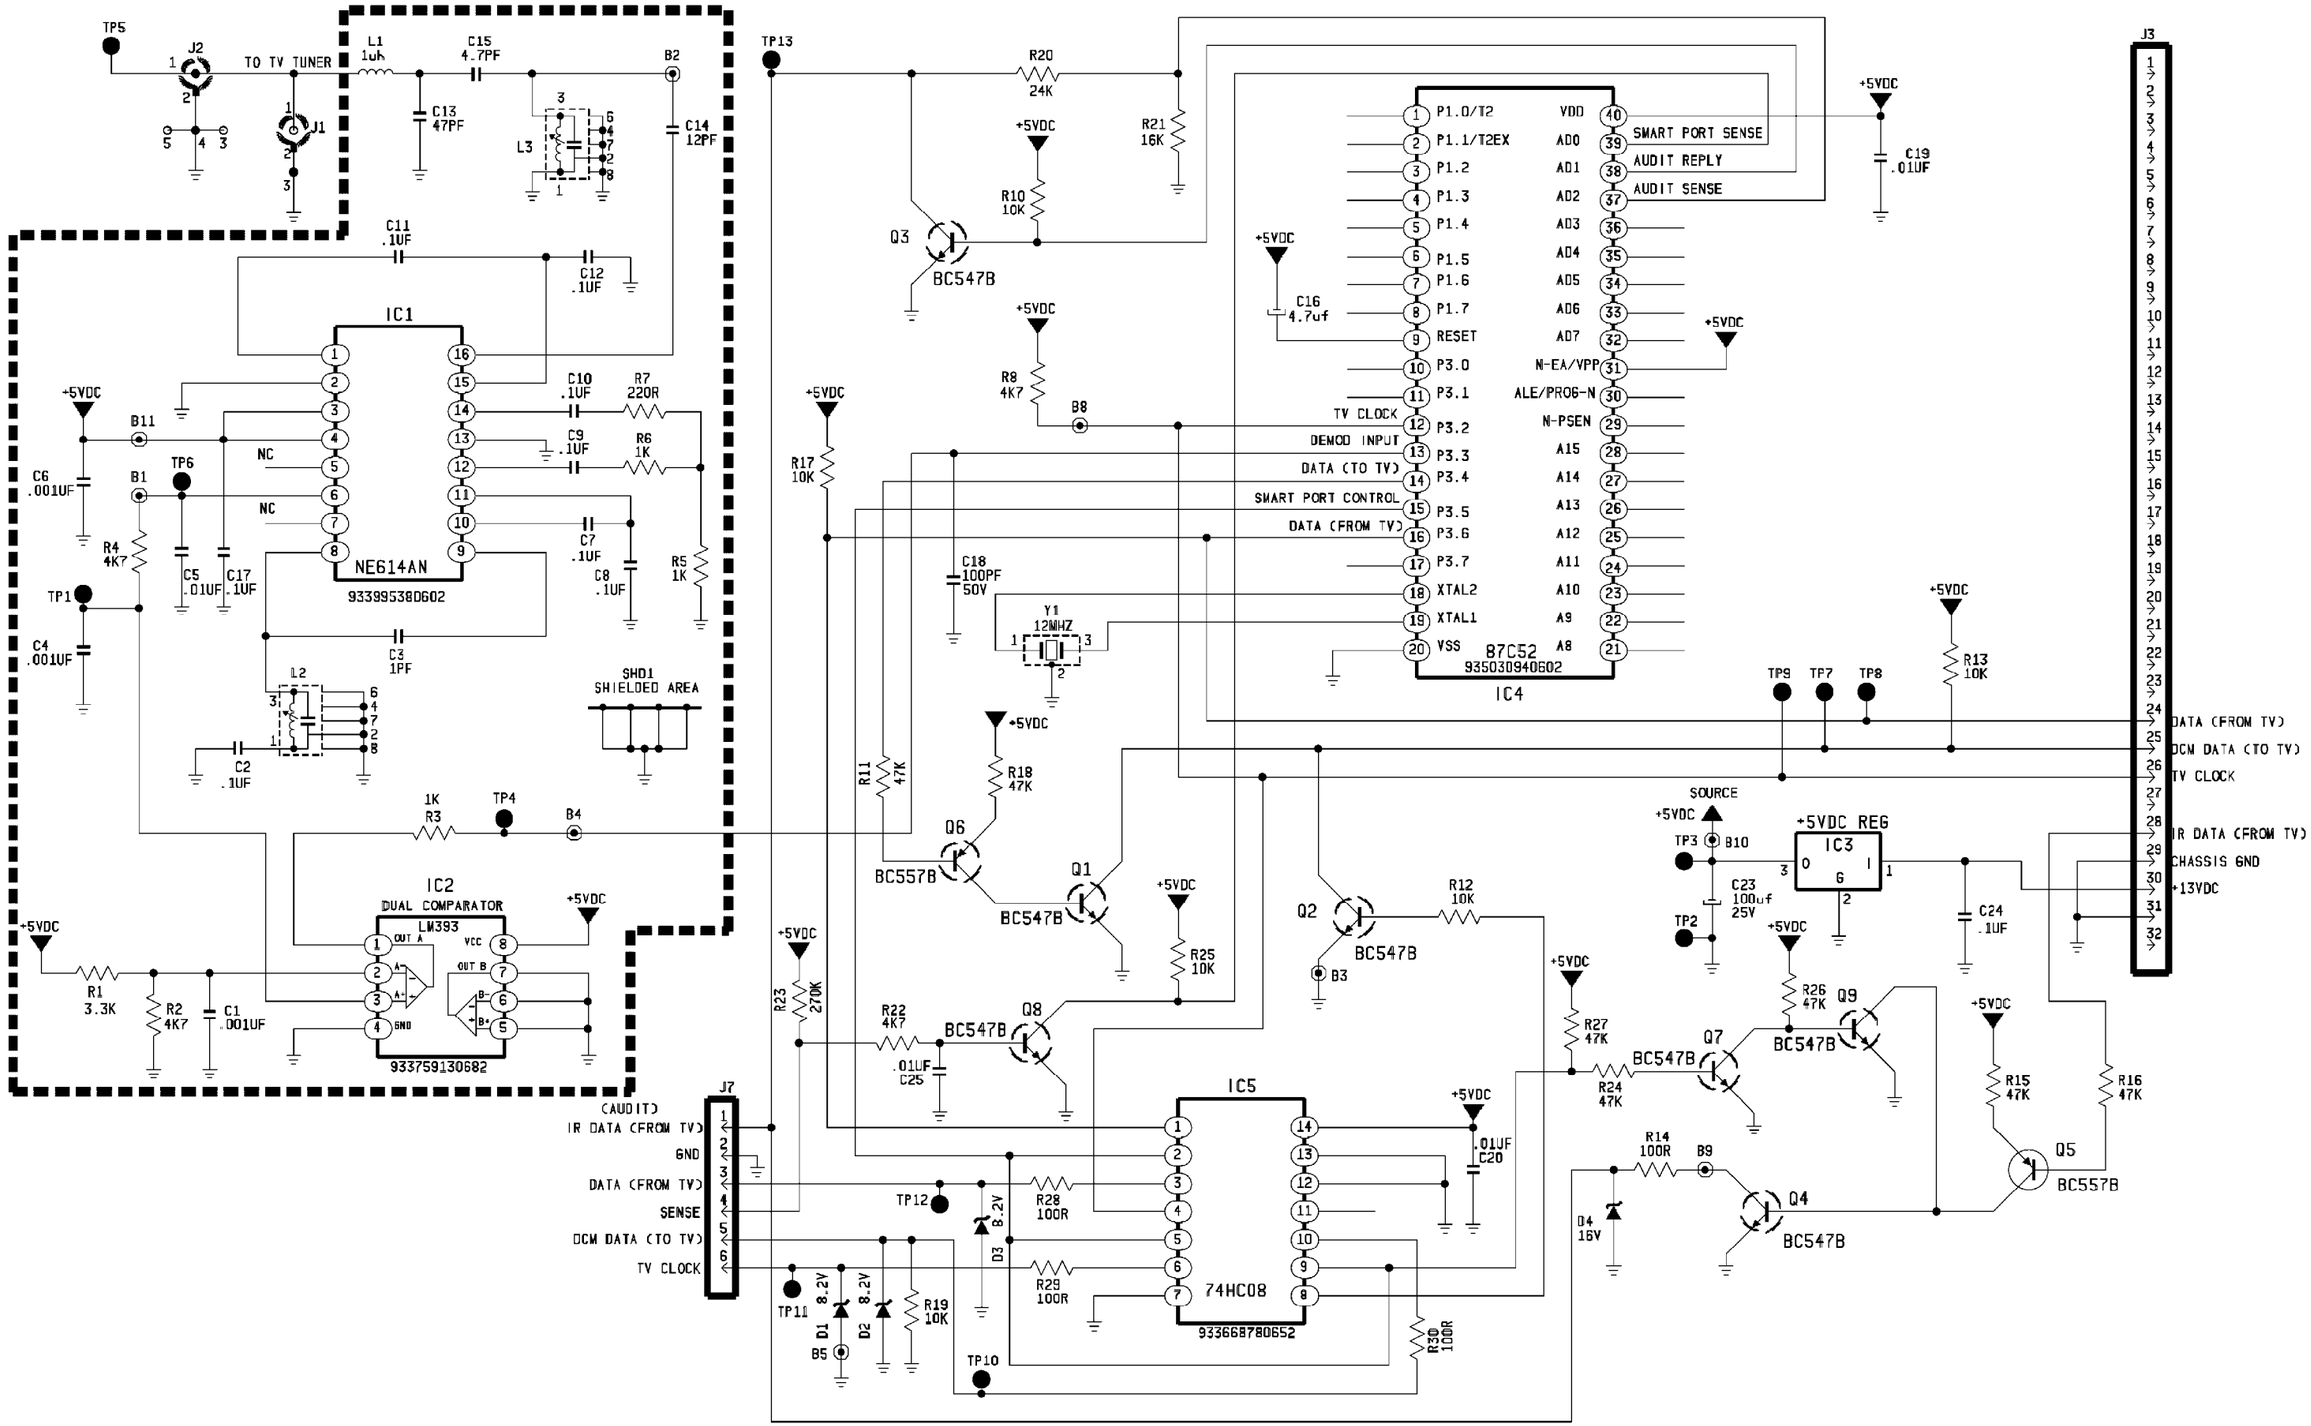

USED ONLY IN MODELS: CH1927C101 (7583) - ON COMMAND OCV TV VIDEO - A10602

A10602 OCV TV Module

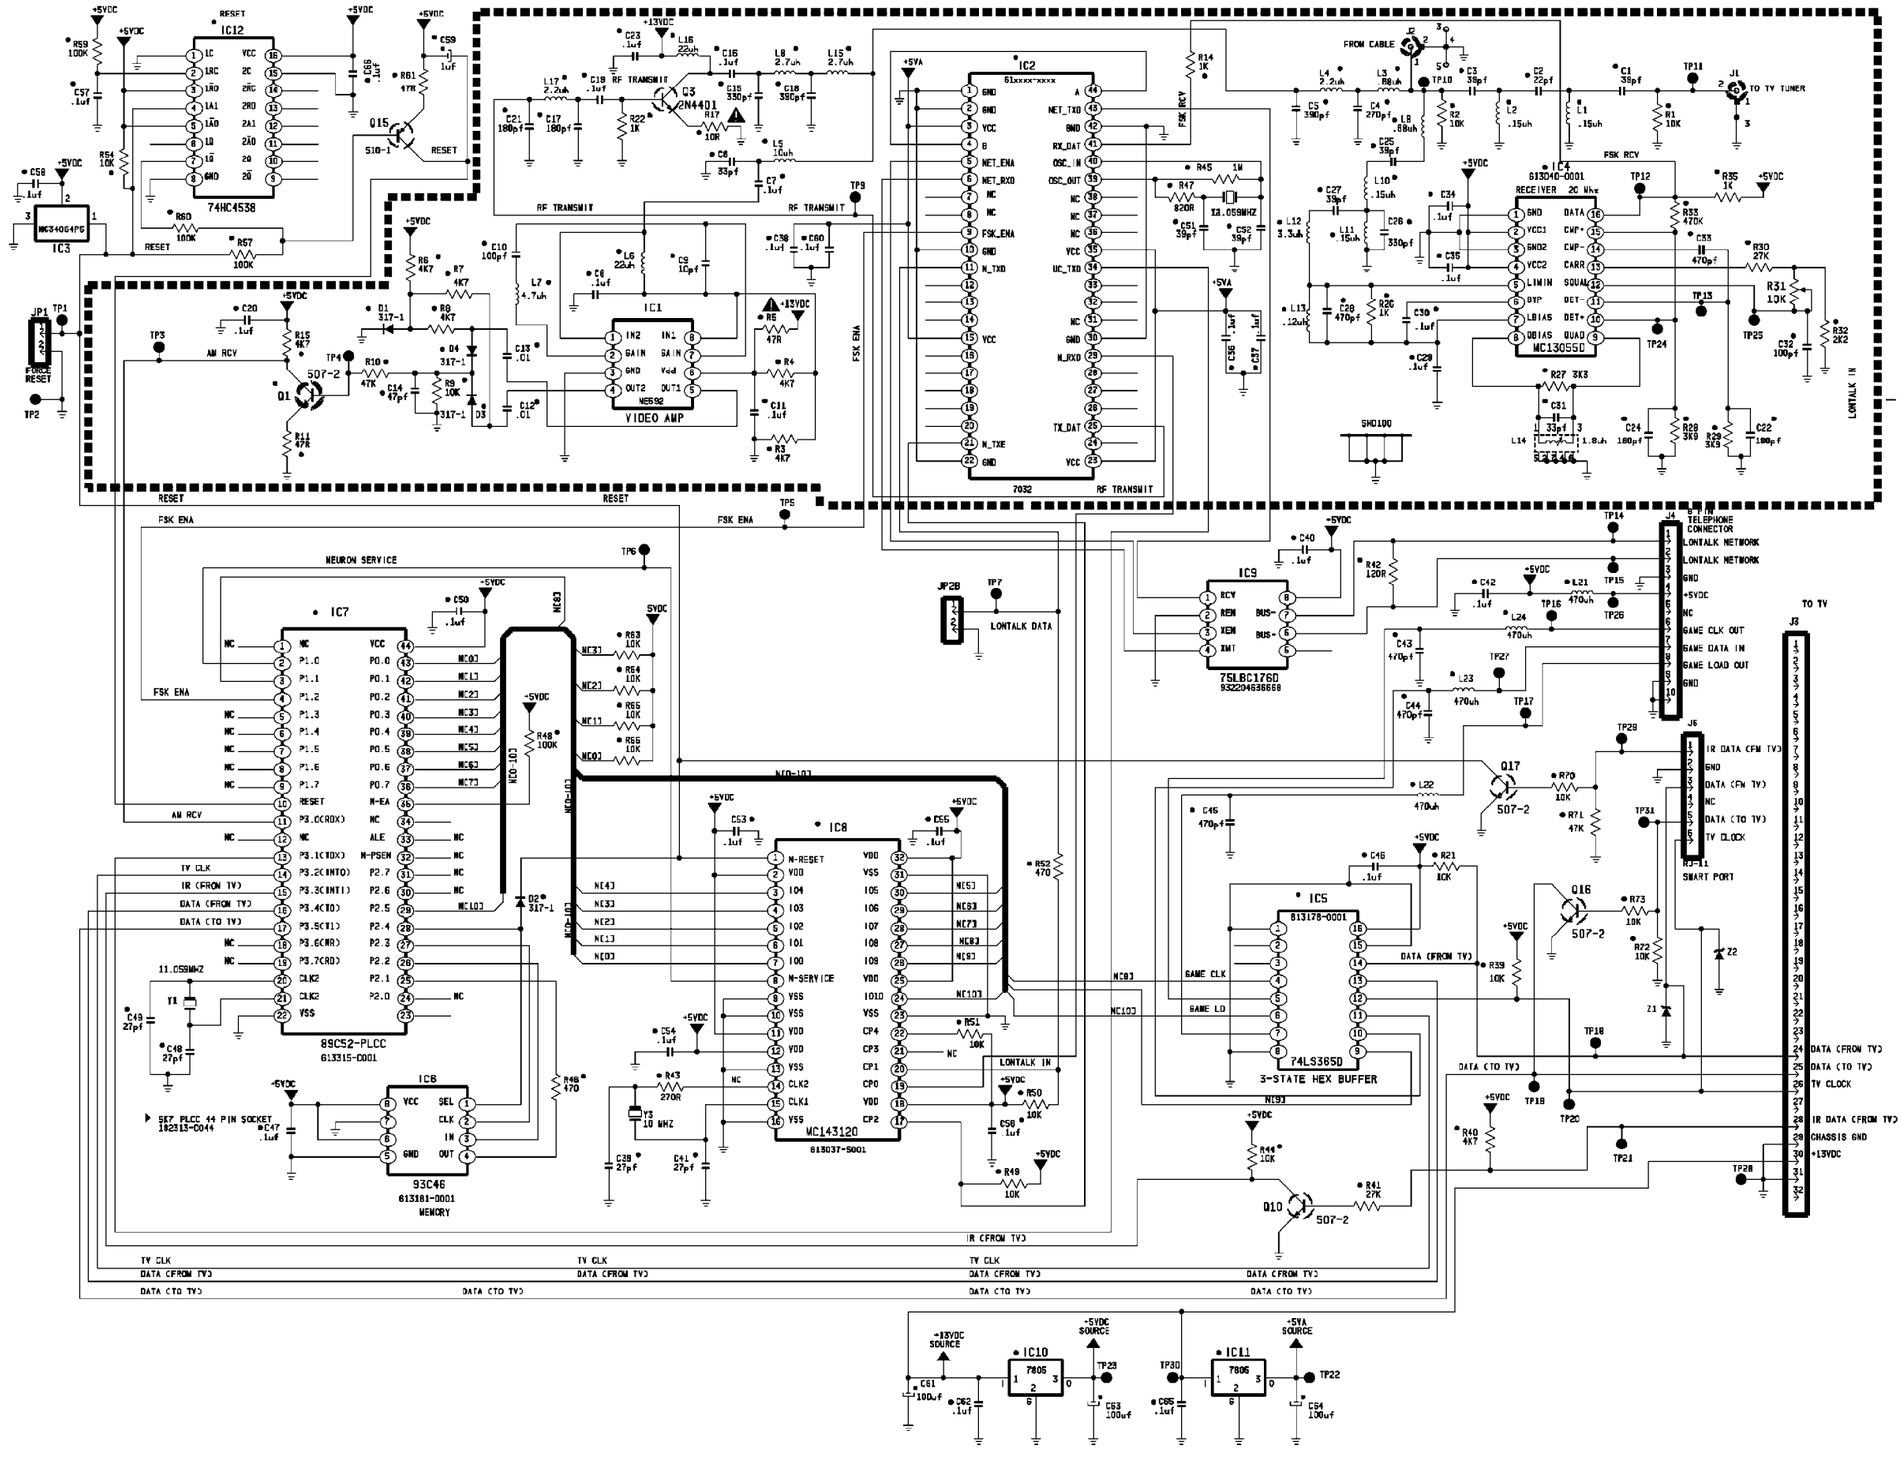

USED ONLY IN MODELS: SC2932C121, SC2932C221 (7583) - SCAN CONVERTER JACK PANEL - A10654

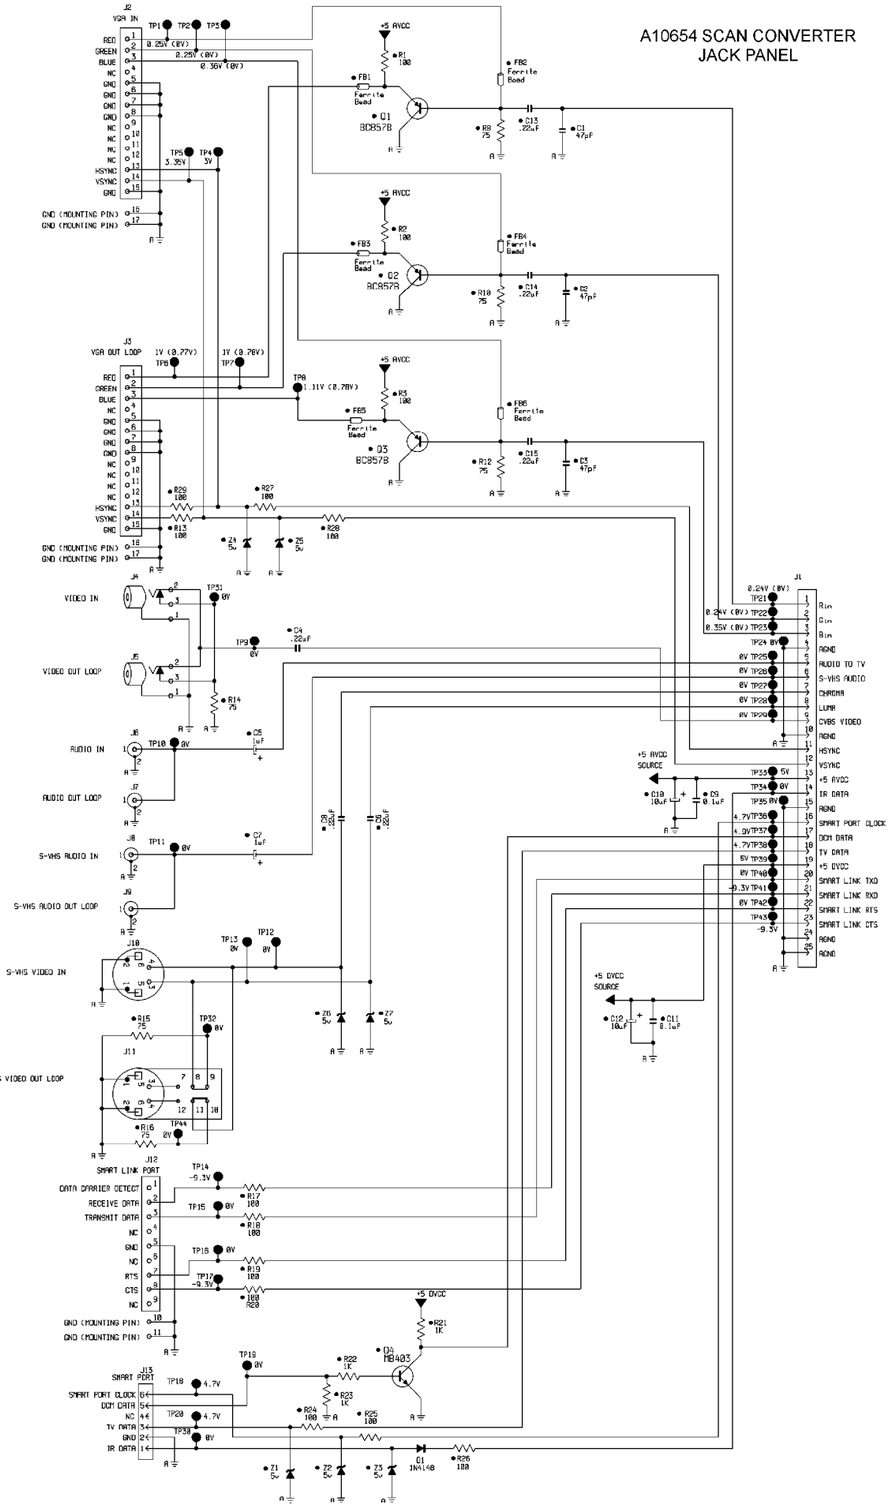

USED ONLY IN MODELS: SC2932C121, SC2932C221 (7583) - SCAN CONVERTER CARD SECT. 1 - AVJ222

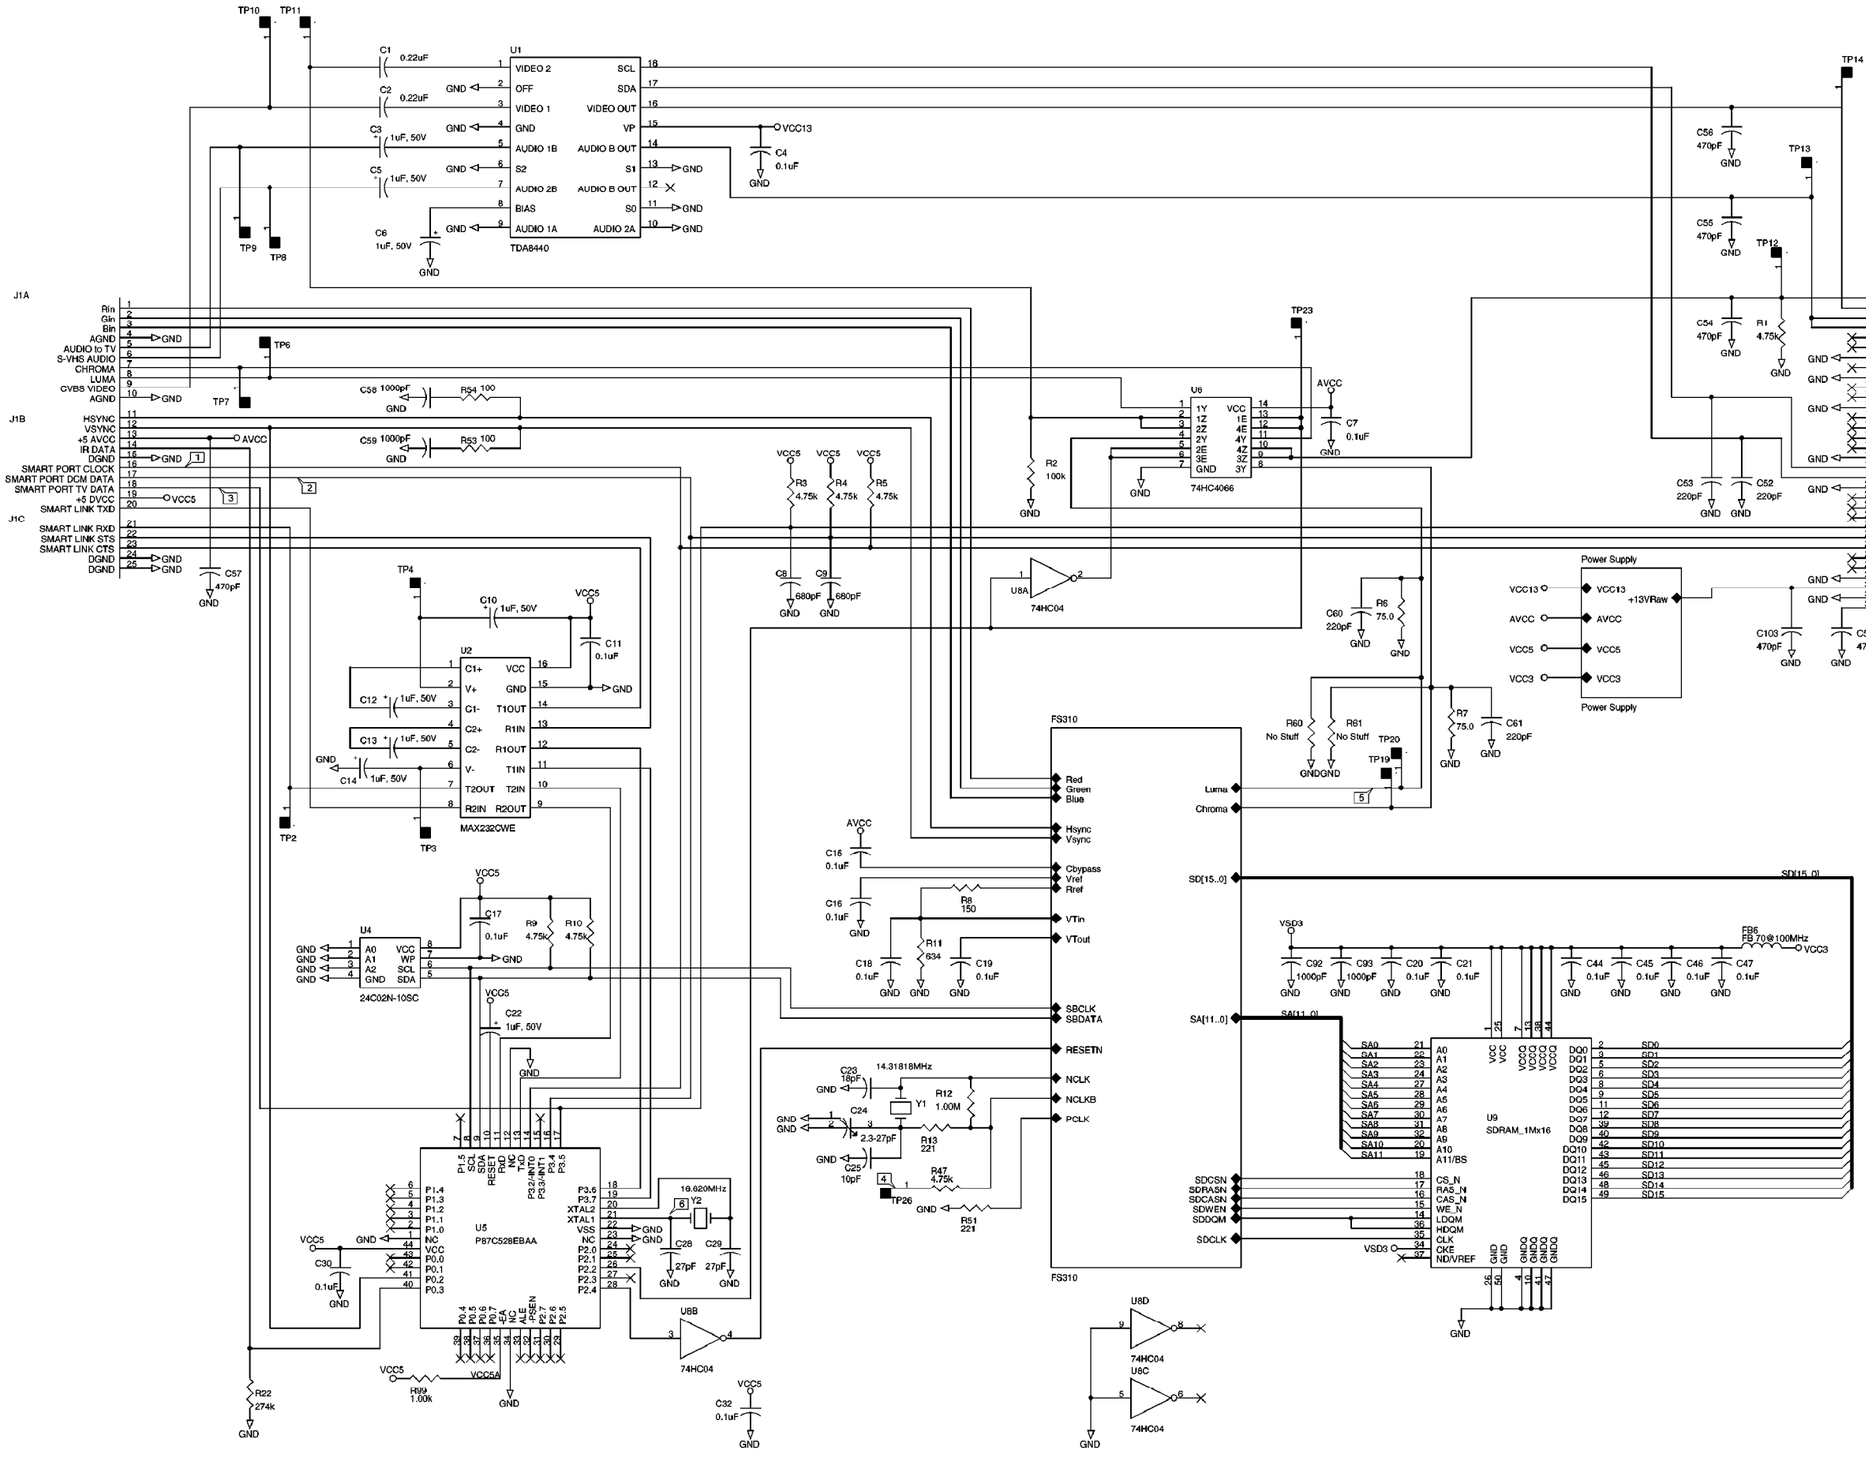

USED ONLY IN MODELS: SC2932C121, SC2932C221 (7583) - SCAN CONVERTER CARD SECT. 2 - AVJ222

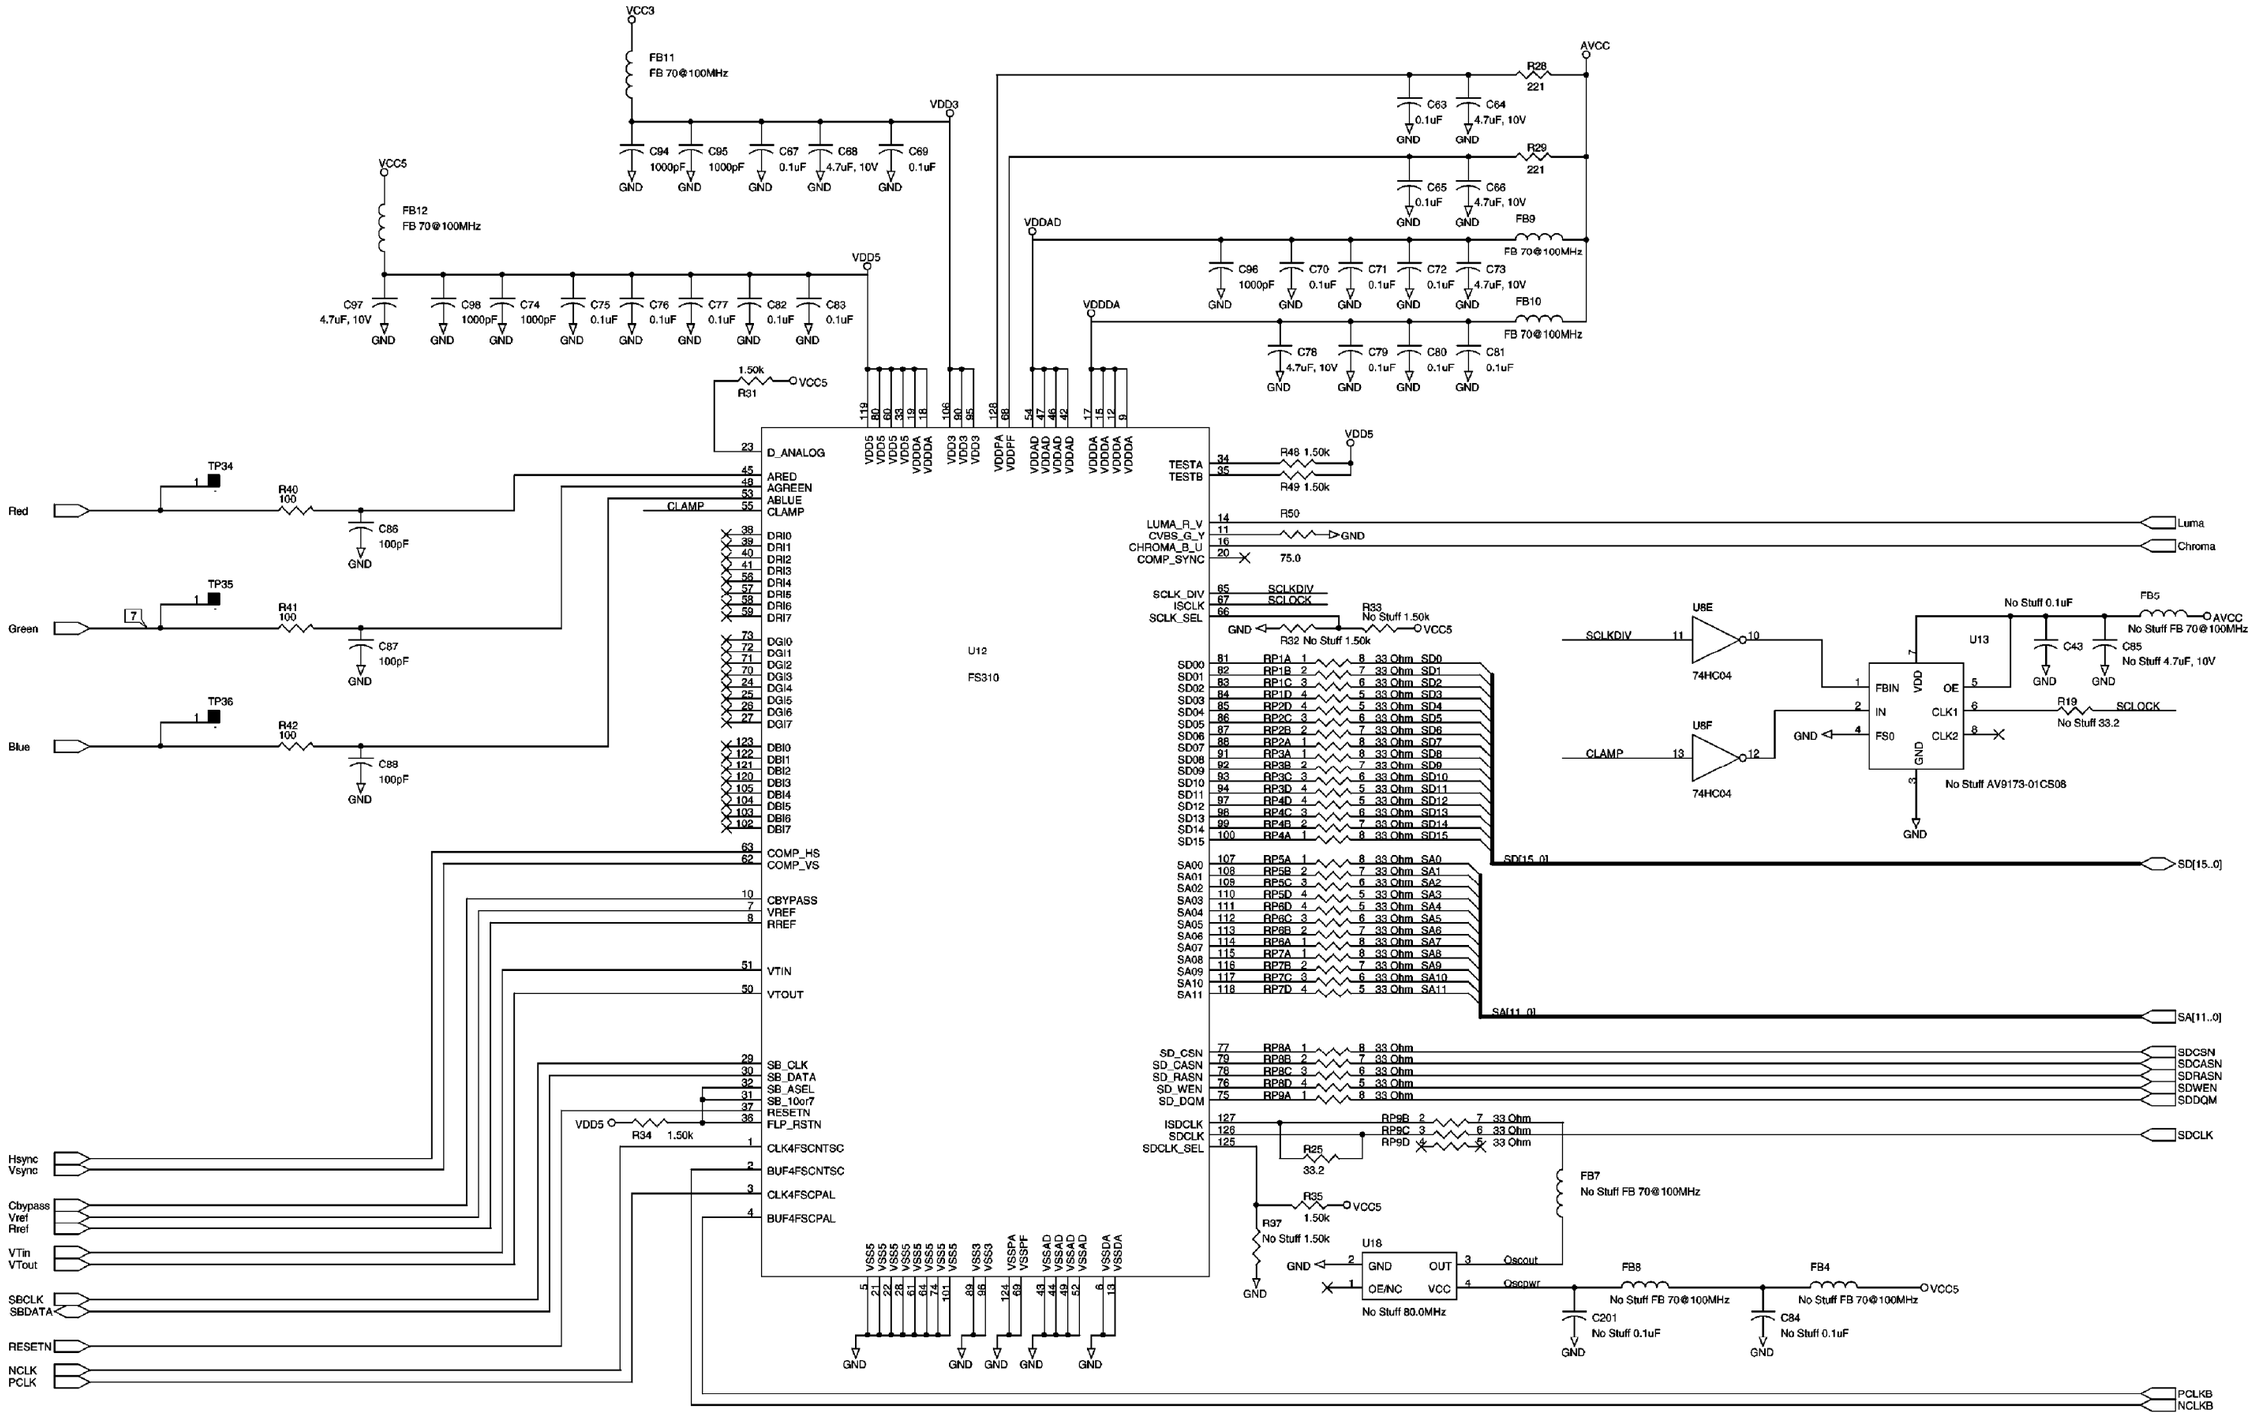

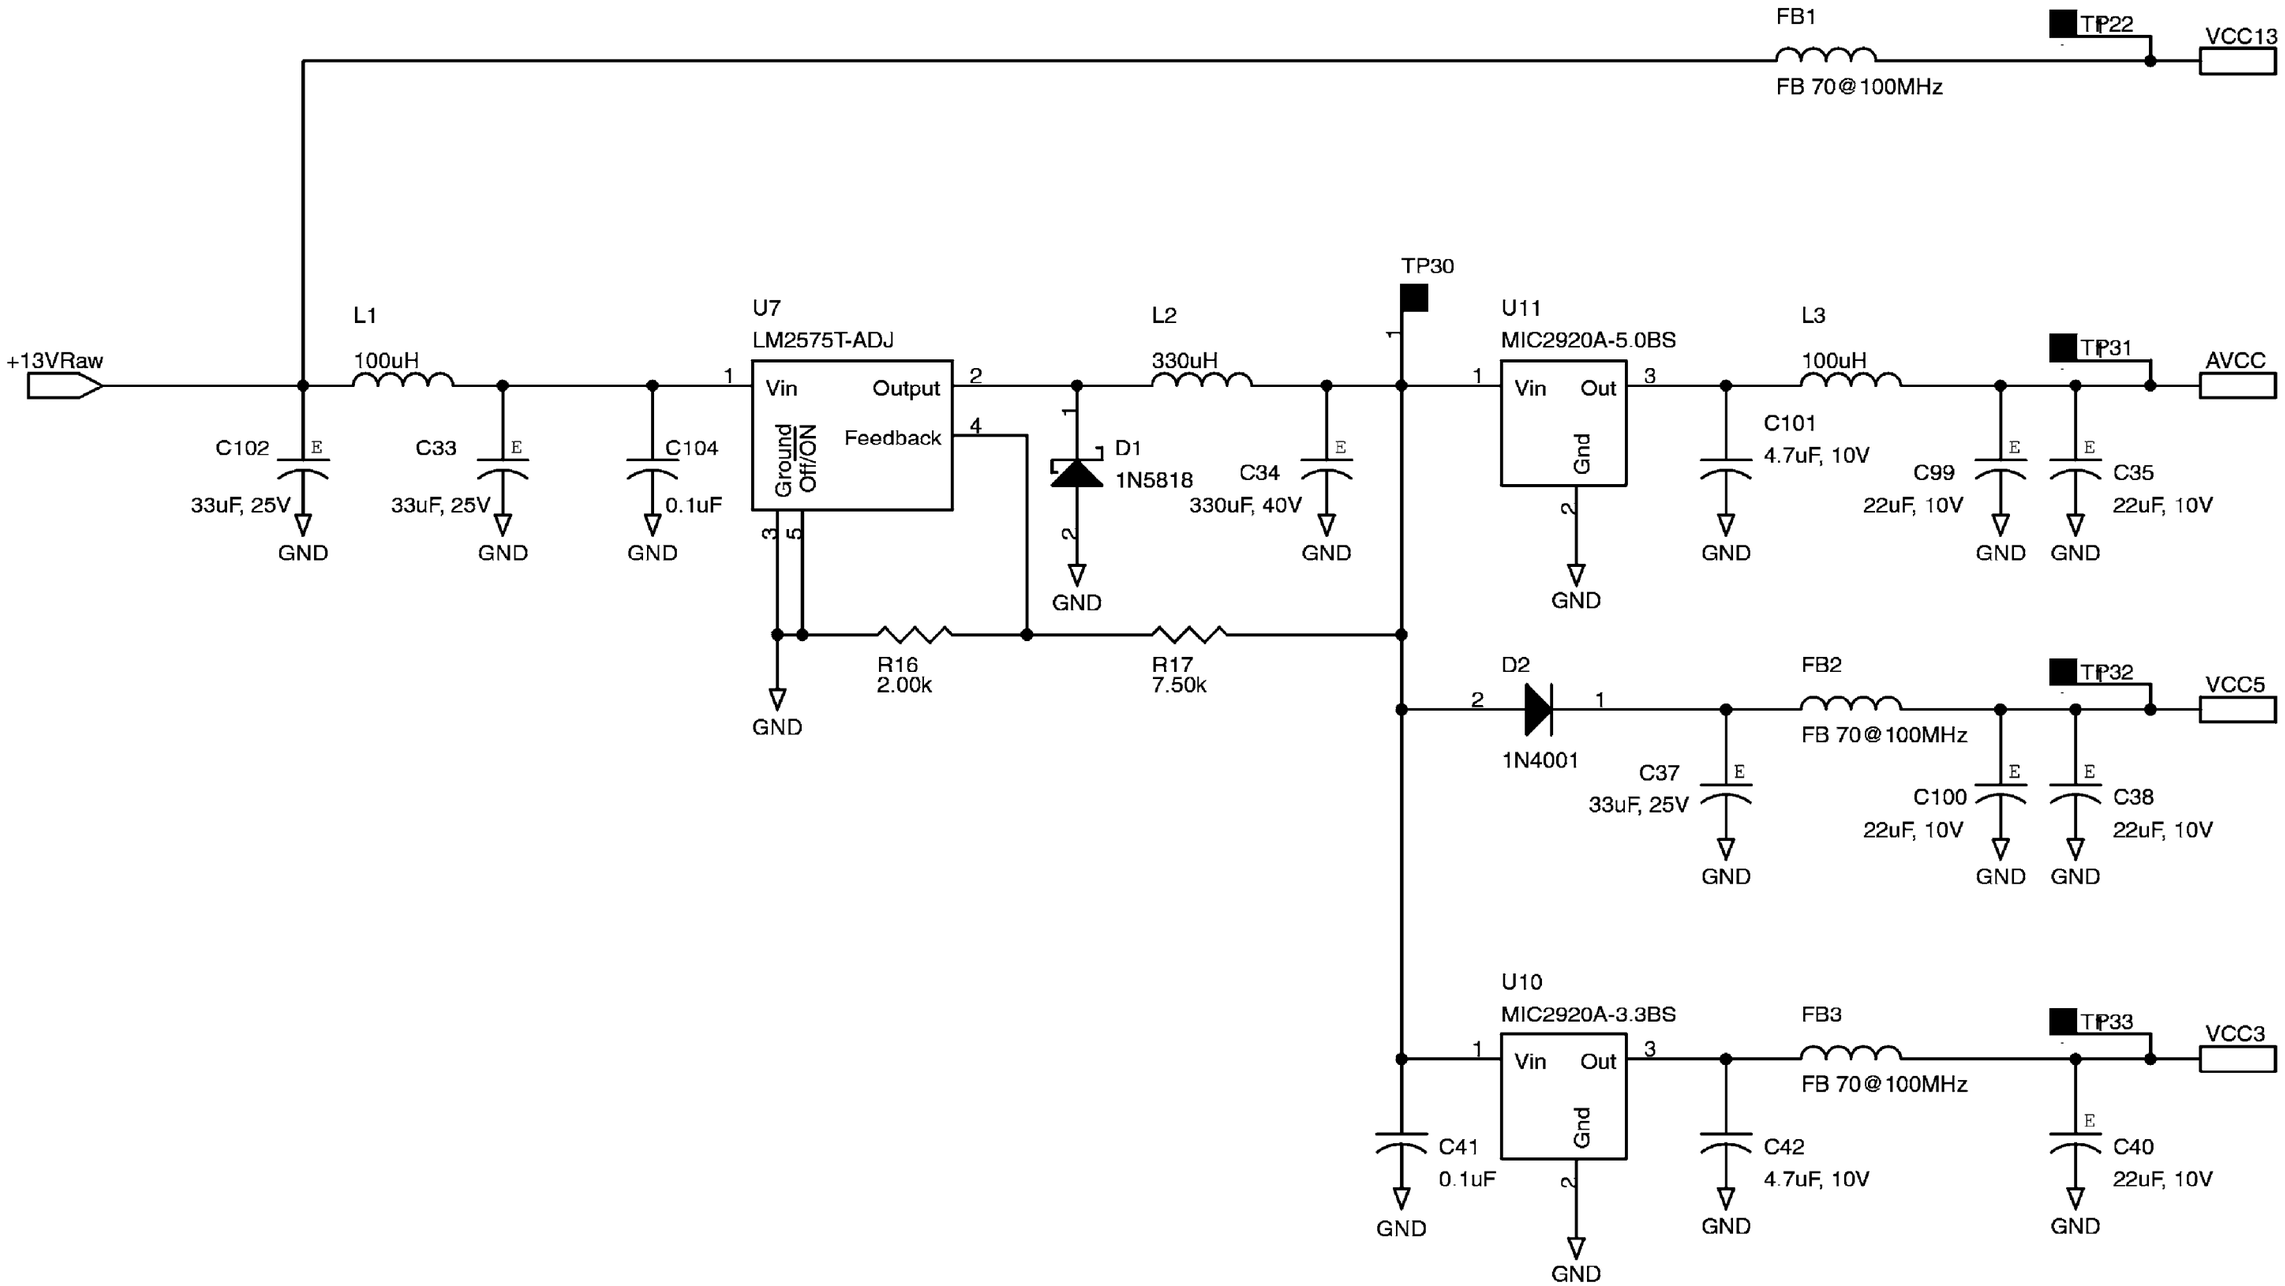
FB1
FB 70@100MHz
TP22
VCC13
+13VRaw
L1
100uH
C102
33uF, 25V
C33
33uF, 25V
C104
0.1uF
GND
U7
LM2575T-ADJ
Vin
Output
Ground
Off/ON
Feedback
L2
330uH
D1
1N5818
C34
330uF, 40V
TP30
U11
MIC2920A-5.0BS
Vin
Out
Gnd
L3
100uH
C101
4.7uF, 10V
C99
22uF, 10V
TP31
AVCC
C35
22uF, 10V
R16
2.00k
R17
7.50k
D2
1N4001
FB2
FB 70@100MHz
C37
33uF, 25V
C100
22uF, 10V
TP32
VCC5
C38
22uF, 10V
U10
MIC2920A-3.3BS
FB3
FB 70@100MHz
TP33
VCC3
C41
0.1uF
C42
4.7uF, 10V
C40
22uF, 10V

USED ONLY IN MODELS: SC3927C121, SC3925C121, PA9032C101 (7583) - ITV SCAN 3 CARD SECT. 1 - A10797

A10797 ITV Scan 3 Card Schematic

TO FRONT COMPUTER JACK

Computer Video In

Computer Video Inputs and Prefiltering

Clock

SCAN CONVERTER IC

FS401 7011

(FOCUS ENHANCEMENTS)

FS401

RGB Output Filtering

I2C BUS

Output DAC REF Network

Decoupling and filtering networks

Video Memory

0001 H1	3085-C G9
1000 A1	3085-D G9
1001 C3	3066-A G11
1005 D2	3066-B G11
1013 A1	3066-C G11
2000 A6	3066-D G11
2001 A6	3073-A G9
2002 A7	3073-B G9
2003 A11	3073-C H9
2004 A12	3073-D H9
2005 B6	3074-A H11
2006 B6	3074-B H11
2007 B7	3074-C G11
2008 B9	3074-D G11
2009 B10	3082-A H11
2010 B6	3082-B H11
2011 B11	3082-C H11
2012 C11	3082-D H11
2013 C9	3085-A H9
2014 C10	3085-B H9
2015 C5	3085-C H9
2016 E2	3085-D H9
2018 C11	3089 H8
2019 D11	3090-A H11
2020 C12	3090-B I11
2021 D9	3090-C I11
2022 D10	3090-D I11
2023 D11	3091-A I9
2024 C6	3091-B I9
2025 C7	3091-C I9
2026 E3	3091-D I9
2059 C5	3097 E1
2060 F10	3099 H3
2061 F10	3100 H3
2062 F11	3102 I11
2063 F11	3103 I4
2064 F10	3104 I8
2065 F10	3105 E1
2066 F11	3106 I4
2067 F11	3129 B3
2068 D2	3130 C3
2070 D3	3135 C7
2071 E3	5001 A5
2072 F4	5002 B9
2073 F4	5003 C9
2074 E1	5004 D9
2075 E1	5010 B5
2076 E1	5012 B5
2077 E1	5014 F12
2078 F1	5015 F1
2079 F1	5016 F1
2080 F1	5017 G1
2081 F2	5023 B3
2082 F2	6001 B4
2083 F2	6002 B4
2084 I6	6009 B1
2085 F1	6010 B1
2086 F1	6011 A10
2087 F1	6012 A11
2088 F2	6013 B10
2089 F2	6014 C11
2090 F2	6015 C10
2091 G1	6016 D11
2092 G1	7000 A7
2093 G1	7001-A B12
2094 G2	7001-B A12
2095 G2	7002-A E10
2096 G2	7002-B D12
2097 G3	7003 B10
2098 G3	7004 C10
2132 B3	7005 D10
3001 H2	7006 C8
3002 D3	7007 B7
3003 D3	7010 B7
3004 A6	7011 D4
3005 A5	7012 G10
3006 A9	7013 H3
3007 A10	F001 C3
3008 A11	F002 D3
3009 A11	F003 D5
3010 A11	F004 B5
3011 B9	F005 A7
3012 B11	F006 A7
3013 B10	F007 B7
3014 B11	F008 E3
3015 B11	F011 H4
3016 C11	F012 H4
3017 C11	
3018 C9	
3019 C10	
3020 C11	
3021 C11	
3022 D11	
3023 D11	
3024 D9	
3025 E9	
3026 E9	
3027 E9	
3028 E11	
3029 C8	
3030 C7	
3031 C8	
3033 B6	
3049 B5	
3052 B4	
3053 B6	
3056 F3	
3057 C5	
3058 F4	
3059 C4	
3060 D5	
3061 C3	
3062 C3	
3063 F3	
3064 F4	
3065-A G9	
3065-B G9	

USED ONLY IN MODELS: SC3927C121, SC3925C121, PA9032C101 (7583) - ITV SCAN 3 CARD SECT. 2 - A10797

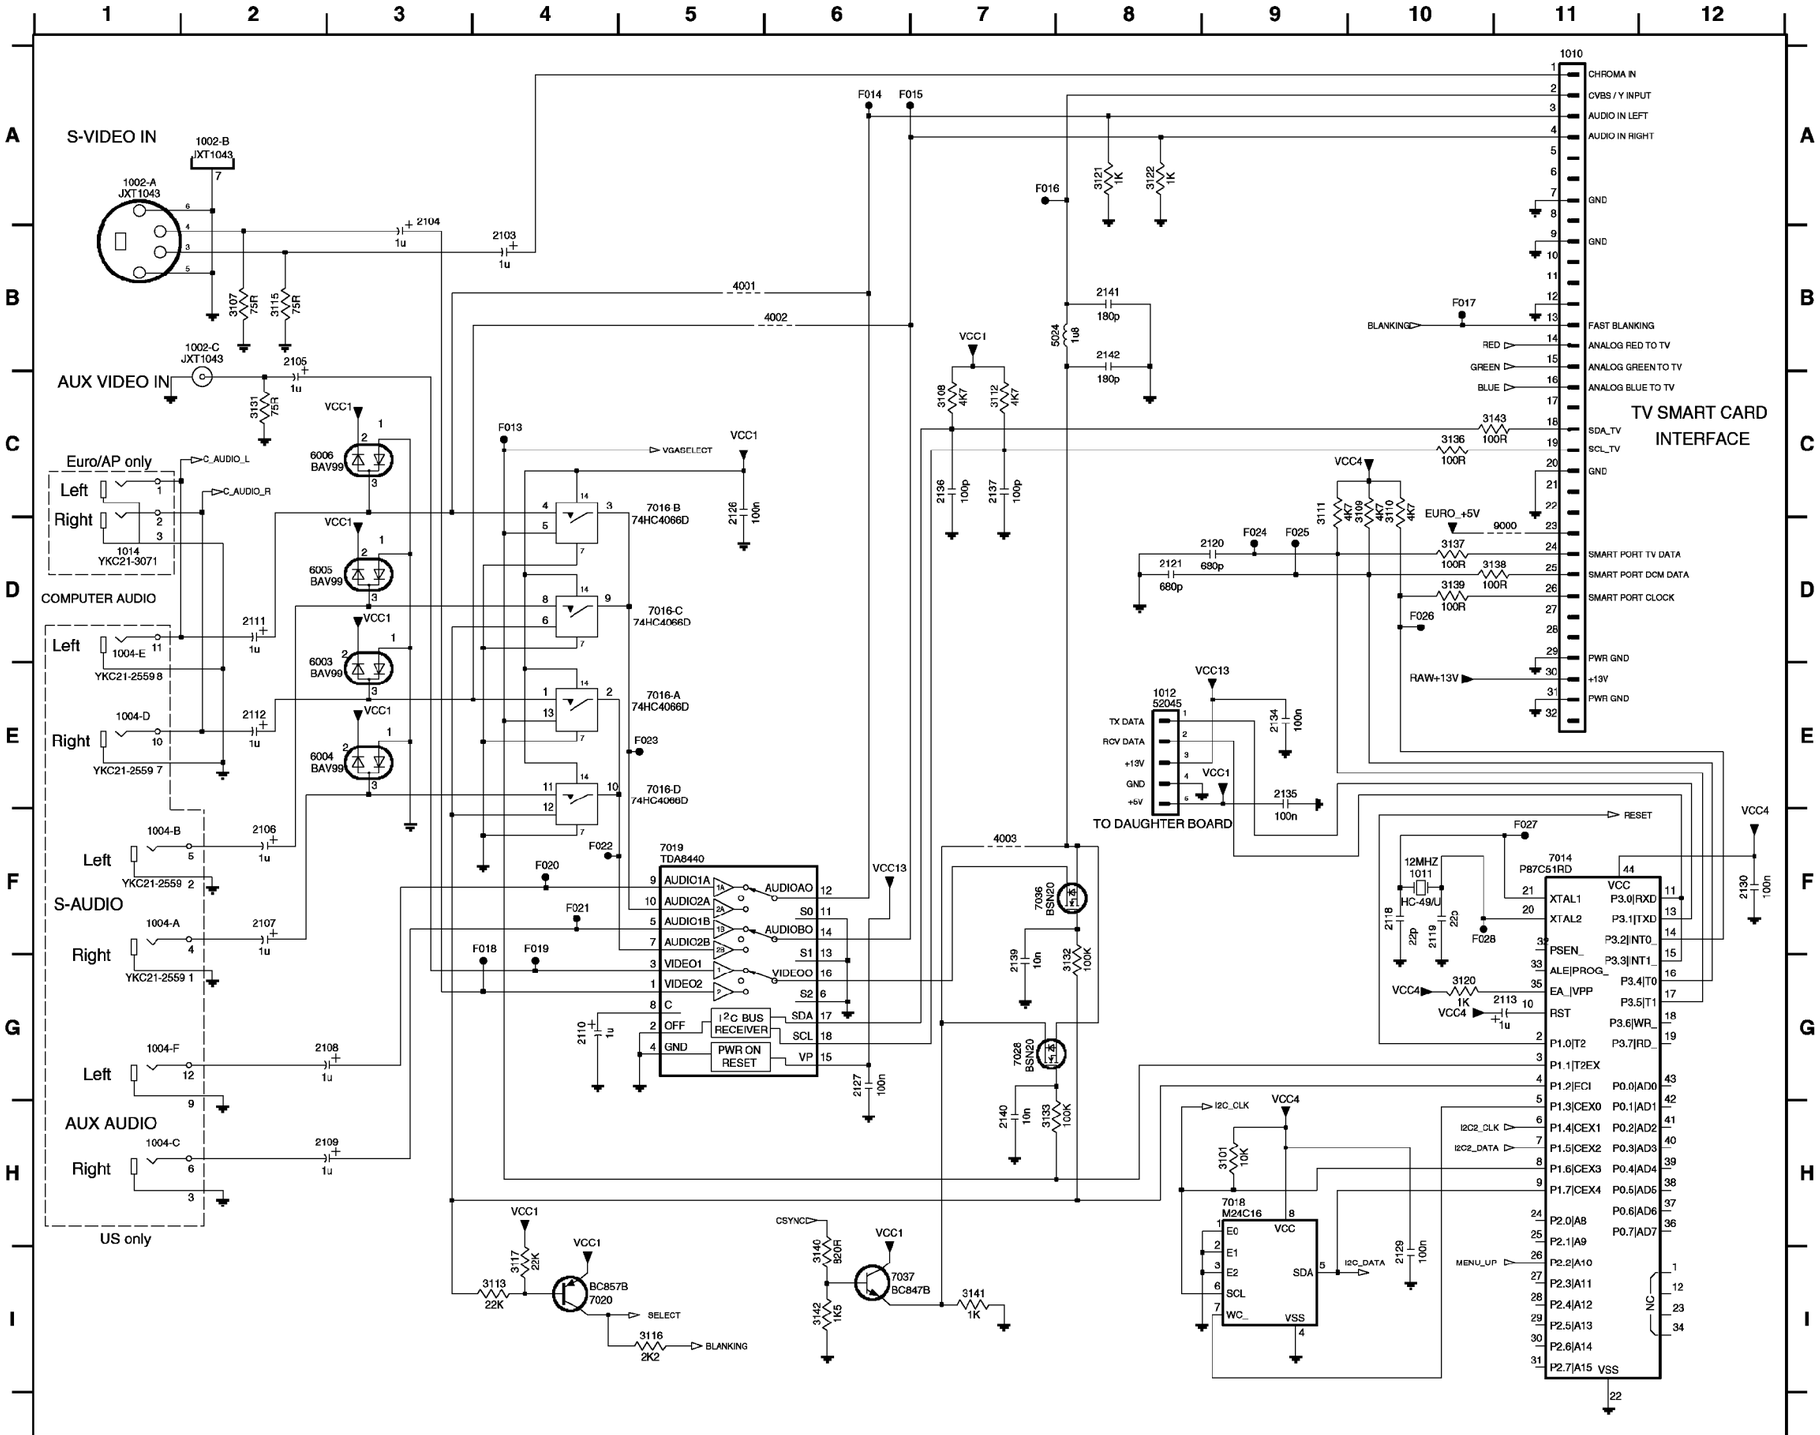

1002-A A1
1002-B A2
1002-C B2
1004-A F1
1004-B F1
1004-C H1
1004-D E1
1004-E D1
1004-F G1
1010 A11
1011 F10
1012 E8
1014 D1
2103 B4
2104 A3
2105 B2
2106 F2
2107 F2
2108 G3
2109 H3
2110 G4
2111 D2
2112 E2
2113 G11
2118 F10
2119 F10
2120 D9
2121 D8
2126 C5
2127 G6
2129 I10
2130 F12
2134 E9
2135 E9
2136 C7
2137 C7
2139 G7
2140 H7
2141 B8
2142 B8
3101 H9
3107 B2
3108 C7
3109 C10
3110 C10
3111 C9
3112 C7
3113 I4
3115 B2
3116 I5
3117 I4
3120 G10
3121 A8
3122 A8
3131 C2
3132 G8
3133 H7
3136 C10
3137 D10
3138 D11
3139 D10
3140 I6
3141 I7
3142 I6
3143 C11
4001 B5
4002 B6
4003 F7
5024 B8
6003 E2
6004 E2
6005 D2
6006 C2
7014 F11
7016-A E5
7016-B C5
7016-C D5
7016-D E5
7018 H9
7019 F5
7020 I4
7028 G7
7036 F7
7037 I6
9000 D11
F013 C4
F014 A6
F015 A7
F016 A7
F017 B10
F018 F4
F019 F4
F020 F4
F021 F4
F022 F4
F023 E5
F024 D9
F025 D9
F026 D10
F027 F11
F028 F10

Ref Des	APEN/TSC	APEPAL	USA
1002-A	NOT USED	NOT USED	242203300365 JXT1043
1002-B	NOT USED	NOT USED	242203300365 JXT1043
1002-C	NOT USED	NOT USED	242203300365 JXT1043
1004-A	NOT USED	NOT USED	242202604827 YKC21-2559
1004-B	NOT USED	NOT USED	242202604827 YKC21-2559
1004-C	NOT USED	NOT USED	242202604827
1004-D	NOT USED	NOT USED	242202604827 YKC21-2559
1004-E	NOT USED	NOT USED	242202604827 YKC21-2559
1004-F	NOT USED	NOT USED	242202604827
1014	242202604635 YKC21-3C/1	242202604635 YKC21-3C/1	NOT USED
2103	NOT USED	NOT USED	319803081080 1u
2104	NOT USED	NOT USED	319803081080 1u
2105	NOT USED	NOT USED	319803081080 1u
2106	NOT USED	NOT USED	319803081080 1u
2107	NOT USED	NOT USED	319803081080 1u
2108	NOT USED	NOT USED	319803081080 1u
2109	NOT USED	NOT USED	319803081080 1u
2110	NOT USED	NOT USED	319803081080 1u
2127	NOT USED	NOT USED	319801701040 100n
2136	NOT USED	NOT USED	319801601010 100p
2137	NOT USED	NOT USED	319801601010 100p
2139	NOT USED	NOT USED	319801701030 10n
2140	NOT USED	NOT USED	319801701030 10n
3107	NOT USED	NOT USED	319802158210 820R
3108	NOT USED	NOT USED	319802154720 4K7
3112	NOT USED	NOT USED	319802154720 4K7
3115	NOT USED	NOT USED	319802157590 75R
3116	NOT USED	NOT USED	319802152220 2K2
3131	NOT USED	NOT USED	319802157590 75R
3132	NOT USED	NOT USED	319802151040 100K
3133	NOT USED	NOT USED	319802151040 100K
4001	315802190020	315802190020	NOT USED
4002	315802190020	315802190020	NOT USED
4003	315802190020	315802190020	NOT USED
6004	NOT USED	NOT USED	319801010620 BAV99
6005	NOT USED	NOT USED	319801010620 BAV99
7016-A	NOT USED	NOT USED	933714420653 74HC4066D
7016-B	NOT USED	NOT USED	933714420653 74HC4066D
7016-C	NOT USED	NOT USED	933714420653 74HC4066D
7016-D	NOT USED	NOT USED	933714420653 74HC4066D
7019	NOT USED	NOT USED	933618070112 TDA9440
7028	NOT USED	NOT USED	934012500235 BSN20
7036	NOT USED	NOT USED	934012500235 BSN20
9000	032217900148	032217900148	NOT USED

USED ONLY IN MODELS: SC3927C121, SC3925C121, PA9032C101 (7583) - ITV SCAN 3 CARD SECT. 3 - A10797

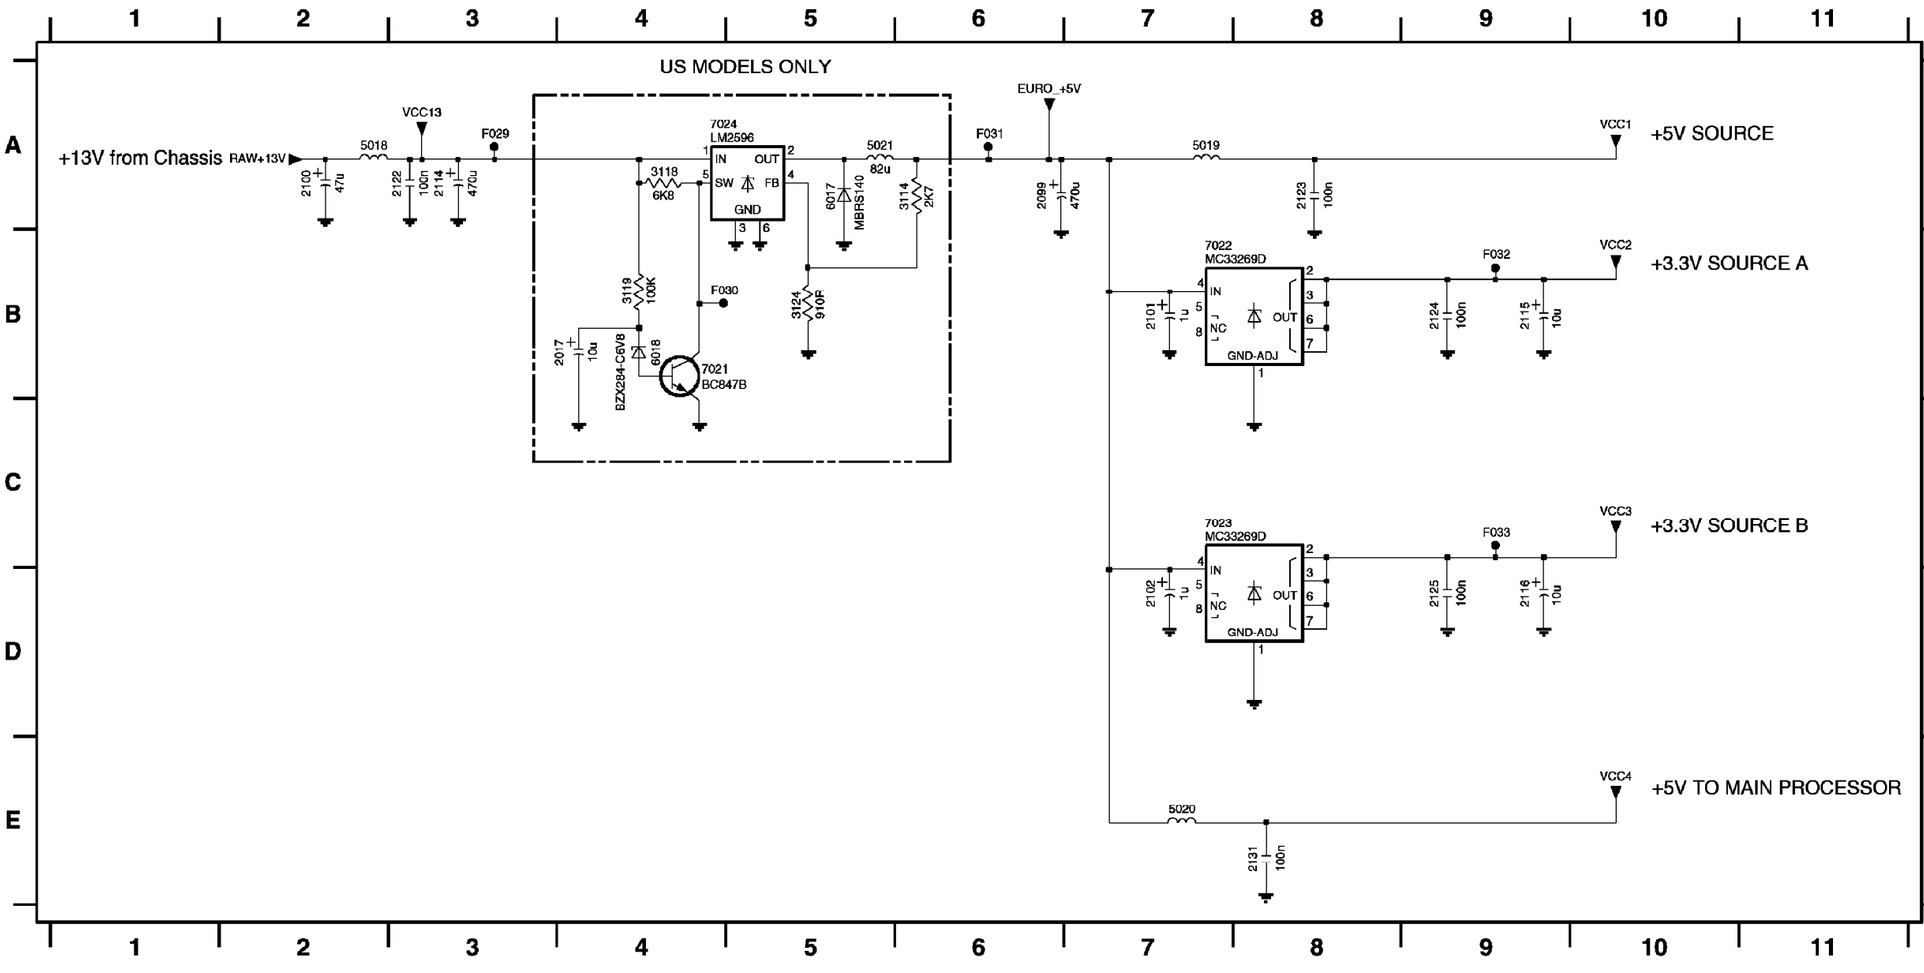

2017 B4
2099 A6
2100 A2
2101 B7
2102 D7
2114 A3
2115 B9
2116 D9
2122 A3
2123 A8
2124 B9
2125 D9
2131 E8
3114 A6
3118 A4
3119 B4
3124 B5
5018 A2
5019 A7
5020 E7
5021 A5
6007 A5
6008 B4
7021 B4
7022 B7
7023 C7
7024 A4
F029 A3
F030 B4
F031 A6
F032 B9
F033 C9

Ref Des	APENTSC	APEPAL	USA
2017	NOT USED	NOT USED	202202900401 10u
2100	NOT USED	NOT USED	319802534790 47u
2114	NOT USED	NOT USED	202002191376 470u
2122	NOT USED	NOT USED	319901701040 100n
3114	NOT USED	NOT USED	319802152720 2K7
3118	NOT USED	NOT USED	319802156820 6K8
3119	NOT USED	NOT USED	319802151040 100K
3124	NOT USED	NOT USED	232273469101 910R
5018	NOT USED	NOT USED	319801890060
5021	NOT USED	NOT USED	242253595408 82u
6017	NOT USED	NOT USED	932207026668 MBRS140
6018	NOT USED	NOT USED	934039640115 BZX284-C6V8
7021	NOT USED	NOT USED	319801042030 BC847B
7024	NOT USED	NOT USED	932213086685 LM2596
F029	NOT USED	NOT USED	testpoint_1.9

Net 1 Panel Schematic

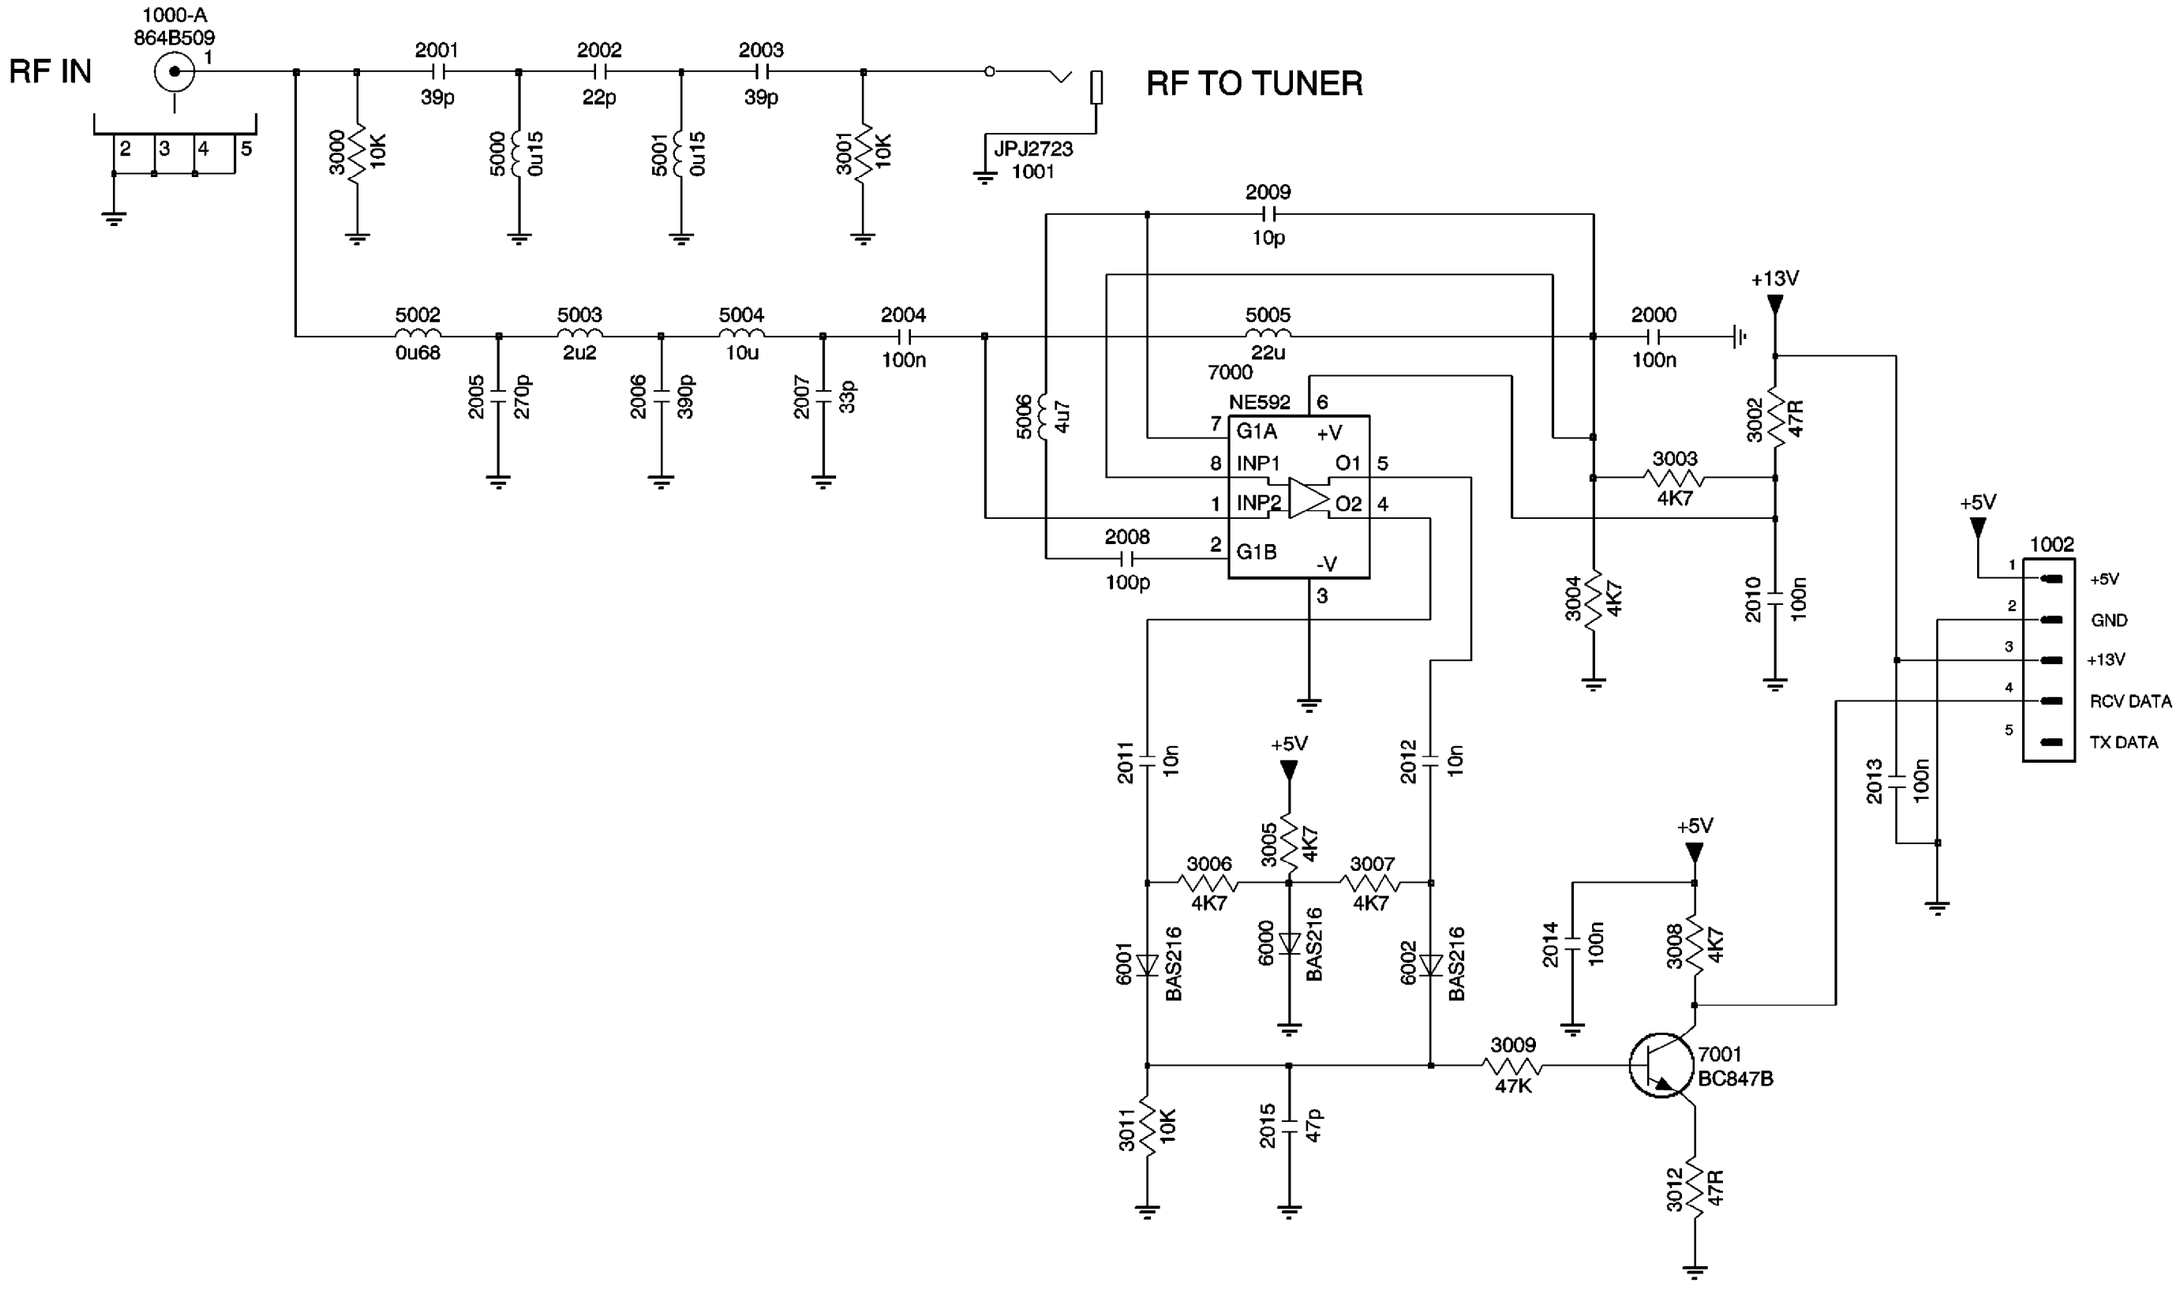

All Models (7583) - MAIN CHASSIC & CRT (TOP VIEW)

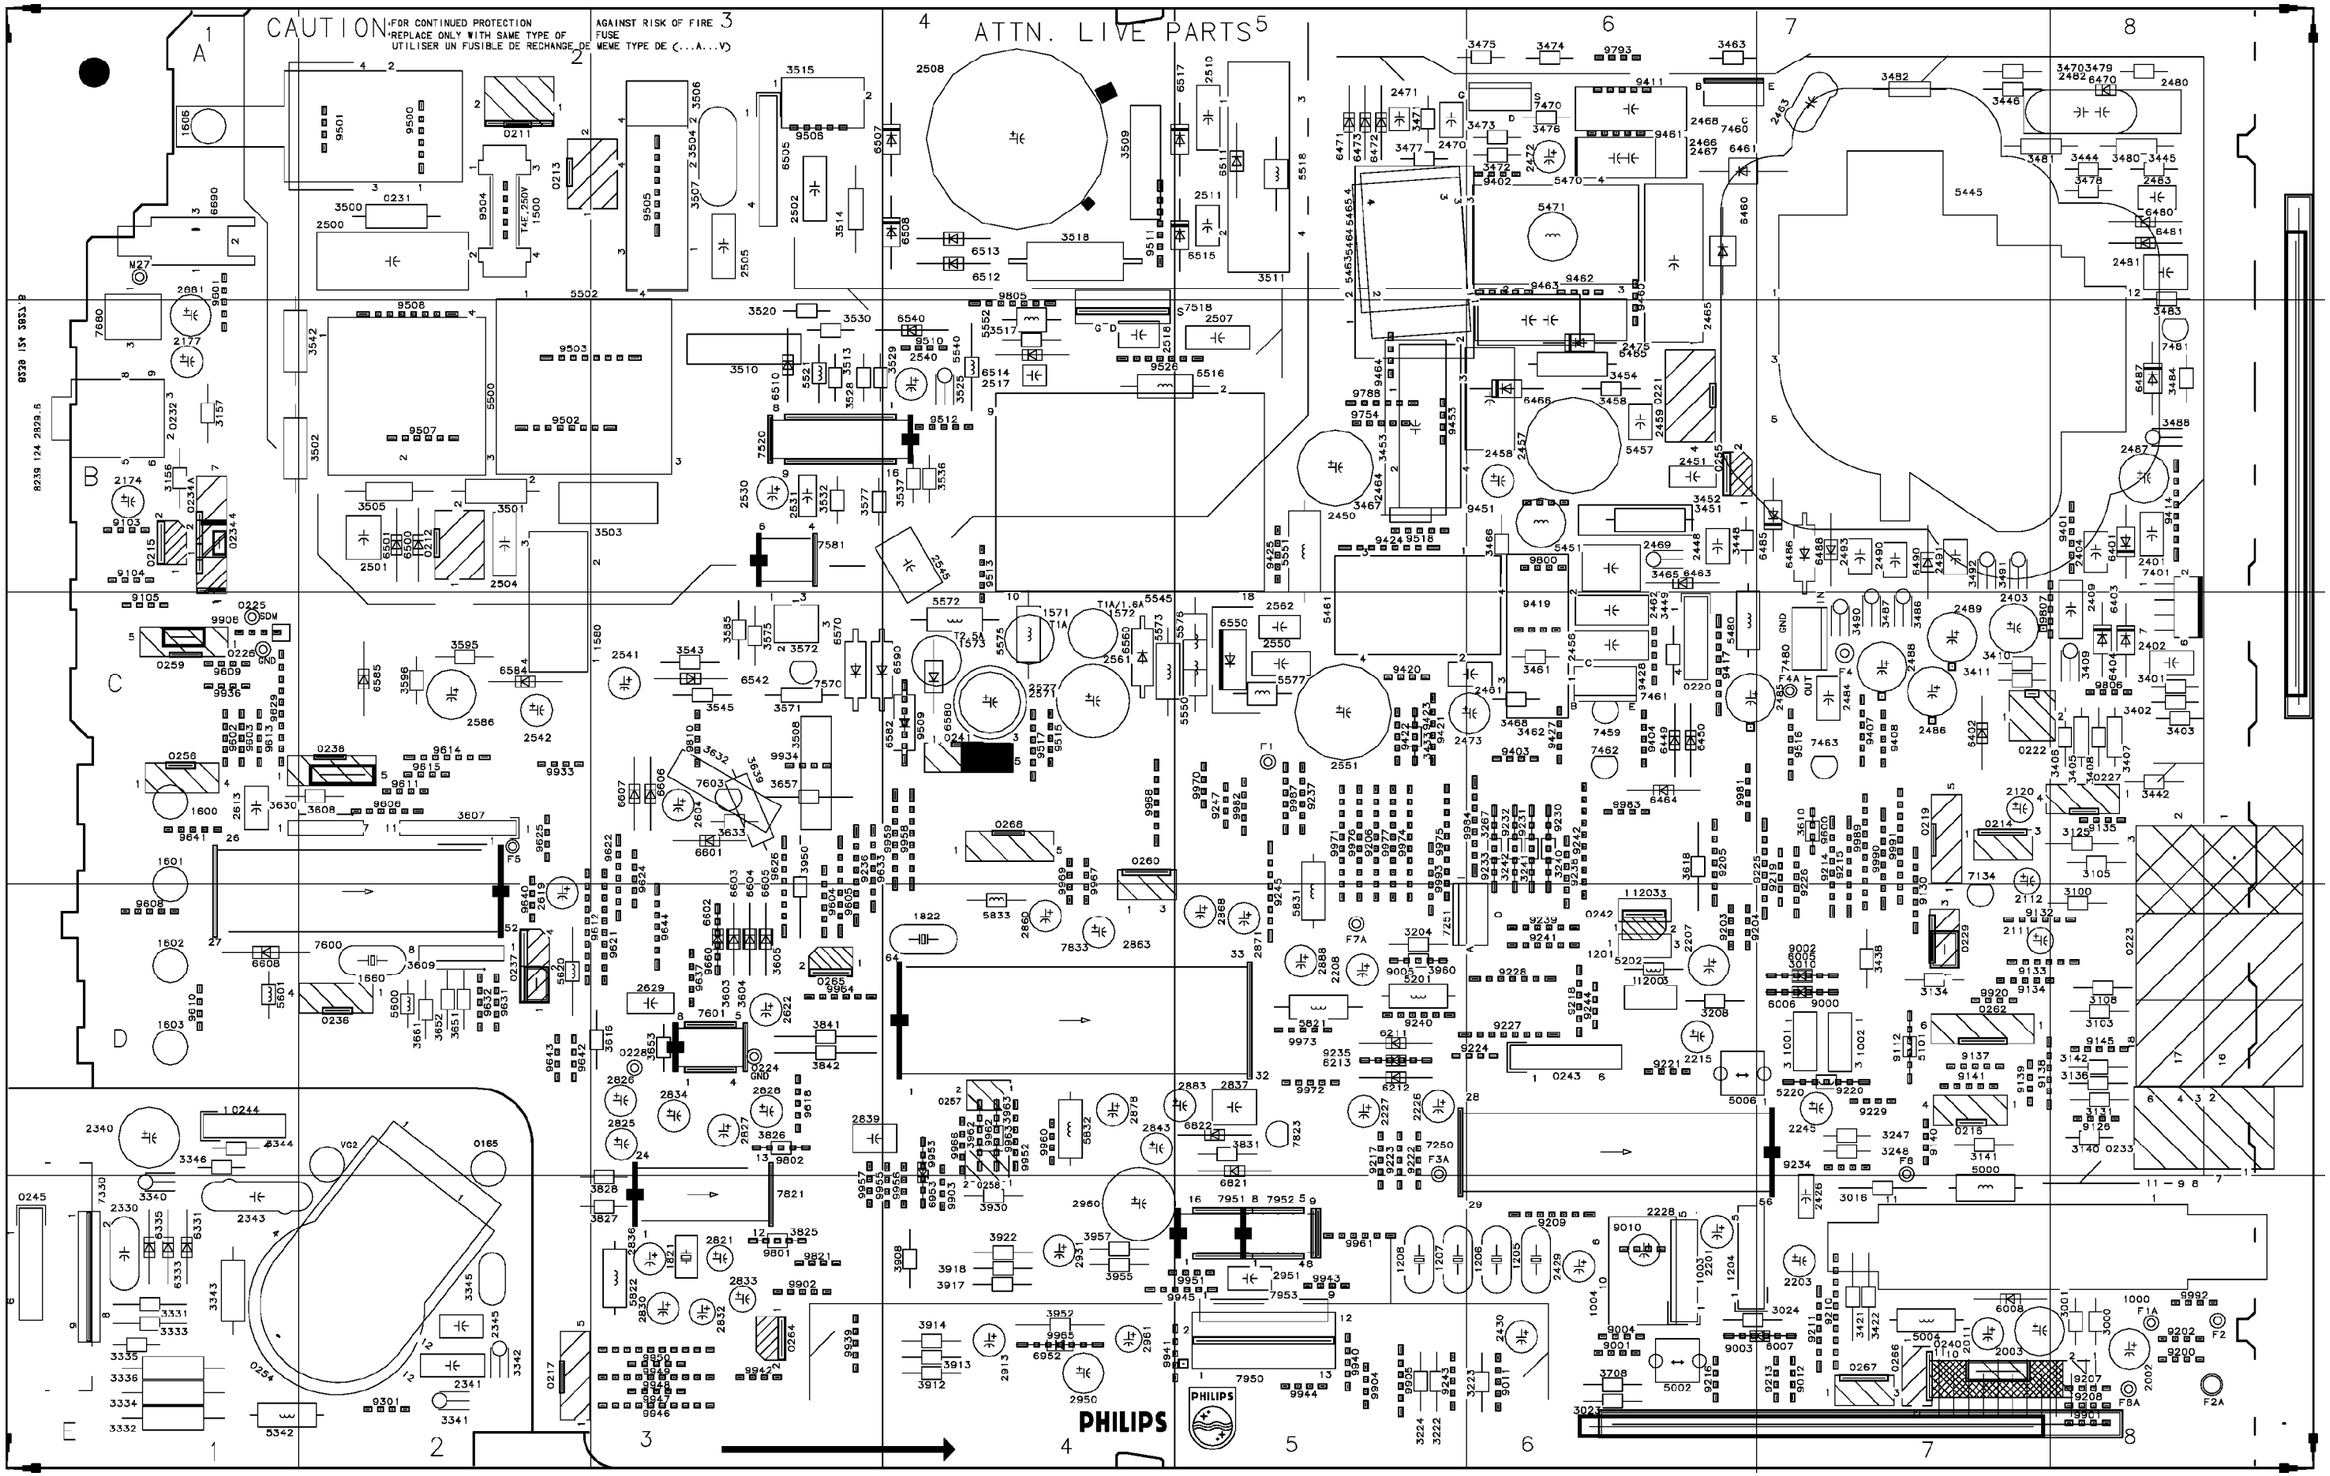
CAUTION: FOR CONTINUED PROTECTION AGAINST RISK OF FIRE REPLACE ONLY WITH SAME TYPE OF FUSE UTILISER UN FUSIBLE DE RECHANGE DE MEME TYPE DE (...A...V)
ATTN. LIVE PARTS
PHILIPS

All Models (7583) - MAIN CHASSIS & CRT (BOTTOM VIEW)

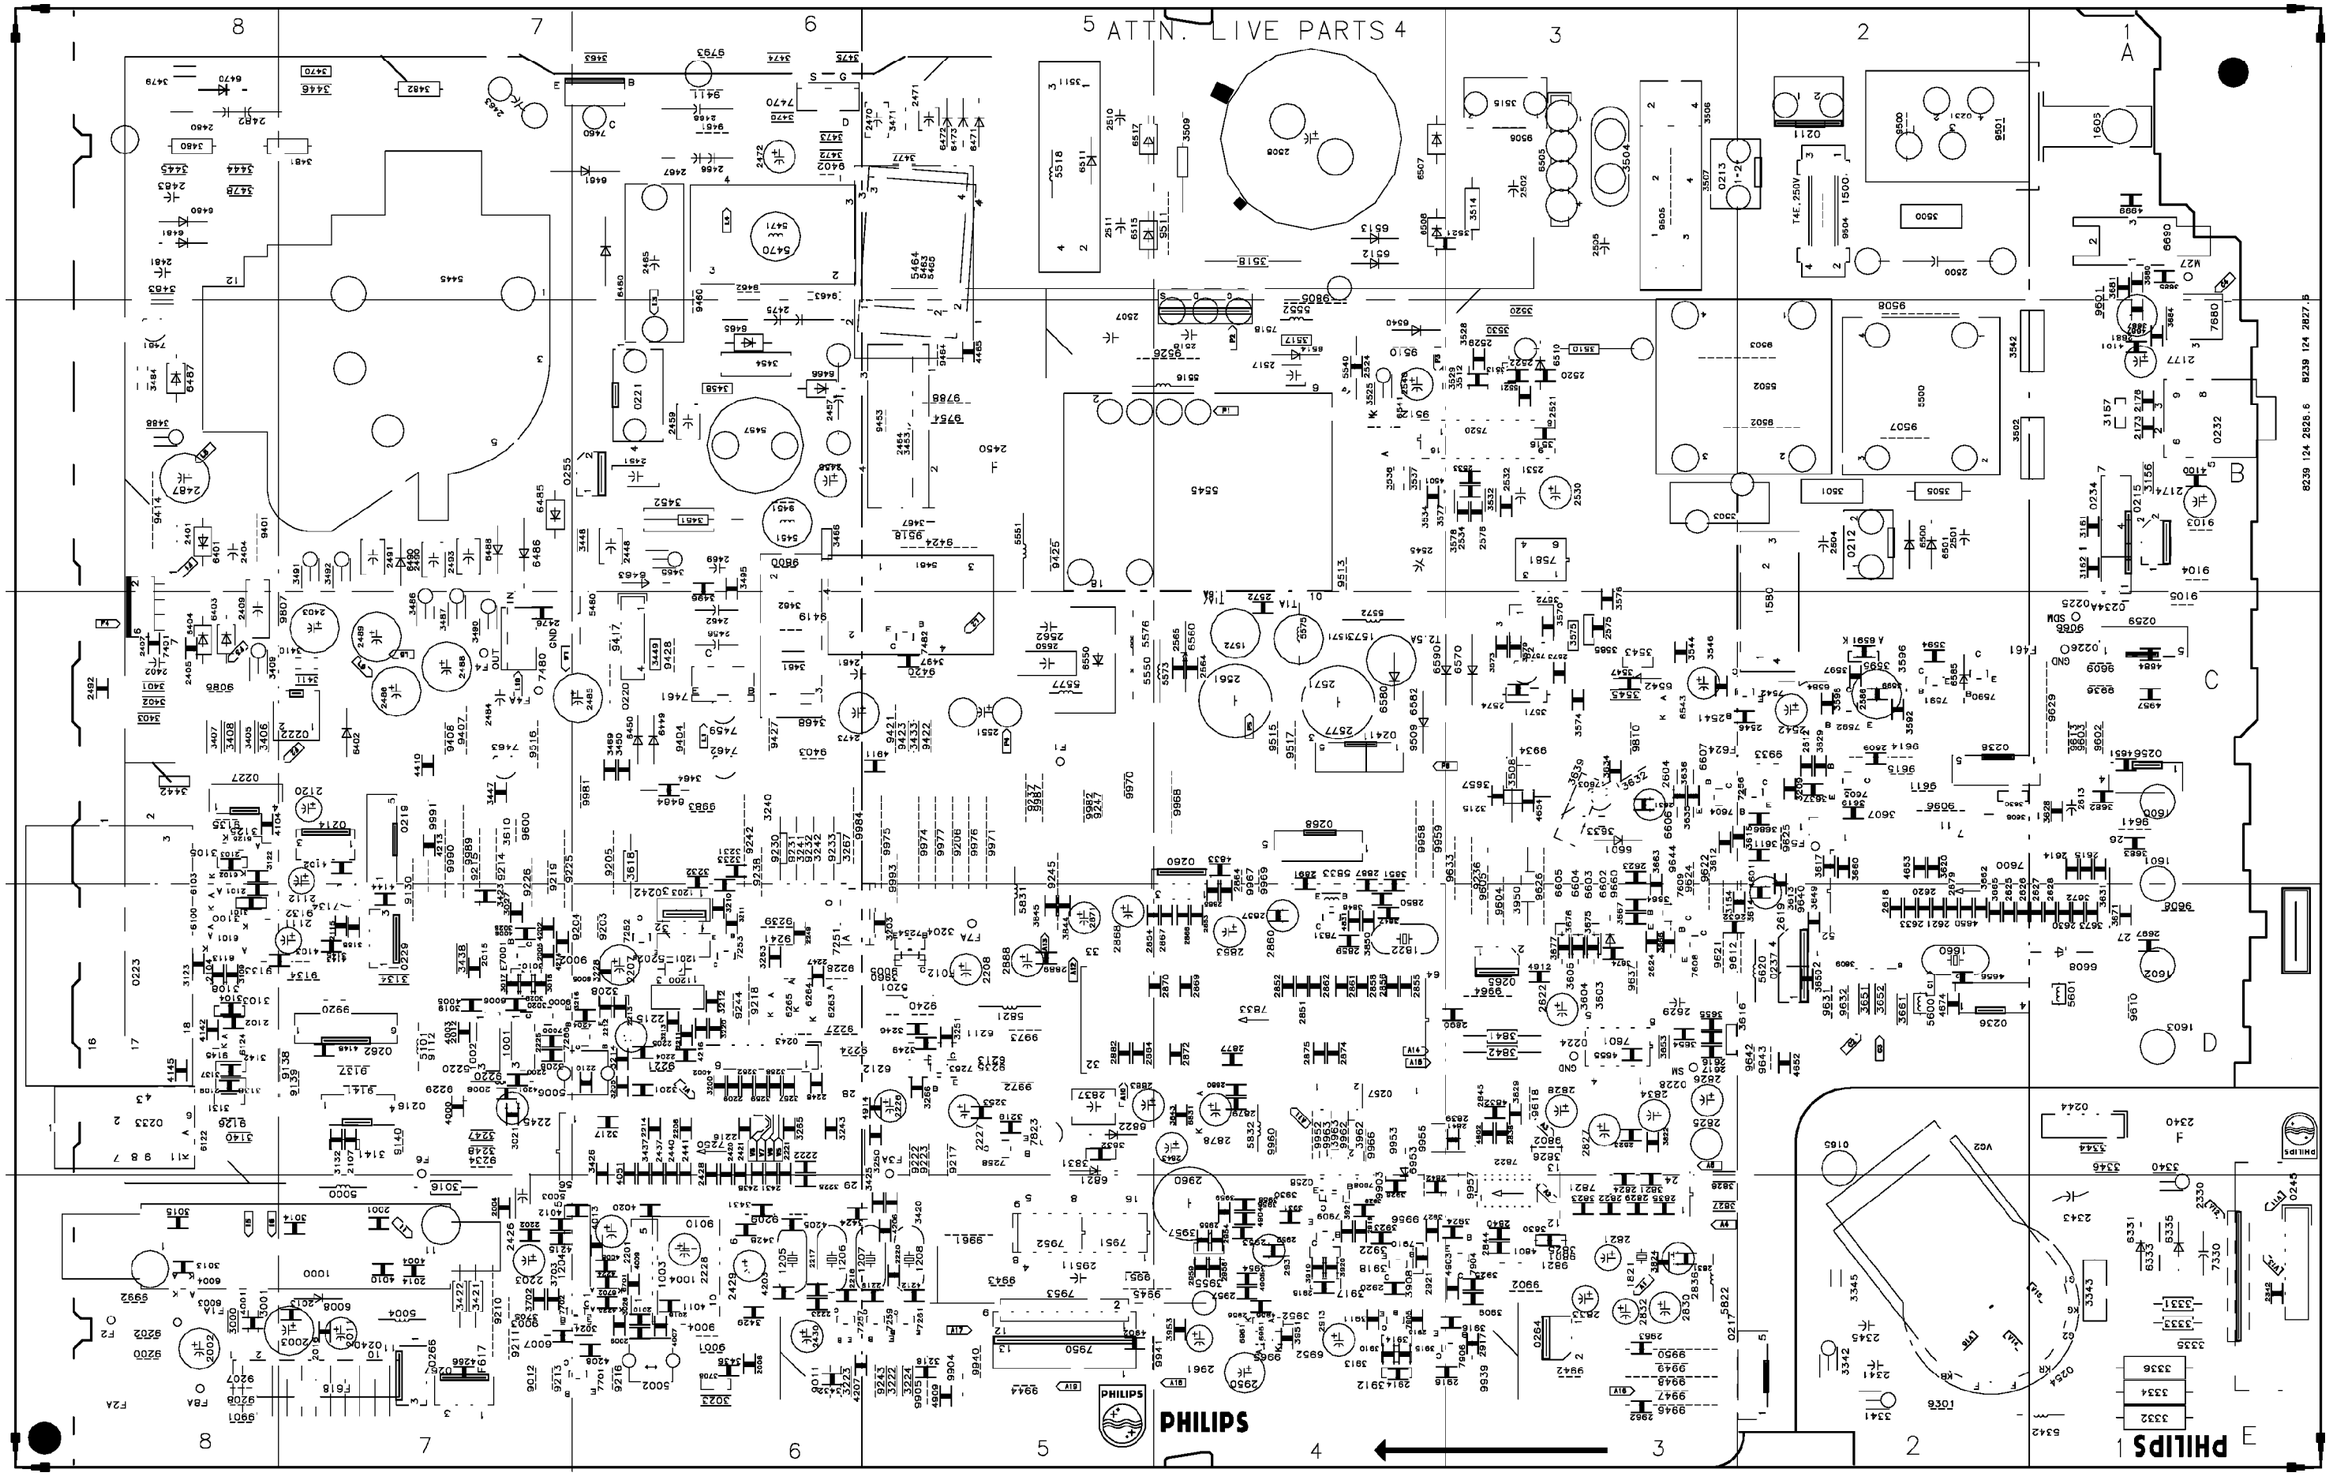

A10791 Comb Filter CBA

Top View

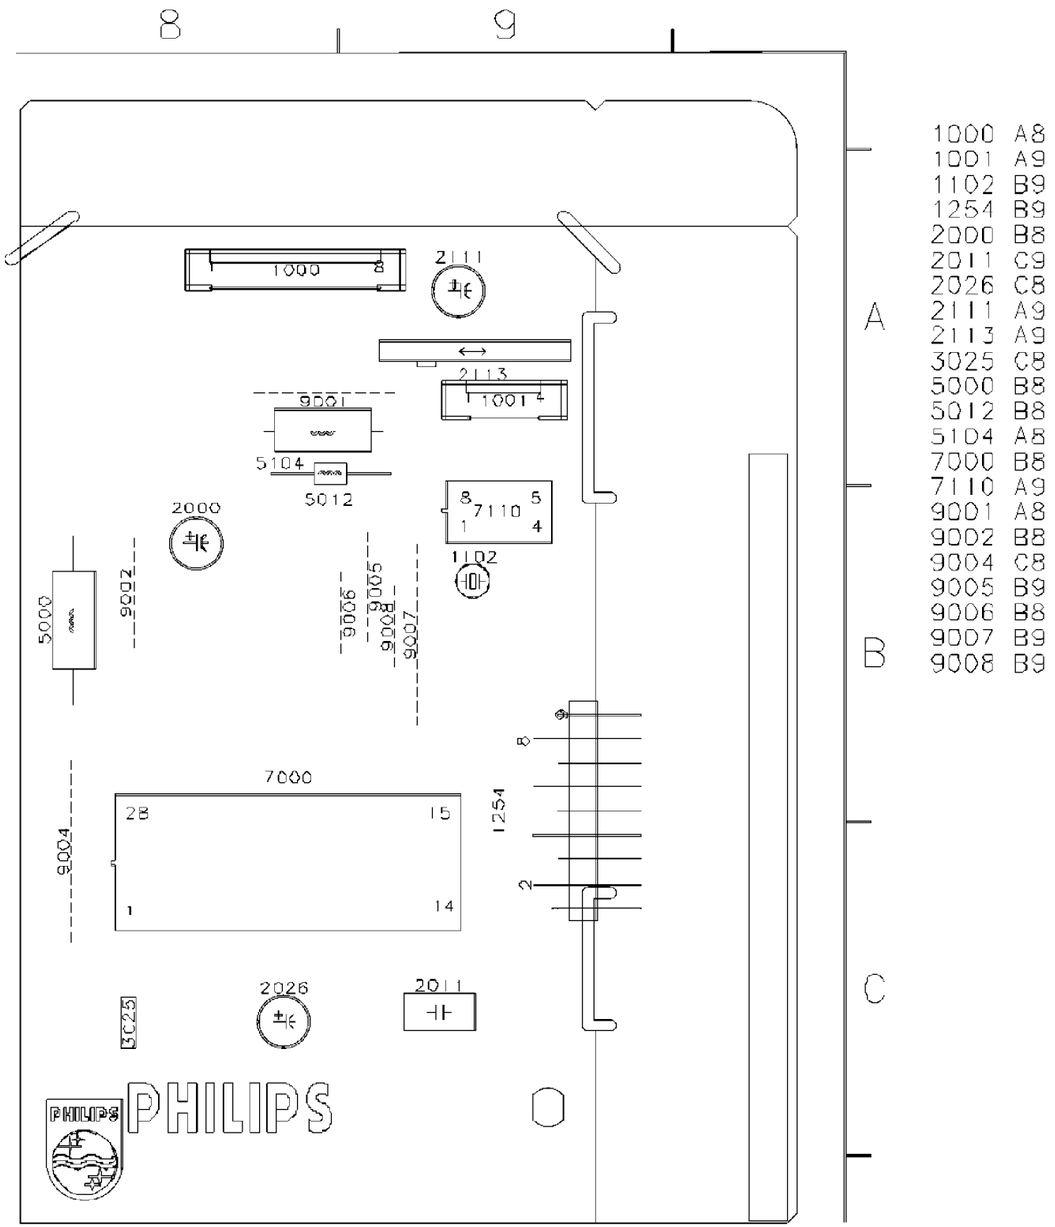

1000 A8
1001 A9
1102 B9
1254 B9
2000 B8
2011 C9
2026 C8
2111 A9
2113 A9
3025 C8
5000 B8
5012 B8
5104 A8
7000 B8
7110 A9
9001 A8
9002 B8
9004 C8
9005 B9
9006 B8
9007 B9
9008 B9

Bottom View

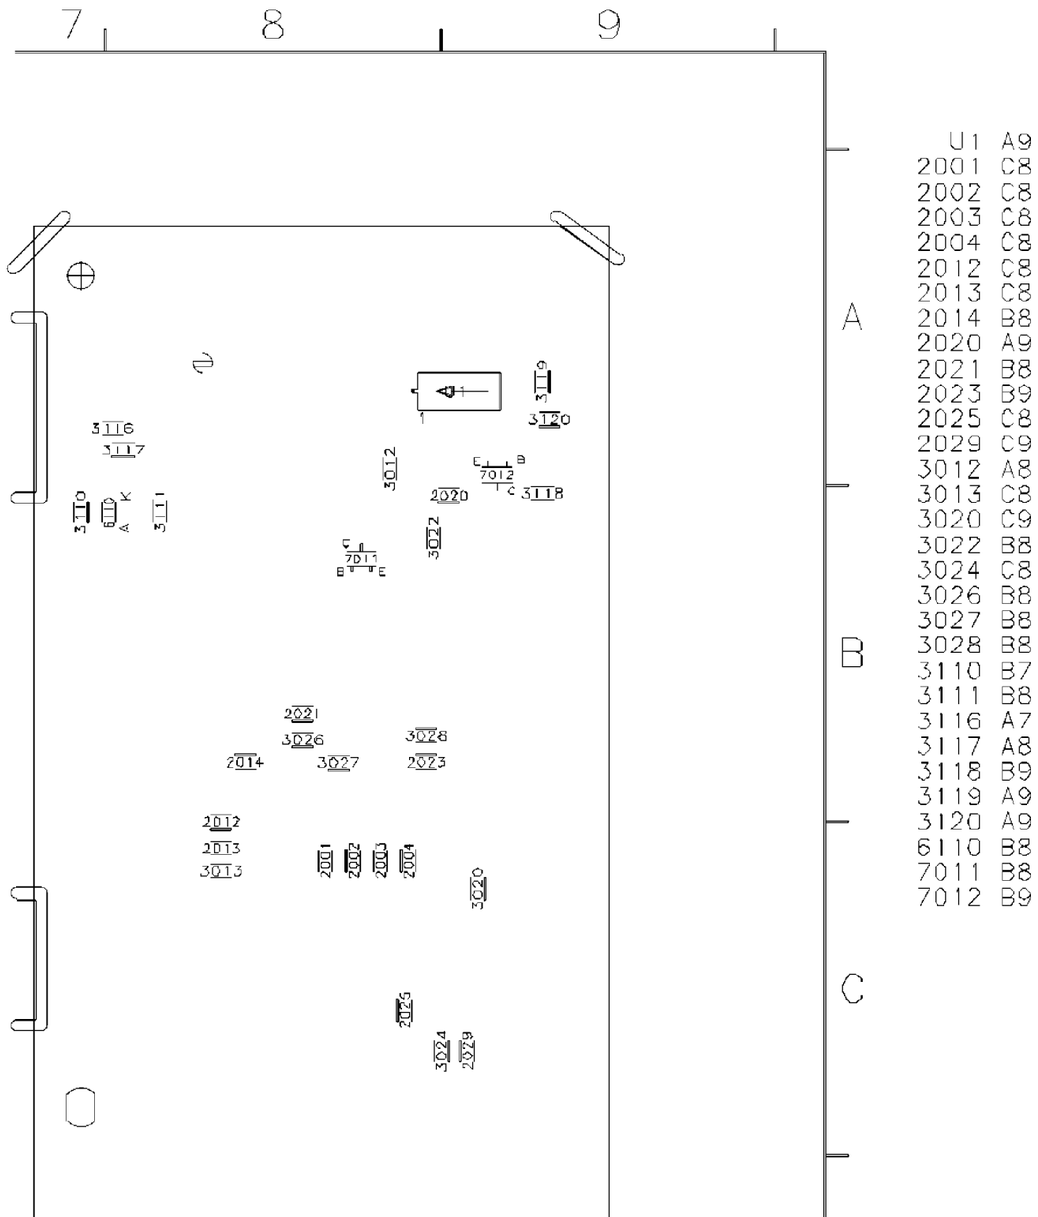

U1 A9
2001 C8
2002 C8
2003 C8
2004 C8
2012 C8
2013 C8
2014 B8
2020 A9
2021 B8
2023 B9
2025 C8
2029 C9
3012 A8
3013 C8
3020 C9
3022 B8
3024 C8
3026 B8
3027 B8
3028 B8
3110 B7
3111 B8
3116 A7
3117 A8
3118 B9
3119 A9
3120 A9
6110 B8
7011 B8
7012 B9

USED ONLY IN MODELS: PC9227C101, CH1927C101, , , SC3925C121, , TC9225C221, CH1927C121, PC9227C121, PCW027C121, SC2927C121, SC3927C121, PA9027C101 (7583) - INTERFACE MODULE - A10777 & A10808
PPC927C201, SC3932C121, PPC932C101, SC2932C121, SC2932C221, PA9027C121, PPC927C121, PPC927C101, PPC932C121, PPC932C221, PA9032C101, PA9036C121,

A10808 PRO PLUS INTERFACE &
A10777 INTERFACE MODULE
C.B.A. TOP VIEW

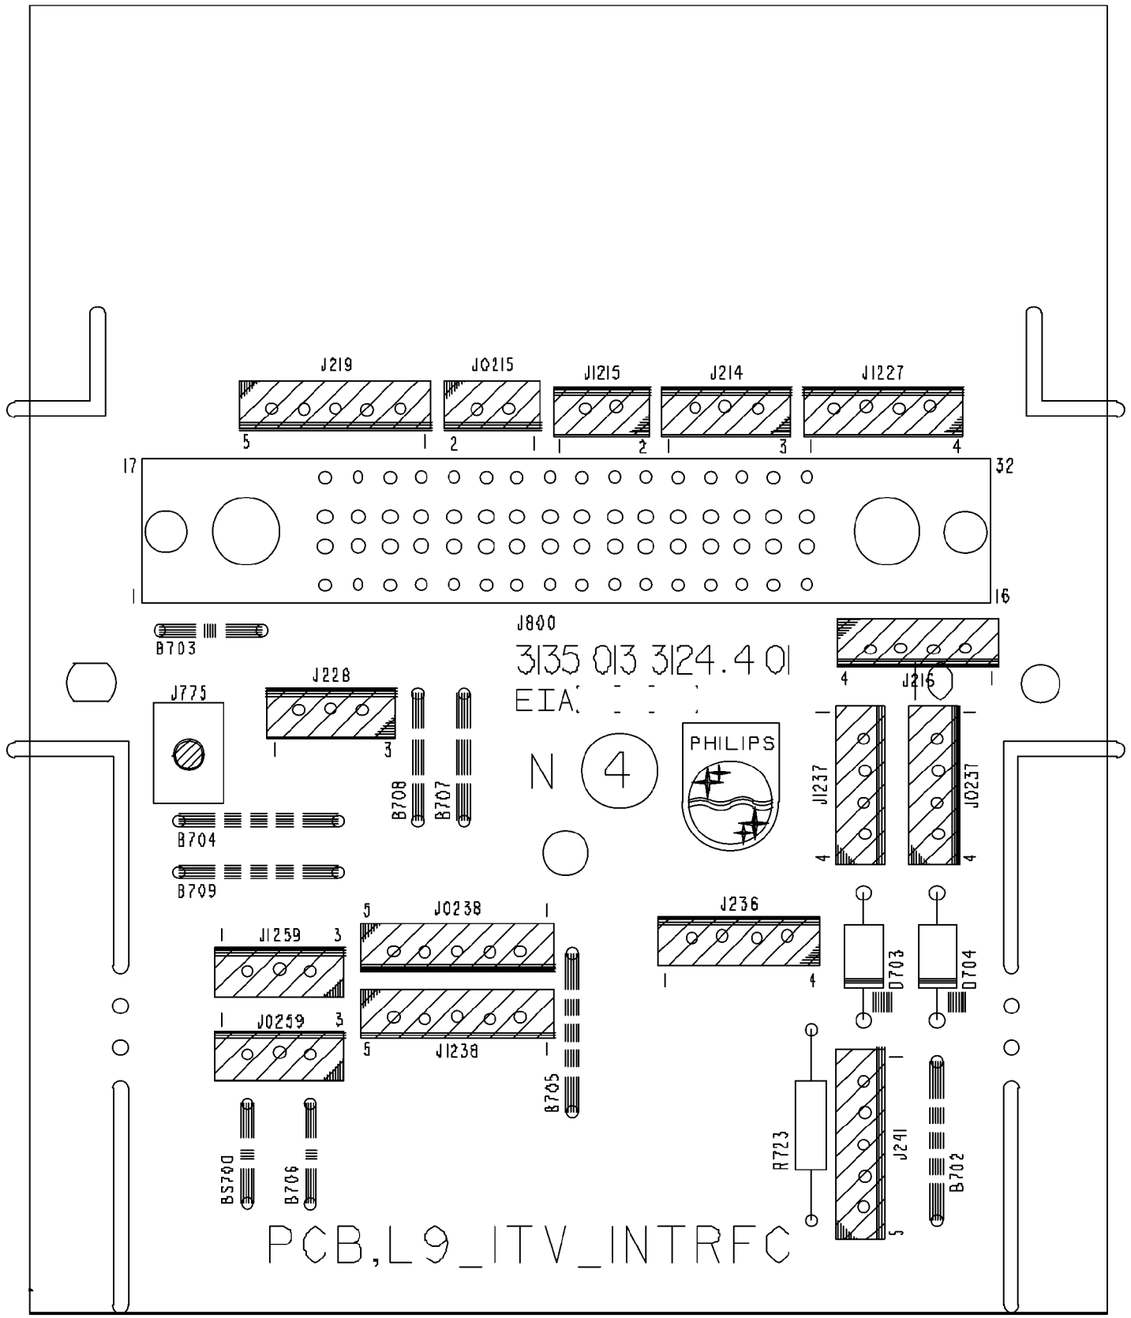

USED ONLY IN MODELS: PA9027C101, PPC927C201, , SC3932C121, PPC932C101, , SC2932C121, SC2932C221, PA9027C121, PPC927C121, PPC927C101, PPC932C121, PPC932C221 (7583) - AUDIO JACK PANEL - A10757
PA9032C101, PA9036C121,

A10757 Audio Jack Panel CBA

Top View

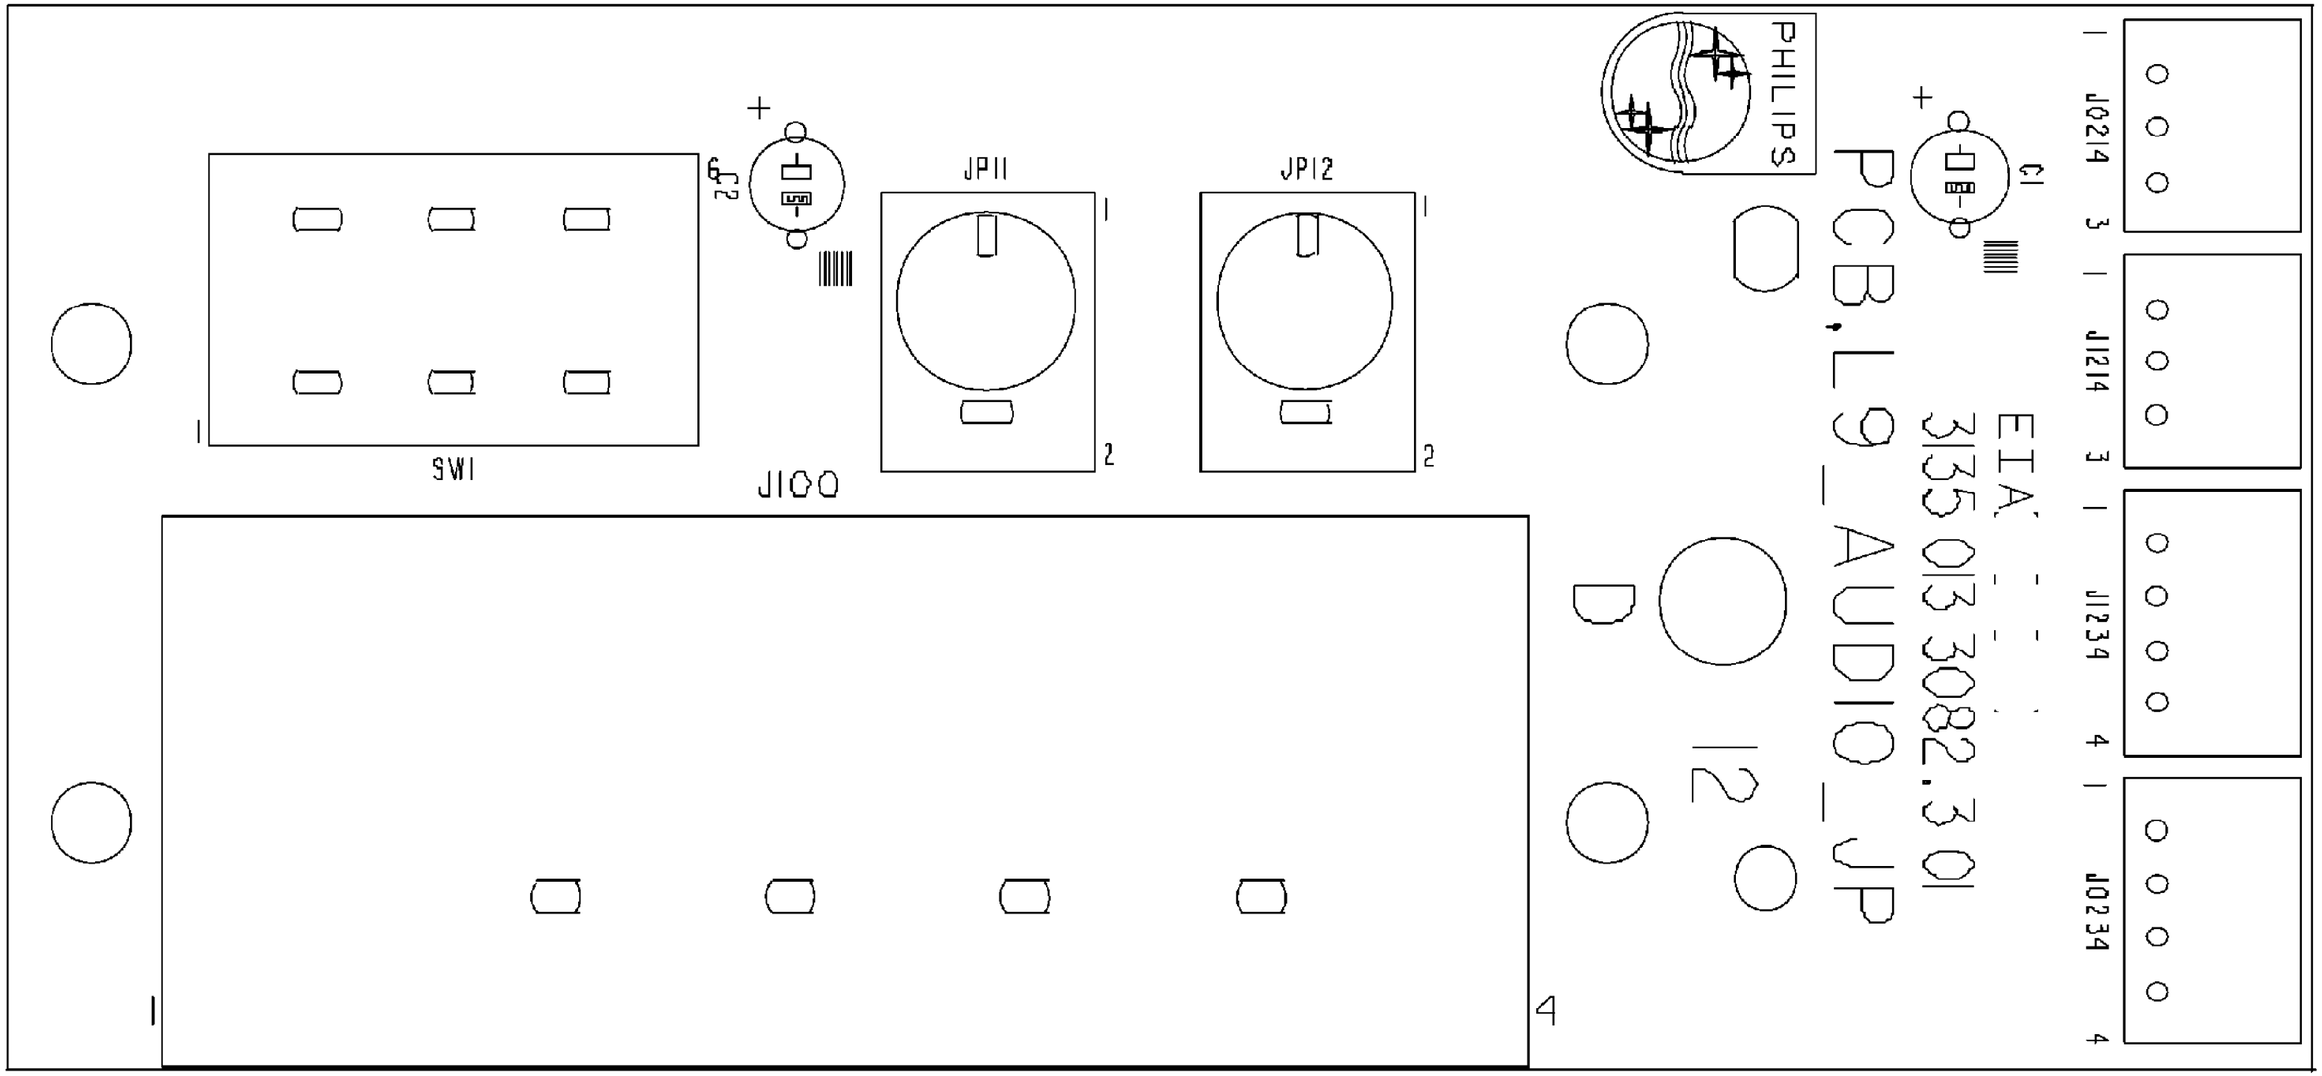

A10758 Pro Video Card
C.B.A. Top View

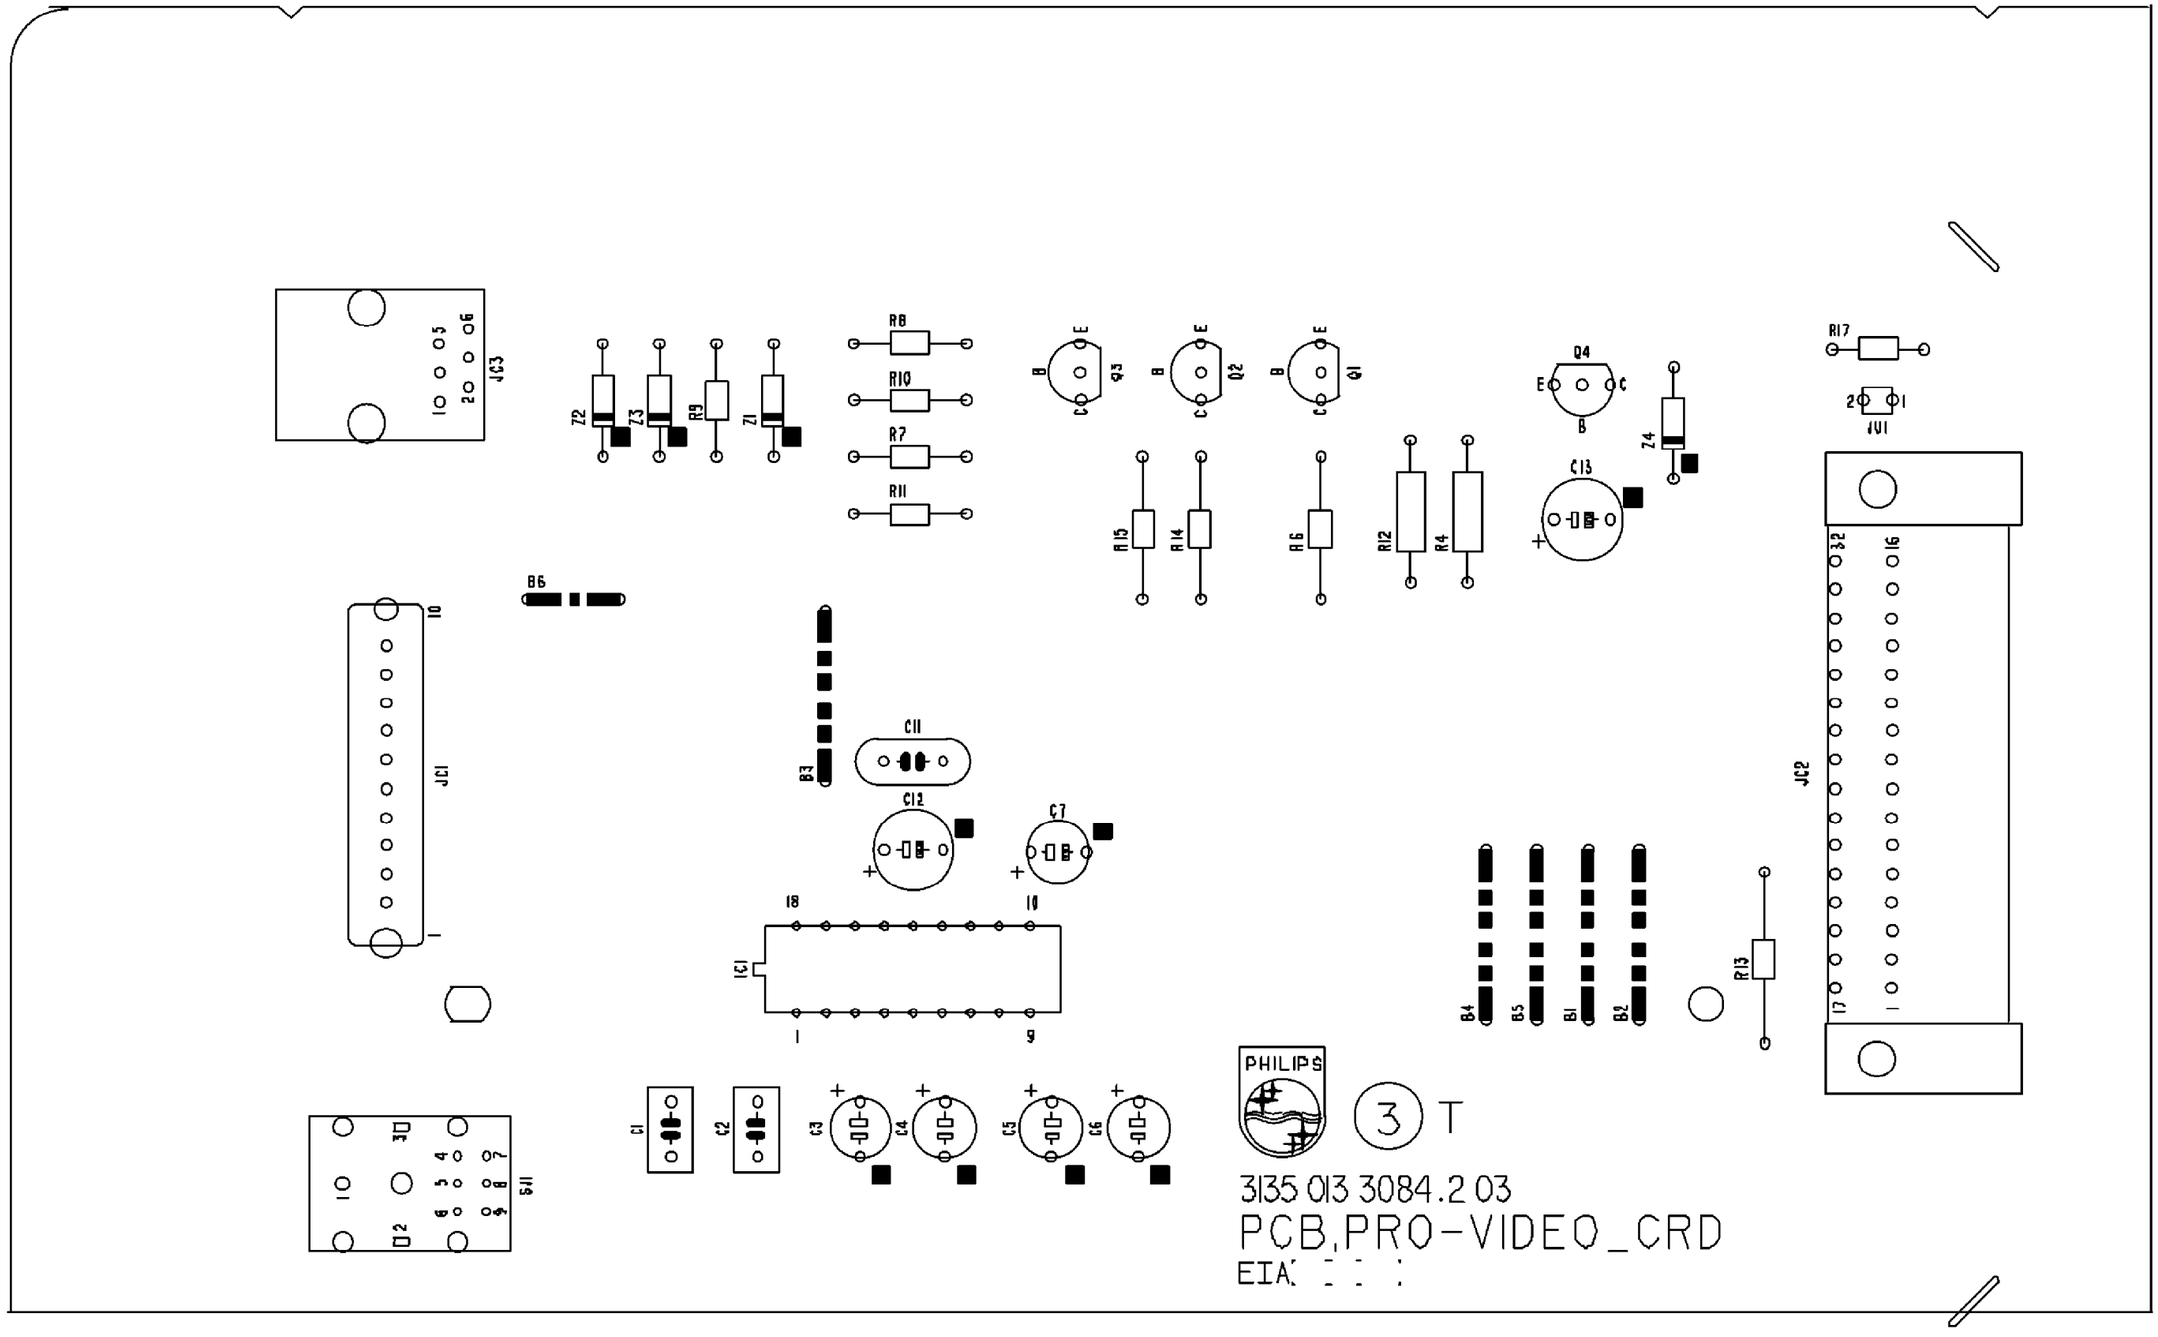

A10759 Pro Video Jack Panel
C.B.A. Top View

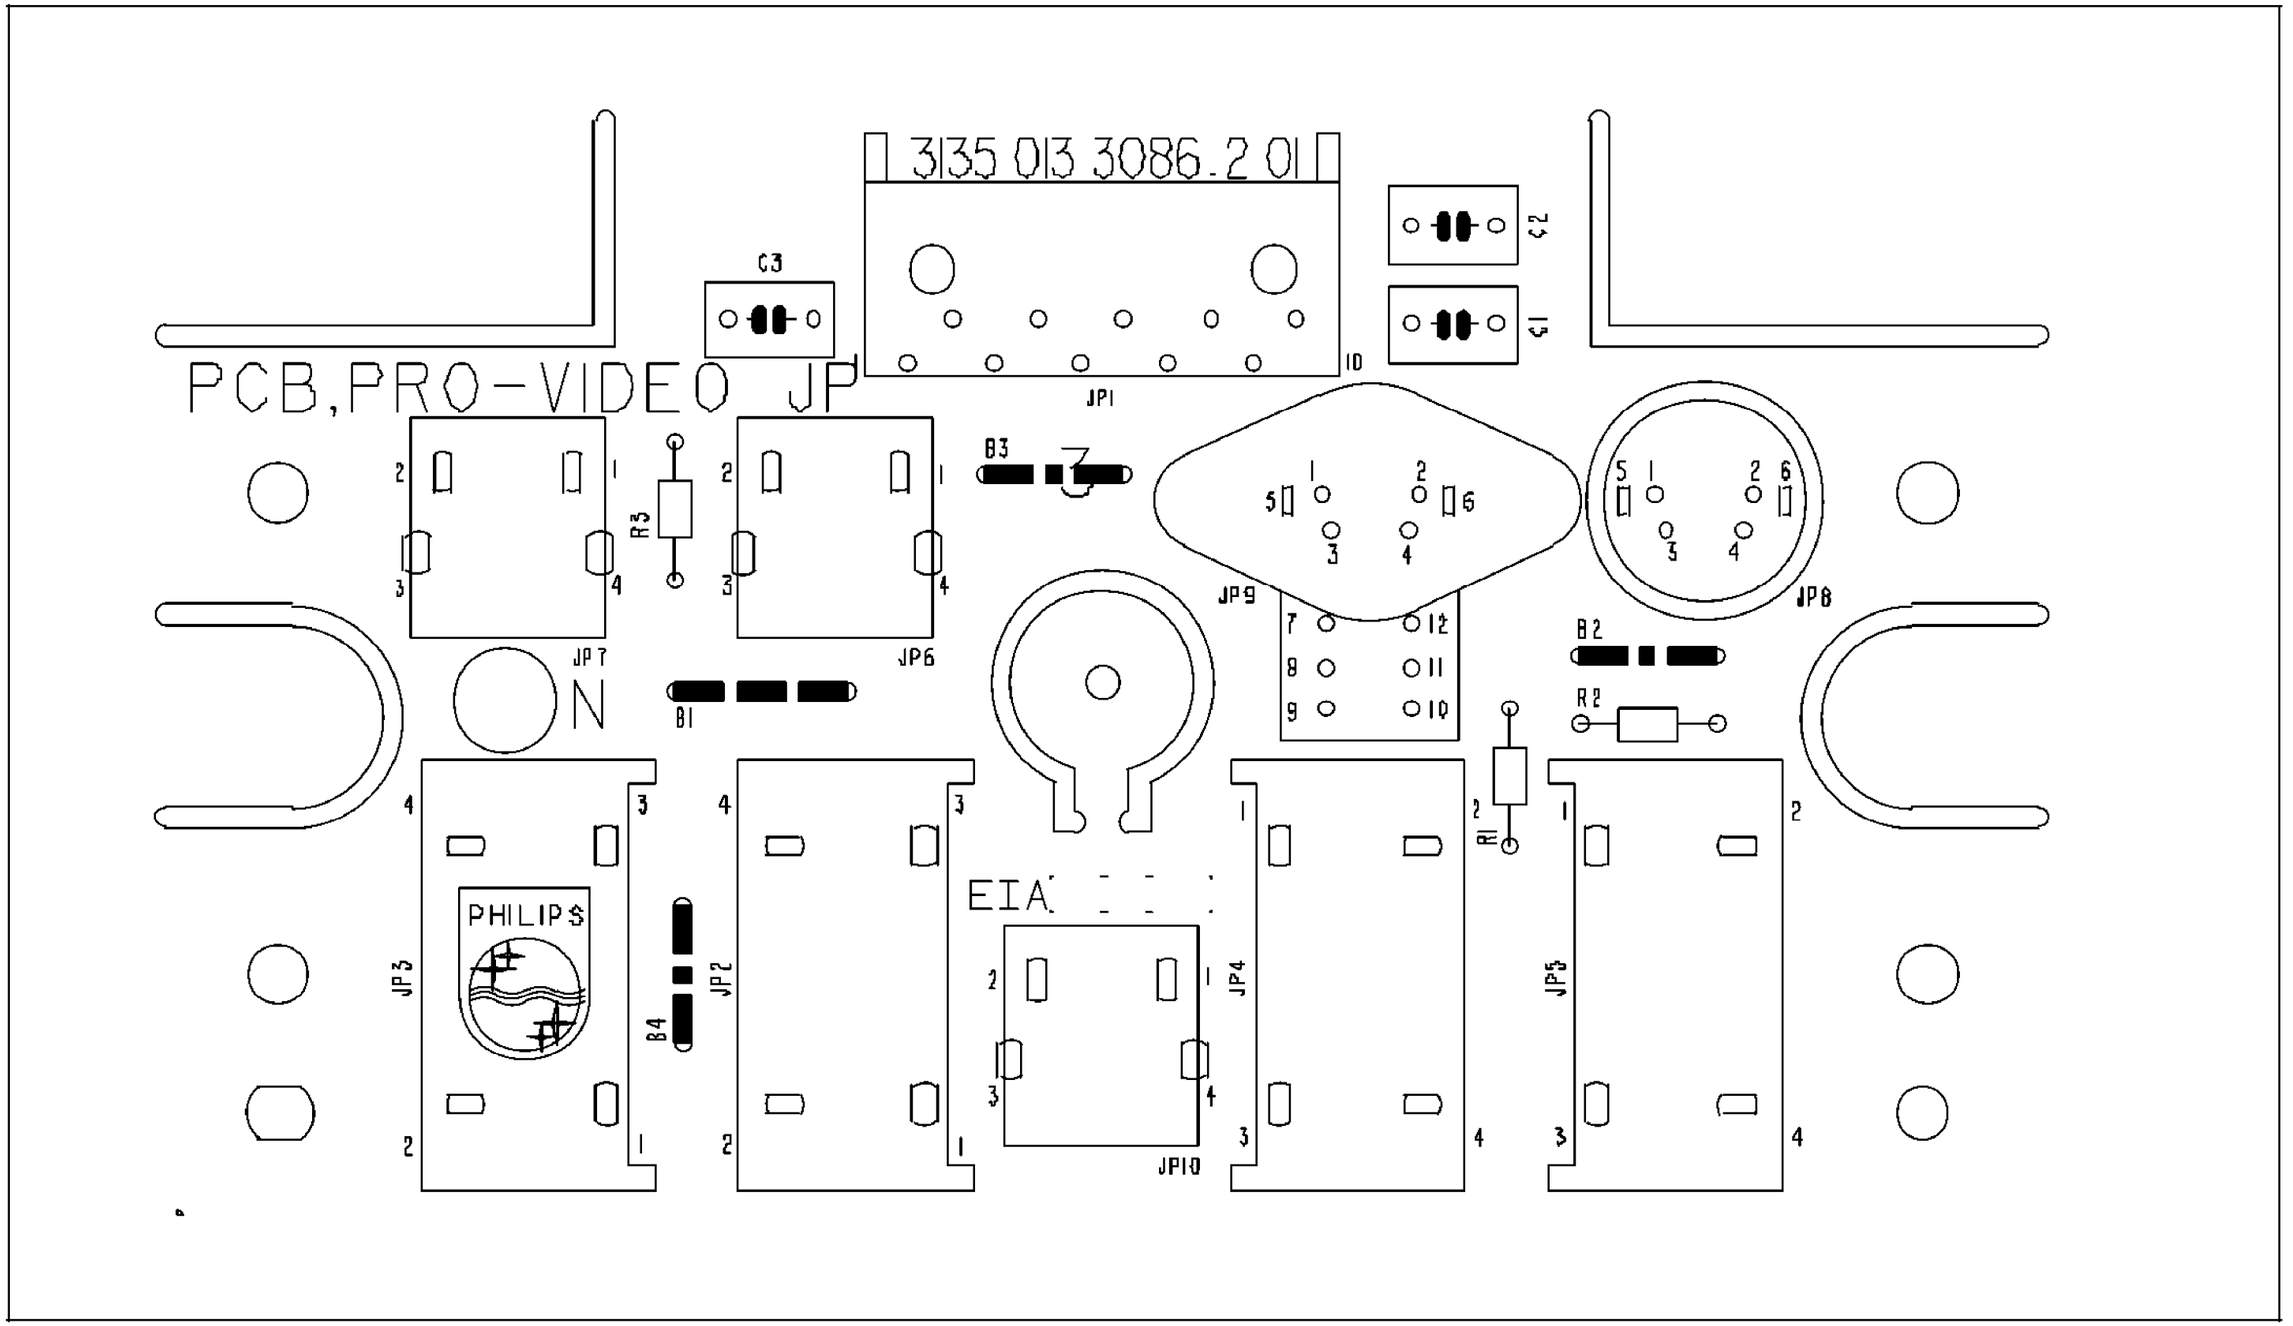

A10778 ITV FRONT AV PANEL
C.B.A. TOP VIEW

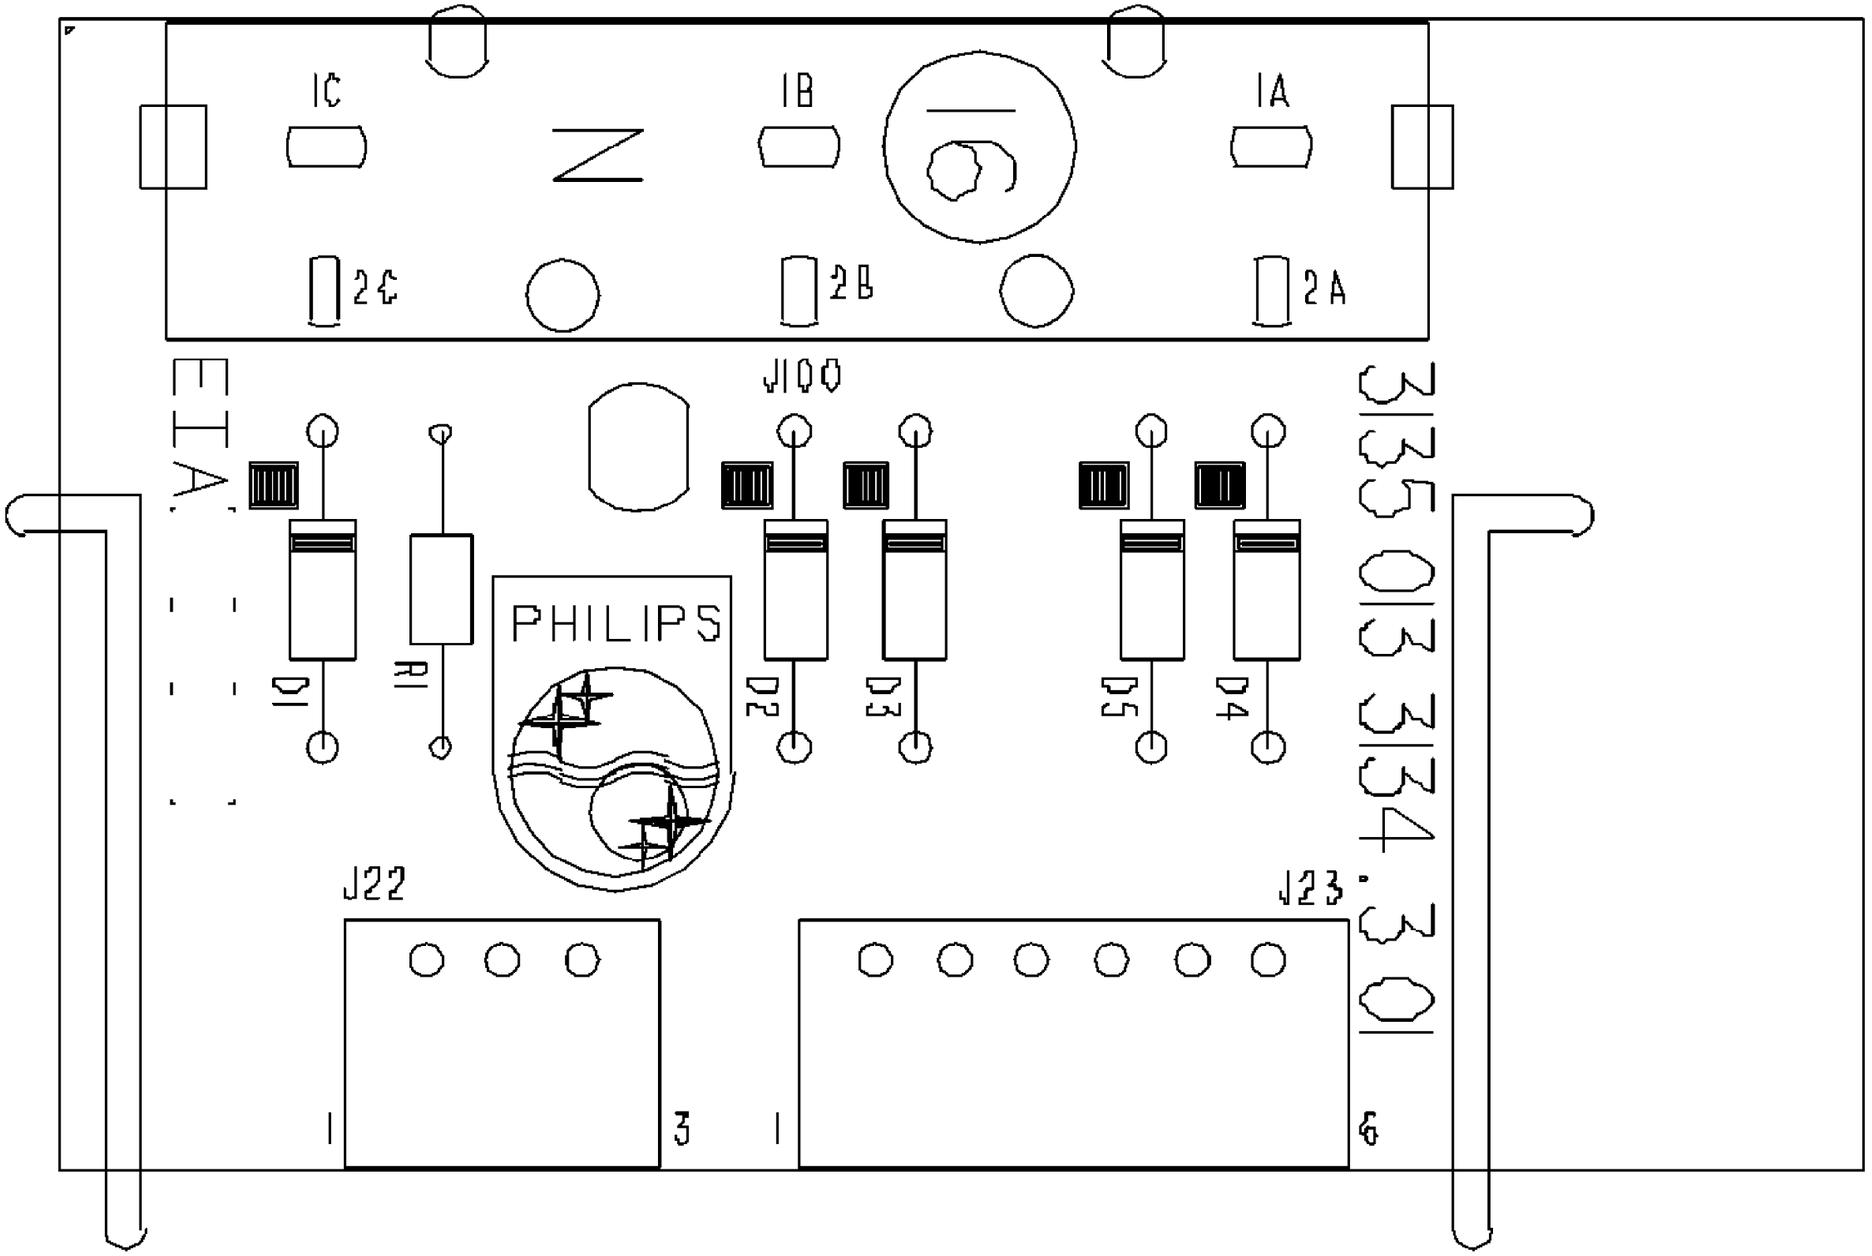

A10680 CHANNEL ONE CARD
C.B.A. TOP VIEW

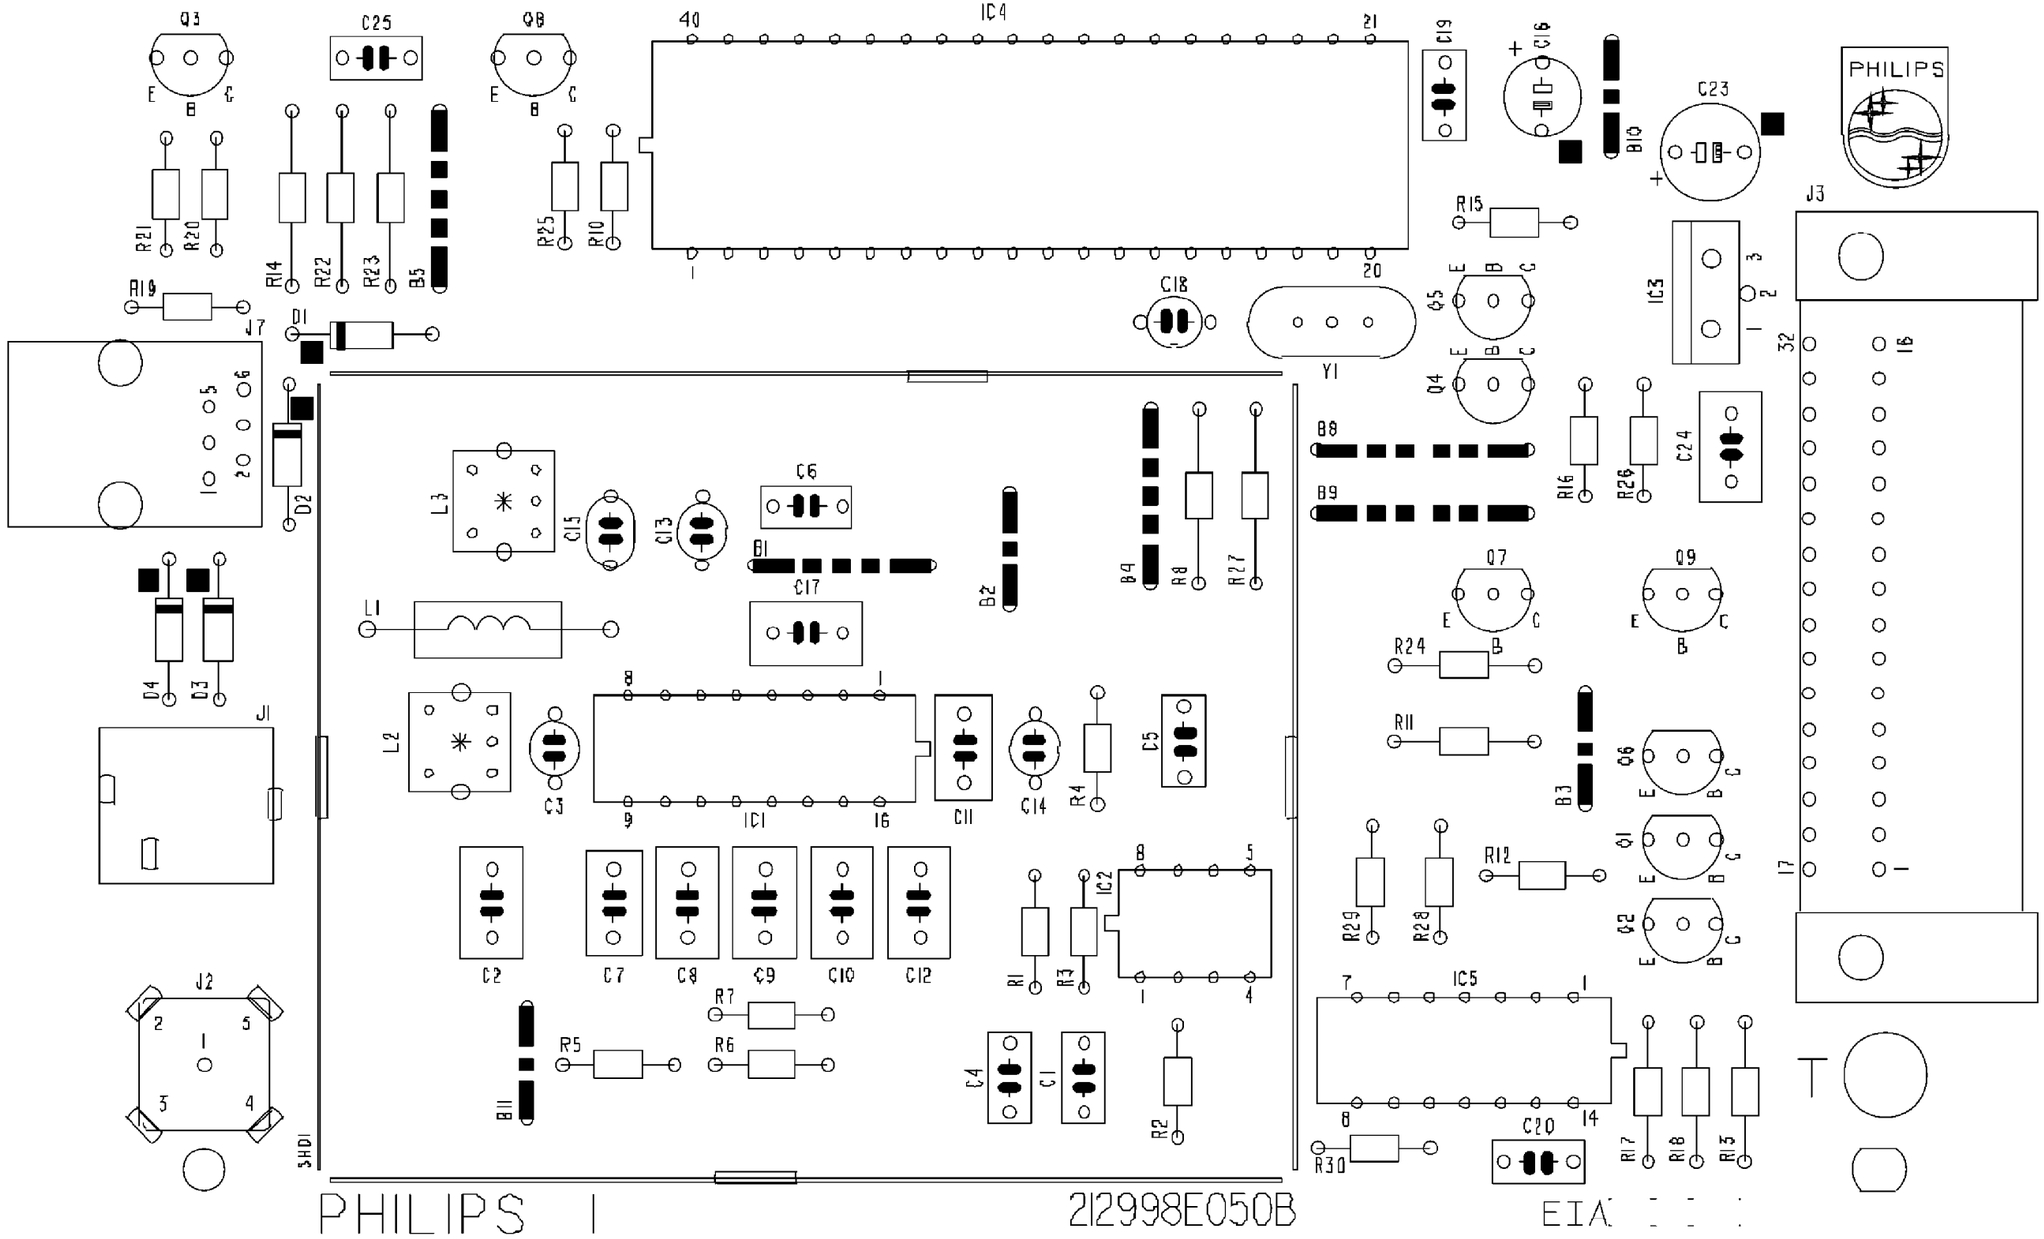

USED ONLY IN MODELS: CH1927C101 (7583) - ON COMMAND OCV TV VIDEO - A10602

A10602 ON COMMAND VIDEO MODULE C.B.A.
TOP VIEW

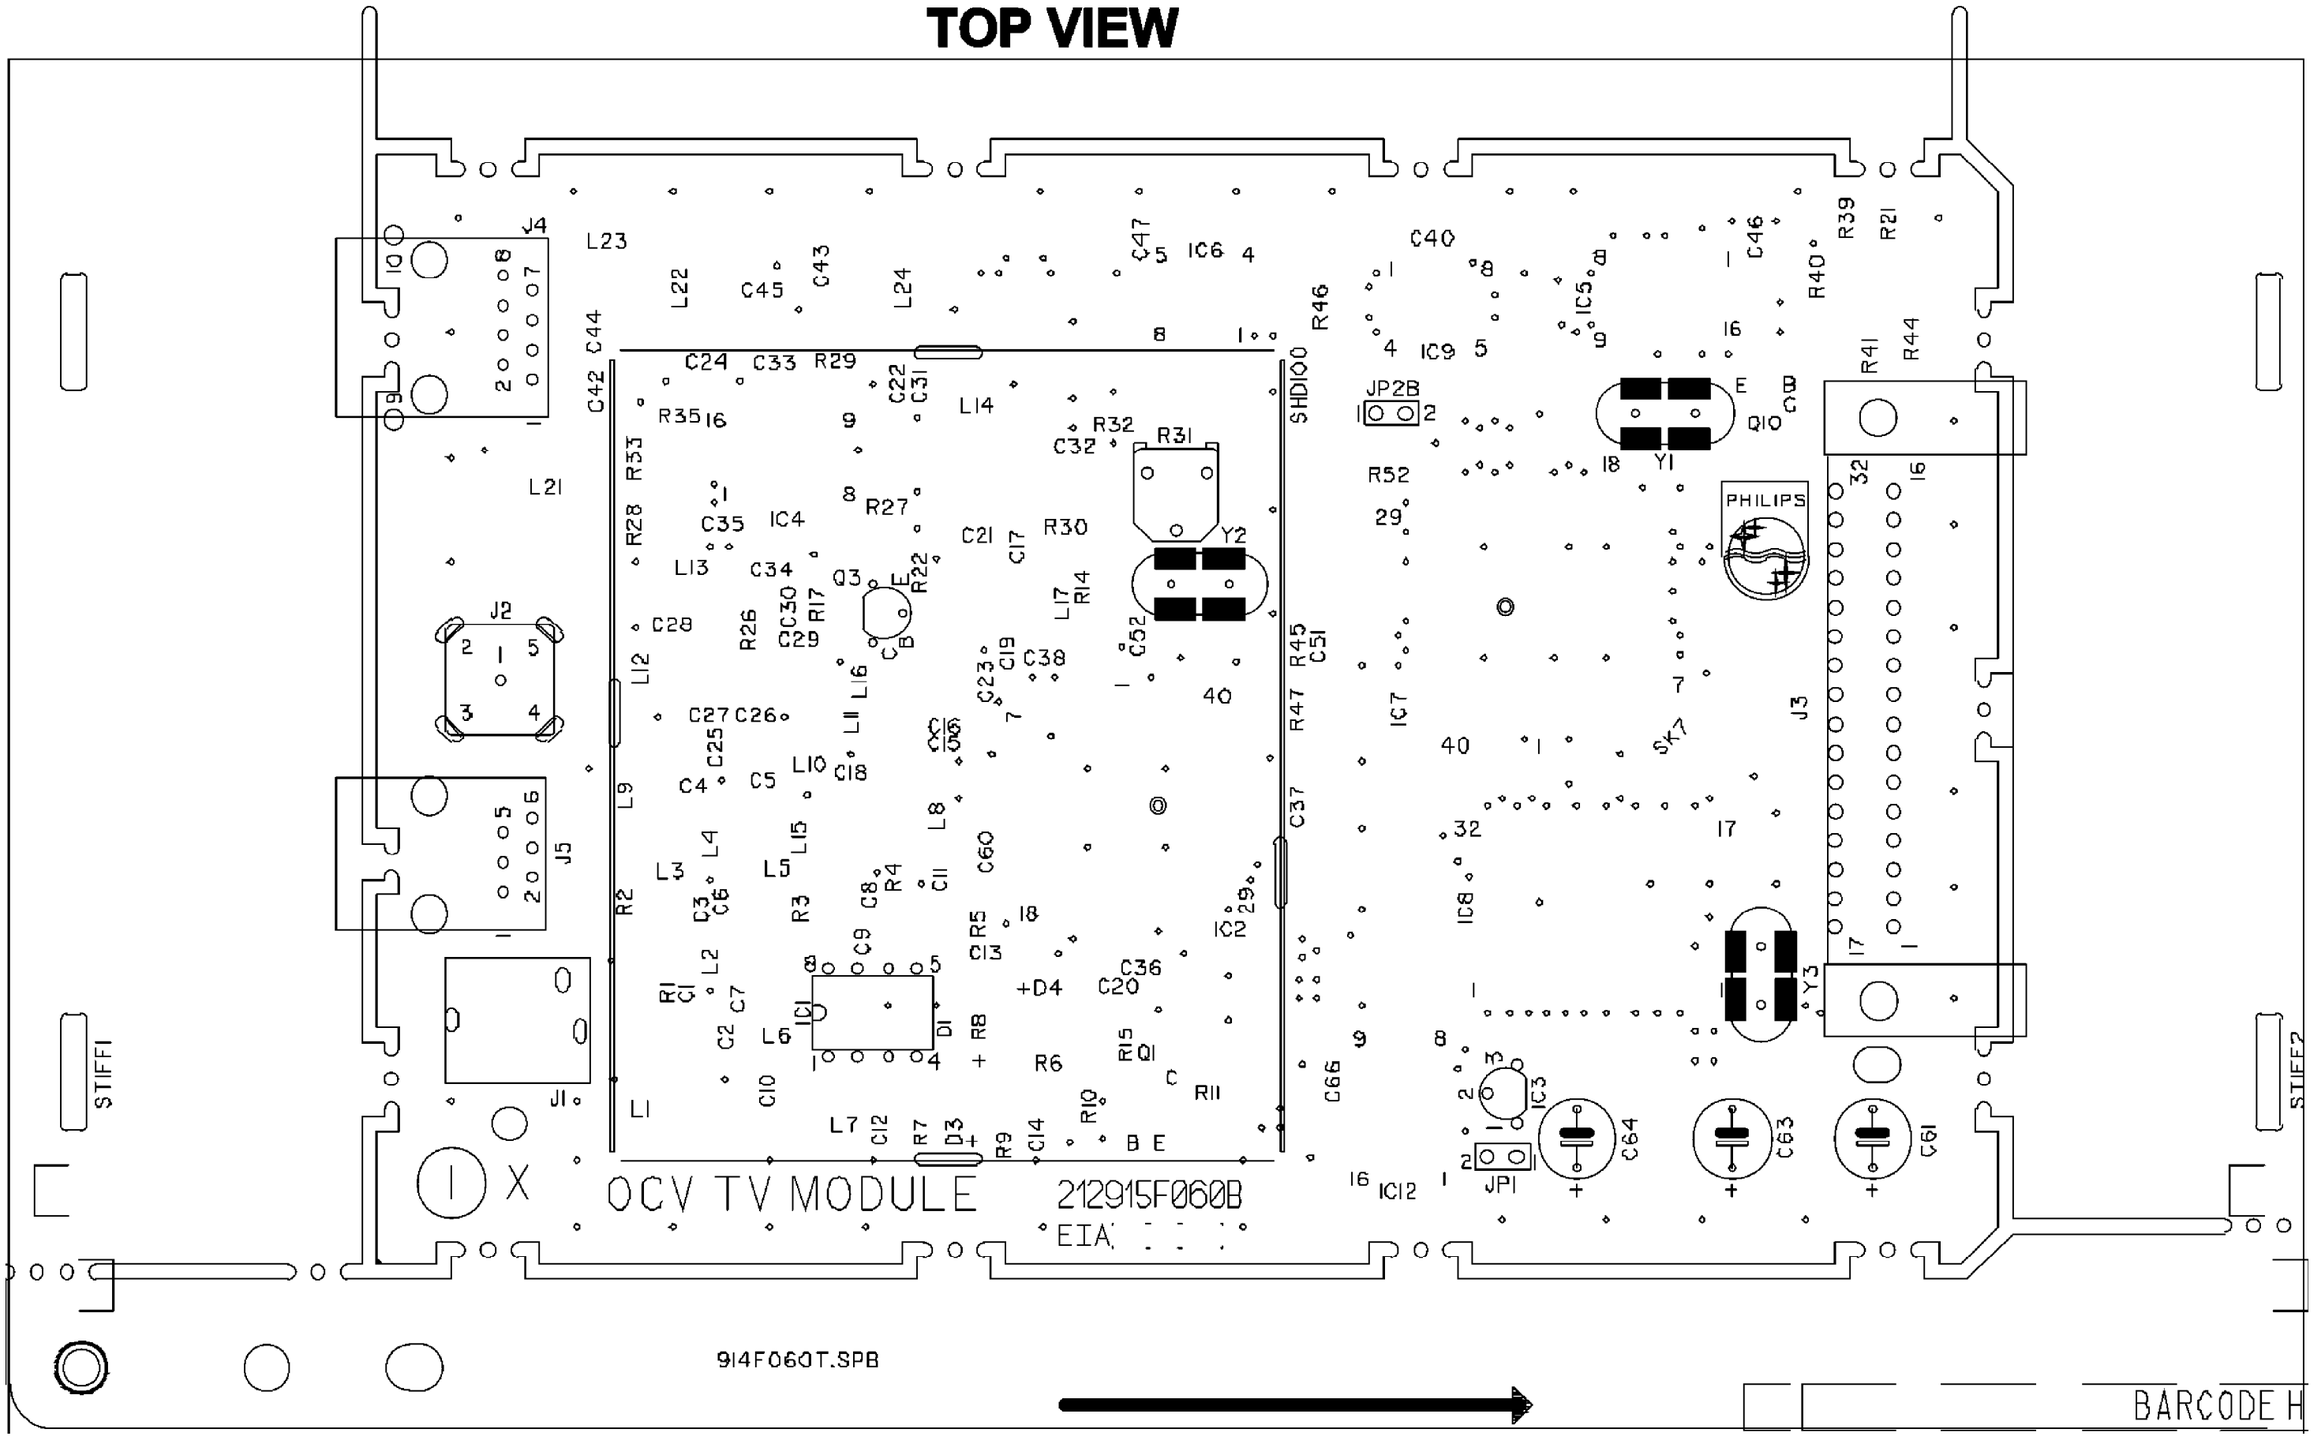

USED ONLY IN MODELS: SC2932C121, SC2932C221 (7583) - SCAN CONVERTER JACK PANEL (TOP VIEW) - A10654

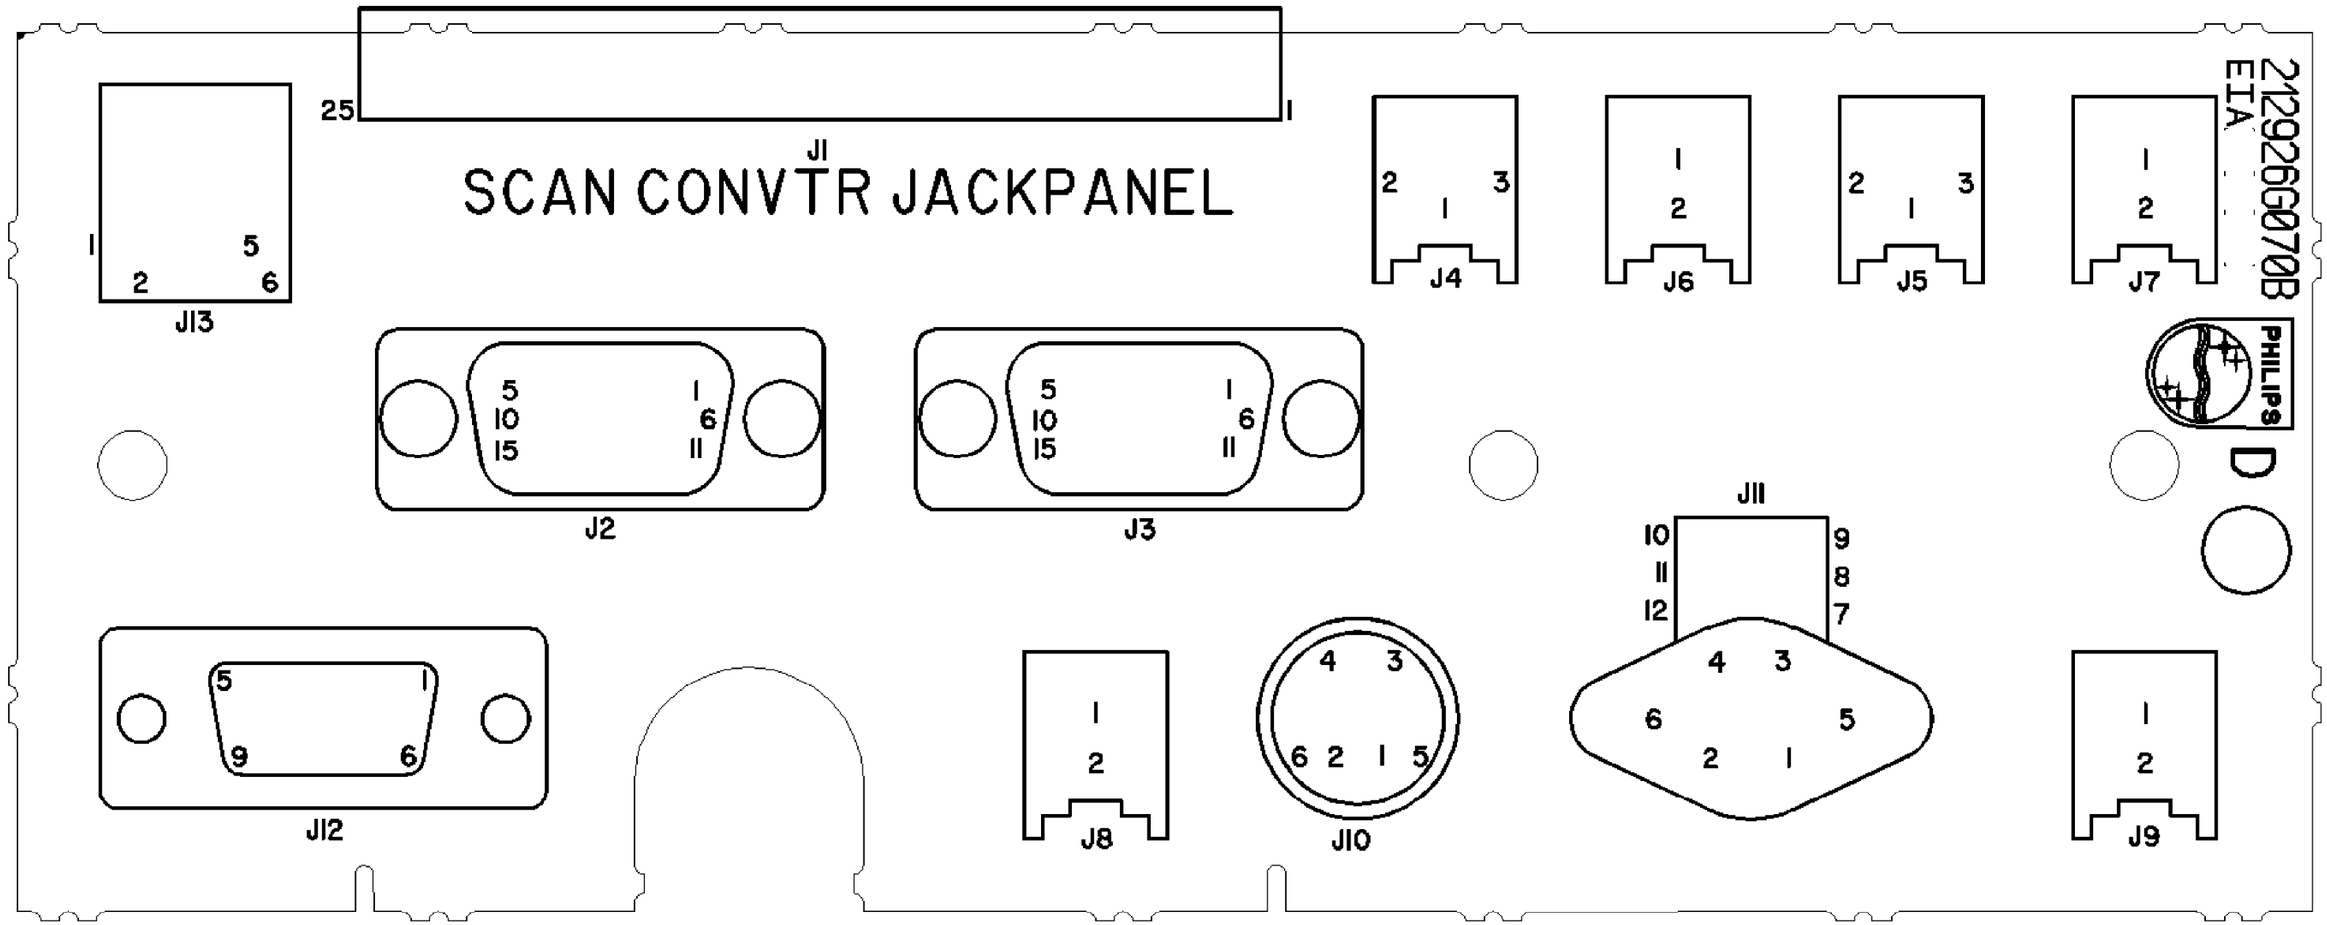

USED ONLY IN MODELS: SC2932C121, SC2932C221 (7583) - SCAN CONVERTER JACK PANEL (BOTTOM VIEW) - A10654

USED ONLY IN MODELS: SC3927C121, SC3925C121, PA9032C101 (7583) - ITV SCAN 3 CARD - A10797 (TOP VIEW)

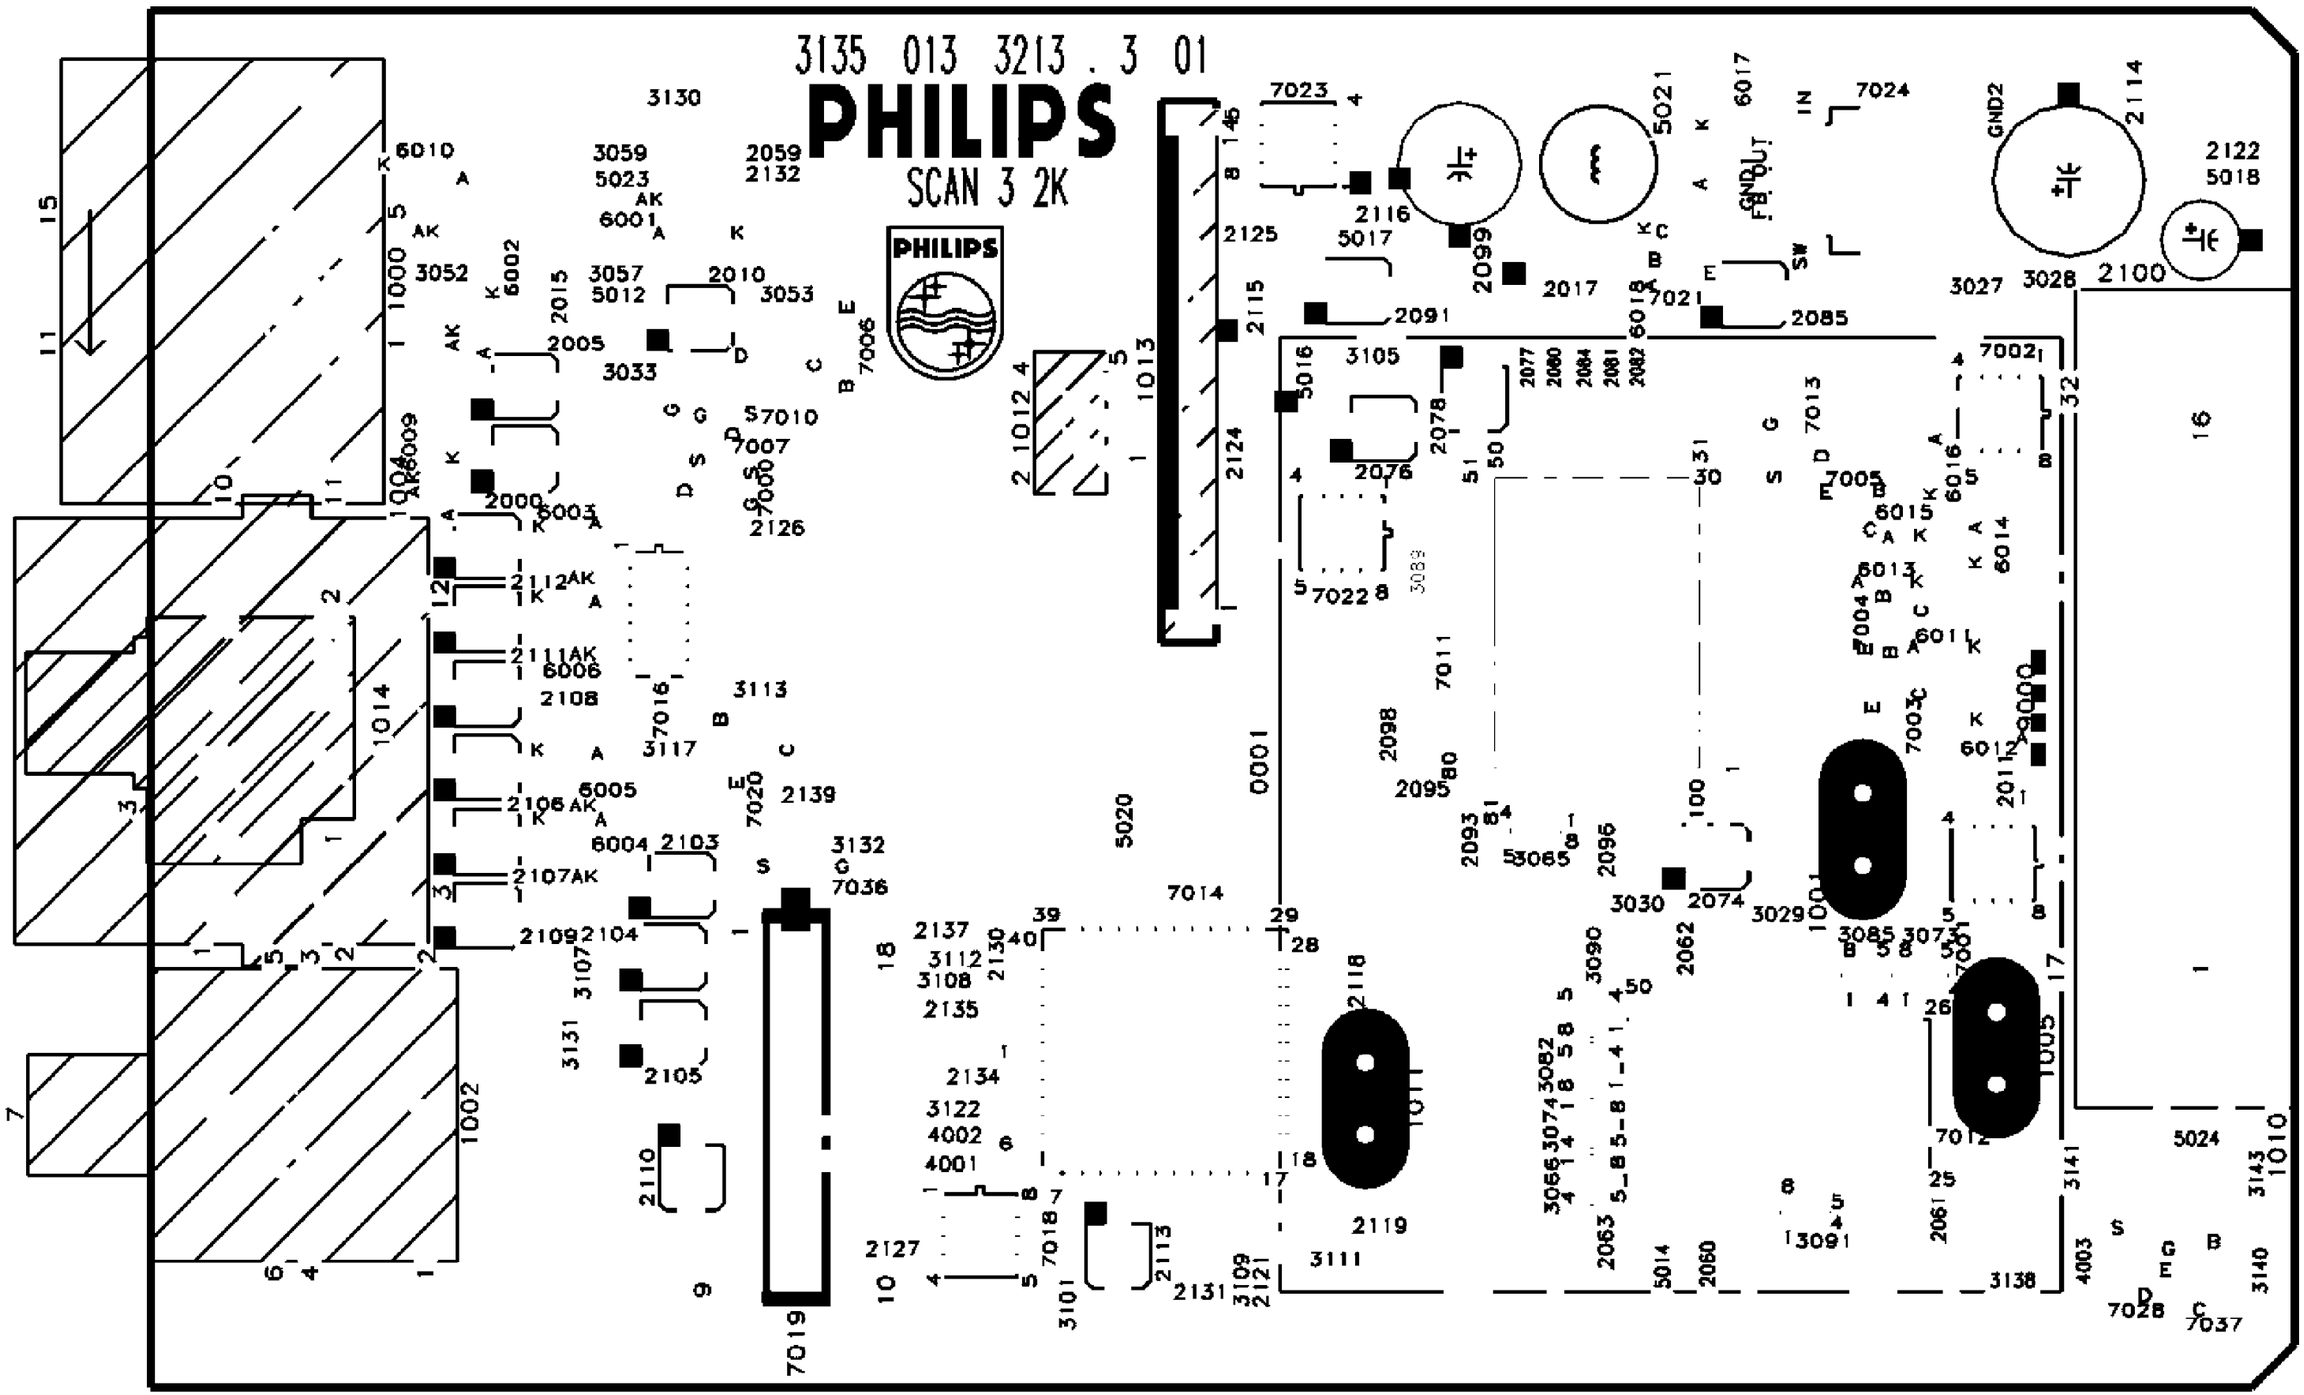

USED ONLY IN MODELS: SC3927C121, SC3925C121, PA9032C101 (7583) - ITV SCAN 3 CARD - A10797 (BOTTOM VIEW)

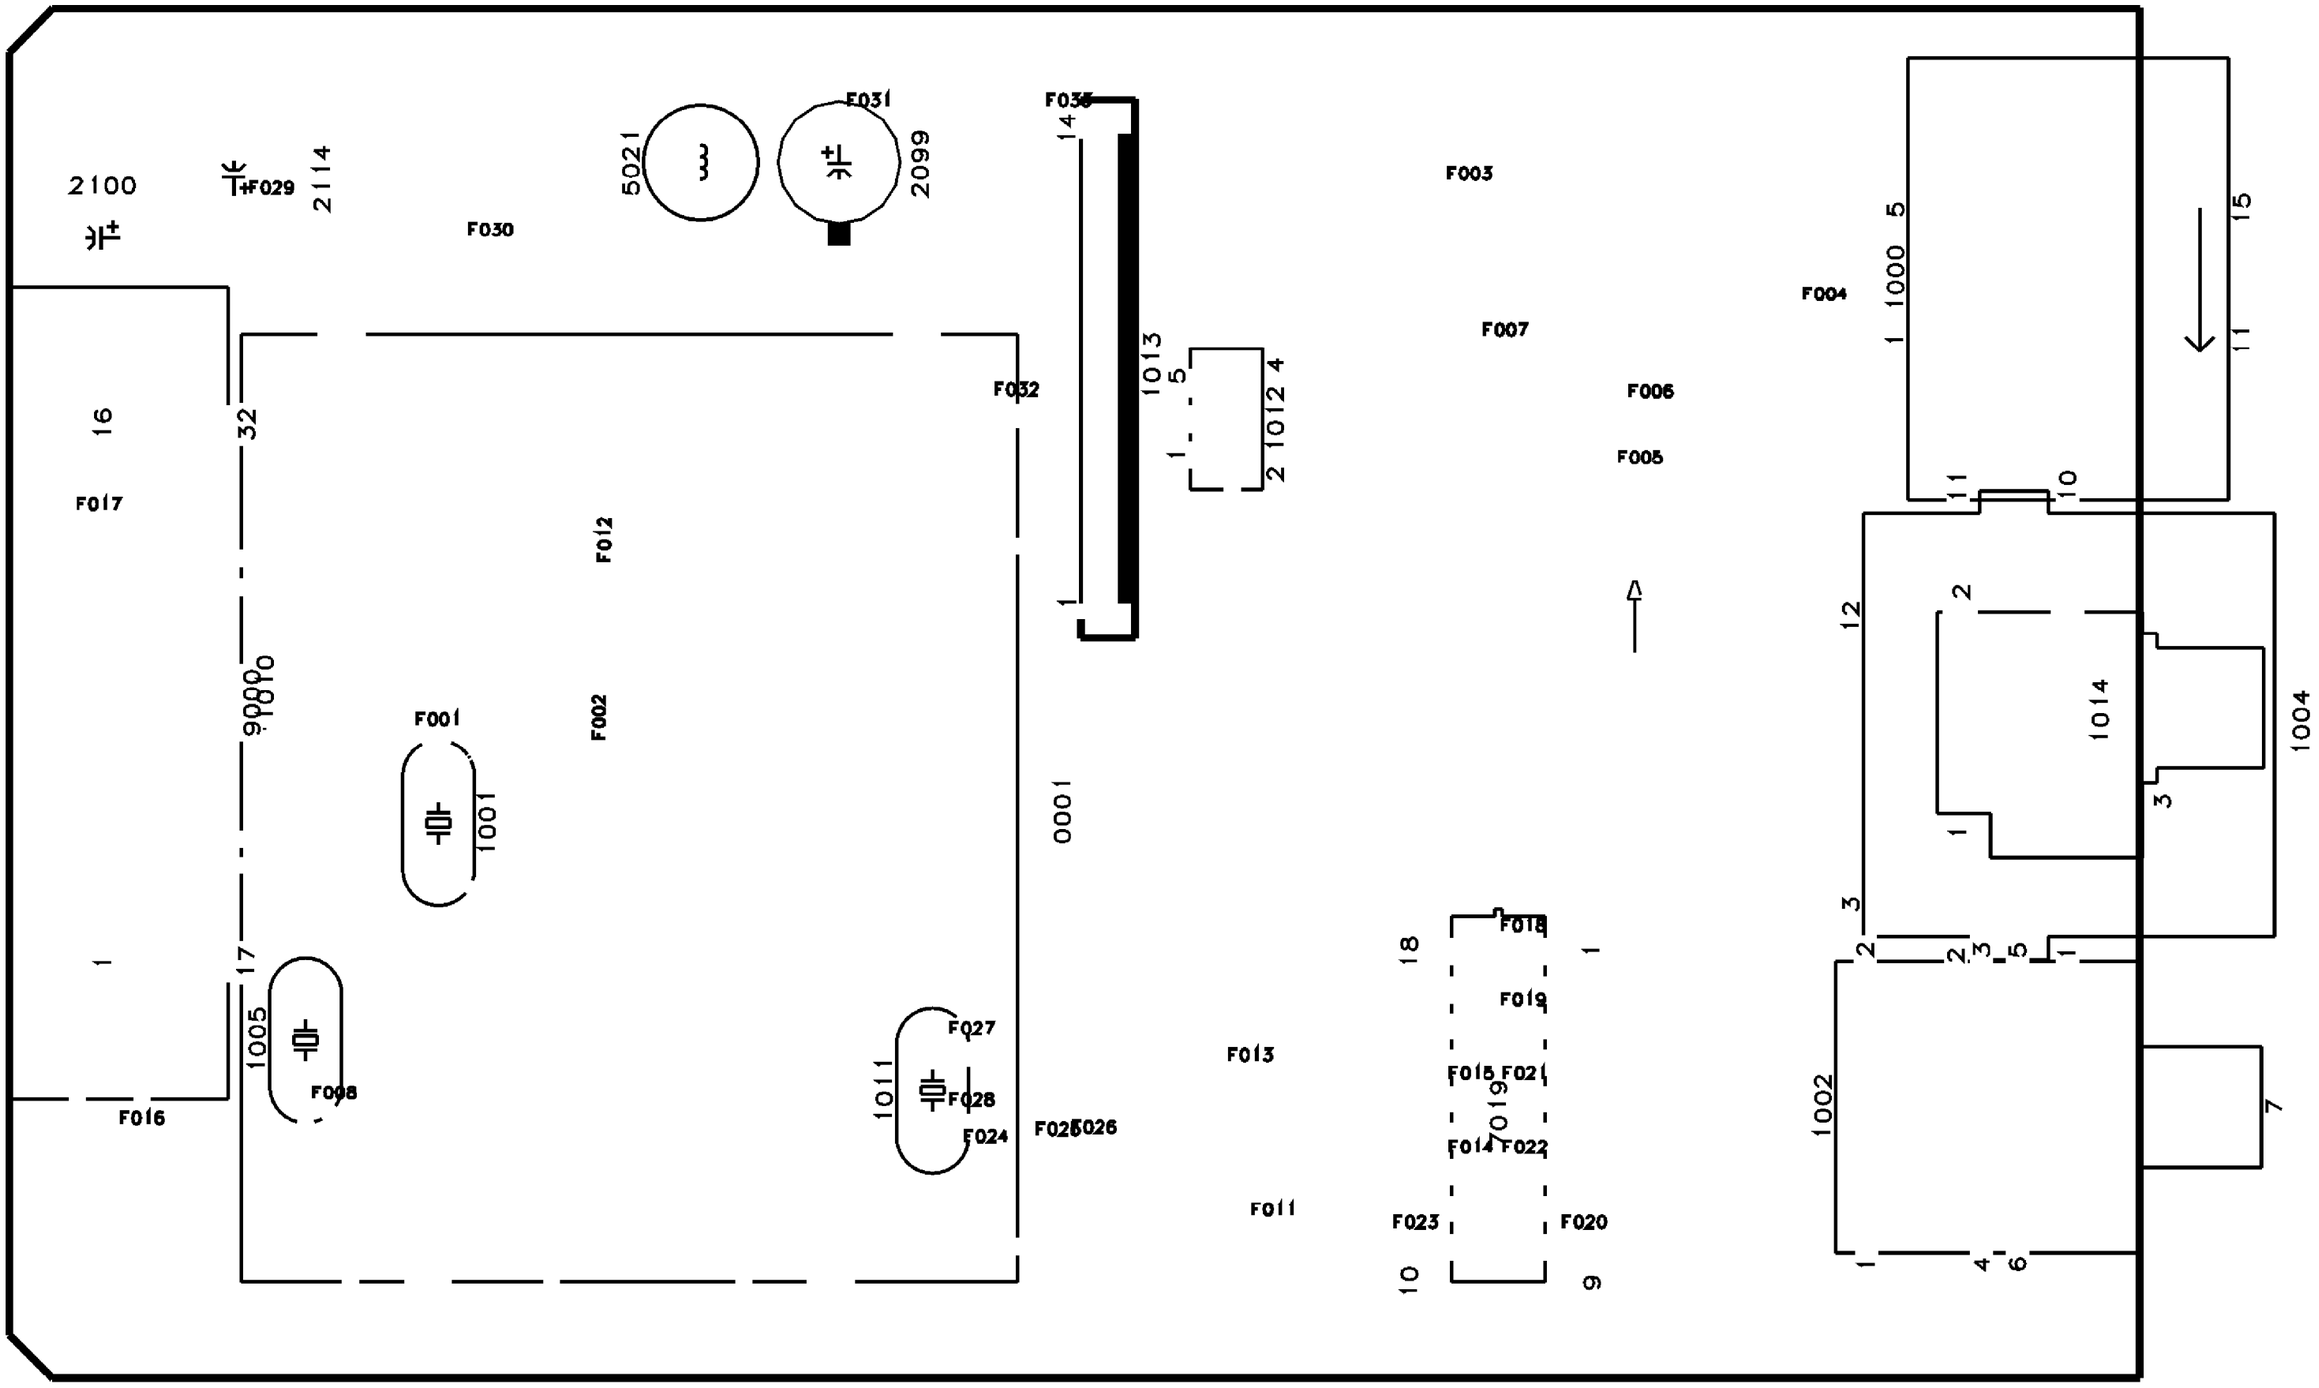

USED ONLY IN MODELS: SC3925C121, SC3925N121 (7583) - NET 1 CARD (TOP VIEW)

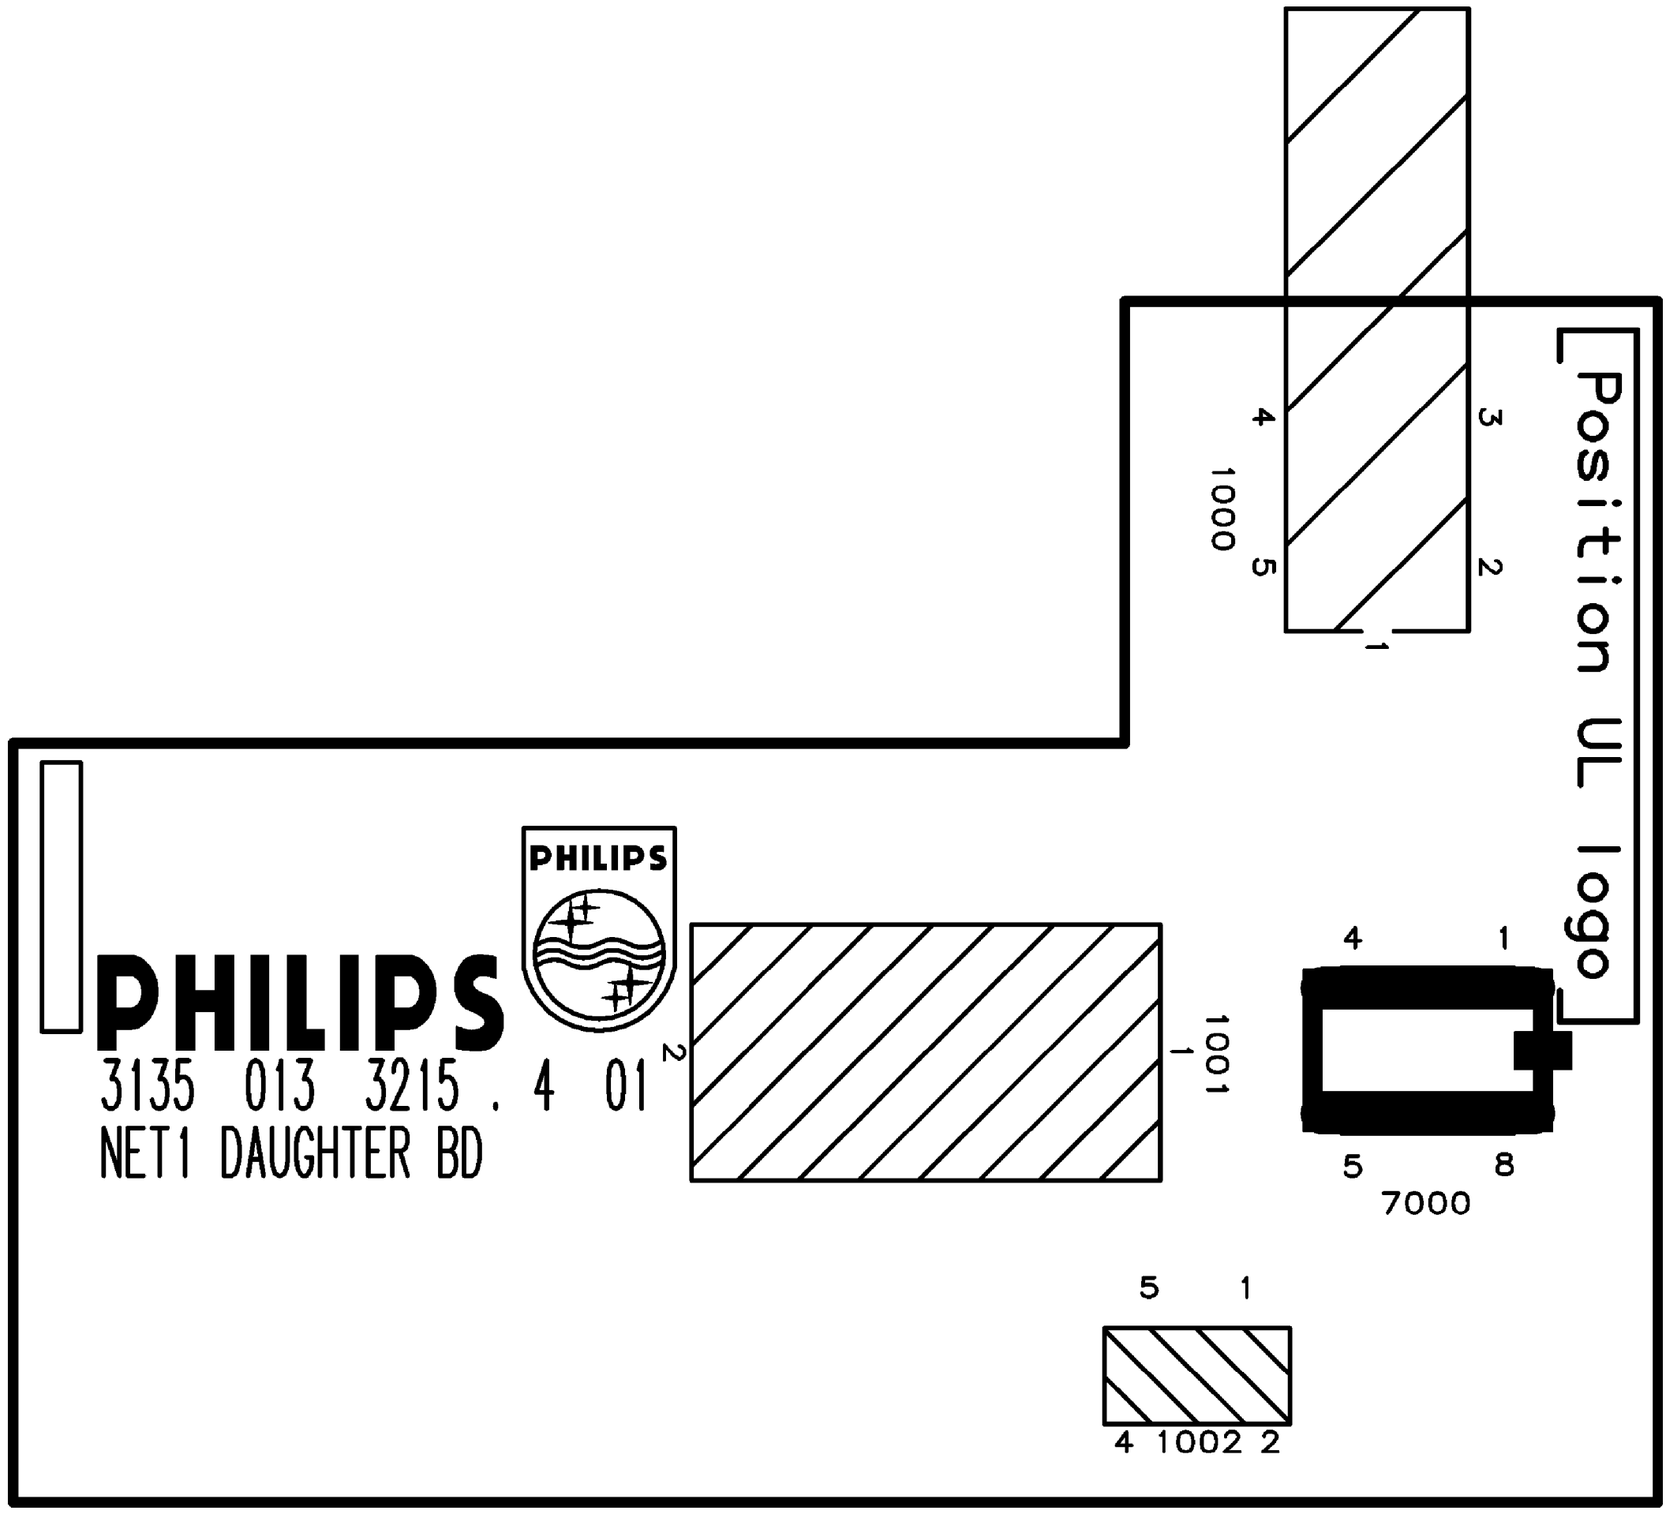

USED ONLY IN MODELS: SC3925C121, SC3925N121 (7583) - NET 1 CARD (BOTTOM VIEW)

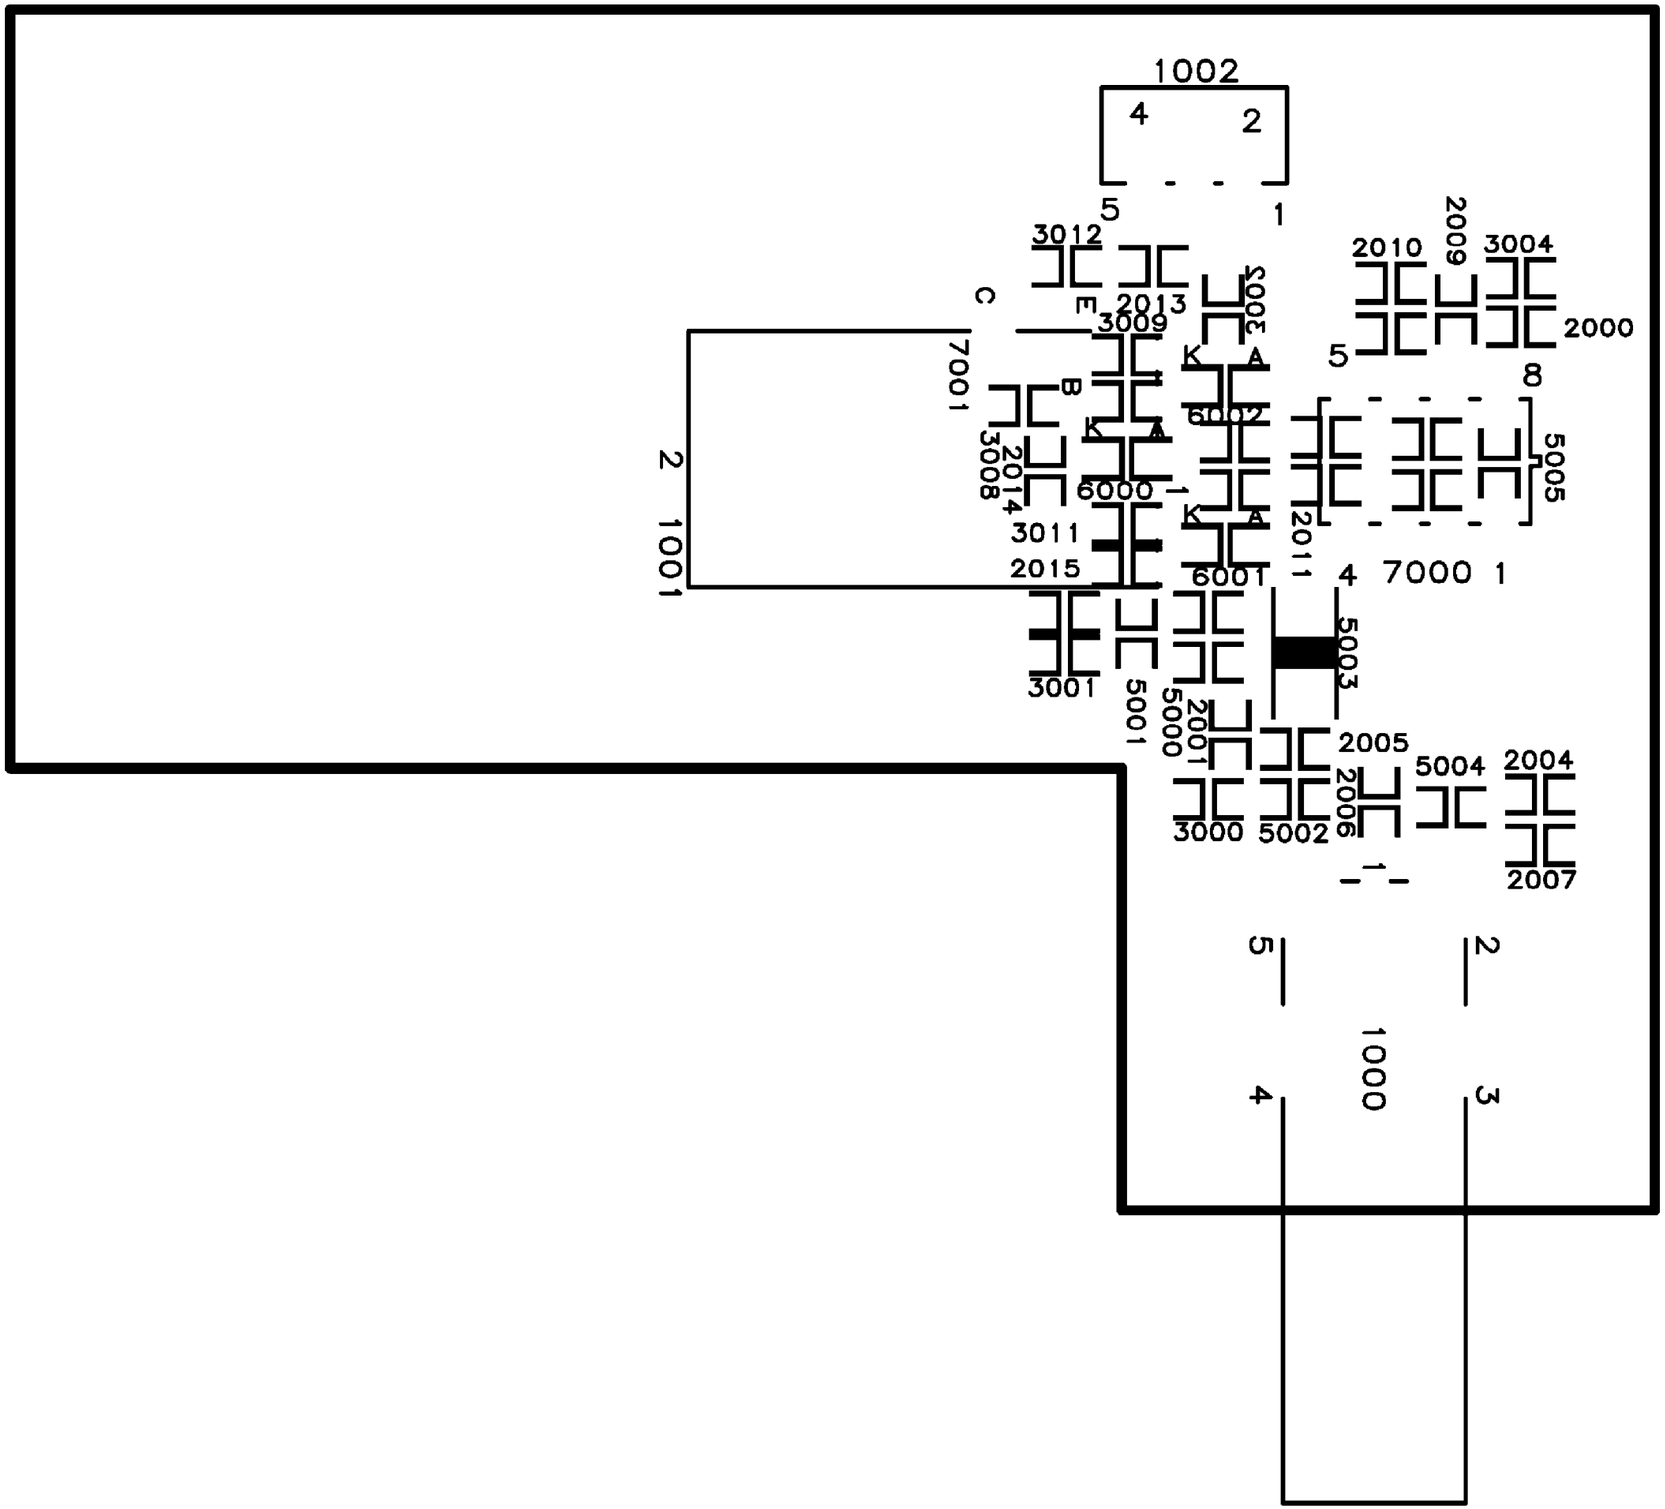

TYPICAL TABLE MODEL EXPLODED VIEW

REF.		DESCRIPTION
AC01	⚠	AC Power Cord
AC02	⚠	Anode Clip
AC03		Cabinet Back
AC04		Cabinet Front
AC05		Chassis Guide
AC06		Control Buttons
AC07	⚠	Convergence and Purity Assembly
AC08	⚠	CRT
AC09	⚠	Degaussing Coil
AC10		Degaussing Coil Holder (4 Used)
AC11		Light Guide
AC12		Nameplate
AC13		Owner's Manual
AC14		Power Button
REMOTE		Remote Transmitter
AC16		Speaker
AC17		Strain Relief for AC Cord
AC18	⚠	Yoke
AC19		Yoke Wedge
AC20		AC Adaptor (Not Shown)
AC21		Batteries for Remote Transmitter (Not Shown)
AC22		Card Door Cover (Not Shown)
AC23		Card Housing (Not Shown)
AC24		Degaussing Coil Spring (Not Shown)
AC25		Instruction Sheet (Not Shown)
AC26		Jack Panel, Plastic (Not Shown)
AC27		OCV Card Door Cover (Not Shown)
AC28		RF Cable (Not Shown)
AC29		Vent Cover (Not Shown)
AC30		**Extra Power Supply Bracket** (Not Shown)
AC31		**Extra Power Supply Module** (Not Shown)
AC32		Scan Card Cover
AC33		Jack Panel, Plastic

Note: Some parts listed are not available in all models.

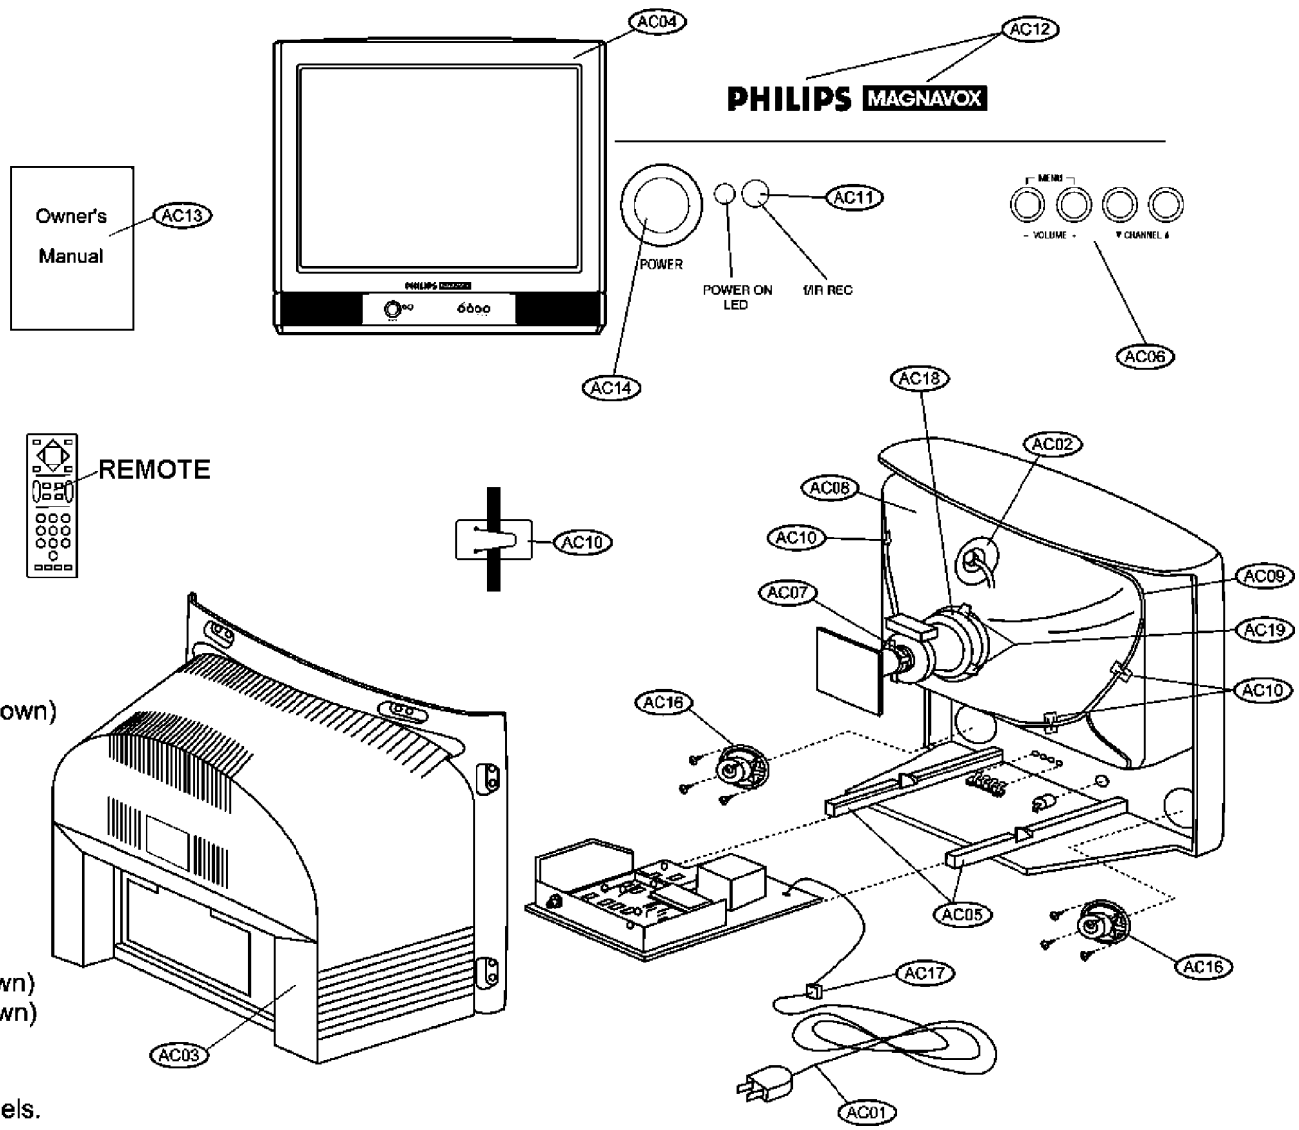

MAIN CABINET EXPLODED VIEW

25PT10C121 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts		
S 0127	3.15 Amp Fuse, ...	3122 358 72141	
0152	Cable, DIP, 6 Pin, 400mm	3104 301 09421	
0153	4 Pin Cable.	3104 301 09431	
0212	Connector, 2 Pin	2422 025 15396	
0215	Connector, 2 Pin	2412 020 00724	
0220	4 Pin Board Connector.	2422 025 04852	
0224	1 Pin Board Connector.	2422 034 20021	
0228	1 Pin Board Connector.	2422 034 20021	
S 0243	Connector, 6 Pin	2422 025 04854	
0244	4 Pin Board Connector.	2422 025 04852	
S 0245	Connector, 6 Pin	2422 025 04854	
S 0254	CRT Socket (9 Pin)	2422 500 80022	
0267	Connector, 3 Pin	2412 020 00725	
1000	Tuner.	2422 542 90057	
1001	Filter	2422 549 42501	
1003	45 MHz SAW, Filter,.	2422 549 42433	
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807	
1208	Crystal Resonator.	4835 242 77276	
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10869	
S 1571	1 Amp, Radial Fuse,.	4835 253 97162	
S 1572	1 Amp, Radial Fuse,.	4835 253 97162	
S 1580	Relay, 12V	2422 132 07317	
1600	Switch, Tactile.	2422 128 02742	
1601	Switch, Tactile.	2422 128 02742	
1602	Switch, Tactile.	2422 128 02742	
1603	Switch, Tactile.	2422 128 02742	
1606	Switch, Tactile.	2422 128 02742	
1660	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488	
2001	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2002	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2003	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2004	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2006	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290	
2011	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2201	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2202	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2203	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2204	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2205	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2207	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2208	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2209	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2211	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2212	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2213	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2214	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2215	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280	
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 16654	
2220	Cap, 18p, 5%, 50V, Ceramic	3198 016 01890	
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2222	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2226	Cap, 33u, 20%, 25V, Electrolytic . .	2020 021 90124	
2227	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2228	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780	
2247	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2248	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2249	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2330	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177	
2340	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495	
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320	
S 2343	Cap, 3n3, 10%, 2KV, Ceramic.	2020 558 90529	
2345	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020	
2401	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2402	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2404	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2405	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2407	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2409	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2420	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2426	Cap, 100n, 10%, 63V, Metalized Polyes ter.	2222 370 75104	
2428	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220	
2429	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2430	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2431	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2437	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2438	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2448	Cap, 220p, 10%, 500V, Ceramic. . . .	3198 019 42210	
2450	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91139	
2451	Cap, 15n, 10%, 50V, Polyester. . . .	2020 300 90575	
2451	0.01uF., 10%, 50V, Polyester, only 27	3198 138 20941	
2456	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176	
2457	Cap, 390n, 5%, 250V, Metalized Polypr opylene.	2222 479 90021	
2458	Cap, 2u2, 20%, 100V, Electrolytic. .	2020 021 91331	
2459	Cap, 680p, 10%, 500V, Ceramic. . . .	3198 019 46810	
2461	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020	
2462	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176	
2463	470pF., 10%, 2KV, Ceramic.	4835 122 47638	
S 2465	Cap, 10n, 5%, 1600V, Polypropylene .	2222 375 90154	
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050	
2473	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790	
2481	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740	
2482	Cap, 68n, 10%, 250V, Polyester . . .	2222 347 90234	
2484	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2485	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293	
2486	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2487	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2488	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2489	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2490	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710	
2491	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710	
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810	
2500	0.47uF., 250V, Polyester	4835 121 47569	
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
S 2507	Cap, 1n5, 10%, 1KV, Ceramic.	2020 558 90443	
2508	Cap, 470u, 20%, 200V, Electrolytic .	2020 024 90647	
S 2511	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020	
S 2518	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290	
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320	
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320	
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2530	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 021 91147	
2531	Cap, 1n, 2%, 50V, Polypropylene. . .	2020 310 90049	
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220	
2540	Cap, 100u, 20%, 25V, Electrolytic. .	2020 021 90547	
S 2545	1500pF., 250VAC, Ceramic	4835 122 47621	
S 2550	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2551	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91358	
2561	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020	
S 2562	Cap, 220p, 10%, 1KV, Ceramic	2020 558 90424	
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020	
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020	
2572	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330	
2575	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820	
2577	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020	
2586	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2604	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290	
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2613	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2615	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2619	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2622	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890	
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2629	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230	
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2631	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2679	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2681	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2913	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280	
2914	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330	
2915	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	
2916	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648	
2917	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2960	Cap, 220u, 20%, 50V, Electrolytic. .	3198 026 52210	
2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090	
2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090	
2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090	
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	

S = Safety Part Be sure to use exact replacement part.

25PT10C121 (continued)

	3010	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610		3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
	3013	Zero ohm,.	4835 111 27056		3469	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
	3014	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052		3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
	3015	22k, 5%, 1/10W, Metal Film	4835 111 37441		3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703
	3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810		3481	Res, 100K, 1%, 3/5W, Metal Film. . .	2322 156 21004
	3021	Res, 1K, 2%, 0,25W	4822 051 10102		3482	Res, 32K4, 1%, 3/5W, Metal Film. . .	2322 156 23243
	3200	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
	3201	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253		3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3203	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443	S	3485	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
	3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	S	3486	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3205	Res, 1K, 2%, 0,25W	4822 051 10102	S	3487	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3206	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	S	3488	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
	3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3490	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3209	22k, 5%, 1/10W, Metal Film	4835 111 37441	S	3491	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3212	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253	S	3492	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3213	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3495	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272
	3215	22k, 5%, 1/10W, Metal Film	4835 111 37441		3496	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3216	Zero ohm,.	4835 111 27056		3497	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3218	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
	3219	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	S	3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225
	3220	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3503	10ohm, 120VAC, Positive Temperature C	
	3225	100k, 5%, 1/10W, Metal Film.	4835 111 37434			oefficient	4835 116 47001
	3228	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3505	Surge Protector.	2422 549 43073
	3231	Zero ohm,.	4835 111 27056	S	3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
	3232	Zero ohm,.	4835 111 27056	S	3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333
	3233	Zero ohm,.	4835 111 27056	S	3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102
	3243	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052		3512	15k, 5%, 1/10W, Metal Film	4835 111 37458
	3246	82k, 5%, 1/10W, Metal Film	4835 111 37277		3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184
	3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204
	3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3515	2.5 ohm, 20%, 3.6W, Negative Temperat	
	3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340			ure Coefficient.	2122 612 00023
	3250	Zero ohm,.	4835 111 27056		3516	Res, 1K, 2%, 0,25W	4822 051 10102
	3251	100k, 5%, 1/10W, Metal Film.	4835 111 37434		3517	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
	3252	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	S	3518	Res, 0R22, 5%, 3W, Metal Film. . . .	2120 106 90548
	3253	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		3520	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
	3257	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3521	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443
	3258	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3525	33 ohm, 5%, 1/3W, Metal Film	4835 116 57665
	3259	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3528	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3529	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
	3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3530	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3532	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
	3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3534	15k, 5%, 1/10W, Metal Film	4835 111 37458
	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3536	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
	3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3537	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
S	3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109	S	3542	4.7 Megohm, 5%, 1/2W, Metal Film . .	4835 116 57009
S	3341	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483		3570	15k, 5%, 1/10W, Metal Film	4835 111 37458
S	3342	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483		3571	Res, 150K, 1%, 3/5W, Metal Film. . .	2322 156 21504
	3343	1.5k, 20%, 1/2W, Carbon Composition.	4835 110 47034		3573	Res, 2K, 1%, 1/10W, Metalized Glass.	2120 108 92657
	3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290		3574	33k, 5%, 1/10W, Metal Film	4835 111 37248
S	3345	VDR, DC, 1mA, 50V, MAX 115V	2322 593 13507		3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290		3577	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3401	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380		3578	Res, 1K, 2%, 0,25W	4822 051 10102
	3402	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380		3579	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
	3403	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380		3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3405	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002		3592	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3406	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020		3594	22k, 5%, 1/10W, Metal Film	4835 111 37441
	3407	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002		3595	68k, 5%, 1/6W, Carbon Film	4835 111 37205
	3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020		3596	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3409	1.5 ohm, 5%, 1/3W, Metal Film. . . .	4835 116 57664		3597	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
	3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210		3598	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210		3599	22k, 5%, 1/10W, Metal Film	4835 111 37441
	3420	470k, 5%, 1/10W, Metal Film.	4835 111 37407		3607	8.2k, 5%, 1/8W, Inline Package . . .	4835 111 97046
	3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220		3608	2.2k, 5%, 1/8W, Inline Package . . .	4835 111 97049
	3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220		3609	2.2k, 5%, Resistor Network	2120 108 93868
	3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840		3611	Res, 1K, 2%, 0,25W	4822 051 10102
	3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606		3612	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3425	150k, 5%, 1/10W, Metal Film.	4835 111 27045		3613	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3426	39k, 5%, 1/10W, Metal Film	4835 111 27051		3615	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3428	22k, 5%, 1/10W, Metal Film	4835 111 37441		3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3429	27k, 5%, 1/10W, Metal Film	4835 111 37442		3619	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
	3431	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247		3629	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259
	3432	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
	3433	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030		3631	27k, 5%, 1/10W, Metal Film	4835 111 37442
	3436	Res, 1K, 2%, 0,25W	4822 051 10102	S	3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63479
	3437	10k, 5%, 1/10W, Metal Film	4835 111 37216		3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210
	3438	33k, 1/4W, Carbon Film	4835 110 57375		3634	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
	3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920		3635	22k, 5%, 1/10W, Metal Film	4835 111 37441
	3447	10k, 5%, 1/10W, Metal Film	4835 111 37216		3636	22k, 5%, 1/10W, Metal Film	4835 111 37441
	3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3637	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
	3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320		3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
S	3452	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63229		3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
S	3453	Res, 4R7, 5%, 5W, Wire Wound	2322 251 41478		3653	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
S	3454	Res, 33K, 5%, 1 1/3W, Metal Film . .	2322 194 63333		3654	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
	3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020		3655	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
	3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720		3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710
S	3462	Res, 6K8, 5%, 5W, Metal Film	2322 257 41682		3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790		3662	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
	3464	Res, 1K, 2%, 0,25W	4822 051 10102		3663	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
S	3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109		3664	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
	3466	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903		3665	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
	3467	Res, 14K, 1%, 3/5W, Metal Film . . .	2322 156 21403		3666	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376
	3467	Res, 15K, 1%, 3/5W, Metal Film . . .	2322 156 21503		3667	27k, 5%, 1/10W, Metal Film	4835 111 37442

S = Safety Part Be sure to use exact replacement part.

25PT10C121 (continued)

3672	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
3673	10k, 5%, 1/10W, Metal Film	4835 111 37216
3674	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231
3675	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3676	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3677	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3680	680 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37271
3681	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
3682	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
3683	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
3684	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
3908	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710
3909	Res, 1K, 2%, 0,25W	4822 051 10102
3910	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376
3911	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230
3912	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
3913	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3914	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820
3915	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231
3916	220 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37371
3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810
3951	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3953	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272
3955	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
4001	Zero ohm,.	4835 111 27056
4002	Zero ohm,.	4835 111 27056
4004	Zero ohm,.	4835 111 27056
4007	Zero ohm,.	4835 111 27056
4009	Zero ohm,.	4835 111 27056
4010	Zero ohm,.	4835 111 27056
4011	Zero ohm,.	4835 111 27056
4012	Zero ohm,.	4835 111 27056
4013	Zero ohm,.	4835 111 27056
4020	Zero ohm,.	4835 111 27056
4051	Zero ohm,.	4835 111 27056
4100	Zero ohm,.	4835 111 27056
4101	Zero ohm,.	4835 111 27056
4102	Zero ohm,.	4835 111 27056
4103	Zero ohm,.	4835 111 27056
4143	Zero ohm,.	4835 111 27056
4144	Zero ohm,.	4835 111 27056
4203	Zero ohm,.	4835 111 27056
4207	Zero ohm,.	4835 111 27056
4212	Zero ohm,.	4835 111 27056
4214	Zero ohm,.	4835 111 27056
4215	Zero ohm,.	4835 111 27056
4216	Zero ohm,.	4835 111 27056
4501	Zero ohm,.	4835 111 27056
4602	Zero ohm,.	4835 111 27056
4650	Zero ohm,.	4835 111 27056
4651	Zero ohm,.	4835 111 27056
4652	Zero ohm,.	4835 111 27056
4654	Zero ohm,.	4835 111 27056
4655	Zero ohm,.	4835 111 27056
4684	Zero ohm,.	4835 111 27056
4687	Zero ohm,.	4835 111 27056
4831	Zero ohm,.	4835 111 27056
4832	Zero ohm,.	4835 111 27056
4833	Zero ohm,.	4835 111 27056
4902	Zero ohm,.	4835 111 27056
4903	Zero ohm,.	4835 111 27056
4904	Zero ohm,.	4835 111 27056
4905	Zero ohm,.	4835 111 27056
4909	Zero ohm,.	4835 111 27056
4911	Zero ohm,.	4835 111 27056
4912	Zero ohm,.	4835 111 27056
4914	Zero ohm,.	4835 111 27056
4957	Zero ohm,.	4835 111 27056
4999	Zero ohm,.	4835 111 27056
5000	Coil, 5u6.	3198 018 25680
5004	Coil, 820n	2422 535 97314
5201	Coil, 22u.	3198 018 22290
5202	Coil, 6u8.	3198 018 16880
5342	22uH., 10%, Coil, Peaking.	4835 157 67069
S 5445	Transformer, L.O.T., models ending in C101, C121, and C125	2422 531 02327
S 5445	Transformer, L.O.T., models ending in C221 and C225.	3128 138 20941
5451	Coil, 27u.	2422 535 96614
5457	Coil, Linear Correction.	3128 138 53241
5461	Transformer.	3128 138 33811
5480	Coil, 27u.	2422 535 97334
5480	Coil, 39u.	2422 535 97336
5480	33uH., Peaking Coil, only in 25. . .	4835 157 58205
S 5500	Filter, Mains, 5mH, 2A	2422 549 43432
5516	100uH., Coil	4835 157 67078
5518	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5521	Coil, 2u2.	3198 018 12280
5540	Coil, 4u7.	3198 018 14780
S 5545	Transfomer,.	2422 531 02314
5551	27uH., 5%, Coil, Peaking	4835 157 67052
5552	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5572	100uH., Coil	4835 157 67078
5573	100uH., Coil	4835 157 67078
5576	100uH., Coil	4835 157 67078
5577	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5600	Coil, 8u2.	3198 018 18280
5601	Coil, 8u2.	3198 018 18280
5620	Coil, 6u8.	3198 018 16880
5821	Coil, 100u	3198 018 21010
6008	Zener, 33 Volt BZX79-C33	4835 130 37904
6211	Diode, 1N4148.	4835 130 37048
6212	Diode, 1N4148.	4835 130 37048
6213	Diode, 1N4148.	4835 130 37048
6331	Diode.	4835 130 37294
6333	Diode.	4835 130 37294
6335	Diode.	4835 130 37294
6401	Diode.	4835 130 37094
6402	Zener, 33 Volt, BZX79-C33.	4835 130 37904
6403	Diode.	4835 130 37094
6404	Diode.	4835 130 37094
6449	Diode, 1N4148.	4835 130 37048
6450	Diode, 1N4148.	4835 130 37048
6460	Diode, Rect, BY228/20	9336 215 80112
6463	Diode, 1N4148.	4835 130 37048
6464	Zener, 6.2 Volt, BZX79-B6V2.	4835 130 37948
6465	Diode, BYD33J.	4835 130 37094
6466	Diode, BYD33J.	4835 130 37094
6480	Diode, Zener	4835 130 37947
6481	Diode, 1N4148.	4835 130 37048
6485	Diode, BYD33J.	4835 130 37094
6486	Diode, EGP20DL-530	4835 130 37919
6487	Diode.	4835 130 37094
6488	Diode, Rect, BYV27-200.	9322 126 72673
6490	Diode, Rect, BYV27-200.	9322 126 72673
6505	Diode, Bridge Rect, GBU6JL-7002 . .	9322 138 08667
6507	Diode, BYD33J.	4835 130 37094
6508	Diode, BYD33J.	4835 130 37094
6510	Zener Diode, 20 volt	9331 178 60133
6511	Diode, BYV95C.	4835 130 37052
6512	Diode, Rect, BY228/20	4822 130 41275
6513	Diode, Rect, BY228/20	4822 130 41275
6514	Zener, 18 Volt, BZX79-C18.	4835 130 37908
6540	Diode.	4835 130 37294
6550	Diode, Rect, BY229X-800	9340 380 30127
6560	Diode, EGP20DL-530	4835 130 37919
6580	Diode, Rect, BYV27-200.	9322 126 72673
6584	Diode, 1N4148.	4835 130 37048
6585	Diode, 1N4148.	4835 130 37048
6591	Diode, BAS216.	4835 130 37905
6601	Diode, Zener	4835 130 37684
6606	Zener, 4.7 Volt, BZX79-C4V7.	4835 130 37005
6607	Zener, 6.8 Volt, BZX79-C6V8.	4835 130 37945
6690	LED, LTL-307P.	4835 130 97096
6951	Diode, BAS216.	4835 130 37905
6961	Diode, BAS216.	4835 130 37905
7250	IC,.	9352 620 26112
7251	IC, LM317T	9337 220 80682
7254	Transistor, NPN, BC847B.	4822 130 60511
7256	Transistor, NPN, BC847B.	4822 130 60511
7258	Transistor, NPN, BC847B.	4822 130 60511
7263	Transistor, PNP, BC857B.	5322 130 60508
7266	Transistor, NPN, BC847B.	4822 130 60511
7330	IC,.	9352 184 10112
7401	IC,.	9322 121 47687
7460	Transistor, NPN, BU1508DX.	9340 170 50127
7461	Transistor, NPN, BF819	9335 354 50127
7462	Transistor, BC547B	4835 130 47055
7463	Transistor, BC557B	4835 130 47409
7480	IC,.	9322 028 93682
7481	Transistor, BC557B	4835 130 47409
7482	Transistor, PNP, BC857B.	5322 130 60508
7518	STH8NA60FI SMPS FET	9322 068 92687
7518	STH10NC60FI SMPS FET.	9322 155 66687
7520	IC, MC44603A	4835 209 88537
7570	IC,.	9337 711 00676
S 7581	Coupler, TCDT1101G	9338 431 30682
7590	Transistor, NPN, BC847B.	4822 130 60511
7591	Transistor, NPN, BC847B.	4822 130 60511
7592	Transistor, NPN, BC847B.	4822 130 60511
7600	IC, SAA5543PS/M4/1046 L90US1-1.4 . .	4835 310 57477
7601	IC, ST24W04B6.	9322 097 23682
7603	Transistor, NPN, BC337	9331 796 00126
7604	Transistor, NPN, BC847B.	4822 130 60511
7605	Transistor, NPN, BC847B.	4822 130 60511
7608	Transistor, NPN, BC847B.	4822 130 60511
7609	Transistor, NPN, BC847B.	4822 130 60511
7680	IR Receiver.	9322 127 53667
7904	Transistor, NPN, BC847B.	4822 130 60511
7905	Transistor, NPN, BC847B.	4822 130 60511

S = Safety Part Be sure to use exact replacement part.

25PT10C121 (continued)

7906	Transistor, NPN, BC847B.	4822	130 60511
7952	IC,.	4835	209 88542
CBA	00EMF803A002 Main Chassis Board Asm.	00EM	F80 3A002

Cabinet & Accessory Parts

	Cabinet & Accessory Parts		
S AC01	Mainscord, 125V, 10A	3135	010 03831
S AC02	Anode Clip	4835	256 97264
AC03	Cabinet Back	3139	124 27951
AC04	Cabinet Front.	3139	137 72701
AC05	Chassis Guide.	3139	124 31381
AC06	Control Buttons.	3139	124 27351
S AC07	Convergence and Purity Assembly. . .	2422	549 43385
S AC08	CRT A63AFW36X (C121 Version)	9301	763 20443
S AC09	Coil, Degaussing	3121	218 62961
AC11	Light Guide.	3139	124 26461
AC13	Owner's Manual	3135	015 16431
AC14	Power Button	3139	124 26444
REMOTE	Remote Transmitter, RC282901/01. . .	3139	228 81441
AC16	Speaker, 16R, 1W5 (2 Used)	2422	264 00343
S AC18	Yoke (C121 Version).	3321	203 00121
AC19	Yoke Wedge (3 Used).	4835	535 27001
AC21	Battery, 1.5V AA, 2-Pack, (Not Shown	9299	000 10137
AC24	Spring	3139	121 26231

S = Safety Part Be sure to use exact replacement part.

25PT15C121 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts	
S 0127	3.15 Amp Fuse, ...	3122 358 72141
0152	Cable, DIP, 6 Pin, 400mm	3104 301 09421
0153	4 Pin Cable.	3104 301 09431
0212	Connector, 2 Pin	2422 025 15396
0220	4 Pin Board Connector.	2422 025 04852
0223	3 Pin Board Connector.	2422 026 04963
0224	1 Pin Board Connector.	2422 034 20021
0228	1 Pin Board Connector.	2422 034 20021
0234	Connector, 4 Pin	2422 025 15847
S 0243	Connector, 6 Pin	2422 025 04854
0244	4 Pin Board Connector.	2422 025 04852
S 0245	Connector, 6 Pin	2422 025 04854
S 0254	CRT Socket (9 Pin)	2422 500 80022
0267	Connector, 3 Pin	2412 020 00725
1000	Tuner.	2422 542 90057
1001	Filter	2422 549 42501
1003	45 MHz SAW, Filter,.	2422 549 42433
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807
1208	Crystal Resonator.	4835 242 77276
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10869
S 1571	1 Amp, Radial Fuse,.	4835 253 97162
S 1572	1 Amp, Radial Fuse,.	4835 253 97162
S 1580	Relay, 12V	2422 132 07317
1600	Switch, Tactile.	2422 128 02742
1601	Switch, Tactile.	2422 128 02742
1602	Switch, Tactile.	2422 128 02742
1603	Switch, Tactile.	2422 128 02742
1606	Switch, Tactile.	2422 128 02742
1660	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488
1821	Ceramic Resonator.	4835 122 97102
2001	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2002	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2003	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2004	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2011	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2102	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2103	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2104	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2201	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2202	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2203	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2204	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2205	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2208	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2209	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2211	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2212	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2213	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2214	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2215	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 16654
2220	Cap, 18p, 5%, 50V, Ceramic	3198 016 01890
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2222	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2226	Cap, 33u, 20%, 25V, Electrolytic . .	2020 021 90124
2227	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2247	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2248	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2249	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2330	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2340	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320
S 2343	Cap, 3n3, 10%, 2KV, Ceramic.	2020 558 90529
2345	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2401	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2402	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2404	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2405	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2407	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2409	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2420	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2426	Cap, 100n, 10%, 63V, Metalized Polyes ter.	2222 370 75104
2428	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2429	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2430	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2431	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2437	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2438	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2448	Cap, 220p, 10%, 500V, Ceramic. . . .	3198 019 42210
2450	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91139
2451	Cap, 15n, 10%, 50V, Polyester. . . .	2020 300 90575
2451	0.01uF., 10%, 50V, Polyester, only 27	3198 138 20941
2456	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176
2457	Cap, 390n, 5%, 250V, Metalized Polypr opylene.	2222 479 90021
2458	Cap, 2u2, 20%, 100V, Electrolytic. .	2020 021 91331
2459	Cap, 680p, 10%, 500V, Ceramic. . . .	3198 019 46810
2461	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2462	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176
2463	470pF., 10%, 2KV, Ceramic.	4835 122 47638
S 2465	Cap, 10n, 5%, 1600V, Polypropylene .	2222 375 90154
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050
2473	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2481	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2482	Cap, 68n, 10%, 250V, Polyester . . .	2222 347 90234
2484	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2485	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2486	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2487	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2488	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2489	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2490	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2491	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810
2500	0.47uF., 250V, Polyester	4835 121 47569
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
S 2507	Cap, 1n5, 10%, 1KV, Ceramic.	2020 558 90443
2508	Cap, 470u, 20%, 200V, Electrolytic .	2020 024 90647
S 2511	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
S 2518	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2530	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 021 91147
2531	Cap, 1n, 2%, 50V, Polypropylene. . .	2020 310 90049
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2540	Cap, 100u, 20%, 25V, Electrolytic. .	2020 021 90547
S 2545	1500pF., 250VAC, Ceramic	4835 122 47621
S 2550	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2551	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91358
2561	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
S 2562	Cap, 220p, 10%, 1KV, Ceramic	2020 558 90424
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2572	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2575	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2577	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2586	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2604	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2613	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2615	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2619	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2622	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2629	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2679	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2681	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2821	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280
2823	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2825	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2826	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090
2827	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2828	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2829	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2830	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280
2831	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2832	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280

S = Safety Part Be sure to use exact replacement part.

25PT15C121 (continued)

2833	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280		3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
2834	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780		3401	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2835	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3402	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2836	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3403	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2837	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740		3405	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002
2838	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3406	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2839	Cap, 1u, 5%, 50V, Metalized Polyester	2020 308 90124		3407	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002
2840	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2841	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3409	1.5 ohm, 5%, 1/3W, Metal Film. . . .	4835 116 57664
2842	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2844	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3420	470k, 5%, 1/10W, Metal Film.	4835 111 37407
2845	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2913	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280		3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2914	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330		3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840
2915	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606
2916	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648		3425	150k, 5%, 1/10W, Metal Film.	4835 111 27045
2917	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3426	39k, 5%, 1/10W, Metal Film	4835 111 27051
2918	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330		3428	22k, 5%, 1/10W, Metal Film	4835 111 37441
2919	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3429	27k, 5%, 1/10W, Metal Film	4835 111 37442
2920	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648		3431	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
2921	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3432	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
2931	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280		3433	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3436	Res, 1K, 2%, 0,25W	4822 051 10102
2952	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3437	10k, 5%, 1/10W, Metal Film	4835 111 37216
2954	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3438	33k, 1/4W, Carbon Film	4835 110 57375
2955	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3447	10k, 5%, 1/10W, Metal Film	4835 111 37216
2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
2960	Cap, 220u, 20%, 50V, Electrolytic. .	3198 026 52210	S	3452	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63229
2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090	S	3453	Res, 4R7, 5%, 5W, Wire Wound	2322 251 41478
2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090	S	3454	Res, 33K, 5%, 1 1/3W, Metal Film . .	2322 194 63333
2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090		3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3462	Res, 6K8, 5%, 5W, Metal Film	2322 257 41682
3010	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610		3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3013	Zero ohm,.	4835 111 27056		3464	Res, 1K, 2%, 0,25W	4822 051 10102
3014	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	S	3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
3015	22k, 5%, 1/10W, Metal Film	4835 111 37441		3466	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903
3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810		3467	Res, 14K, 1%, 3/5W, Metal Film . . .	2322 156 21403
3021	Res, 1K, 2%, 0,25W	4822 051 10102		3467	Res, 15K, 1%, 3/5W, Metal Film . . .	2322 156 21503
3103	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3104	10k, 5%, 1/10W, Metal Film	4835 111 37216		3469	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
3108	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3109	10k, 5%, 1/10W, Metal Film	4835 111 37216		3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703
3123	75 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37276		3481	Res, 100K, 1%, 3/5W, Metal Film. . .	2322 156 21004
3200	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3482	Res, 32K4, 1%, 3/5W, Metal Film. . .	2322 156 23243
3201	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253		3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3203	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443		3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	S	3485	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
3205	Res, 1K, 2%, 0,25W	4822 051 10102	S	3486	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3206	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	S	3487	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3488	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
3209	22k, 5%, 1/10W, Metal Film	4835 111 37441	S	3490	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3212	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253	S	3491	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3213	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	S	3492	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3215	22k, 5%, 1/10W, Metal Film	4835 111 37441		3495	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272
3216	Zero ohm,.	4835 111 27056		3496	10k, 5%, 1/10W, Metal Film	4835 111 37216
3217	Res, 1M5, 5%, 1/8W, Metalized Glass.	2322 730 61155		3497	10k, 5%, 1/10W, Metal Film	4835 111 37216
3218	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3219	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	S	3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225
3220	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3503	10ohm, 120VAC, Positive Temperature C	
3225	100k, 5%, 1/10W, Metal Film.	4835 111 37434			oefficient	4835 116 47001
3228	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3505	Surge Protector.	2422 549 43073
3231	Zero ohm,.	4835 111 27056	S	3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3232	Zero ohm,.	4835 111 27056	S	3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333
3233	Zero ohm,.	4835 111 27056	S	3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102
3243	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052		3512	15k, 5%, 1/10W, Metal Film	4835 111 37458
3246	82k, 5%, 1/10W, Metal Film	4835 111 37277		3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184
3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204
3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3515	2.5 ohm, 20%, 3.6W, Negative Temperat	
3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340			ure Coefficient.	2122 612 00023
3250	Zero ohm,.	4835 111 27056		3516	Res, 1K, 2%, 0,25W	4822 051 10102
3251	100k, 5%, 1/10W, Metal Film.	4835 111 37434		3517	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3252	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	S	3518	Res, 0R22, 5%, 3W, Metal Film. . . .	2120 106 90548
3253	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		3520	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3257	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3521	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443
3258	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3525	33 ohm, 5%, 1/3W, Metal Film	4835 116 57665
3259	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3528	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3529	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3530	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3532	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3534	15k, 5%, 1/10W, Metal Film	4835 111 37458
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3536	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3537	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
S 3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109	S	3542	4.7 Megohm, 5%, 1/2W, Metal Film . .	4835 116 57009
S 3341	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483		3570	15k, 5%, 1/10W, Metal Film	4835 111 37458
S 3342	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483		3571	Res, 150K, 1%, 3/5W, Metal Film. . .	2322 156 21504
3343	1.5k, 20%, 1/2W, Carbon Composition.	4835 110 47034		3573	Res, 2K, 1%, 1/10W, Metalized Glass.	2120 108 92657
3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290		3574	33k, 5%, 1/10W, Metal Film	4835 111 37248
S 3345	VDR, DC, 1mA, 50V, MAX 115V	2322 593 13507		3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010

S = Safety Part Be sure to use exact replacement part.

25PT15C121 (continued)

3577	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3578	Res, 1K, 2%, 0,25W	4822 051 10102	
3579	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451	
3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3592	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3594	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3595	68k, 5%, 1/6W, Carbon Film	4835 111 37205	
3596	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3597	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3598	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3599	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3607	8.2k, 5%, 1/8W, Inline Package . . .	4835 111 97046	
3608	2.2k, 5%, 1/8W, Inline Package . . .	4835 111 97049	
3609	2.2k, 5%, Resistor Network	2120 108 93868	
3611	Res, 1K, 2%, 0,25W	4822 051 10102	
3612	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3613	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3615	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3619	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3629	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259	
3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3631	27k, 5%, 1/10W, Metal Film	4835 111 37442	
S 3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63479	
3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210	
3634	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3635	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3636	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3637	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3653	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3654	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3655	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3662	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3663	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3664	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3665	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3666	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376	
3667	27k, 5%, 1/10W, Metal Film	4835 111 37442	
3672	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3673	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3674	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231	
3675	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3676	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3677	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3680	680 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37271	
3681	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3682	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3683	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3684	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3821	15k, 5%, 1/10W, Metal Film	4835 111 37458	
3822	1.2k, 5%, 1/10W, Metal Film.	4835 111 27042	
3823	100k, 5%, 1/10W, Metal Film.	4835 111 37434	
3824	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3825	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3826	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3827	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3828	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3829	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272	
3830	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272	
3831	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198 011 03310	
3832	47 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37262	
3908	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3909	Res, 1K, 2%, 0,25W	4822 051 10102	
3910	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376	
3911	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230	
3912	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3913	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3914	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	
3915	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231	
3916	220 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37371	
3917	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3918	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3919	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376	
3920	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231	
3921	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230	
3922	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	
3923	220 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37371	
3924	39k, 5%, 1/10W, Metal Film	4835 111 27051	
3925	39k, 5%, 1/10W, Metal Film	4835 111 27051	
3926	39k, 5%, 1/10W, Metal Film	4835 111 27051	
3929	39k, 5%, 1/10W, Metal Film	4835 111 27051	
3930	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3931	Res, 1K, 2%, 0,25W	4822 051 10102	
3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810	
3951	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3953	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3955	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
3957	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
4001	Zero ohm,.	4835 111 27056	
4002	Zero ohm,.	4835 111 27056	
4004	Zero ohm,.	4835 111 27056	
4007	Zero ohm,.	4835 111 27056	
4009	Zero ohm,.	4835 111 27056	
4010	Zero ohm,.	4835 111 27056	
4011	Zero ohm,.	4835 111 27056	
4012	Zero ohm,.	4835 111 27056	
4013	Zero ohm,.	4835 111 27056	
4020	Zero ohm,.	4835 111 27056	
4051	Zero ohm,.	4835 111 27056	
4100	Zero ohm,.	4835 111 27056	
4101	Zero ohm,.	4835 111 27056	
4102	Zero ohm,.	4835 111 27056	
4103	Zero ohm,.	4835 111 27056	
4143	Zero ohm,.	4835 111 27056	
4144	Zero ohm,.	4835 111 27056	
4203	Zero ohm,.	4835 111 27056	
4207	Zero ohm,.	4835 111 27056	
4212	Zero ohm,.	4835 111 27056	
4214	Zero ohm,.	4835 111 27056	
4215	Zero ohm,.	4835 111 27056	
4216	Zero ohm,.	4835 111 27056	
4501	Zero ohm,.	4835 111 27056	
4602	Zero ohm,.	4835 111 27056	
4650	Zero ohm,.	4835 111 27056	
4651	Zero ohm,.	4835 111 27056	
4652	Zero ohm,.	4835 111 27056	
4654	Zero ohm,.	4835 111 27056	
4655	Zero ohm,.	4835 111 27056	
4684	Zero ohm,.	4835 111 27056	
4687	Zero ohm,.	4835 111 27056	
4831	Zero ohm,.	4835 111 27056	
4832	Zero ohm,.	4835 111 27056	
4833	Zero ohm,.	4835 111 27056	
4902	Zero ohm,.	4835 111 27056	
4903	Zero ohm,.	4835 111 27056	
4904	Zero ohm,.	4835 111 27056	
4905	Zero ohm,.	4835 111 27056	
4909	Zero ohm,.	4835 111 27056	
4911	Zero ohm,.	4835 111 27056	
4912	Zero ohm,.	4835 111 27056	
4914	Zero ohm,.	4835 111 27056	
4957	Zero ohm,.	4835 111 27056	
4999	Zero ohm,.	4835 111 27056	
5000	Coil, 5u6.	3198 018 25680	
5004	Coil, 820n	2422 535 97314	
5201	Coil, 22u.	3198 018 22290	
5202	Coil, 6u8.	3198 018 16880	
5342	22uH., 10%, Coil, Peaking.	4835 157 67069	
S 5445	Transformer, L.O.T., models ending in C101, C121, and C125	2422 531 02327	
S 5445	Transformer, L.O.T., models ending in C221 and C225.	3128 138 20941	
5451	Coil, 27u.	2422 535 96614	
5457	Coil, Linear Correction.	3128 138 53241	
5461	Transformer.	3128 138 33811	
5480	Coil, 27u.	2422 535 97334	
5480	Coil, 39u.	2422 535 97336	
5480	33uH., Peaking Coil, only in 25. . .	4835 157 58205	
S 5500	Filter, Mains, 5mH, 2A	2422 549 43432	
5516	100uH., Coil	4835 157 67078	
5518	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5521	Coil, 2u2.	3198 018 12280	
5540	Coil, 4u7.	3198 018 14780	
S 5545	Transfomer,.	2422 531 02314	
5551	27uH., 5%, Coil, Peaking	4835 157 67052	
5552	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5572	100uH., Coil	4835 157 67078	
5573	100uH., Coil	4835 157 67078	
5576	100uH., Coil	4835 157 67078	
5577	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5600	Coil, 8u2.	3198 018 18280	
5601	Coil, 8u2.	3198 018 18280	
5620	Coil, 6u8.	3198 018 16880	
5821	Coil, 100u	3198 018 21010	
5822	Coil, 18u.	3198 018 21890	
6008	Zener, 33 Volt BZX79-C33	4835 130 37904	
6113	Zener Diode, 6.8 volt.	9340 386 40115	
6211	Diode, 1N4148.	4835 130 37048	
6212	Diode, 1N4148.	4835 130 37048	
6213	Diode, 1N4148.	4835 130 37048	
6331	Diode.	4835 130 37294	
6333	Diode.	4835 130 37294	
6335	Diode.	4835 130 37294	
6401	Diode.	4835 130 37094	
6402	Zener, 33 Volt, BZX79-C33.	4835 130 37904	
6403	Diode.	4835 130 37094	

S = Safety Part Be sure to use exact replacement part.

25PT15C121 (continued)

6404	Diode.	4835 130 37094	
6449	Diode, 1N4148.	4835 130 37048	
6450	Diode, 1N4148.	4835 130 37048	
6460	Diode, Rect, BY228/20	9336 215 80112	
6463	Diode, 1N4148.	4835 130 37048	
6464	Zener, 6.2 Volt, BZX79-B6V2.	4835 130 37948	
6465	Diode, BYD33J.	4835 130 37094	
6466	Diode, BYD33J.	4835 130 37094	
6480	Diode, Zener	4835 130 37947	
6481	Diode, 1N4148.	4835 130 37048	
6485	Diode, BYD33J.	4835 130 37094	
6486	Diode, EGP20DL-530	4835 130 37919	
6487	Diode.	4835 130 37094	
6488	Diode, Rect, BYV27-200.	9322 126 72673	
6490	Diode, Rect, BYV27-200.	9322 126 72673	
6505	Diode, Bridge Rect, GBU6JL-7002	9322 138 08667	
6507	Diode, BYD33J.	4835 130 37094	
6508	Diode, BYD33J.	4835 130 37094	
6510	Zener Diode, 20 volt	9331 178 60133	
6511	Diode, BYV95C.	4835 130 37052	
6512	Diode, Rect, BY228/20	4822 130 41275	
6513	Diode, Rect, BY228/20	4822 130 41275	
6514	Zener, 18 Volt, BZX79-C18.	4835 130 37908	
6540	Diode.	4835 130 37294	
6550	Diode, Rect, BY229X-800	9340 380 30127	
6560	Diode, EGP20DL-530	4835 130 37919	
6580	Diode, Rect, SB140.	9339 577 60673	
6584	Diode, 1N4148.	4835 130 37048	
6585	Diode, 1N4148.	4835 130 37048	
6591	Diode, BAS216.	4835 130 37905	
6601	Diode, Zener	4835 130 37684	
6606	Zener, 4.7 Volt, BZX79-C4V7.	4835 130 37005	
6607	Zener, 6.8 Volt, BZX79-C6V8.	4835 130 37945	
6690	LED, LTL-307P.	4835 130 97096	
6821	Zener Diode, 9.1 volt.	9331 177 80133	
6822	Fixed Coil	4835 130 37048	
6951	Diode, BAS216.	4835 130 37905	
6961	Diode, BAS216.	4835 130 37905	
7250	IC,.	9352 620 26112	
7251	IC, LM317T	9337 220 80682	
7254	Transistor, NPN, BC847B.	4822 130 60511	
7256	Transistor, NPN, BC847B.	4822 130 60511	
7258	Transistor, NPN, BC847B.	4822 130 60511	
7263	Transistor, PNP, BC857B.	5322 130 60508	
7266	Transistor, NPN, BC847B.	4822 130 60511	
7330	IC,.	9352 184 10112	
7401	IC,.	9322 121 47687	
7460	Transistor, NPN, BU1508DX.	9340 170 50127	
7461	Transistor, NPN, BF819	9335 354 50127	
7462	Transistor, BC547B	4835 130 47055	
7463	Transistor, BC557B	4835 130 47409	
7480	IC,.	9322 028 93682	
7481	Transistor, BC557B	4835 130 47409	
7482	Transistor, PNP, BC857B.	5322 130 60508	
7518	STH8NA60FI SMPS FET	9322 068 92687	
7518	STH10NC60FI SMPS FET.	9322 155 66687	
7520	IC, MC44603A	4835 209 88537	
7570	IC,.	9337 711 00676	
S 7581	Coupler, TCDT1101G	9338 431 30682	
7590	Transistor, NPN, BC847B.	4822 130 60511	
7591	Transistor, NPN, BC847B.	4822 130 60511	
7592	Transistor, NPN, BC847B.	4822 130 60511	
7600	IC, SAA5543PS/M4/1046 L90US1-1.4	4835 310 57477	
7601	IC, ST24W04B6.	9322 097 23682	
7603	Transistor, NPN, BC337	9331 796 00126	
7604	Transistor, NPN, BC847B.	4822 130 60511	
7605	Transistor, NPN, BC847B.	4822 130 60511	
7608	Transistor, NPN, BC847B.	4822 130 60511	
7609	Transistor, NPN, BC847B.	4822 130 60511	
7680	IR Receiver.	9322 127 53667	
7821	IC,.	9352 374 70112	
7822	IC, HEF4052BT.	9333 729 50653	
7823	Transistor, NPN, BC337-25.	3198 020 43530	
7904	Transistor, NPN, BC847B.	4822 130 60511	
7905	Transistor, NPN, BC847B.	4822 130 60511	
7906	Transistor, NPN, BC847B.	4822 130 60511	
7908	Transistor, NPN, BC847B.	4822 130 60511	
7909	Transistor, NPN, BC847B.	4822 130 60511	
7910	Transistor, NPN, BC847B.	4822 130 60511	
7951	IC,.	4822 209 13706	
CBA	00EMF806A002 Main Chassis Board Asm.	00EM F80 6A002	

Cabinet & Accessory Parts

	Cabinet & Accessory Parts		
S AC01	Mainscord, 125V, 10A	3135 010 03831	
S AC02	Anode Clip	4835 256 97264	
AC03	Cabinet Back	3139 124 27731	
AC04	Cabinet Front.	3139 137 72721	
AC05	Chassis Guide.	3139 124 31381	
AC06	Customer Control Buttons	3139 124 30901	
S AC07	Convergence and Purity Assembly.	2422 549 43385	
S AC08	CRT A63AFW36X (C121 Version)	9301 763 20443	
S AC09	Coil, Degaussing	3121 218 62961	
AC11	Light Guide.	3139 124 26461	
AC13	Owner's Manual	3135 015 16441	
AC14	Power Button	3139 124 26444	
REMOTE	Remote Transmitter, RC282901/01.	3139 228 81441	
AC16	Speaker, 16R, 1W5 (2 Used)	2422 264 00343	
S AC18	Yoke (C121 Version).	3321 203 00121	
AC19	Yoke Wedge (3 Used).	4835 535 27001	
AC21	Battery, 1.5V AA, 2-Pack, (Not Shown	9299 000 10137	
AC24	Spring	3139 121 26231	

S = Safety Part Be sure to use exact replacement part.

25TR19C121 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts		
S 0127	3.15 Amp Fuse, ...	3122 358 72141	
0152	Cable, DIP, 6 Pin, 400mm	3104 301 09421	
0153	4 Pin Cable.	3104 301 09431	
0212	Connector, 2 Pin	2422 025 15396	
0215	Connector, 2 Pin	2412 020 00724	
0220	4 Pin Board Connector.	2422 025 04852	
0224	1 Pin Board Connector.	2422 034 20021	
0228	1 Pin Board Connector.	2422 034 20021	
S 0243	Connector, 6 Pin	2422 025 04854	
0244	4 Pin Board Connector.	2422 025 04852	
S 0245	Connector, 6 Pin	2422 025 04854	
S 0254	CRT Socket (9 Pin)	2422 500 80022	
0267	Connector, 3 Pin	2412 020 00725	
1000	Tuner.	2422 542 90057	
1001	Filter	2422 549 42501	
1003	45 MHz SAW, Filter,.	2422 549 42433	
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807	
1208	Crystal Resonator.	4835 242 77276	
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10869	
S 1571	1 Amp, Radial Fuse,.	4835 253 97162	
S 1572	1 Amp, Radial Fuse,.	4835 253 97162	
S 1580	Relay, 12V	2422 132 07317	
1600	Switch, Tactile.	2422 128 02742	
1601	Switch, Tactile.	2422 128 02742	
1602	Switch, Tactile.	2422 128 02742	
1603	Switch, Tactile.	2422 128 02742	
1606	Switch, Tactile.	2422 128 02742	
1660	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488	
2001	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2002	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2003	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2004	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2006	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290	
2011	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2201	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2202	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2203	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2204	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2205	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2207	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2208	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2209	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2211	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2212	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2213	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2214	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2215	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280	
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 16654	
2220	Cap, 15p, 5%, 50V, Ceramic	3198 016 01590	
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2222	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2226	Cap, 33u, 20%, 25V, Electrolytic . .	2020 021 90124	
2227	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2228	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780	
2247	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2248	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2249	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2330	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177	
2340	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495	
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320	
S 2343	Cap, 3n3, 10%, 2KV, Ceramic.	2020 558 90529	
2345	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020	
2401	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2402	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2404	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2405	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2407	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2409	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2420	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2426	Cap, 100n, 10%, 63V, Metalized Polyes ter.	2222 370 75104	
2428	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220	
2429	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2430	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2431	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2437	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2438	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2448	Cap, 220p, 10%, 500V, Ceramic. . . .	3198 019 42210	
2450	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91139	
2451	Cap, 15n, 10%, 50V, Polyester. . . .	2020 300 90575	
2451	0.01uF., 10%, 50V, Polyester, only 27	3198 138 20941	
2456	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176	
2457	Cap, 390n, 5%, 250V, Metalized Polypr opylene.	2222 479 90021	
2458	Cap, 2u2, 20%, 100V, Electrolytic. .	2020 021 91331	
2459	Cap, 680p, 10%, 500V, Ceramic. . . .	3198 019 46810	
2461	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020	
2462	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176	
2463	470pF., 10%, 2KV, Ceramic.	4835 122 47638	
S 2465	Cap, 10n, 5%, 1600V, Polypropylene .	2222 375 90154	
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050	
2473	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790	
2481	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740	
2482	Cap, 68n, 10%, 250V, Polyester . . .	2222 347 90234	
2484	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2485	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293	
2486	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2487	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2488	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2489	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2490	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710	
2491	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710	
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810	
2500	0.47uF., 250V, Polyester	4835 121 47569	
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
S 2507	Cap, 1n5, 10%, 1KV, Ceramic.	2020 558 90443	
2508	Cap, 470u, 20%, 200V, Electrolytic .	2020 024 90647	
S 2511	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020	
S 2518	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290	
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320	
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320	
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2530	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 021 91147	
2531	Cap, 1n, 2%, 50V, Polypropylene. . .	2020 310 90049	
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220	
2540	Cap, 100u, 20%, 25V, Electrolytic. .	2020 021 90547	
S 2545	1500pF., 250VAC, Ceramic	4835 122 47621	
S 2550	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2551	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91358	
2561	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020	
S 2562	Cap, 220p, 10%, 1KV, Ceramic	2020 558 90424	
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020	
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020	
2572	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330	
2575	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820	
2577	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020	
2586	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2604	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290	
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2613	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2615	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2619	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2622	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890	
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2629	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230	
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2631	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2679	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2681	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2913	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280	
2914	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330	
2915	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	
2916	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648	
2917	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2960	Cap, 220u, 20%, 50V, Electrolytic. .	3198 026 52210	
2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090	
2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090	
2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090	
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	

S = Safety Part Be sure to use exact replacement part.

25TR19C121 (continued)

	3010	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610		3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
	3013	Zero ohm,.	4835 111 27056		3469	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
	3014	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052		3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
	3015	22k, 5%, 1/10W, Metal Film	4835 111 37441		3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703
	3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810		3481	Res, 100K, 1%, 3/5W, Metal Film. . .	2322 156 21004
	3021	Res, 1K, 2%, 0,25W	4822 051 10102		3482	Res, 32K4, 1%, 3/5W, Metal Film. . .	2322 156 23243
	3200	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
	3201	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253		3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3203	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443	S	3485	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
	3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	S	3486	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3205	Res, 1K, 2%, 0,25W	4822 051 10102	S	3487	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3206	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	S	3488	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
	3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3490	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3209	22k, 5%, 1/10W, Metal Film	4835 111 37441	S	3491	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3212	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253	S	3492	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3213	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3495	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272
	3215	22k, 5%, 1/10W, Metal Film	4835 111 37441		3496	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3216	Zero ohm,.	4835 111 27056		3497	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3217	Res, 1M5, 5%, 1/8W, Metalized Glass.	2322 730 61155		3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
	3218	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225
	3219	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3503	10ohm, 120VAC, Positive Temperature C	
	3220	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432			oefficient	4835 116 47001
	3225	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S	3505	Surge Protector.	2422 549 43073
	3228	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
	3231	Zero ohm,.	4835 111 27056	S	3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333
	3232	Zero ohm,.	4835 111 27056	S	3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102
	3233	Zero ohm,.	4835 111 27056		3512	15k, 5%, 1/10W, Metal Film	4835 111 37458
	3243	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052		3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184
	3246	82k, 5%, 1/10W, Metal Film	4835 111 37277		3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204
	3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3515	2.5 ohm, 20%, 3.6W, Negative Temperat	
	3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010			ure Coefficient.	2122 612 00023
	3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340		3516	Res, 1K, 2%, 0,25W	4822 051 10102
	3250	Zero ohm,.	4835 111 27056		3517	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
	3251	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S	3518	Res, 0R22, 5%, 3W, Metal Film. . . .	2120 106 90548
	3252	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		3520	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
	3253	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		3521	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443
	3257	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3525	33 ohm, 5%, 1/3W, Metal Film	4835 116 57665
	3258	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3528	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3259	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3529	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3530	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
	3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3532	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3534	15k, 5%, 1/10W, Metal Film	4835 111 37458
	3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3536	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3537	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046	S	3542	4.7 Megohm, 5%, 1/2W, Metal Film . .	4835 116 57009
S	3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109		3570	15k, 5%, 1/10W, Metal Film	4835 111 37458
S	3341	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483		3571	Res, 150K, 1%, 3/5W, Metal Film. . .	2322 156 21504
S	3342	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483		3573	Res, 2K, 1%, 1/10W, Metalized Glass.	2120 108 92657
	3343	1.5k, 20%, 1/2W, Carbon Composition.	4835 110 47034		3574	33k, 5%, 1/10W, Metal Film	4835 111 37248
	3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290		3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
S	3345	VDR, DC, 1mA, 50V, MAX 115V	2322 593 13507		3577	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290		3578	Res, 1K, 2%, 0,25W	4822 051 10102
	3401	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380		3579	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
	3402	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380		3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3403	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380		3592	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3405	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002		3594	22k, 5%, 1/10W, Metal Film	4835 111 37441
	3406	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020		3595	68k, 5%, 1/6W, Carbon Film	4835 111 37205
	3407	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002		3596	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020		3597	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
	3409	1.5 ohm, 5%, 1/3W, Metal Film. . . .	4835 116 57664		3598	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210		3599	22k, 5%, 1/10W, Metal Film	4835 111 37441
	3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210		3607	8.2k, 5%, 1/8W, Inline Package . . .	4835 111 97046
	3420	470k, 5%, 1/10W, Metal Film.	4835 111 37407		3608	2.2k, 5%, 1/8W, Inline Package . . .	4835 111 97049
	3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220		3609	2.2k, 5%, Resistor Network	2120 108 93868
	3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220		3611	Res, 1K, 2%, 0,25W	4822 051 10102
	3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840		3612	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606		3613	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3425	150k, 5%, 1/10W, Metal Film.	4835 111 27045		3615	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3426	39k, 5%, 1/10W, Metal Film	4835 111 27051		3617	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
	3428	22k, 5%, 1/10W, Metal Film	4835 111 37441		3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3429	27k, 5%, 1/10W, Metal Film	4835 111 37442		3619	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
	3431	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247		3629	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259
	3432	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
	3436	Res, 1K, 2%, 0,25W	4822 051 10102		3631	27k, 5%, 1/10W, Metal Film	4835 111 37442
	3437	10k, 5%, 1/10W, Metal Film	4835 111 37216	S	3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63479
	3438	33k, 1/4W, Carbon Film	4835 110 57375		3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210
	3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920		3634	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
	3447	10k, 5%, 1/10W, Metal Film	4835 111 37216		3635	22k, 5%, 1/10W, Metal Film	4835 111 37441
	3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3636	22k, 5%, 1/10W, Metal Film	4835 111 37441
	3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320		3637	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
S	3452	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63229		3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
S	3453	Res, 4R7, 5%, 5W, Wire Wound	2322 251 41478		3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
S	3454	Res, 33K, 5%, 1 1/3W, Metal Film . .	2322 194 63333		3653	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020		3654	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
	3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720		3655	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
S	3462	Res, 6K8, 5%, 5W, Metal Film	2322 257 41682		3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710
	3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790		3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3464	Res, 1K, 2%, 0,25W	4822 051 10102		3662	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
S	3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109		3663	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
	3466	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903		3664	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
	3467	Res, 14K, 1%, 3/5W, Metal Film . . .	2322 156 21403		3665	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
	3467	Res, 15K, 1%, 3/5W, Metal Film . . .	2322 156 21503		3666	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376

S = Safety Part Be sure to use exact replacement part.

25TR19C121 (continued)

3667	27k, 5%, 1/10W, Metal Film	4835 111 37442
3672	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
3673	10k, 5%, 1/10W, Metal Film	4835 111 37216
3674	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231
3675	Res, 150 ohm, 5%, 1/10W, Metalized Glass	3198 021 51510
3676	Res, 150 ohm, 5%, 1/10W, Metalized Glass	3198 021 51510
3677	Res, 150 ohm, 5%, 1/10W, Metalized Glass	3198 021 51510
3680	680 ohm, 5%, 1/10W, Metal Film	4835 111 37271
3681	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
3682	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
3683	100 ohm, 5%, 1/10W, Metal Film	4835 111 37432
3684	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
3908	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710
3909	Res, 1K, 2%, 0,25W	4822 051 10102
3910	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376
3911	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230
3912	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
3913	Res, 6K8, 5%, 1/6W, Carbon Film.	3198 011 06820
3914	Res, 1K8, 5%, 1/6W, Carbon Film.	3198 011 01820
3915	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231
3916	220 ohm, 5%, 1/10W, Metal Film	4835 111 37371
3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810
3951	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3953	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272
3955	Res, 4K7, 5%, 1/6W, Carbon Film.	3198 011 04720
4001	Zero ohm,	4835 111 27056
4002	Zero ohm,	4835 111 27056
4004	Zero ohm,	4835 111 27056
4007	Zero ohm,	4835 111 27056
4009	Zero ohm,	4835 111 27056
4010	Zero ohm,	4835 111 27056
4011	Zero ohm,	4835 111 27056
4012	Zero ohm,	4835 111 27056
4013	Zero ohm,	4835 111 27056
4020	Zero ohm,	4835 111 27056
4051	Zero ohm,	4835 111 27056
4100	Zero ohm,	4835 111 27056
4101	Zero ohm,	4835 111 27056
4102	Zero ohm,	4835 111 27056
4103	Zero ohm,	4835 111 27056
4143	Zero ohm,	4835 111 27056
4144	Zero ohm,	4835 111 27056
4203	Zero ohm,	4835 111 27056
4207	Zero ohm,	4835 111 27056
4212	Zero ohm,	4835 111 27056
4214	Zero ohm,	4835 111 27056
4215	Zero ohm,	4835 111 27056
4216	Zero ohm,	4835 111 27056
4501	Zero ohm,	4835 111 27056
4602	Zero ohm,	4835 111 27056
4650	Zero ohm,	4835 111 27056
4651	Zero ohm,	4835 111 27056
4652	Zero ohm,	4835 111 27056
4654	Zero ohm,	4835 111 27056
4655	Zero ohm,	4835 111 27056
4684	Zero ohm,	4835 111 27056
4687	Zero ohm,	4835 111 27056
4831	Zero ohm,	4835 111 27056
4832	Zero ohm,	4835 111 27056
4833	Zero ohm,	4835 111 27056
4902	Zero ohm,	4835 111 27056
4903	Zero ohm,	4835 111 27056
4904	Zero ohm,	4835 111 27056
4905	Zero ohm,	4835 111 27056
4909	Zero ohm,	4835 111 27056
4911	Zero ohm,	4835 111 27056
4912	Zero ohm,	4835 111 27056
4914	Zero ohm,	4835 111 27056
4957	Zero ohm,	4835 111 27056
4999	Zero ohm,	4835 111 27056
5000	Coil, 5u6.	3198 018 25680
5004	Coil, 820n	2422 535 97314
5201	Coil, 22u.	3198 018 22290
5202	Coil, 6u8.	3198 018 16880
5342	22uH., 10%, Coil, Peaking.	4835 157 67069
S 5445	Transformer, L.O.T., models ending in C101, C121, and C125	2422 531 02327
S 5445	Transformer, L.O.T., models ending in C221 and C225.	3128 138 20941
5451	Coil, 27u.	2422 535 96614
5457	Coil, Linear Correction.	3128 138 53241
5461	Transformer.	3128 138 33811
5480	Coil, 27u.	2422 535 97334
5480	Coil, 39u.	2422 535 97336
5480	33uH., Peaking Coil, only in 25.	4835 157 58205
S 5500	Filter, Mains, 5mH, 2A	2422 549 43432
5516	100uH., Coil	4835 157 67078
5518	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
5521	Coil, 2u2.	3198 018 12280
5540	Coil, 4u7.	3198 018 14780
S 5545	Transfomer,	2422 531 02314
5551	27uH., 5%, Coil, Peaking	4835 157 67052
5552	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
5572	100uH., Coil	4835 157 67078
5573	100uH., Coil	4835 157 67078
5576	100uH., Coil	4835 157 67078
5577	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
5600	Coil, 8u2.	3198 018 18280
5601	Coil, 8u2.	3198 018 18280
5620	Coil, 6u8.	3198 018 16880
5821	Coil, 100u	3198 018 21010
6008	Zener, 33 Volt BZX79-C33	4835 130 37904
6211	Diode, 1N4148.	4835 130 37048
6212	Diode, 1N4148.	4835 130 37048
6213	Diode, 1N4148.	4835 130 37048
6331	Diode.	4835 130 37294
6333	Diode.	4835 130 37294
6335	Diode.	4835 130 37294
6401	Diode.	4835 130 37094
6402	Zener, 33 Volt, BZX79-C33.	4835 130 37904
6403	Diode.	4835 130 37094
6404	Diode.	4835 130 37094
6449	Diode, 1N4148.	4835 130 37048
6450	Diode, 1N4148.	4835 130 37048
6460	Diode, Rect, BY228/20	9336 215 80112
6463	Diode, 1N4148.	4835 130 37048
6464	Zener Diode, 6.2 volt.	9337 242 70133
6465	Diode, BYD33J.	4835 130 37094
6466	Diode, BYD33J.	4835 130 37094
6480	Diode, Zener	4835 130 37947
6481	Diode, 1N4148.	4835 130 37048
6485	Diode, BYD33J.	4835 130 37094
6486	Diode, EGP20DL-530	4835 130 37919
6487	Diode.	4835 130 37094
6488	Diode, Rect, BYV27-200.	9322 126 72673
6490	Diode, Rect, BYV27-200.	9322 126 72673
6505	Diode, Bridge Rect, GBU6JL-7002	9322 138 08667
6507	Diode, BYD33J.	4835 130 37094
6508	Diode, BYD33J.	4835 130 37094
6510	Zener Diode, 20 volt	9331 178 60133
6511	Diode, BYV95C.	4835 130 37052
6512	Diode, Rect, BY228/20	4822 130 41275
6513	Diode, Rect, BY228/20	4822 130 41275
6514	Zener, 18 Volt, BZX79-C18.	4835 130 37908
6540	Diode.	4835 130 37294
6550	Diode, Rect, BY229X-800	9340 380 30127
6560	Diode, EGP20DL-530	4835 130 37919
6580	Diode, Rect, BYV27-200.	9322 126 72673
6584	Diode, 1N4148.	4835 130 37048
6585	Diode, 1N4148.	4835 130 37048
6591	Diode, BAS216.	4835 130 37905
6601	Diode, Zener	4835 130 37684
6606	Zener, 4.7 Volt, BZX79-C4V7.	4835 130 37005
6607	Zener, 6.8 Volt, BZX79-C6V8.	4835 130 37945
6690	LED, LTL-307P.	4835 130 97096
6951	Diode, BAS216.	4835 130 37905
6961	Diode, BAS216.	4835 130 37905
7250	IC,	9352 620 26112
7251	IC, LM317T	9337 220 80682
7254	Transistor, NPN, BC847B.	4822 130 60511
7256	Transistor, NPN, BC847B.	4822 130 60511
7258	Transistor, NPN, BC847B.	4822 130 60511
7263	Transistor, PNP, BC857B.	5322 130 60508
7266	Transistor, NPN, BC847B.	4822 130 60511
7330	IC,	9352 184 10112
7401	IC,	9322 121 47687
7460	Transistor, NPN, BU1508DX.	9340 170 50127
7461	Transistor, NPN, BF819	9335 354 50127
7462	Transistor, BC547B	4835 130 47055
7463	Transistor, BC557B	4835 130 47409
7480	IC,	9322 028 93682
7481	Transistor, BC557B	4835 130 47409
7482	Transistor, PNP, BC857B.	5322 130 60508
7518	STH8NA60FI SMPS FET	9322 068 92687
7518	STH10NC60FI SMPS FET.	9322 155 66687
7520	IC, MC44603A	4835 209 88537
7570	IC,	9337 711 00676
S 7581	Coupler, TCDT1101G	9338 431 30682
7590	Transistor, NPN, BC847B.	4822 130 60511
7591	Transistor, NPN, BC847B.	4822 130 60511
7592	Transistor, NPN, BC847B.	4822 130 60511
7600	IC, SAA5543PS/M4/1046 L90US1-1.4	4835 310 57477
7601	IC, ST24W04B6.	9322 097 23682
7603	Transistor, NPN, BC337	9331 796 00126
7604	Transistor, NPN, BC847B.	4822 130 60511
7605	Transistor, NPN, BC847B.	4822 130 60511
7608	Transistor, NPN, BC847B.	4822 130 60511
7609	Transistor, NPN, BC847B.	4822 130 60511
7680	IR Receiver.	9322 127 53667
7904	Transistor, NPN, BC847B.	4822 130 60511

S = Safety Part Be sure to use exact replacement part.

25TR19C121 (continued)

7905	Transistor, NPN, BC847B.	4822 130 60511
7906	Transistor, NPN, BC847B.	4822 130 60511
7952	IC,.	4835 209 88542
9423	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
CBA	00EMF803A001 Main Chassis Board Asm.	00EM F80 3A001

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Mainscord, 125V, 10A	3135 010 03831
S AC02	Anode Clip	4835 256 97264
AC03	Cabinet Back	3139 124 27951
AC04	Cabinet Front.	3139 137 55881
AC05	Chassis Guide.	3139 124 31381
AC06	Control Buttons.	3139 124 27351
S AC07	Convergence and Purity Assembly. . .	2422 549 43385
S AC08	CRT A63AFW36X (C121 Version)	9301 763 20443
S AC08	CRT A63QDB891X01	9322 151 39682
S AC09	Coil, Degaussing	3121 218 62961
AC11	Light Guide.	3139 124 26461
AC13	Owner's Manual, English.	3135 015 10642
AC14	Power Button	3139 124 26444
REMOTE	Remote Transmitter, RC282901/04. . .	3139 228 81451
AC16	Speaker, 16R, 1W5 (2 Used)	2422 264 00343
S AC18	Yoke (C121 Version).	3321 203 00121
S AC18	Yoke, Vendor # DSE2603CL(M), (C125 Version)	4835 310 57502
AC19	Yoke Wedge (3 Used).	4835 535 27001
AC21	Battery, 1.5V AA, 2-Pack, (Not Shown	9299 000 10137
AC24	Spring	3139 121 26231

S = Safety Part Be sure to use exact replacement part.

25TR19C125 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts		
S 0127	3.15 Amp Fuse, ...	3122 358 72141	
0152	Cable, DIP, 6 Pin, 400mm	3104 301 09421	
0153	4 Pin Cable.	3104 301 09431	
0212	Connector, 2 Pin	2422 025 15396	
0215	Connector, 2 Pin	2412 020 00724	
0220	4 Pin Board Connector.	2422 025 04852	
0224	1 Pin Board Connector.	2422 034 20021	
0228	1 Pin Board Connector.	2422 034 20021	
S 0243	Connector, 6 Pin	2422 025 04854	
0244	4 Pin Board Connector.	2422 025 04852	
S 0245	Connector, 6 Pin	2422 025 04854	
S 0254	CRT Socket (9 Pin)	2422 500 80022	
0267	Connector, 3 Pin	2412 020 00725	
1000	Tuner.	2422 542 90057	
1001	Filter	2422 549 42501	
1003	45 MHz SAW, Filter,.	2422 549 42433	
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807	
1208	Crystal Resonator.	4835 242 77276	
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10869	
S 1571	1 Amp, Radial Fuse,.	4835 253 97162	
S 1572	1 Amp, Radial Fuse,.	4835 253 97162	
S 1580	Relay, 12V	2422 132 07317	
1600	Switch, Tactile.	2422 128 02742	
1601	Switch, Tactile.	2422 128 02742	
1602	Switch, Tactile.	2422 128 02742	
1603	Switch, Tactile.	2422 128 02742	
1606	Switch, Tactile.	2422 128 02742	
1660	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488	
2001	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2002	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2003	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2004	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2006	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290	
2011	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2201	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2202	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2203	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2204	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2205	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2207	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2208	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2209	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2211	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2212	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2213	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2214	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2215	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280	
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 16654	
2220	Cap, 15p, 5%, 50V, Ceramic	3198 016 01590	
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2222	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2226	Cap, 33u, 20%, 25V, Electrolytic . .	2020 021 90124	
2227	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2228	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780	
2247	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2248	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2249	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2330	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177	
2340	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495	
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320	
S 2343	Cap, 3n3, 10%, 2KV, Ceramic.	2020 558 90529	
2345	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020	
2401	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2402	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2404	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2405	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2407	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2409	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2420	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2426	Cap, 100n, 10%, 63V, Metalized Polyes ter.	2222 370 75104	
2428	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220	
2429	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2430	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2431	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2437	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2438	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2448	Cap, 220p, 10%, 500V, Ceramic. . . .	3198 019 42210	
2450	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91139	
2451	Cap, 15n, 10%, 50V, Polyester. . . .	2020 300 90575	
2451	0.01uF., 10%, 50V, Polyester, only 27	3198 138 20941	
2456	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176	
2457	Cap, 390n, 5%, 250V, Metalized Polypr opylene.	2222 479 90021	
2458	Cap, 2u2, 20%, 100V, Electrolytic. .	2020 021 91331	
2459	Cap, 680p, 10%, 500V, Ceramic. . . .	3198 019 46810	
2461	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020	
2462	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176	
2463	470pF., 10%, 2KV, Ceramic.	4835 122 47638	
S 2465	Cap, 10n, 5%, 1600V, Polypropylene .	2222 375 90154	
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050	
2473	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790	
2481	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740	
2482	Cap, 68n, 10%, 250V, Polyester . . .	2222 347 90234	
2484	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2485	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293	
2486	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2487	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2488	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2489	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2490	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710	
2491	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710	
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810	
2500	0.47uF., 250V, Polyester	4835 121 47569	
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
S 2507	Cap, 1n5, 10%, 1KV, Ceramic.	2020 558 90443	
2508	Cap, 470u, 20%, 200V, Electrolytic .	2020 024 90647	
S 2511	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020	
S 2518	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290	
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320	
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320	
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2530	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 021 91147	
2531	Cap, 1n, 2%, 50V, Polypropylene. . .	2020 310 90049	
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220	
2540	Cap, 100u, 20%, 25V, Electrolytic. .	2020 021 90547	
S 2545	1500pF., 250VAC, Ceramic	4835 122 47621	
S 2550	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2551	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91358	
2561	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020	
S 2562	Cap, 220p, 10%, 1KV, Ceramic	2020 558 90424	
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020	
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020	
2572	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330	
2575	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820	
2577	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020	
2586	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2604	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290	
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2613	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2615	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2619	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2622	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890	
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2629	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230	
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2631	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2679	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2681	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2913	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280	
2914	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330	
2915	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	
2916	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648	
2917	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2960	Cap, 220u, 20%, 50V, Electrolytic. .	3198 026 52210	
2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090	
2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090	
2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090	
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	

S = Safety Part Be sure to use exact replacement part.

25TR19C125 (continued)

3010	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610		3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3013	Zero ohm,.	4835 111 27056		3469	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
3014	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052		3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3015	22k, 5%, 1/10W, Metal Film	4835 111 37441		3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703
3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810		3481	Res, 100K, 1%, 3/5W, Metal Film. . .	2322 156 21004
3021	Res, 1K, 2%, 0,25W	4822 051 10102		3482	Res, 32K4, 1%, 3/5W, Metal Film. . .	2322 156 23243
3200	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3201	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253		3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3203	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443	S	3485	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	S	3486	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3205	Res, 1K, 2%, 0,25W	4822 051 10102	S	3487	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3206	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	S	3488	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3490	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3209	22k, 5%, 1/10W, Metal Film	4835 111 37441	S	3491	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3212	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253	S	3492	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3213	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3495	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272
3215	22k, 5%, 1/10W, Metal Film	4835 111 37441		3496	10k, 5%, 1/10W, Metal Film	4835 111 37216
3216	Zero ohm,.	4835 111 27056		3497	10k, 5%, 1/10W, Metal Film	4835 111 37216
3217	Res, 1M5, 5%, 1/8W, Metalized Glass.	2322 730 61155		3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3218	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225
3219	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3503	10ohm, 120VAC, Positive Temperature C	
3220	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432			oefficient	4835 116 47001
3225	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S	3505	Surge Protector.	2422 549 43073
3228	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3231	Zero ohm,.	4835 111 27056	S	3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333
3232	Zero ohm,.	4835 111 27056	S	3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102
3233	Zero ohm,.	4835 111 27056		3512	15k, 5%, 1/10W, Metal Film	4835 111 37458
3243	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052		3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184
3246	82k, 5%, 1/10W, Metal Film	4835 111 37277		3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204
3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3515	2.5 ohm, 20%, 3.6W, Negative Temperat	
3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010			ure Coefficient.	2122 612 00023
3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340		3516	Res, 1K, 2%, 0,25W	4822 051 10102
3250	Zero ohm,.	4835 111 27056		3517	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3251	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S	3518	Res, 0R22, 5%, 3W, Metal Film. . . .	2120 106 90548
3252	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		3520	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3253	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		3521	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443
3257	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3525	33 ohm, 5%, 1/3W, Metal Film	4835 116 57665
3258	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3528	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3259	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3529	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3530	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3532	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3534	15k, 5%, 1/10W, Metal Film	4835 111 37458
3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3536	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3537	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046	S	3542	4.7 Megohm, 5%, 1/2W, Metal Film . .	4835 116 57009
S 3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109		3570	15k, 5%, 1/10W, Metal Film	4835 111 37458
S 3341	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483		3571	Res, 150K, 1%, 3/5W, Metal Film. . .	2322 156 21504
S 3342	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483		3573	Res, 2K, 1%, 1/10W, Metalized Glass.	2120 108 92657
3343	1.5k, 20%, 1/2W, Carbon Composition.	4835 110 47034		3574	33k, 5%, 1/10W, Metal Film	4835 111 37248
3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290		3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
S 3345	VDR, DC, 1mA, 50V, MAX 115V	2322 593 13507		3577	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290		3578	Res, 1K, 2%, 0,25W	4822 051 10102
3401	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380		3579	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
3402	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380		3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3403	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380		3592	10k, 5%, 1/10W, Metal Film	4835 111 37216
3405	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002		3594	22k, 5%, 1/10W, Metal Film	4835 111 37441
3406	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020		3595	68k, 5%, 1/6W, Carbon Film	4835 111 37205
3407	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002		3596	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020		3597	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
3409	1.5 ohm, 5%, 1/3W, Metal Film. . . .	4835 116 57664		3598	10k, 5%, 1/10W, Metal Film	4835 111 37216
3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210		3599	22k, 5%, 1/10W, Metal Film	4835 111 37441
3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210		3607	8.2k, 5%, 1/8W, Inline Package . . .	4835 111 97046
3420	470k, 5%, 1/10W, Metal Film.	4835 111 37407		3608	2.2k, 5%, 1/8W, Inline Package . . .	4835 111 97049
3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220		3609	2.2k, 5%, Resistor Network	2120 108 93868
3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220		3611	Res, 1K, 2%, 0,25W	4822 051 10102
3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840		3612	10k, 5%, 1/10W, Metal Film	4835 111 37216
3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606		3613	10k, 5%, 1/10W, Metal Film	4835 111 37216
3425	150k, 5%, 1/10W, Metal Film.	4835 111 27045		3615	10k, 5%, 1/10W, Metal Film	4835 111 37216
3426	39k, 5%, 1/10W, Metal Film	4835 111 27051		3617	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
3428	22k, 5%, 1/10W, Metal Film	4835 111 37441		3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3429	27k, 5%, 1/10W, Metal Film	4835 111 37442		3619	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
3431	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247		3629	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259
3432	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
3436	Res, 1K, 2%, 0,25W	4822 051 10102		3631	27k, 5%, 1/10W, Metal Film	4835 111 37442
3437	10k, 5%, 1/10W, Metal Film	4835 111 37216	S	3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63479
3438	33k, 1/4W, Carbon Film	4835 110 57375		3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210
3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920		3634	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
3447	10k, 5%, 1/10W, Metal Film	4835 111 37216		3635	22k, 5%, 1/10W, Metal Film	4835 111 37441
3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3636	22k, 5%, 1/10W, Metal Film	4835 111 37441
3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320		3637	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
S 3452	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63229		3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
S 3453	Res, 4R7, 5%, 5W, Wire Wound	2322 251 41478		3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
S 3454	Res, 33K, 5%, 1 1/3W, Metal Film . .	2322 194 63333		3653	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020		3654	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720		3655	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
S 3462	Res, 6K8, 5%, 5W, Metal Film	2322 257 41682		3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710
3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790		3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3464	Res, 1K, 2%, 0,25W	4822 051 10102		3662	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
S 3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109		3663	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
3466	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903		3664	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
3467	Res, 14K, 1%, 3/5W, Metal Film . . .	2322 156 21403		3665	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
3467	Res, 15K, 1%, 3/5W, Metal Film . . .	2322 156 21503		3666	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376

S = Safety Part Be sure to use exact replacement part.

25TR19C125 (continued)

3667	27k, 5%, 1/10W, Metal Film	4835 111 37442
3672	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
3673	10k, 5%, 1/10W, Metal Film	4835 111 37216
3674	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231
3675	Res, 150 ohm, 5%, 1/10W, Metalized Glass	3198 021 51510
3676	Res, 150 ohm, 5%, 1/10W, Metalized Glass	3198 021 51510
3677	Res, 150 ohm, 5%, 1/10W, Metalized Glass	3198 021 51510
3680	680 ohm, 5%, 1/10W, Metal Film	4835 111 37271
3681	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
3682	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
3683	100 ohm, 5%, 1/10W, Metal Film	4835 111 37432
3684	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
3908	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710
3909	Res, 1K, 2%, 0,25W	4822 051 10102
3910	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376
3911	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230
3912	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
3913	Res, 6K8, 5%, 1/6W, Carbon Film.	3198 011 06820
3914	Res, 1K8, 5%, 1/6W, Carbon Film.	3198 011 01820
3915	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231
3916	220 ohm, 5%, 1/10W, Metal Film	4835 111 37371
3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810
3951	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3953	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272
3955	Res, 4K7, 5%, 1/6W, Carbon Film.	3198 011 04720
4001	Zero ohm,	4835 111 27056
4002	Zero ohm,	4835 111 27056
4004	Zero ohm,	4835 111 27056
4007	Zero ohm,	4835 111 27056
4009	Zero ohm,	4835 111 27056
4010	Zero ohm,	4835 111 27056
4011	Zero ohm,	4835 111 27056
4012	Zero ohm,	4835 111 27056
4013	Zero ohm,	4835 111 27056
4020	Zero ohm,	4835 111 27056
4051	Zero ohm,	4835 111 27056
4100	Zero ohm,	4835 111 27056
4101	Zero ohm,	4835 111 27056
4102	Zero ohm,	4835 111 27056
4103	Zero ohm,	4835 111 27056
4143	Zero ohm,	4835 111 27056
4144	Zero ohm,	4835 111 27056
4203	Zero ohm,	4835 111 27056
4207	Zero ohm,	4835 111 27056
4212	Zero ohm,	4835 111 27056
4214	Zero ohm,	4835 111 27056
4215	Zero ohm,	4835 111 27056
4216	Zero ohm,	4835 111 27056
4501	Zero ohm,	4835 111 27056
4602	Zero ohm,	4835 111 27056
4650	Zero ohm,	4835 111 27056
4651	Zero ohm,	4835 111 27056
4652	Zero ohm,	4835 111 27056
4654	Zero ohm,	4835 111 27056
4655	Zero ohm,	4835 111 27056
4684	Zero ohm,	4835 111 27056
4687	Zero ohm,	4835 111 27056
4831	Zero ohm,	4835 111 27056
4832	Zero ohm,	4835 111 27056
4833	Zero ohm,	4835 111 27056
4902	Zero ohm,	4835 111 27056
4903	Zero ohm,	4835 111 27056
4904	Zero ohm,	4835 111 27056
4905	Zero ohm,	4835 111 27056
4909	Zero ohm,	4835 111 27056
4911	Zero ohm,	4835 111 27056
4912	Zero ohm,	4835 111 27056
4914	Zero ohm,	4835 111 27056
4957	Zero ohm,	4835 111 27056
4999	Zero ohm,	4835 111 27056
5000	Coil, 5u6.	3198 018 25680
5004	Coil, 820n	2422 535 97314
5201	Coil, 22u.	3198 018 22290
5202	Coil, 6u8.	3198 018 16880
5342	22uH., 10%, Coil, Peaking.	4835 157 67069
S 5445	Transformer, L.O.T., models ending in C101, C121, and C125	2422 531 02327
S 5445	Transformer, L.O.T., models ending in C221 and C225.	3128 138 20941
5451	Coil, 27u.	2422 535 96614
5457	Coil, Linear Correction.	3128 138 53241
5461	Transformer.	3128 138 33811
5480	Coil, 27u.	2422 535 97334
5480	Coil, 39u.	2422 535 97336
5480	33uH., Peaking Coil, only in 25.	4835 157 58205
S 5500	Filter, Mains, 5mH, 2A	2422 549 43432
5516	100uH., Coil	4835 157 67078
5518	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
5521	Coil, 2u2.	3198 018 12280
5540	Coil, 4u7.	3198 018 14780
S 5545	Transfomer,	2422 531 02314
5551	27uH., 5%, Coil, Peaking	4835 157 67052
5552	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
5572	100uH., Coil	4835 157 67078
5573	100uH., Coil	4835 157 67078
5576	100uH., Coil	4835 157 67078
5577	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
5600	Coil, 8u2.	3198 018 18280
5601	Coil, 8u2.	3198 018 18280
5620	Coil, 6u8.	3198 018 16880
5821	Coil, 100u	3198 018 21010
6008	Zener, 33 Volt BZX79-C33	4835 130 37904
6211	Diode, 1N4148.	4835 130 37048
6212	Diode, 1N4148.	4835 130 37048
6213	Diode, 1N4148.	4835 130 37048
6331	Diode.	4835 130 37294
6333	Diode.	4835 130 37294
6335	Diode.	4835 130 37294
6401	Diode.	4835 130 37094
6402	Zener, 33 Volt, BZX79-C33.	4835 130 37904
6403	Diode.	4835 130 37094
6404	Diode.	4835 130 37094
6449	Diode, 1N4148.	4835 130 37048
6450	Diode, 1N4148.	4835 130 37048
6460	Diode, Rect, BY228/20	9336 215 80112
6463	Diode, 1N4148.	4835 130 37048
6464	Zener Diode, 6.2 volt.	9337 242 70133
6465	Diode, BYD33J.	4835 130 37094
6466	Diode, BYD33J.	4835 130 37094
6480	Diode, Zener	4835 130 37947
6481	Diode, 1N4148.	4835 130 37048
6485	Diode, BYD33J.	4835 130 37094
6486	Diode, EGP20DL-530	4835 130 37919
6487	Diode.	4835 130 37094
6488	Diode, Rect, BYV27-200.	9322 126 72673
6490	Diode, Rect, BYV27-200.	9322 126 72673
6505	Diode, Bridge Rect, GBU6JL-7002	9322 138 08667
6507	Diode, BYD33J.	4835 130 37094
6508	Diode, BYD33J.	4835 130 37094
6510	Zener Diode, 20 volt	9331 178 60133
6511	Diode, BYV95C.	4835 130 37052
6512	Diode, Rect, BY228/20	4822 130 41275
6513	Diode, Rect, BY228/20	4822 130 41275
6514	Zener, 18 Volt, BZX79-C18.	4835 130 37908
6540	Diode.	4835 130 37294
6550	Diode, Rect, BY229X-800	9340 380 30127
6560	Diode, EGP20DL-530	4835 130 37919
6580	Diode, Rect, BYV27-200.	9322 126 72673
6584	Diode, 1N4148.	4835 130 37048
6585	Diode, 1N4148.	4835 130 37048
6591	Diode, BAS216.	4835 130 37905
6601	Diode, Zener	4835 130 37684
6606	Zener, 4.7 Volt, BZX79-C4V7.	4835 130 37005
6607	Zener, 6.8 Volt, BZX79-C6V8.	4835 130 37945
6690	LED, LTL-307P.	4835 130 97096
6951	Diode, BAS216.	4835 130 37905
6961	Diode, BAS216.	4835 130 37905
7250	IC,	9352 620 26112
7251	IC, LM317T	9337 220 80682
7254	Transistor, NPN, BC847B.	4822 130 60511
7256	Transistor, NPN, BC847B.	4822 130 60511
7258	Transistor, NPN, BC847B.	4822 130 60511
7263	Transistor, PNP, BC857B.	5322 130 60508
7266	Transistor, NPN, BC847B.	4822 130 60511
7330	IC,	9352 184 10112
7401	IC,	9322 121 47687
7460	Transistor, NPN, BU1508DX.	9340 170 50127
7461	Transistor, NPN, BF819	9335 354 50127
7462	Transistor, BC547B	4835 130 47055
7463	Transistor, BC557B	4835 130 47409
7480	IC,	9322 028 93682
7481	Transistor, BC557B	4835 130 47409
7482	Transistor, PNP, BC857B.	5322 130 60508
7518	STH8NA60FI SMPS FET	9322 068 92687
7518	STH10NC60FI SMPS FET.	9322 155 66687
7520	IC, MC44603A	4835 209 88537
7570	IC,	9337 711 00676
S 7581	Coupler, TCDT1101G	9338 431 30682
7590	Transistor, NPN, BC847B.	4822 130 60511
7591	Transistor, NPN, BC847B.	4822 130 60511
7592	Transistor, NPN, BC847B.	4822 130 60511
7600	IC, SAA5543PS/M4/1046 L90US1-1.4	4835 310 57477
7601	IC, ST24W04B6.	9322 097 23682
7603	Transistor, NPN, BC337	9331 796 00126
7604	Transistor, NPN, BC847B.	4822 130 60511
7605	Transistor, NPN, BC847B.	4822 130 60511
7608	Transistor, NPN, BC847B.	4822 130 60511
7609	Transistor, NPN, BC847B.	4822 130 60511
7680	IR Receiver.	9322 127 53667
7904	Transistor, NPN, BC847B.	4822 130 60511

S = Safety Part Be sure to use exact replacement part.

25TR19C125 (continued)

7905	Transistor, NPN, BC847B.	4822	130 60511
7906	Transistor, NPN, BC847B.	4822	130 60511
7952	IC,.	4835	209 88542
9423	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198	011 01030
CBA	00EMF803A001 Main Chassis Board Asm.	00EM	F80 3A001

Cabinet & Accessory Parts

	Cabinet & Accessory Parts		
S AC01	Mainscord, 125V, 10A	3135	010 03831
S AC02	Anode Clip	4835	256 97264
AC03	Cabinet Back	3139	124 27951
AC04	Cabinet Front.	3139	137 55881
AC05	Chassis Guide.	3139	124 31381
AC06	Control Buttons.	3139	124 27351
S AC07	Convergence and Purity Assembly. . .	2422	549 43385
S AC08	CRT A63AFW36X (C121 Version)	9301	763 20443
S AC08	CRT A63QDB891X01	9322	151 39682
S AC09	Coil, Degaussing	3121	218 62961
AC11	Light Guide.	3139	124 26461
AC13	Owner's Manual, English.	3135	015 10642
AC14	Power Button	3139	124 26444
REMOTE	Remote Transmitter, RC282901/04. . .	3139	228 81451
AC16	Speaker, 16R, 1W5 (2 Used)	2422	264 00343
S AC18	Yoke (C121 Version).	3321	203 00121
S AC18	Yoke, Vendor # DSE2603CL(M), (C125 Version)	4835	310 57502
AC19	Yoke Wedge (3 Used).	4835	535 27001
AC21	Battery, 1.5V AA, 2-Pack, (Not Shown	9299	000 10137
AC24	Spring	3139	121 26231

S = Safety Part Be sure to use exact replacement part.

25TR19C221 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts	
0113	L9 SOPS HEATSINK	3139 121 62041
0119	DIODE HEATSINK L9.	3139 121 26691
0121	LINE HEATSINK (CINCH).	3139 121 61942
S 0127	Holder, Fuse, 2 Pin.	3122 358 71251
0211	Connector, 2 Pin	2422 025 11196
0212	Connector, 2 Pin	2422 025 15396
0215	Connector, 2 Pin	2412 020 00724
0220	4 Pin Board Connector.	2422 025 04852
0221	Connector, 4 Pin	2422 025 15503
0222	Connector, 2 Pin	2422 025 10646
0225	1 Pin Board Connector.	2422 034 20021
0226	1 Pin Board Connector.	2422 034 20021
S 0243	Connector, 6 Pin	2422 025 04854
0244	4 Pin Board Connector.	2422 025 04852
S 0245	Connector, 6 Pin	2422 025 04854
S 0254	CRT Socket (9 Pin)	2422 500 80022
0267	Connector, 3 Pin	2412 020 00725
1000	TUNER.	3139 147 16412
1001	Filter	2422 549 42501
1003	45 MHz SAW, Filter,.	2422 549 42433
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807
1208	Crystal Resonator, 3.58MHz	2422 543 00832
S 1500	Fue, 4 A, 250V	2422 086 10905
S 1571	FUSE 1A 250V	2422 086 10779
S 1572	FUSE 1A 250V	2422 086 10779
S 1580	Relay, 12V, 5A G5PA-1.	2422 132 07444
1600	Switch, Tactile.	2422 128 02742
1601	Switch, Tactile.	2422 128 02742
1602	Switch, Tactile.	2422 128 02742
1603	Switch, Tactile.	2422 128 02742
1606	Switch, Tactile.	2422 128 02742
1660	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488
2001	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2002	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2003	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2004	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2011	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2201	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2202	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2203	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2204	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2205	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2208	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2209	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2211	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2212	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2213	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2214	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2215	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 15654
2220	Cap, 18p, 5%, 50V, Ceramic	3198 016 01890
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2222	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2226	Cap, 33u, 20%, 25V, Electrolytic . .	2020 021 90124
2227	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2228	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780
2247	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2248	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2249	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2330	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2340	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320
S 2343	Cap, 3n3, 10%, 2KV, Ceramic.	2020 558 90529
2345	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2401	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2402	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2404	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2405	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2407	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2409	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2420	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2426	Cap, 100n, 10%, 63V, Metalized Polyes ter.	2222 370 75104
2428	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2429	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2430	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2431	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2437	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2438	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2448	Cap, 33p, 5%, 500V, Ceramic.	2020 557 90192
2450	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91139
2451	Cap, 15n, 10%, 50V, Polyester. . . .	2020 300 90575
2456	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176
2457	Cap, 390n, 5%, 250V, Metalized Polypr opylene.	2222 479 90021
2458	Cap, 2u2, 20%, 100V, Electrolytic. .	2020 021 91331
2459	Cap, 680p, 10%, 500V, Ceramic. . . .	3198 019 46810
2461	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2462	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176
S 2463	Cap, 470p, 10%, 2KV, Ceramic	2020 558 90483
S 2465	Cap, 10n, 5%, 1600V, Polypropylene .	2222 375 90154
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050
2473	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2481	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2482	Cap, 68n, 10%, 250V, Polyester . . .	2222 347 90234
2484	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2485	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2486	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2487	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2488	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2489	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2490	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2491	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810
2499	Cap, 220n, 10%, 100V, Metalized Polye ster	2222 365 25224
2500	Cap, 470n, 20%, 275V, Polypropylene.	2222 336 29148
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2507	Cap, 1n5, 10%, 1KV, Ceramic.	3198 019 61520
2508	Cap, 470u, 20%, 200V, Electrolytic .	2020 024 90647
2511	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
2518	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2530	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 021 91147
2531	Cap, 1n, 2%, 50V, Polypropylene. . .	2020 310 90049
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2540	Cap, 100u, 20%, 25V, Electrolytic. .	2020 021 90547
S 2545	Cap, 1n5, 20%, v, Ceramic.	2020 554 90128
2550	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2551	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91358
2561	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2562	Cap, 220p, 10%, 1KV, Ceramic	3198 019 62210
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2572	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2575	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2577	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2586	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2604	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2613	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2615	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2619	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2622	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2629	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2679	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2681	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2913	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2914	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2915	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2916	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648
2917	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030

S = Safety Part Be sure to use exact replacement part.

25TR19C221 (continued)

	2960	Cap, 220u, 20%, 50V, Electrolytic. .	3198 026 52210
	2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090
	2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
	2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
	3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3010	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
	3013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
	3015	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
	3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810
	3021	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
	3200	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
	3201	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
	3203	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
	3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820
	3205	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
	3206	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
	3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3209	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
	3212	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
	3213	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
	3215	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
	3216	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	3218	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
	3219	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
	3220	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
	3225	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
	3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
	3243	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
	3246	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
	3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340
	3250	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	3251	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
	3252	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
	3253	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
	3257	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
	3258	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
	3259	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	3198 013 01020
	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	3198 013 01020
	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	3198 013 01020
S	3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
S	3341	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
S	3342	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
	3343	Res, 1K5, 20%, 1/2W, Carbon Film . .	3198 013 01520
	3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
	3345	VDR DC 1MA/50V S MAX 110V A . . .	2122 550 00152
	3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
	3401	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
	3402	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
	3403	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
	3405	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002
	3406	Res, 1K, 5%, 1/6W, Carbon Film. . .	3198 011 01020
	3407	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002
	3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
	3409	Res, 1R5, 5%, 1/3W, Metal Film . . .	2306 204 03158
	3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
	3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
	3420	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
	3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
	3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
	3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840
	3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606
	3425	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
	3426	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
	3428	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
	3429	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
	3431	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
	3432	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
	3433	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3436	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
	3437	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	3438	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
	3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
	3447	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
	3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
S	3452	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	3198 012 32290
S	3453	Res, 4R7, 5%, 5W, Wire Wound	2322 251 41478
S	3454	Res, 33K, 5%, 1 1/3W, Metal Film . .	2322 194 63333
	3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
	3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
S	3462	Res, 6K8, 5%, 5W, Metal Film	2322 257 41682
	3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
	3464	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
S	3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
	3466	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903
	3467	Res, 14K, 1%, 3/5W, Metal Film . . .	2322 156 21403
	3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
	3469	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
	3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
	3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703
	3481	Res, 100K, 1%, 3/5W, Metal Film. . .	2322 156 21004
	3482	Res, 32K4, 1%, 3/5W, Metal Film. . .	2322 156 23243
	3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
	3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
S	3486	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
S	3487	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
S	3488	Res, 4R7, 5%, 1/2W, Metal Film . . .	2306 207 03478
S	3490	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
S	3491	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
S	3492	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
	3495	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
	3496	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	3497	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	3500	Res, 1M5, 5%, 1/2W, Metalized Glass.	2322 242 13155
	3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	3198 013 04710
S	3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225
	3503	PTC DC ZPB 120V S 10R PM30 B . . .	2120 661 00019
S	3505	Surge Protector.	2422 549 43073
S	3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
S	3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333
S	3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102
	3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
	3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184
	3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204
S	3515	2.5 ohm, 20%, 3.6W, Negative Temperat ure Coefficient.	2122 612 00023
	3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
	3517	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
S	3518	Res, 0R22, 5%, 2 1/2W, Metal Film. .	3198 012 32270
	3520	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
	3521	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
S	3525	Res, 47 ohm, 5%, 1/3W, Metal Film. .	2306 204 03479
	3528	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
	3529	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
	3530	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
	3532	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
	3534	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
	3536	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
	3537	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
S	3542	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3570	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
	3571	Res, 150K, 1%, 3/5W, Metal Film. . .	2322 156 21504
	3573	Res, 2K, 1%, 1/8W, Metalized Glass .	2322 734 62002
	3574	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
	3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3577	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3578	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
	3579	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
	3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3592	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	3594	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
	3595	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
	3596	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3597	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
	3598	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	3599	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
	3607	RST NETW RGLE 10X 8K2 PM5 B . . .	2120 108 93916
	3608	RST NETW RGLE 6X 2K2 PM5 B . . .	2120 108 93913
	3609	RST NETW RGLE 7X 2K2 PM5 B . . .	2120 108 93915
	3611	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
	3612	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	3613	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	3615	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	3616	Jumper Wire/Staple	0322 179 00003
	3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3619	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
	3629	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
	3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
	3631	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
S	3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
	3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210
	3634	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
	3635	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
	3636	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
	3637	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
	3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010

S = Safety Part Be sure to use exact replacement part.

25TR19C221 (continued)

3653	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3654	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3655	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710
3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3662	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3663	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220
3664	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220
3665	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3666	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3667	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3672	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3673	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3674	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3675	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3676	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3677	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3680	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3681	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3682	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220
3683	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3684	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3908	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710
3909	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3910	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3911	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230
3912	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
3913	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3914	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820
3915	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3916	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810
3951	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3953	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3955	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4004	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4011	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4012	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4020	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4051	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4100	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4203	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4212	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4215	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4216	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4465	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4501	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4650	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4651	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4654	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4911	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4914	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4957	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4999	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 5u6.	3198 018 25680
5004	Coil, 820n	2422 535 97314
5201	Coil, 22u.	3198 018 22290
5202	Coil, 6u8.	3198 018 16880
5342	Coil, 22u.	3198 018 22290
S 5445	Transformer, L.O.T., models ending in C221 and C225.	3128 138 20941
5451	Coil, 27u.	2422 535 96614
5457	Coil, Linear Correction.	3128 138 53241
5461	TFM SIG SLOT UU-1522S WIRE B . . .	2422 531 02318
5461	Transformer.	3128 138 33811
5480	Coil, 33u.	2422 535 97335
S 5500	Filter, Mains, 5mH, 2A	2422 549 43432
5516	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5518	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5521	Coil, 2u2.	3198 018 12280
5540	Coil, 4u7.	3198 018 14780
S 5545	Transfomer,.	2422 531 02314
5551	Coil, 27u.	2422 535 95366
5552	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5572	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5573	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5576	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5577	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5600	Coil, 8u2.	3198 018 18280
5601	Coil, 8u2.	3198 018 18280
5620	Coil, 6u8.	3198 018 16880
5821	Coil, 100u	3198 018 21010
6008	Zener Diode, 33 volt	3198 010 23390
6211	Diode, Signal, 1N4148.	3198 010 10010
6212	Diode, Signal, 1N4148.	3198 010 10010
6213	Diode, Signal, 1N4148.	3198 010 10010
6331	Diode, Signal, BAV21	3198 010 10070
6333	Diode, Signal, BAV21	3198 010 10070
6335	Diode, Signal, BAV21	3198 010 10070
6401	Diode, Rect, BYD33D	9337 234 00133
6402	Zener Diode, 33 volt	3198 010 23390
6403	Diode, Rect, BYD33D	9337 234 00133
6404	Zener Diode, 75 volt	9331 180 00133
6449	Diode, Signal, 1N4148.	3198 010 10010
6450	Diode, Signal, 1N4148.	3198 010 10010
6460	Diode, Rect, BY228/20	9336 215 80112
6463	Diode, Signal, 1N4148.	3198 010 10010
6464	Zener Diode, 6.2 volt.	9331 668 30133
6465	Diode, Rect, BYD33J	9337 234 20133
6466	Diode, Rect, BYD33J	9337 234 20133
6480	Zener Diode, 27 volt	3198 010 22790
6481	Diode, Signal, 1N4148.	3198 010 10010
6485	Diode, Rect, BYD33J	9337 234 20133
6486	Diode, Rect, EGP20DL-5300	9322 100 13682
6487	Diode, Rect, BYD33D	9337 234 00133
6488	Diode, Rect, BYV27-200.	9322 126 72673
6490	Diode, Rect, BYV27-200.	9322 126 72673
6505	Diode, Bridge Rect, GBU6JL-7002 . .	9322 138 08667
6507	Diode, Rect, BYD33J	9337 234 20133
6508	Diode, Rect, BYD33J	9337 234 20133
6510	Zener Diode, 20 volt	9331 178 60133
6511	Diode, Rect, BYV95C	9335 001 80133
6512	Diode, Rect, 1N5062	3198 010 10120
6513	Diode, Rect, 1N5062	3198 010 10120
6514	Zener Diode, 18 volt	3198 010 21890
6540	Diode, Signal, BAV21	3198 010 10070
6550	Diode, Rect, BY229X-800	9340 380 30127
6560	Diode, Rect, EGP20DL-5300	9322 100 13682
6580	Diode, Rect, BYV27-200.	9322 126 72673
6584	Diode, Signal, 1N4148.	3198 010 10010
6585	Diode, Signal, 1N4148.	3198 010 10010
6591	Diode, Signal, BAS16WS	9322 031 99685
6601	Zener Diode, 3.9 volt.	3198 010 23980
6603	Jumper Wire/Staple	0322 179 00003
6604	Jumper Wire/Staple	0322 179 00003
6605	Jumper Wire/Staple	0322 179 00003
6606	Zener Diode, 4.7 volt.	3198 010 24780
6607	Zener Diode, 6.8 volt.	3198 010 26880
6690	LED VS LTL-307P (LITO) B . . .	9322 033 95682
6951	Diode, Signal, BAS16WS	9322 031 99685
6961	Diode, Signal, BAS16WS	9322 031 99685
7250	IC,.	9352 620 26112
7251	IC, LM317T	9337 220 80682
7254	Transistor, NPN, BC847B.	3198 010 42030
7256	Transistor, NPN, BC847B.	3198 010 42030
7258	Transistor, NPN, BC847B.	3198 010 42030
7263	Transistor, PNP, BC857B.	3198 010 42150
7266	Transistor, NPN, BC847B.	3198 010 42030
7330	IC, TDA6107Q/N2.	9352 576 50112
7401	IC,.	9322 121 47687
7460	Transistor, NPN, BU1508DX.	9340 170 50127
7461	Transistor, NPN, BF819	9335 354 50127
7462	Transistor, NPN, BC547B.	3198 020 40030
7463	Transistor, PNP, BC557B.	3198 020 40110
7480	IC,.	9322 028 93682
7481	Transistor, PNP, BC557B.	3198 020 40110
7482	Transistor, PNP, BC857B.	3198 010 42150
7518	STH10NC60FI SMPS FET.	9322 155 66687
7520	IC,.	9322 108 36682
7570	IC,.	9337 711 00676
S 7581	Coupler, TCDT1101G	9338 431 30682
7590	Transistor, NPN, BC847B.	3198 010 42030
7591	Transistor, NPN, BC847B.	3198 010 42030
7592	Transistor, NPN, BC847B.	3198 010 42030
7600	IC,.	9352 670 96112
7601	IC, ST24W04B6.	9322 097 23682
7603	Transistor, NPN, BC337	9331 796 00126
7604	Transistor, NPN, BC847B.	3198 010 42030
7605	Transistor, NPN, BC847B.	3198 010 42030
7608	Transistor, NPN, BC847B.	3198 010 42030
7609	Transistor, NPN, BC847B.	3198 010 42030
7680	IR RECEIVER.	9322 154 48667
7904	Transistor, NPN, BC847B.	3198 010 42030
7905	Transistor, NPN, BC847B.	3198 010 42030
7906	Transistor, NPN, BC847B.	3198 010 42030
7952	IC,.	9350 662 70112

S = Safety Part Be sure to use exact replacement part.

25TR19C221 (continued)

7970	ISOPROPYL ALCOHOL.	1306 500 43201
9001	Jumper Wire/Staple	0322 179 00003
9003	Jumper Wire/Staple	0322 179 00003
9005	Jumper Wire/Staple	0322 179 00003
9011	Jumper Wire/Staple	0322 179 00003
9012	Jumper Wire/Staple	0322 179 00003
9105	Jumper Wire/Staple	0322 179 00003
9126	Jumper Wire/Staple	0322 179 00003
9200	Jumper Wire/Staple	0322 179 00003
9202	Jumper Wire/Staple	0322 179 00003
9203	Jumper Wire/Staple	0322 179 00003
9204	Jumper Wire/Staple	0322 179 00003
9205	Jumper Wire/Staple	0322 179 00003
9206	Jumper Wire/Staple	0322 179 00003
9207	Jumper Wire/Staple	0322 179 00003
9208	Jumper Wire/Staple	0322 179 00003
9209	Jumper Wire/Staple	0322 179 00003
9210	Jumper Wire/Staple	0322 179 00003
9211	Jumper Wire/Staple	0322 179 00003
9214	Jumper Wire/Staple	0322 179 00003
9215	Jumper Wire/Staple	0322 179 00003
9216	Jumper Wire/Staple	0322 179 00003
9217	Jumper Wire/Staple	0322 179 00003
9218	Jumper Wire/Staple	0322 179 00003
9220	Jumper Wire/Staple	0322 179 00003
9221	Jumper Wire/Staple	0322 179 00003
9222	Jumper Wire/Staple	0322 179 00003
9225	Jumper Wire/Staple	0322 179 00003
9226	Jumper Wire/Staple	0322 179 00003
9227	Jumper Wire/Staple	0322 179 00003
9228	Jumper Wire/Staple	0322 179 00003
9229	Jumper Wire/Staple	0322 179 00003
9230	Jumper Wire/Staple	0322 179 00003
9231	Jumper Wire/Staple	0322 179 00003
9232	Jumper Wire/Staple	0322 179 00003
9233	Jumper Wire/Staple	0322 179 00003
9234	Jumper Wire/Staple	0322 179 00003
9236	Jumper Wire/Staple	0322 179 00003
9237	Jumper Wire/Staple	0322 179 00003
9238	Jumper Wire/Staple	0322 179 00003
9240	Jumper Wire/Staple	0322 179 00003
9241	Jumper Wire/Staple	0322 179 00003
9242	Jumper Wire/Staple	0322 179 00003
9243	Jumper Wire/Staple	0322 179 00003
9245	Jumper Wire/Staple	0322 179 00003
9301	Jumper Wire/Staple	0322 179 00003
9401	Jumper Wire/Staple	0322 179 00003
9402	Jumper Wire/Staple	0322 179 00003
9403	Jumper Wire/Staple	0322 179 00003
9404	Jumper Wire/Staple	0322 179 00003
9407	Jumper Wire/Staple	0322 179 00003
9408	Jumper Wire/Staple	0322 179 00003
9411	Jumper Wire/Staple	0322 179 00003
9414	Jumper Wire/Staple	0322 179 00003
9417	Jumper Wire/Staple	0322 179 00003
9419	Jumper Wire/Staple	0322 179 00003
9420	Jumper Wire/Staple	0322 179 00003
9421	Jumper Wire/Staple	0322 179 00003
9422	Jumper Wire/Staple	0322 179 00003
9424	Jumper Wire/Staple	0322 179 00003
9425	Jumper Wire/Staple	0322 179 00003
9427	Jumper Wire/Staple	0322 179 00003
9428	Jumper Wire/Staple	0322 179 00003
9460	Jumper Wire/Staple	0322 179 00003
9461	Jumper Wire/Staple	0322 179 00003
9500	Jumper Wire/Staple	0322 179 00003
9501	Jumper Wire/Staple	0322 179 00003
9502	Jumper Wire/Staple	0322 179 00003
9503	Jumper Wire/Staple	0322 179 00003
9505	Jumper Wire/Staple	0322 179 00003
9509	Jumper Wire/Staple	0322 179 00003
9510	Jumper Wire/Staple	0322 179 00003
9511	Jumper Wire/Staple	0322 179 00003
9512	Jumper Wire/Staple	0322 179 00003
9513	Jumper Wire/Staple	0322 179 00003
9515	Jumper Wire/Staple	0322 179 00003
9516	Jumper Wire/Staple	0322 179 00003
9517	Jumper Wire/Staple	0322 179 00003
9518	Jumper Wire/Staple	0322 179 00003
9526	Jumper Wire/Staple	0322 179 00003
9601	Jumper Wire/Staple	0322 179 00003
9602	Jumper Wire/Staple	0322 179 00003
9603	Jumper Wire/Staple	0322 179 00003
9604	Jumper Wire/Staple	0322 179 00003
9605	Jumper Wire/Staple	0322 179 00003
9606	Jumper Wire/Staple	0322 179 00003
9608	Jumper Wire/Staple	0322 179 00003
9609	Jumper Wire/Staple	0322 179 00003
9610	Jumper Wire/Staple	0322 179 00003
9611	Jumper Wire/Staple	0322 179 00003
9612	Jumper Wire/Staple	0322 179 00003
9613	Jumper Wire/Staple	0322 179 00003
9614	Jumper Wire/Staple	0322 179 00003
9615	Jumper Wire/Staple	0322 179 00003
9618	Jumper Wire/Staple	0322 179 00003
9621	Jumper Wire/Staple	0322 179 00003
9622	Jumper Wire/Staple	0322 179 00003
9624	Jumper Wire/Staple	0322 179 00003
9625	Jumper Wire/Staple	0322 179 00003
9626	Jumper Wire/Staple	0322 179 00003
9629	Jumper Wire/Staple	0322 179 00003
9631	Jumper Wire/Staple	0322 179 00003
9632	Jumper Wire/Staple	0322 179 00003
9637	Jumper Wire/Staple	0322 179 00003
9640	Jumper Wire/Staple	0322 179 00003
9642	Jumper Wire/Staple	0322 179 00003
9643	Jumper Wire/Staple	0322 179 00003
9644	Jumper Wire/Staple	0322 179 00003
9660	Jumper Wire/Staple	0322 179 00003
9754	Jumper Wire/Staple	0322 179 00003
9788	Jumper Wire/Staple	0322 179 00003
9793	Jumper Wire/Staple	0322 179 00003
9800	Jumper Wire/Staple	0322 179 00003
9805	Jumper Wire/Staple	0322 179 00003
9806	Jumper Wire/Staple	0322 179 00003
9807	Jumper Wire/Staple	0322 179 00003
9810	Jumper Wire/Staple	0322 179 00003
9901	Jumper Wire/Staple	0322 179 00003
9902	Jumper Wire/Staple	0322 179 00003
9905	Jumper Wire/Staple	0322 179 00003
9906	Jumper Wire/Staple	0322 179 00003
9933	Jumper Wire/Staple	0322 179 00003
9936	Jumper Wire/Staple	0322 179 00003
9940	Jumper Wire/Staple	0322 179 00003
9941	Jumper Wire/Staple	0322 179 00003
9942	Jumper Wire/Staple	0322 179 00003
9943	Jumper Wire/Staple	0322 179 00003
9944	Jumper Wire/Staple	0322 179 00003
9945	Jumper Wire/Staple	0322 179 00003
9946	Jumper Wire/Staple	0322 179 00003
9947	Jumper Wire/Staple	0322 179 00003
9948	Jumper Wire/Staple	0322 179 00003
9949	Jumper Wire/Staple	0322 179 00003
9950	Jumper Wire/Staple	0322 179 00003
9951	Jumper Wire/Staple	0322 179 00003
9952	Jumper Wire/Staple	0322 179 00003
9953	Jumper Wire/Staple	0322 179 00003
9955	Jumper Wire/Staple	0322 179 00003
9956	Jumper Wire/Staple	0322 179 00003
9957	Jumper Wire/Staple	0322 179 00003
9958	Jumper Wire/Staple	0322 179 00003
9959	Jumper Wire/Staple	0322 179 00003
9960	Jumper Wire/Staple	0322 179 00003
9962	Jumper Wire/Staple	0322 179 00003
9963	Jumper Wire/Staple	0322 179 00003
9964	Jumper Wire/Staple	0322 179 00003
9965	Jumper Wire/Staple	0322 179 00003
9966	Jumper Wire/Staple	0322 179 00003
9967	Jumper Wire/Staple	0322 179 00003
9968	Jumper Wire/Staple	0322 179 00003
9969	Jumper Wire/Staple	0322 179 00003
9970	Jumper Wire/Staple	0322 179 00003
9971	Jumper Wire/Staple	0322 179 00003
9972	Jumper Wire/Staple	0322 179 00003
9974	Jumper Wire/Staple	0322 179 00003
9975	Jumper Wire/Staple	0322 179 00003
9976	Jumper Wire/Staple	0322 179 00003
9977	Jumper Wire/Staple	0322 179 00003
9981	Jumper Wire/Staple	0322 179 00003
9982	Jumper Wire/Staple	0322 179 00003
9983	Jumper Wire/Staple	0322 179 00003
9984	Jumper Wire/Staple	0322 179 00003
9987	Jumper Wire/Staple	0322 179 00003
9989	Jumper Wire/Staple	0322 179 00003
9990	Jumper Wire/Staple	0322 179 00003
9991	Jumper Wire/Staple	0322 179 00003
9992	Jumper Wire/Staple	0322 179 00003
9993	Jumper Wire/Staple	0322 179 00003
CBA	313917887121 Main Chassis Board Asm.	3139 178 87121

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Mainscord, 125V, 10A	3135 010 03831
AC02	Clip, Anode Lead	3135 014 04471
AC03	Cabinet Back	3139 124 27951
AC04	Cabinet Front.	3139 137 53291
AC05	Chassis Guide.	3139 124 31381
AC06	Control Buttons.	3139 124 27461
S AC07	Convergence and Purity Assembly.	2422 549 43385
S AC08	CRT A63AFW36X (C121 Version)	9301 763 20443
S AC08	CRT A63QDB891X01	9322 151 39682
S AC09	Coil, Degaussing	2422 549 44489
AC10	Holder, Degaussing (4 Used).	3135 013 01641
AC11	Light Guide.	3139 124 26461

S = Safety Part Be sure to use exact replacement part.

25TR19C221 (continued)

	AC13	Owner's Manual, English.	3135 015 10691
	AC14	Power Button	3139 124 26444
	REMOTE	Remote Transmitter	3139 148 54201
	AC16	Speaker 242226400312 16ohm 1.5W. . .	3121 230 40031
S	AC18	Yoke (C121 Version).	3321 203 00121
	AC19	Yoke Wedge (3 used).	3135 013 00311
	AC21	Batteries f/Remote Transmitter . . .	9299 000 13827
	AC24	Spring	3139 121 26231

S = Safety Part Be sure to use exact replacement part.

25TR19C225 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts		
0113	L9 SOPS HEATSINK	3139 121 62041	
0119	DIODE HEATSINK L9.	3139 121 26691	
0121	LINE HEATSINK (CINCH).	3139 121 61942	
S 0127	Holder, Fuse, 2 Pin.	3122 358 71251	
0211	Connector, 2 Pin	2422 025 11196	
0212	Connector, 2 Pin	2422 025 15396	
0215	Connector, 2 Pin	2412 020 00724	
0220	4 Pin Board Connector.	2422 025 04852	
0221	Connector, 4 Pin	2422 025 15503	
0222	Connector, 2 Pin	2422 025 10646	
0225	1 Pin Board Connector.	2422 034 20021	
0226	1 Pin Board Connector.	2422 034 20021	
S 0243	Connector, 6 Pin	2422 025 04854	
0244	4 Pin Board Connector.	2422 025 04852	
S 0245	Connector, 6 Pin	2422 025 04854	
S 0254	CRT Socket (9 Pin)	2422 500 80022	
0267	Connector, 3 Pin	2412 020 00725	
1000	TUNER.	3139 147 16412	
1001	Filter	2422 549 42501	
1003	45 MHz SAW, Filter,.	2422 549 42433	
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807	
1208	Crystal Resonator, 3.58MHz	2422 543 00832	
S 1500	Fue, 4 A, 250V	2422 086 10905	
S 1571	FUSE 1A 250V	2422 086 10779	
S 1572	FUSE 1A 250V	2422 086 10779	
S 1580	Relay, 12V, 5A G5PA-1.	2422 132 07444	
1600	Switch, Tactile.	2422 128 02742	
1601	Switch, Tactile.	2422 128 02742	
1602	Switch, Tactile.	2422 128 02742	
1603	Switch, Tactile.	2422 128 02742	
1606	Switch, Tactile.	2422 128 02742	
1660	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488	
2001	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2002	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2003	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2004	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2006	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290	
2011	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2201	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2202	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2203	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2204	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2205	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2207	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2208	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2209	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2211	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2212	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2213	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2214	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2215	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280	
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 15654	
2220	Cap, 18p, 5%, 50V, Ceramic	3198 016 01890	
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2222	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2226	Cap, 33u, 20%, 25V, Electrolytic . .	2020 021 90124	
2227	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2228	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780	
2247	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2248	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2249	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2330	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177	
2340	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495	
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320	
S 2343	Cap, 3n3, 10%, 2KV, Ceramic.	2020 558 90529	
2345	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020	
2401	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2402	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2404	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2405	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2407	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2409	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2420	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2426	Cap, 100n, 10%, 63V, Metalized Polyes ter.	2222 370 75104	
2428	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220	
2429	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2430	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2431	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2437	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2438	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2448	Cap, 33p, 5%, 500V, Ceramic.	2020 557 90192	
2450	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91139	
2451	Cap, 15n, 10%, 50V, Polyester. . . .	2020 300 90575	
2456	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176	
2457	Cap, 390n, 5%, 250V, Metalized Polypr opylene.	2222 479 90021	
2458	Cap, 2u2, 20%, 100V, Electrolytic. .	2020 021 91331	
2459	Cap, 680p, 10%, 500V, Ceramic. . . .	3198 019 46810	
2461	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020	
2462	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176	
S 2463	Cap, 470p, 10%, 2KV, Ceramic	2020 558 90483	
S 2465	Cap, 10n, 5%, 1600V, Polypropylene .	2222 375 90154	
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050	
2473	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790	
2481	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740	
2482	Cap, 68n, 10%, 250V, Polyester . . .	2222 347 90234	
2484	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2485	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293	
2486	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2487	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2488	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2489	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2490	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710	
2491	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710	
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810	
2499	Cap, 220n, 10%, 100V, Metalized Polye ster	2222 365 25224	
2500	Cap, 470n, 20%, 275V, Polypropylene.	2222 336 29148	
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
2507	Cap, 1n5, 10%, 1KV, Ceramic.	3198 019 61520	
2508	Cap, 470u, 20%, 200V, Electrolytic .	2020 024 90647	
2511	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020	
2518	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290	
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320	
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320	
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2530	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 021 91147	
2531	Cap, 1n, 2%, 50V, Polypropylene. . .	2020 310 90049	
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220	
2540	Cap, 100u, 20%, 25V, Electrolytic. .	2020 021 90547	
S 2545	Cap, 1n5, 20%, v, Ceramic.	2020 554 90128	
2550	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2551	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91358	
2561	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020	
2562	Cap, 220p, 10%, 1KV, Ceramic	3198 019 62210	
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020	
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020	
2572	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330	
2575	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820	
2577	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020	
2586	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2604	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290	
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2613	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2615	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2619	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2622	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890	
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2629	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230	
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2631	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2679	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2681	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2913	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280	
2914	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330	
2915	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	
2916	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648	
2917	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	

S = Safety Part Be sure to use exact replacement part.

25TR19C225 (continued)

2960	Cap, 220u, 20%, 50V, Electrolytic. .	3198 026 52210
2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090
2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3010	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
3013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810
3021	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3200	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3201	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3203	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820
3205	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3206	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3209	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3212	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3213	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3215	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3216	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3218	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3219	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3220	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3225	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3243	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3246	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340
3250	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3251	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3252	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3253	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3257	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3258	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3259	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	3198 013 01020
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	3198 013 01020
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	3198 013 01020
S 3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
3343	Res, 1K5, 20%, 1/2W, Carbon Film . .	3198 013 01520
3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
3345	VDR DC 1MA/50V S MAX 110V A . . .	2122 550 00152
3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
3401	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
3402	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
3403	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
3405	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002
3406	Res, 1K, 5%, 1/6W, Carbon Film. . .	3198 011 01020
3407	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002
3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3409	Res, 1R5, 5%, 1/3W, Metal Film . . .	2306 204 03158
3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
3420	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840
3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606
3425	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3426	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3428	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3429	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3431	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3432	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3433	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3436	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3437	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3438	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
3447	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
S 3452	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	3198 012 32290
S 3453	Res, 4R7, 5%, 5W, Wire Wound	2322 251 41478
S 3454	Res, 33K, 5%, 1 1/3W, Metal Film . .	2322 194 63333
3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
S 3462	Res, 6K8, 5%, 5W, Metal Film	2322 257 41682
3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3464	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
S 3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
3466	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903
3467	Res, 14K, 1%, 3/5W, Metal Film . . .	2322 156 21403
3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3469	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703
3481	Res, 100K, 1%, 3/5W, Metal Film. . .	2322 156 21004
3482	Res, 32K4, 1%, 3/5W, Metal Film. . .	2322 156 23243
3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
S 3486	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
S 3487	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
S 3488	Res, 4R7, 5%, 1/2W, Metal Film . . .	2306 207 03478
S 3490	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
S 3491	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
S 3492	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
3495	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3496	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3497	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3500	Res, 1M5, 5%, 1/2W, Metalized Glass.	2322 242 13155
3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	3198 013 04710
S 3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225
3503	PTC DC ZPB 120V S 10R PM30 B . . .	2120 661 00019
S 3505	Surge Protector.	2422 549 43073
S 3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
S 3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333
S 3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102
3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184
3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204
S 3515	2.5 ohm, 20%, 3.6W, Negative Temperat ure Coefficient.	2122 612 00023
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3517	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
S 3518	Res, 0R22, 5%, 2 1/2W, Metal Film. .	3198 012 32270
3520	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3521	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
S 3525	Res, 47 ohm, 5%, 1/3W, Metal Film. .	2306 204 03479
3528	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3529	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3530	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
3532	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3534	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3536	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3537	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
S 3542	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3570	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3571	Res, 150K, 1%, 3/5W, Metal Film. . .	2322 156 21504
3573	Res, 2K, 1%, 1/8W, Metalized Glass .	2322 734 62002
3574	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3577	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3578	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3579	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3592	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3594	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3595	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3596	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3597	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3598	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3599	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3607	RST NETW RGLE 10X 8K2 PM5 B . . .	2120 108 93916
3608	RST NETW RGLE 6X 2K2 PM5 B . . .	2120 108 93913
3609	RST NETW RGLE 7X 2K2 PM5 B . . .	2120 108 93915
3611	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3612	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3613	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3615	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3616	Jumper Wire/Staple	0322 179 00003
3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3619	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3629	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
3631	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
S 3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210
3634	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3635	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3636	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3637	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010

S = Safety Part Be sure to use exact replacement part.

25TR19C225 (continued)

3653	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3654	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3655	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710
3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3662	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3663	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220
3664	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220
3665	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3666	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3667	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3672	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3673	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3674	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3675	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3676	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3677	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3680	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3681	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3682	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220
3683	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3684	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3908	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710
3909	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3910	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3911	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230
3912	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
3913	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3914	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820
3915	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3916	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810
3951	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3953	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3955	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4004	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4011	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4012	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4020	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4051	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4100	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4203	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4212	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4215	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4216	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4465	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4501	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4650	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4651	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4654	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4911	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4914	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4957	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4999	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 5u6.	3198 018 25680
5004	Coil, 820n	2422 535 97314
5201	Coil, 22u.	3198 018 22290
5202	Coil, 6u8.	3198 018 16880
5342	Coil, 22u.	3198 018 22290
S 5445	Transformer, L.O.T., models ending in C221 and C225.	3128 138 20941
5451	Coil, 27u.	2422 535 96614
5457	Coil, Linear Correction.	3128 138 53241
5461	TFM SIG SLOT UU-1522S WIRE B . . .	2422 531 02318
5461	Transformer.	3128 138 33811
5480	Coil, 33u.	2422 535 97335
S 5500	Filter, Mains, 5mH, 2A	2422 549 43432
5516	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5518	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5521	Coil, 2u2.	3198 018 12280
5540	Coil, 4u7.	3198 018 14780
S 5545	Transfomer,.	2422 531 02314
5551	Coil, 27u.	2422 535 95366
5552	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5572	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5573	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5576	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5577	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5600	Coil, 8u2.	3198 018 18280
5601	Coil, 8u2.	3198 018 18280
5620	Coil, 6u8.	3198 018 16880
5821	Coil, 100u	3198 018 21010
6008	Zener Diode, 33 volt	3198 010 23390
6211	Diode, Signal, 1N4148.	3198 010 10010
6212	Diode, Signal, 1N4148.	3198 010 10010
6213	Diode, Signal, 1N4148.	3198 010 10010
6331	Diode, Signal, BAV21	3198 010 10070
6333	Diode, Signal, BAV21	3198 010 10070
6335	Diode, Signal, BAV21	3198 010 10070
6401	Diode, Rect, BYD33D	9337 234 00133
6402	Zener Diode, 33 volt	3198 010 23390
6403	Diode, Rect, BYD33D	9337 234 00133
6404	Zener Diode, 75 volt	9331 180 00133
6449	Diode, Signal, 1N4148.	3198 010 10010
6450	Diode, Signal, 1N4148.	3198 010 10010
6460	Diode, Rect, BY228/20	9336 215 80112
6463	Diode, Signal, 1N4148.	3198 010 10010
6464	Zener Diode, 6.2 volt.	9331 668 30133
6465	Diode, Rect, BYD33J	9337 234 20133
6466	Diode, Rect, BYD33J	9337 234 20133
6480	Zener Diode, 27 volt	3198 010 22790
6481	Diode, Signal, 1N4148.	3198 010 10010
6485	Diode, Rect, BYD33J	9337 234 20133
6486	Diode, Rect, EGP20DL-5300	9322 100 13682
6487	Diode, Rect, BYD33D	9337 234 00133
6488	Diode, Rect, BYV27-200.	9322 126 72673
6490	Diode, Rect, BYV27-200.	9322 126 72673
6505	Diode, Bridge Rect, GBU6JL-7002 . .	9322 138 08667
6507	Diode, Rect, BYD33J	9337 234 20133
6508	Diode, Rect, BYD33J	9337 234 20133
6510	Zener Diode, 20 volt	9331 178 60133
6511	Diode, Rect, BYV95C	9335 001 80133
6512	Diode, Rect, 1N5062	3198 010 10120
6513	Diode, Rect, 1N5062	3198 010 10120
6514	Zener Diode, 18 volt	3198 010 21890
6540	Diode, Signal, BAV21	3198 010 10070
6550	Diode, Rect, BY229X-800	9340 380 30127
6560	Diode, Rect, EGP20DL-5300	9322 100 13682
6580	Diode, Rect, BYV27-200.	9322 126 72673
6584	Diode, Signal, 1N4148.	3198 010 10010
6585	Diode, Signal, 1N4148.	3198 010 10010
6591	Diode, Signal, BAS16WS	9322 031 99685
6601	Zener Diode, 3.9 volt.	3198 010 23980
6603	Jumper Wire/Staple	0322 179 00003
6604	Jumper Wire/Staple	0322 179 00003
6605	Jumper Wire/Staple	0322 179 00003
6606	Zener Diode, 4.7 volt.	3198 010 24780
6607	Zener Diode, 6.8 volt.	3198 010 26880
6690	LED VS LTL-307P (LITO) B . . .	9322 033 95682
6951	Diode, Signal, BAS16WS	9322 031 99685
6961	Diode, Signal, BAS16WS	9322 031 99685
7250	IC,.	9352 620 26112
7251	IC, LM317T	9337 220 80682
7254	Transistor, NPN, BC847B.	3198 010 42030
7256	Transistor, NPN, BC847B.	3198 010 42030
7258	Transistor, NPN, BC847B.	3198 010 42030
7263	Transistor, PNP, BC857B.	3198 010 42150
7266	Transistor, NPN, BC847B.	3198 010 42030
7330	IC, TDA6107Q/N2.	9352 576 50112
7401	IC,.	9322 121 47687
7460	Transistor, NPN, BU1508DX.	9340 170 50127
7461	Transistor, NPN, BF819	9335 354 50127
7462	Transistor, NPN, BC547B.	3198 020 40030
7463	Transistor, PNP, BC557B.	3198 020 40110
7480	IC,.	9322 028 93682
7481	Transistor, PNP, BC557B.	3198 020 40110
7482	Transistor, PNP, BC857B.	3198 010 42150
7518	STH10NC60FI SMPS FET.	9322 155 66687
7520	IC,.	9322 108 36682
7570	IC,.	9337 711 00676
S 7581	Coupler, TCDT1101G	9338 431 30682
7590	Transistor, NPN, BC847B.	3198 010 42030
7591	Transistor, NPN, BC847B.	3198 010 42030
7592	Transistor, NPN, BC847B.	3198 010 42030
7600	IC,.	9352 670 96112
7601	IC, ST24W04B6.	9322 097 23682
7603	Transistor, NPN, BC337	9331 796 00126
7604	Transistor, NPN, BC847B.	3198 010 42030
7605	Transistor, NPN, BC847B.	3198 010 42030
7608	Transistor, NPN, BC847B.	3198 010 42030
7609	Transistor, NPN, BC847B.	3198 010 42030
7680	IR RECEIVER.	9322 154 48667
7904	Transistor, NPN, BC847B.	3198 010 42030
7905	Transistor, NPN, BC847B.	3198 010 42030
7906	Transistor, NPN, BC847B.	3198 010 42030
7952	IC,.	9350 662 70112

S = Safety Part Be sure to use exact replacement part.

25TR19C225 (continued)

7970	ISOPROPYL ALCOHOL.	1306 500 43201
9001	Jumper Wire/Staple	0322 179 00003
9003	Jumper Wire/Staple	0322 179 00003
9005	Jumper Wire/Staple	0322 179 00003
9011	Jumper Wire/Staple	0322 179 00003
9012	Jumper Wire/Staple	0322 179 00003
9105	Jumper Wire/Staple	0322 179 00003
9126	Jumper Wire/Staple	0322 179 00003
9200	Jumper Wire/Staple	0322 179 00003
9202	Jumper Wire/Staple	0322 179 00003
9203	Jumper Wire/Staple	0322 179 00003
9204	Jumper Wire/Staple	0322 179 00003
9205	Jumper Wire/Staple	0322 179 00003
9206	Jumper Wire/Staple	0322 179 00003
9207	Jumper Wire/Staple	0322 179 00003
9208	Jumper Wire/Staple	0322 179 00003
9209	Jumper Wire/Staple	0322 179 00003
9210	Jumper Wire/Staple	0322 179 00003
9211	Jumper Wire/Staple	0322 179 00003
9214	Jumper Wire/Staple	0322 179 00003
9215	Jumper Wire/Staple	0322 179 00003
9216	Jumper Wire/Staple	0322 179 00003
9217	Jumper Wire/Staple	0322 179 00003
9218	Jumper Wire/Staple	0322 179 00003
9220	Jumper Wire/Staple	0322 179 00003
9221	Jumper Wire/Staple	0322 179 00003
9222	Jumper Wire/Staple	0322 179 00003
9225	Jumper Wire/Staple	0322 179 00003
9226	Jumper Wire/Staple	0322 179 00003
9227	Jumper Wire/Staple	0322 179 00003
9228	Jumper Wire/Staple	0322 179 00003
9229	Jumper Wire/Staple	0322 179 00003
9230	Jumper Wire/Staple	0322 179 00003
9231	Jumper Wire/Staple	0322 179 00003
9232	Jumper Wire/Staple	0322 179 00003
9233	Jumper Wire/Staple	0322 179 00003
9234	Jumper Wire/Staple	0322 179 00003
9236	Jumper Wire/Staple	0322 179 00003
9237	Jumper Wire/Staple	0322 179 00003
9238	Jumper Wire/Staple	0322 179 00003
9240	Jumper Wire/Staple	0322 179 00003
9241	Jumper Wire/Staple	0322 179 00003
9242	Jumper Wire/Staple	0322 179 00003
9243	Jumper Wire/Staple	0322 179 00003
9245	Jumper Wire/Staple	0322 179 00003
9301	Jumper Wire/Staple	0322 179 00003
9401	Jumper Wire/Staple	0322 179 00003
9402	Jumper Wire/Staple	0322 179 00003
9403	Jumper Wire/Staple	0322 179 00003
9404	Jumper Wire/Staple	0322 179 00003
9407	Jumper Wire/Staple	0322 179 00003
9408	Jumper Wire/Staple	0322 179 00003
9411	Jumper Wire/Staple	0322 179 00003
9414	Jumper Wire/Staple	0322 179 00003
9417	Jumper Wire/Staple	0322 179 00003
9419	Jumper Wire/Staple	0322 179 00003
9420	Jumper Wire/Staple	0322 179 00003
9421	Jumper Wire/Staple	0322 179 00003
9422	Jumper Wire/Staple	0322 179 00003
9424	Jumper Wire/Staple	0322 179 00003
9425	Jumper Wire/Staple	0322 179 00003
9427	Jumper Wire/Staple	0322 179 00003
9428	Jumper Wire/Staple	0322 179 00003
9460	Jumper Wire/Staple	0322 179 00003
9461	Jumper Wire/Staple	0322 179 00003
9500	Jumper Wire/Staple	0322 179 00003
9501	Jumper Wire/Staple	0322 179 00003
9502	Jumper Wire/Staple	0322 179 00003
9503	Jumper Wire/Staple	0322 179 00003
9505	Jumper Wire/Staple	0322 179 00003
9509	Jumper Wire/Staple	0322 179 00003
9510	Jumper Wire/Staple	0322 179 00003
9511	Jumper Wire/Staple	0322 179 00003
9512	Jumper Wire/Staple	0322 179 00003
9513	Jumper Wire/Staple	0322 179 00003
9515	Jumper Wire/Staple	0322 179 00003
9516	Jumper Wire/Staple	0322 179 00003
9517	Jumper Wire/Staple	0322 179 00003
9518	Jumper Wire/Staple	0322 179 00003
9526	Jumper Wire/Staple	0322 179 00003
9601	Jumper Wire/Staple	0322 179 00003
9602	Jumper Wire/Staple	0322 179 00003
9603	Jumper Wire/Staple	0322 179 00003
9604	Jumper Wire/Staple	0322 179 00003
9605	Jumper Wire/Staple	0322 179 00003
9606	Jumper Wire/Staple	0322 179 00003
9608	Jumper Wire/Staple	0322 179 00003
9609	Jumper Wire/Staple	0322 179 00003
9610	Jumper Wire/Staple	0322 179 00003
9611	Jumper Wire/Staple	0322 179 00003
9612	Jumper Wire/Staple	0322 179 00003
9613	Jumper Wire/Staple	0322 179 00003
9614	Jumper Wire/Staple	0322 179 00003
9615	Jumper Wire/Staple	0322 179 00003
9618	Jumper Wire/Staple	0322 179 00003
9621	Jumper Wire/Staple	0322 179 00003
9622	Jumper Wire/Staple	0322 179 00003
9624	Jumper Wire/Staple	0322 179 00003
9625	Jumper Wire/Staple	0322 179 00003
9626	Jumper Wire/Staple	0322 179 00003
9629	Jumper Wire/Staple	0322 179 00003
9631	Jumper Wire/Staple	0322 179 00003
9632	Jumper Wire/Staple	0322 179 00003
9637	Jumper Wire/Staple	0322 179 00003
9640	Jumper Wire/Staple	0322 179 00003
9642	Jumper Wire/Staple	0322 179 00003
9643	Jumper Wire/Staple	0322 179 00003
9644	Jumper Wire/Staple	0322 179 00003
9660	Jumper Wire/Staple	0322 179 00003
9754	Jumper Wire/Staple	0322 179 00003
9788	Jumper Wire/Staple	0322 179 00003
9793	Jumper Wire/Staple	0322 179 00003
9800	Jumper Wire/Staple	0322 179 00003
9805	Jumper Wire/Staple	0322 179 00003
9806	Jumper Wire/Staple	0322 179 00003
9807	Jumper Wire/Staple	0322 179 00003
9810	Jumper Wire/Staple	0322 179 00003
9901	Jumper Wire/Staple	0322 179 00003
9902	Jumper Wire/Staple	0322 179 00003
9905	Jumper Wire/Staple	0322 179 00003
9906	Jumper Wire/Staple	0322 179 00003
9933	Jumper Wire/Staple	0322 179 00003
9936	Jumper Wire/Staple	0322 179 00003
9940	Jumper Wire/Staple	0322 179 00003
9941	Jumper Wire/Staple	0322 179 00003
9942	Jumper Wire/Staple	0322 179 00003
9943	Jumper Wire/Staple	0322 179 00003
9944	Jumper Wire/Staple	0322 179 00003
9945	Jumper Wire/Staple	0322 179 00003
9946	Jumper Wire/Staple	0322 179 00003
9947	Jumper Wire/Staple	0322 179 00003
9948	Jumper Wire/Staple	0322 179 00003
9949	Jumper Wire/Staple	0322 179 00003
9950	Jumper Wire/Staple	0322 179 00003
9951	Jumper Wire/Staple	0322 179 00003
9952	Jumper Wire/Staple	0322 179 00003
9953	Jumper Wire/Staple	0322 179 00003
9955	Jumper Wire/Staple	0322 179 00003
9956	Jumper Wire/Staple	0322 179 00003
9957	Jumper Wire/Staple	0322 179 00003
9958	Jumper Wire/Staple	0322 179 00003
9959	Jumper Wire/Staple	0322 179 00003
9960	Jumper Wire/Staple	0322 179 00003
9962	Jumper Wire/Staple	0322 179 00003
9963	Jumper Wire/Staple	0322 179 00003
9964	Jumper Wire/Staple	0322 179 00003
9965	Jumper Wire/Staple	0322 179 00003
9966	Jumper Wire/Staple	0322 179 00003
9967	Jumper Wire/Staple	0322 179 00003
9968	Jumper Wire/Staple	0322 179 00003
9969	Jumper Wire/Staple	0322 179 00003
9970	Jumper Wire/Staple	0322 179 00003
9971	Jumper Wire/Staple	0322 179 00003
9972	Jumper Wire/Staple	0322 179 00003
9974	Jumper Wire/Staple	0322 179 00003
9975	Jumper Wire/Staple	0322 179 00003
9976	Jumper Wire/Staple	0322 179 00003
9977	Jumper Wire/Staple	0322 179 00003
9981	Jumper Wire/Staple	0322 179 00003
9982	Jumper Wire/Staple	0322 179 00003
9983	Jumper Wire/Staple	0322 179 00003
9984	Jumper Wire/Staple	0322 179 00003
9987	Jumper Wire/Staple	0322 179 00003
9989	Jumper Wire/Staple	0322 179 00003
9990	Jumper Wire/Staple	0322 179 00003
9991	Jumper Wire/Staple	0322 179 00003
9992	Jumper Wire/Staple	0322 179 00003
9993	Jumper Wire/Staple	0322 179 00003
CBA	313917887121 Main Chassis Board Asm.	3139 178 87121

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Mainscord, 125V, 10A	3135 010 03831
AC02	Clip, Anode Lead	3135 014 04471
AC03	Cabinet Back	3139 124 27951
AC04	Cabinet Front.	3139 137 53291
AC05	Chassis Guide.	3139 124 31381
AC06	Control Buttons.	3139 124 27461
S AC07	Convergence and Purity Assembly.	2422 549 43385
S AC08	CRT A63AFW36X (C121 Version)	9301 763 20443
S AC08	CRT A63QDB891X01	9322 151 39682
S AC09	Coil, Degaussing	2422 549 44489
AC10	Holder, Degaussing (4 Used).	3135 013 01641
AC11	Light Guide.	3139 124 26461

S = Safety Part Be sure to use exact replacement part.

25TR19C225 (continued)

	AC13	Owner's Manual, English.	3135 015 10691
	AC14	Power Button	3139 124 26444
	REMOTE	Remote Transmitter	3139 148 54201
	AC16	Speaker 242226400312 16ohm 1.5W. . .	3121 230 40031
S	AC18	Yoke (C121 Version).	3321 203 00121
	AC19	Yoke Wedge (3 used).	3135 013 00311
	AC21	Batteries f/Remote Transmitter . . .	9299 000 13827
	AC24	Spring	3139 121 26231

S = Safety Part Be sure to use exact replacement part.

25TS56C121 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts		
S 0127	3.15 Amp Fuse, ...	3122 358 72141	
0152	Cable, DIP, 6 Pin, 400mm	3104 301 09421	
0153	4 Pin Cable.	3104 301 09431	
0212	Connector, 2 Pin	2422 025 15396	
0220	4 Pin Board Connector.	2422 025 04852	
0223	3 Pin Board Connector.	2422 026 04963	
0224	1 Pin Board Connector.	2422 034 20021	
0228	1 Pin Board Connector.	2422 034 20021	
0234	Connector, 4 Pin	2422 025 15847	
S 0243	Connector, 6 Pin	2422 025 04854	
0244	4 Pin Board Connector.	2422 025 04852	
S 0245	Connector, 6 Pin	2422 025 04854	
S 0254	CRT Socket (9 Pin)	2422 500 80022	
0267	Connector, 3 Pin	2412 020 00725	
1000	Tuner.	2422 542 90057	
1001	Filter	2422 549 42501	
1003	45 MHz SAW, Filter,.	2422 549 42433	
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807	
1208	Crystal Resonator.	4835 242 77276	
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10869	
S 1571	1 Amp, Radial Fuse,.	4835 253 97162	
S 1572	1 Amp, Radial Fuse,.	4835 253 97162	
S 1580	Relay, 12V	2422 132 07317	
1600	Switch, Tactile.	2422 128 02742	
1601	Switch, Tactile.	2422 128 02742	
1602	Switch, Tactile.	2422 128 02742	
1603	Switch, Tactile.	2422 128 02742	
1606	Switch, Tactile.	2422 128 02742	
1660	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488	
1821	Ceramic Resonator.	4835 122 97102	
2001	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2002	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2003	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2004	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2006	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290	
2011	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2102	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2103	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2104	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2201	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2202	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2203	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2204	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2205	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2207	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2208	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2209	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2211	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2212	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2213	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2214	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2215	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280	
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 16654	
2220	Cap, 15p, 5%, 50V, Ceramic	3198 016 01590	
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2222	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2226	Cap, 33u, 20%, 25V, Electrolytic . .	2020 021 90124	
2227	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2247	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2248	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2249	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2330	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177	
2340	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495	
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320	
S 2343	Cap, 3n3, 10%, 2KV, Ceramic.	2020 558 90529	
2345	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020	
2401	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2402	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2404	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2405	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2407	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2409	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2420	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2426	Cap, 100n, 10%, 63V, Metalized Polyes ter.	2222 370 75104	
2428	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220	
2429	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2430	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2431	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2437	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2438	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2448	Cap, 220p, 10%, 500V, Ceramic. . . .	3198 019 42210	
2450	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91139	
2451	Cap, 15n, 10%, 50V, Polyester. . . .	2020 300 90575	
2451	0.01uF., 10%, 50V, Polyester, only 27	3198 138 20941	
2456	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176	
2457	Cap, 390n, 5%, 250V, Metalized Polypr opylene.	2222 479 90021	
2458	Cap, 2u2, 20%, 100V, Electrolytic. .	2020 021 91331	
2459	Cap, 680p, 10%, 500V, Ceramic. . . .	3198 019 46810	
2461	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020	
2462	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176	
2463	470pF., 10%, 2KV, Ceramic.	4835 122 47638	
S 2465	Cap, 10n, 5%, 1600V, Polypropylene .	2222 375 90154	
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050	
2473	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790	
2481	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740	
2482	Cap, 68n, 10%, 250V, Polyester . . .	2222 347 90234	
2484	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2485	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293	
2486	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2487	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2488	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2489	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2490	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710	
2491	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710	
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810	
2500	0.47uF., 250V, Polyester	4835 121 47569	
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
S 2507	Cap, 1n5, 10%, 1KV, Ceramic.	2020 558 90443	
2508	Cap, 470u, 20%, 200V, Electrolytic .	2020 024 90647	
S 2511	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020	
S 2518	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290	
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320	
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320	
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2530	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 021 91147	
2531	Cap, 1n, 2%, 50V, Polypropylene. . .	2020 310 90049	
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220	
2540	Cap, 100u, 20%, 25V, Electrolytic. .	2020 021 90547	
S 2545	1500pF., 250VAC, Ceramic	4835 122 47621	
S 2550	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2551	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91358	
2561	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020	
S 2562	Cap, 220p, 10%, 1KV, Ceramic	2020 558 90424	
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020	
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020	
2572	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330	
2575	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820	
2577	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020	
2586	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2604	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290	
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2613	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2615	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2619	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2622	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890	
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2629	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230	
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2631	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2679	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2681	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2821	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280	
2823	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2825	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2826	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090	
2827	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2828	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2829	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	
2830	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280	
2831	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	
2832	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280	

S = Safety Part Be sure to use exact replacement part.

25TS56C121 (continued)

2833	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280		3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
2834	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780		3401	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2835	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3402	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2836	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3403	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2837	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740		3405	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002
2838	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3406	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2839	Cap, 1u, 5%, 50V, Metalized Polyester	2020 308 90124		3407	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002
2840	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2841	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3409	1.5 ohm, 5%, 1/3W, Metal Film. . . .	4835 116 57664
2842	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2844	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3420	470k, 5%, 1/10W, Metal Film.	4835 111 37407
2845	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2913	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280		3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2914	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330		3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840
2915	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606
2916	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648		3425	150k, 5%, 1/10W, Metal Film.	4835 111 27045
2917	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3426	39k, 5%, 1/10W, Metal Film	4835 111 27051
2918	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330		3428	22k, 5%, 1/10W, Metal Film	4835 111 37441
2919	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3429	27k, 5%, 1/10W, Metal Film	4835 111 37442
2920	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648		3431	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
2921	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3432	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
2931	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280		3436	Res, 1K, 2%, 0,25W	4822 051 10102
2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3437	10k, 5%, 1/10W, Metal Film	4835 111 37216
2952	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3438	33k, 1/4W, Carbon Film	4835 110 57375
2954	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
2955	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3447	10k, 5%, 1/10W, Metal Film	4835 111 37216
2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	S	3452	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63229
2960	Cap, 220u, 20%, 50V, Electrolytic. .	3198 026 52210	S	3453	Res, 4R7, 5%, 5W, Wire Wound	2322 251 41478
2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090	S	3454	Res, 33K, 5%, 1 1/3W, Metal Film . .	2322 194 63333
2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090		3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090		3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3462	Res, 6K8, 5%, 5W, Metal Film	2322 257 41682
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3010	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610		3464	Res, 1K, 2%, 0,25W	4822 051 10102
3013	Zero ohm,.	4835 111 27056	S	3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
3014	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052		3466	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903
3015	22k, 5%, 1/10W, Metal Film	4835 111 37441		3467	Res, 14K, 1%, 3/5W, Metal Film . . .	2322 156 21403
3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810		3467	Res, 15K, 1%, 3/5W, Metal Film . . .	2322 156 21503
3021	Res, 1K, 2%, 0,25W	4822 051 10102		3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3103	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3469	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
3104	10k, 5%, 1/10W, Metal Film	4835 111 37216		3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3108	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703
3109	10k, 5%, 1/10W, Metal Film	4835 111 37216		3481	Res, 100K, 1%, 3/5W, Metal Film. . .	2322 156 21004
3123	75 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37276		3482	Res, 32K4, 1%, 3/5W, Metal Film. . .	2322 156 23243
3200	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3201	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253		3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3203	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443	S	3485	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	S	3486	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3205	Res, 1K, 2%, 0,25W	4822 051 10102	S	3487	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3206	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	S	3488	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3490	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3209	22k, 5%, 1/10W, Metal Film	4835 111 37441	S	3491	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3212	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253	S	3492	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3213	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3495	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272
3215	22k, 5%, 1/10W, Metal Film	4835 111 37441		3496	10k, 5%, 1/10W, Metal Film	4835 111 37216
3216	Zero ohm,.	4835 111 27056		3497	10k, 5%, 1/10W, Metal Film	4835 111 37216
3217	Res, 1M5, 5%, 1/8W, Metalized Glass.	2322 730 61155		3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3218	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225
3219	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3503	10ohm, 120VAC, Positive Temperature C	
3220	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432			oefficient	4835 116 47001
3225	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S	3505	Surge Protector.	2422 549 43073
3228	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3231	Zero ohm,.	4835 111 27056	S	3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333
3232	Zero ohm,.	4835 111 27056	S	3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102
3233	Zero ohm,.	4835 111 27056		3512	15k, 5%, 1/10W, Metal Film	4835 111 37458
3243	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052		3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184
3246	82k, 5%, 1/10W, Metal Film	4835 111 37277		3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204
3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3515	2.5 ohm, 20%, 3.6W, Negative Temperat	
3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010			ure Coefficient.	2122 612 00023
3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340		3516	Res, 1K, 2%, 0,25W	4822 051 10102
3250	Zero ohm,.	4835 111 27056		3517	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3251	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S	3518	Res, 0R22, 5%, 3W, Metal Film. . . .	2120 106 90548
3252	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		3520	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3253	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		3521	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443
3257	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3525	33 ohm, 5%, 1/3W, Metal Film	4835 116 57665
3258	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3528	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3259	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3529	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3530	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3532	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3534	15k, 5%, 1/10W, Metal Film	4835 111 37458
3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3536	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3537	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046	S	3542	4.7 Megohm, 5%, 1/2W, Metal Film . .	4835 116 57009
S 3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109		3570	15k, 5%, 1/10W, Metal Film	4835 111 37458
S 3341	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483		3571	Res, 150K, 1%, 3/5W, Metal Film. . .	2322 156 21504
S 3342	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483		3573	Res, 2K, 1%, 1/10W, Metalized Glass.	2120 108 92657
3343	1.5k, 20%, 1/2W, Carbon Composition.	4835 110 47034		3574	33k, 5%, 1/10W, Metal Film	4835 111 37248
3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290		3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
S 3345	VDR, DC, 1mA, 50V, MAX 115V	2322 593 13507		3577	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030

S = Safety Part Be sure to use exact replacement part.

25TS56C121 (continued)

3578	Res, 1K, 2%, 0,25W	4822 051 10102	
3579	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451	
3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3592	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3594	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3595	68k, 5%, 1/6W, Carbon Film	4835 111 37205	
3596	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3597	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3598	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3599	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3607	8.2k, 5%, 1/8W, Inline Package . . .	4835 111 97046	
3608	2.2k, 5%, 1/8W, Inline Package . . .	4835 111 97049	
3609	2.2k, 5%, Resistor Network	2120 108 93868	
3611	Res, 1K, 2%, 0,25W	4822 051 10102	
3612	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3613	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3615	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3617	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3619	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3629	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259	
3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3631	27k, 5%, 1/10W, Metal Film	4835 111 37442	
S 3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63479	
3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210	
3634	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3635	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3636	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3637	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3653	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3654	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3655	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3662	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3663	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3664	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3665	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3666	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376	
3667	27k, 5%, 1/10W, Metal Film	4835 111 37442	
3672	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3673	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3674	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231	
3675	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3676	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3677	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3680	680 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37271	
3681	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3682	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3683	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3684	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3821	15k, 5%, 1/10W, Metal Film	4835 111 37458	
3822	1.2k, 5%, 1/10W, Metal Film.	4835 111 27042	
3823	100k, 5%, 1/10W, Metal Film.	4835 111 37434	
3824	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3825	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3826	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3827	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3828	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3829	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272	
3830	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272	
3831	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198 011 03310	
3832	47 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37262	
3908	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3909	Res, 1K, 2%, 0,25W	4822 051 10102	
3910	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376	
3911	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230	
3912	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3913	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3914	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	
3915	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231	
3916	220 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37371	
3917	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3918	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3919	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376	
3920	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231	
3921	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230	
3922	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	
3923	220 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37371	
3924	39k, 5%, 1/10W, Metal Film	4835 111 27051	
3925	39k, 5%, 1/10W, Metal Film	4835 111 27051	
3926	39k, 5%, 1/10W, Metal Film	4835 111 27051	
3929	39k, 5%, 1/10W, Metal Film	4835 111 27051	
3930	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3931	Res, 1K, 2%, 0,25W	4822 051 10102	
3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810	
3951	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3953	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3955	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
3957	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
4001	Zero ohm,.	4835 111 27056	
4002	Zero ohm,.	4835 111 27056	
4004	Zero ohm,.	4835 111 27056	
4007	Zero ohm,.	4835 111 27056	
4009	Zero ohm,.	4835 111 27056	
4010	Zero ohm,.	4835 111 27056	
4011	Zero ohm,.	4835 111 27056	
4012	Zero ohm,.	4835 111 27056	
4013	Zero ohm,.	4835 111 27056	
4020	Zero ohm,.	4835 111 27056	
4051	Zero ohm,.	4835 111 27056	
4100	Zero ohm,.	4835 111 27056	
4101	Zero ohm,.	4835 111 27056	
4102	Zero ohm,.	4835 111 27056	
4103	Zero ohm,.	4835 111 27056	
4143	Zero ohm,.	4835 111 27056	
4144	Zero ohm,.	4835 111 27056	
4203	Zero ohm,.	4835 111 27056	
4207	Zero ohm,.	4835 111 27056	
4212	Zero ohm,.	4835 111 27056	
4214	Zero ohm,.	4835 111 27056	
4215	Zero ohm,.	4835 111 27056	
4216	Zero ohm,.	4835 111 27056	
4501	Zero ohm,.	4835 111 27056	
4602	Zero ohm,.	4835 111 27056	
4650	Zero ohm,.	4835 111 27056	
4651	Zero ohm,.	4835 111 27056	
4652	Zero ohm,.	4835 111 27056	
4654	Zero ohm,.	4835 111 27056	
4655	Zero ohm,.	4835 111 27056	
4684	Zero ohm,.	4835 111 27056	
4687	Zero ohm,.	4835 111 27056	
4831	Zero ohm,.	4835 111 27056	
4832	Zero ohm,.	4835 111 27056	
4833	Zero ohm,.	4835 111 27056	
4902	Zero ohm,.	4835 111 27056	
4903	Zero ohm,.	4835 111 27056	
4904	Zero ohm,.	4835 111 27056	
4905	Zero ohm,.	4835 111 27056	
4909	Zero ohm,.	4835 111 27056	
4911	Zero ohm,.	4835 111 27056	
4912	Zero ohm,.	4835 111 27056	
4914	Zero ohm,.	4835 111 27056	
4957	Zero ohm,.	4835 111 27056	
4999	Zero ohm,.	4835 111 27056	
5000	Coil, 5u6.	3198 018 25680	
5004	Coil, 820n	2422 535 97314	
5201	Coil, 22u.	3198 018 22290	
5202	Coil, 6u8.	3198 018 16880	
5342	22uH., 10%, Coil, Peaking.	4835 157 67069	
S 5445	Transformer, L.O.T., models ending in C101, C121, and C125	2422 531 02327	
S 5445	Transformer, L.O.T., models ending in C221 and C225.	3128 138 20941	
5451	Coil, 27u.	2422 535 96614	
5457	Coil, Linear Correction.	3128 138 53241	
5461	Transformer.	3128 138 33811	
5480	Coil, 27u.	2422 535 97334	
5480	Coil, 39u.	2422 535 97336	
5480	33uH., Peaking Coil, only in 25. . .	4835 157 58205	
S 5500	Filter, Mains, 5mH, 2A	2422 549 43432	
5516	100uH., Coil	4835 157 67078	
5518	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5521	Coil, 2u2.	3198 018 12280	
5540	Coil, 4u7.	3198 018 14780	
S 5545	Transfomer,.	2422 531 02314	
5551	27uH., 5%, Coil, Peaking	4835 157 67052	
5552	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5572	100uH., Coil	4835 157 67078	
5573	100uH., Coil	4835 157 67078	
5576	100uH., Coil	4835 157 67078	
5577	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5600	Coil, 8u2.	3198 018 18280	
5601	Coil, 8u2.	3198 018 18280	
5620	Coil, 6u8.	3198 018 16880	
5821	Coil, 100u	3198 018 21010	
5822	Coil, 18u.	3198 018 21890	
6008	Zener, 33 Volt BZX79-C33	4835 130 37904	
6113	Zener Diode, 6.8 volt.	9340 386 40115	
6211	Diode, 1N4148.	4835 130 37048	
6212	Diode, 1N4148.	4835 130 37048	
6213	Diode, 1N4148.	4835 130 37048	
6331	Diode.	4835 130 37294	
6333	Diode.	4835 130 37294	
6335	Diode.	4835 130 37294	
6401	Diode.	4835 130 37094	
6402	Zener, 33 Volt, BZX79-C33.	4835 130 37904	
6403	Diode.	4835 130 37094	

S = Safety Part Be sure to use exact replacement part.

25TS56C121 (continued)

	6404	Diode.	4835 130 37094
	6449	Diode, 1N4148.	4835 130 37048
	6450	Diode, 1N4148.	4835 130 37048
	6460	Diode, Rect, BY228/20	9336 215 80112
	6463	Diode, 1N4148.	4835 130 37048
	6464	Zener Diode, 6.2 volt.	9337 242 70133
	6465	Diode, BYD33J.	4835 130 37094
	6466	Diode, BYD33J.	4835 130 37094
	6480	Diode, Zener	4835 130 37947
	6481	Diode, 1N4148.	4835 130 37048
	6485	Diode, BYD33J.	4835 130 37094
	6486	Diode, EGP20DL-530	4835 130 37919
	6487	Diode.	4835 130 37094
	6488	Diode, Rect, BYV27-200.	9322 126 72673
	6490	Diode, Rect, BYV27-200.	9322 126 72673
	6505	Diode, Bridge Rect, GBU6JL-7002	9322 138 08667
	6507	Diode, BYD33J.	4835 130 37094
	6508	Diode, BYD33J.	4835 130 37094
	6510	Zener Diode, 20 volt	9331 178 60133
	6511	Diode, BYV95C.	4835 130 37052
	6512	Diode, Rect, BY228/20	4822 130 41275
	6513	Diode, Rect, BY228/20	4822 130 41275
	6514	Zener, 18 Volt, BZX79-C18.	4835 130 37908
	6540	Diode.	4835 130 37294
	6550	Diode, Rect, BY229X-800	9340 380 30127
	6560	Diode, EGP20DL-530	4835 130 37919
	6580	Diode, Rect, SB140.	9339 577 60673
	6584	Diode, 1N4148.	4835 130 37048
	6585	Diode, 1N4148.	4835 130 37048
	6591	Diode, BAS216.	4835 130 37905
	6601	Diode, Zener	4835 130 37684
	6606	Zener, 4.7 Volt, BZX79-C4V7.	4835 130 37005
	6607	Zener, 6.8 Volt, BZX79-C6V8.	4835 130 37945
	6690	LED, LTL-307P.	4835 130 97096
	6821	Zener Diode, 9.1 volt.	9331 177 80133
	6822	Fixed Coil	4835 130 37048
	6951	Diode, BAS216.	4835 130 37905
	6961	Diode, BAS216.	4835 130 37905
	7250	IC,.	9352 620 26112
	7251	IC, LM317T	9337 220 80682
	7254	Transistor, NPN, BC847B.	4822 130 60511
	7256	Transistor, NPN, BC847B.	4822 130 60511
	7258	Transistor, NPN, BC847B.	4822 130 60511
	7263	Transistor, PNP, BC857B.	5322 130 60508
	7266	Transistor, NPN, BC847B.	4822 130 60511
	7330	IC,.	9352 184 10112
	7401	IC,.	9322 121 47687
	7460	Transistor, NPN, BU1508DX.	9340 170 50127
	7461	Transistor, NPN, BF819	9335 354 50127
	7462	Transistor, BC547B	4835 130 47055
	7463	Transistor, BC557B	4835 130 47409
	7480	IC,.	9322 028 93682
	7481	Transistor, BC557B	4835 130 47409
	7482	Transistor, PNP, BC857B.	5322 130 60508
	7518	STH8NA60FI SMPS FET	9322 068 92687
	7518	STH10NC60FI SMPS FET.	9322 155 66687
	7520	IC, MC44603A	4835 209 88537
	7570	IC,.	9337 711 00676
S	7581	Coupler, TCDT1101G	9338 431 30682
	7590	Transistor, NPN, BC847B.	4822 130 60511
	7591	Transistor, NPN, BC847B.	4822 130 60511
	7592	Transistor, NPN, BC847B.	4822 130 60511
	7600	IC, SAA5543PS/M4/1046 L90US1-1.4	4835 310 57477
	7601	IC, ST24W04B6.	9322 097 23682
	7603	Transistor, NPN, BC337	9331 796 00126
	7604	Transistor, NPN, BC847B.	4822 130 60511
	7605	Transistor, NPN, BC847B.	4822 130 60511
	7608	Transistor, NPN, BC847B.	4822 130 60511
	7609	Transistor, NPN, BC847B.	4822 130 60511
	7680	IR Receiver.	9322 127 53667
	7821	IC,.	9352 374 70112
	7822	IC, HEF4052BT.	9333 729 50653
	7823	Transistor, NPN, BC337-25.	3198 020 43530
	7904	Transistor, NPN, BC847B.	4822 130 60511
	7905	Transistor, NPN, BC847B.	4822 130 60511
	7906	Transistor, NPN, BC847B.	4822 130 60511
	7908	Transistor, NPN, BC847B.	4822 130 60511
	7909	Transistor, NPN, BC847B.	4822 130 60511
	7910	Transistor, NPN, BC847B.	4822 130 60511
	7951	IC,.	4822 209 13706
	9423	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	CBA	00EMF806A001 Main Chassis Board Asm.	00EM F80 6A001

Cabinet & Accessory Parts

		Cabinet & Accessory Parts	
S	AC01	Mainscord, 125V, 10A	3135 010 03831
S	AC02	Anode Clip	4835 256 97264
	AC03	Cabinet Back	3139 124 27731
	AC04	Cabinet Front.	3139 137 65931
	AC05	Chassis Guide.	3139 124 31381
	AC06	Customer Control Buttons	3139 124 30901
S	AC07	Convergence and Purity Assembly.	2422 549 43385
S	AC08	CRT A63AFW36X (C121 Version)	9301 763 20443
S	AC08	CRT A63QDB891X01	9322 151 39682
S	AC09	Coil, Degaussing	3121 218 62961
	AC11	Light Guide.	3139 124 26461
	AC13	Owner's Manual, English.	3135 015 10752
	AC14	Power Button	3139 124 26444
	REMOTE	Remote Transmitter, RC282901/04.	3139 228 81451
	AC16	Speaker, 16R, 1W5 (2 Used)	2422 264 00343
S	AC18	Yoke (C121 Version).	3321 203 00121
S	AC18	Yoke, Vendor # DSE2603CL(M), (C125 Version)	4835 310 57502
	AC19	Yoke Wedge (3 Used).	4835 535 27001
	AC21	Battery, 1.5V AA, 2-Pack, (Not Shown	9299 000 10137
	AC24	Spring	3139 121 26231

S = Safety Part Be sure to use exact replacement part.

25TS56C221 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts	
0113	L9 SOPS HEATSINK	3139 121 62041
0119	DIODE HEATSINK L9.	3139 121 26691
0121	LINE HEATSINK (CINCH).	3139 121 61942
S 0127	Holder, Fuse, 2 Pin.	3122 358 71251
0211	Connector, 2 Pin	2422 025 11196
0212	Connector, 2 Pin	2422 025 15396
0220	4 Pin Board Connector.	2422 025 04852
0221	Connector, 4 Pin	2422 025 15503
0222	Connector, 2 Pin	2422 025 10646
0223	3 Pin Board Connector.	2422 026 04963
0225	1 Pin Board Connector.	2422 034 20021
0226	1 Pin Board Connector.	2422 034 20021
0234	Connector, 4 Pin	2422 025 15847
S 0243	Connector, 6 Pin	2422 025 04854
0244	4 Pin Board Connector.	2422 025 04852
S 0245	Connector, 6 Pin	2422 025 04854
S 0254	CRT Socket (9 Pin)	2422 500 80022
0267	Connector, 3 Pin	2412 020 00725
1000	TUNER.	3139 147 16412
1001	Filter	2422 549 42501
1003	45 MHz SAW, Filter,.	2422 549 42433
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807
1208	Crystal Resonator, 3.58MHz	2422 543 00832
S 1500	Fue, 4 A, 250V	2422 086 10905
S 1571	FUSE 1A 250V	2422 086 10779
S 1572	FUSE 1A 250V	2422 086 10779
S 1580	Relay, 12V, 5A G5PA-1.	2422 132 07444
1600	Switch, Tactile.	2422 128 02742
1601	Switch, Tactile.	2422 128 02742
1602	Switch, Tactile.	2422 128 02742
1603	Switch, Tactile.	2422 128 02742
1606	Switch, Tactile.	2422 128 02742
1660	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488
1821	Ceramic Resonator, 514KHz5, CSB503F58	2422 540 98344
2001	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2002	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2003	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2004	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2011	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2102	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2103	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2104	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2201	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2202	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2203	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2204	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2205	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2208	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2209	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2211	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2212	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2213	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2214	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2215	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 15654
2220	Cap, 18p, 5%, 50V, Ceramic	3198 016 01890
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2222	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2226	Cap, 33u, 20%, 25V, Electrolytic . .	2020 021 90124
2227	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2247	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2248	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2249	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2330	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2340	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320
S 2343	Cap, 3n3, 10%, 2KV, Ceramic.	2020 558 90529
2345	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2401	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2402	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2404	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2405	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2407	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2409	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2420	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2426	Cap, 100n, 10%, 63V, Metalized Polyes ter.	2222 370 75104
2428	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2429	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2430	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2431	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2437	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2438	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2448	Cap, 33p, 5%, 500V, Ceramic.	2020 557 90192
2450	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91139
2451	Cap, 15n, 10%, 50V, Polyester. . . .	2020 300 90575
2456	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176
2457	Cap, 390n, 5%, 250V, Metalized Polypr opylene.	2222 479 90021
2458	Cap, 2u2, 20%, 100V, Electrolytic. .	2020 021 91331
2459	Cap, 680p, 10%, 500V, Ceramic. . . .	3198 019 46810
2461	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2462	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176
S 2463	Cap, 470p, 10%, 2KV, Ceramic	2020 558 90483
S 2465	Cap, 10n, 5%, 1600V, Polypropylene .	2222 375 90154
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050
2473	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2481	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2482	Cap, 68n, 10%, 250V, Polyester . . .	2222 347 90234
2484	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2485	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2486	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2487	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2488	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2489	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2490	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2491	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810
2499	Cap, 220n, 10%, 100V, Metalized Polye ster	2222 365 25224
2500	Cap, 470n, 20%, 275V, Polypropylene.	2222 336 29148
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2507	Cap, 1n5, 10%, 1KV, Ceramic.	3198 019 61520
2508	Cap, 470u, 20%, 200V, Electrolytic .	2020 024 90647
2511	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
2518	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2530	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 021 91147
2531	Cap, 1n, 2%, 50V, Polypropylene. . .	2020 310 90049
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2540	Cap, 100u, 20%, 25V, Electrolytic. .	2020 021 90547
S 2545	Cap, 1n5, 20%, v, Ceramic.	2020 554 90128
2550	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2551	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91358
2561	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2562	Cap, 220p, 10%, 1KV, Ceramic	3198 019 62210
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2572	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2575	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2577	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2586	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2604	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2613	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2615	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2619	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2622	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2629	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2679	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2681	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2821	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280
2823	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2825	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2826	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090
2827	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010

S = Safety Part Be sure to use exact replacement part.

25TS56C221 (continued)

2828	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	3198 013 01020
2829	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
2830	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280		3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	3198 013 01020
2831	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	S	3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
2832	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280	S	3341	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
2833	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280	S	3342	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
2834	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780		3343	Res, 1K5, 20%, 1/2W, Carbon Film . .	3198 013 01520
2835	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
2836	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3345	VDR DC 1MA/50V S MAX 110V A . . .	2122 550 00152
2837	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740		3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
2838	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3401	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2839	Cap, 1u, 10%, 50V, Polyester	3198 014 01050		3402	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2840	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3403	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2841	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3405	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002
2842	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3406	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3407	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002
2844	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2845	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3409	Res, 1R5, 5%, 1/3W, Metal Film . . .	2306 204 03158
2913	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280		3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2914	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330		3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2915	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3420	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
2916	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648		3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2917	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2918	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330		3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840
2919	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606
2920	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648		3425	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
2921	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3426	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
2931	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280		3428	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3429	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
2952	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3431	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
2954	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3432	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
2955	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3433	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3436	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3437	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3438	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
2960	Cap, 220u, 20%, 50V, Electrolytic. .	3198 026 52210		3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090		3447	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090		3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090		3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3452	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	3198 012 32290
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3453	Res, 4R7, 5%, 5W, Wire Wound	2322 251 41478
3010	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610	S	3454	Res, 33K, 5%, 1 1/3W, Metal Film . .	2322 194 63333
3013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020		3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720		3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3015	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	S	3462	Res, 6K8, 5%, 5W, Metal Film	2322 257 41682
3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810		3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3021	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020		3464	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3103	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220	S	3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
3104	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030		3466	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903
3108	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3467	Res, 14K, 1%, 3/5W, Metal Film . . .	2322 156 21403
3109	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030		3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3123	Res, 75 ohm, 5%, 1/10W, Metalized Gla			3469	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
	ss.	3198 021 57590		3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010		3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703
3201	Res, 390 ohm, 5%, 1/10W, Metalized Gl			3481	Res, 100K, 1%, 3/5W, Metal Film. . .	2322 156 21004
	ass.	3198 021 53910		3482	Res, 32K4, 1%, 3/5W, Metal Film. . .	2322 156 23243
3203	Res, 330 ohm, 5%, 1/10W, Metalized Gl			3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
	ass.	3198 021 53310		3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	S	3486	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
3205	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	S	3487	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
3206	Res, 560 ohm, 5%, 1/10W, Metalized Gl		S	3488	Res, 4R7, 5%, 1/2W, Metal Film . . .	2306 207 03478
	ass.	3198 021 55610	S	3490	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3491	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
3209	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	S	3492	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
3212	Res, 390 ohm, 5%, 1/10W, Metalized Gl			3495	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
	ass.	3198 021 53910		3496	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3213	Res, 560 ohm, 5%, 1/10W, Metalized Gl			3497	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	ass.	3198 021 55610		3500	Res, 1M5, 5%, 1/2W, Metalized Glass.	2322 242 13155
3215	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230		3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	3198 013 04710
3216	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	S	3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225
3217	Res, 1M5, 5%, 1/8W, Metalized Glass.	2322 730 61155		3503	PTC DC ZPB 120V S 10R PM30 B . . .	2120 661 00019
3218	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	S	3505	Surge Protector.	2422 549 43073
3219	Res, 560 ohm, 5%, 1/10W, Metalized Gl		S	3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
	ass.	3198 021 55610	S	3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333
3220	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	S	3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102
3225	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040		3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010		3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184
3243	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720		3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204
3246	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230	S	3515	2.5 ohm, 20%, 3.6W, Negative Temperat	
3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010			ure Coefficient.	2122 612 00023
3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340		3517	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3250	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	S	3518	Res, 0R22, 5%, 2 1/2W, Metal Film. .	3198 012 32270
3251	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040		3520	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3252	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220		3521	Res, 330 ohm, 5%, 1/10W, Metalized Gl	
3253	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220			ass.	3198 021 53310
3257	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	S	3525	Res, 47 ohm, 5%, 1/3W, Metal Film. .	2306 204 03479
3258	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010		3528	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3259	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010		3529	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3530	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	3198 013 01020		3532	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3534	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530

S = Safety Part Be sure to use exact replacement part.

25TS56C221 (continued)

3536	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3537	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
S 3542	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3570	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3571	Res, 150K, 1%, 3/5W, Metal Film. . .	2322 156 21504
3573	Res, 2K, 1%, 1/8W, Metalized Glass .	2322 734 62002
3574	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3577	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3578	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3579	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3592	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3594	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3595	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3596	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3597	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3598	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3599	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3607	RST NETW RGLE 10X 8K2 PM5 B . . .	2120 108 93916
3608	RST NETW RGLE 6X 2K2 PM5 B . . .	2120 108 93913
3609	RST NETW RGLE 7X 2K2 PM5 B . . .	2120 108 93915
3611	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3612	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3613	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3615	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3616	Jumper Wire/Staple	0322 179 00003
3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3619	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3629	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
3631	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
S 3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210
3634	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3635	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3636	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3637	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3653	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3654	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3655	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710
3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3662	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3663	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220
3664	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220
3665	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3666	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3667	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3672	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3673	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3674	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3675	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3676	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3677	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3680	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3681	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3682	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220
3683	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3684	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3821	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3822	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3823	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3824	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3825	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3826	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3827	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3828	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3829	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3830	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3831	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198 011 03310
3832	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3908	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710
3909	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3910	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3911	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230
3912	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
3913	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3914	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820
3915	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3916	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3917	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
3918	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3919	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3920	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3921	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230
3922	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820
3923	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3924	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3925	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3926	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3929	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3930	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710
3931	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810
3951	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3953	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3955	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3957	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4004	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4011	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4012	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4020	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4051	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4100	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4144	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4203	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4207	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4212	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4215	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4216	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4465	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4501	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4650	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4651	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4654	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4833	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4911	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4912	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4914	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4957	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4999	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 5u6.	3198 018 25680
5004	Coil, 820n	2422 535 97314
5201	Coil, 22u.	3198 018 22290
5202	Coil, 6u8.	3198 018 16880
5342	Coil, 22u.	3198 018 22290
S 5445	Transformer, L.O.T., models ending in C221 and C225.	3128 138 20941
5451	Coil, 27u.	2422 535 96614
5457	Coil, Linear Correction.	3128 138 53241
5461	TFM SIG SLOT UU-1522S WIRE B . . .	2422 531 02318
5461	Transformer.	3128 138 33811
5480	Coil, 33u.	2422 535 97335
S 5500	Filter, Mains, 5mH, 2A	2422 549 43432
5516	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5518	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5521	Coil, 2u2.	3198 018 12280
5540	Coil, 4u7.	3198 018 14780
S 5545	Transfomer,.	2422 531 02314
5551	Coil, 27u.	2422 535 95366
5552	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5572	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5573	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5576	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5577	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5600	Coil, 8u2.	3198 018 18280
5601	Coil, 8u2.	3198 018 18280
5620	Coil, 6u8.	3198 018 16880
5821	Coil, 100u	3198 018 21010
5822	Coil, 18u.	3198 018 21890
6008	Zener Diode, 33 volt	3198 010 23390
6113	Zener Diode, 6.8 volt.	9340 386 40115
6211	Diode, Signal, 1N4148.	3198 010 10010
6212	Diode, Signal, 1N4148.	3198 010 10010
6213	Diode, Signal, 1N4148.	3198 010 10010
6331	Diode, Signal, BAV21	3198 010 10070
6333	Diode, Signal, BAV21	3198 010 10070
6335	Diode, Signal, BAV21	3198 010 10070

S = Safety Part Be sure to use exact replacement part.

25TS56C221 (continued)

	6401	Diode, Rect, BYD33D	9337 234 00133		9126	Jumper Wire/Staple	0322 179 00003
	6402	Zener Diode, 33 volt	3198 010 23390		9132	Jumper Wire/Staple	0322 179 00003
	6403	Diode, Rect, BYD33D	9337 234 00133		9140	Jumper Wire/Staple	0322 179 00003
	6404	Zener Diode, 75 volt	9331 180 00133		9200	Jumper Wire/Staple	0322 179 00003
	6449	Diode, Signal, 1N4148.	3198 010 10010		9202	Jumper Wire/Staple	0322 179 00003
	6450	Diode, Signal, 1N4148.	3198 010 10010		9203	Jumper Wire/Staple	0322 179 00003
	6460	Diode, Rect, BY228/20	9336 215 80112		9204	Jumper Wire/Staple	0322 179 00003
	6463	Diode, Signal, 1N4148.	3198 010 10010		9205	Jumper Wire/Staple	0322 179 00003
	6464	Zener Diode, 6.2 volt.	9331 668 30133		9206	Jumper Wire/Staple	0322 179 00003
	6465	Diode, Rect, BYD33J	9337 234 20133		9207	Jumper Wire/Staple	0322 179 00003
	6466	Diode, Rect, BYD33J	9337 234 20133		9208	Jumper Wire/Staple	0322 179 00003
	6480	Zener Diode, 27 volt	3198 010 22790		9209	Jumper Wire/Staple	0322 179 00003
	6481	Diode, Signal, 1N4148.	3198 010 10010		9210	Jumper Wire/Staple	0322 179 00003
	6485	Diode, Rect, BYD33J	9337 234 20133		9211	Jumper Wire/Staple	0322 179 00003
	6486	Diode, Rect, EGP20DL-5300	9322 100 13682		9214	Jumper Wire/Staple	0322 179 00003
	6487	Diode, Rect, BYD33D	9337 234 00133		9215	Jumper Wire/Staple	0322 179 00003
	6488	Diode, Rect, BYV27-200.	9322 126 72673		9216	Jumper Wire/Staple	0322 179 00003
	6490	Diode, Rect, BYV27-200.	9322 126 72673		9217	Jumper Wire/Staple	0322 179 00003
	6505	Diode, Bridge Rect, GBU6JL-7002	9322 138 08667		9218	Jumper Wire/Staple	0322 179 00003
	6507	Diode, Rect, BYD33J	9337 234 20133		9220	Jumper Wire/Staple	0322 179 00003
	6508	Diode, Rect, BYD33J	9337 234 20133		9221	Jumper Wire/Staple	0322 179 00003
	6510	Zener Diode, 20 volt	9331 178 60133		9222	Jumper Wire/Staple	0322 179 00003
	6511	Diode, Rect, BYV95C	9335 001 80133		9225	Jumper Wire/Staple	0322 179 00003
	6512	Diode, Rect, 1N5062	3198 010 10120		9226	Jumper Wire/Staple	0322 179 00003
	6513	Diode, Rect, 1N5062	3198 010 10120		9227	Jumper Wire/Staple	0322 179 00003
	6514	Zener Diode, 18 volt	3198 010 21890		9228	Jumper Wire/Staple	0322 179 00003
	6540	Diode, Signal, BAV21	3198 010 10070		9229	Jumper Wire/Staple	0322 179 00003
	6550	Diode, Rect, BY229X-800	9340 380 30127		9230	Jumper Wire/Staple	0322 179 00003
	6560	Diode, Rect, EGP20DL-5300	9322 100 13682		9231	Jumper Wire/Staple	0322 179 00003
	6580	Diode, Rect, SB140.	9339 577 60673		9232	Jumper Wire/Staple	0322 179 00003
	6584	Diode, Signal, 1N4148.	3198 010 10010		9233	Jumper Wire/Staple	0322 179 00003
	6585	Diode, Signal, 1N4148.	3198 010 10010		9234	Jumper Wire/Staple	0322 179 00003
	6591	Diode, Signal, BAS16WS	9322 031 99685		9236	Jumper Wire/Staple	0322 179 00003
	6601	Zener Diode, 3.9 volt.	3198 010 23980		9237	Jumper Wire/Staple	0322 179 00003
	6603	Jumper Wire/Staple	0322 179 00003		9238	Jumper Wire/Staple	0322 179 00003
	6604	Jumper Wire/Staple	0322 179 00003		9240	Jumper Wire/Staple	0322 179 00003
	6605	Jumper Wire/Staple	0322 179 00003		9241	Jumper Wire/Staple	0322 179 00003
	6606	Zener Diode, 4.7 volt.	3198 010 24780		9242	Jumper Wire/Staple	0322 179 00003
	6607	Zener Diode, 6.8 volt.	3198 010 26880		9243	Jumper Wire/Staple	0322 179 00003
	6690	LED VS LTL-307P (LITO) B	9322 033 95682		9245	Jumper Wire/Staple	0322 179 00003
	6821	Zener Diode, 9.1 volt.	9331 177 80133		9301	Jumper Wire/Staple	0322 179 00003
	6822	Diode, Signal, 1N4148.	3198 010 10010		9401	Jumper Wire/Staple	0322 179 00003
	6951	Diode, Signal, BAS16WS	9322 031 99685		9402	Jumper Wire/Staple	0322 179 00003
	6961	Diode, Signal, BAS16WS	9322 031 99685		9403	Jumper Wire/Staple	0322 179 00003
	7250	IC,	9352 620 26112		9404	Jumper Wire/Staple	0322 179 00003
	7251	IC, LM317T	9337 220 80682		9407	Jumper Wire/Staple	0322 179 00003
	7254	Transistor, NPN, BC847B.	3198 010 42030		9408	Jumper Wire/Staple	0322 179 00003
	7256	Transistor, NPN, BC847B.	3198 010 42030		9411	Jumper Wire/Staple	0322 179 00003
	7258	Transistor, NPN, BC847B.	3198 010 42030		9414	Jumper Wire/Staple	0322 179 00003
	7263	Transistor, PNP, BC857B.	3198 010 42150		9417	Jumper Wire/Staple	0322 179 00003
	7266	Transistor, NPN, BC847B.	3198 010 42030		9419	Jumper Wire/Staple	0322 179 00003
	7330	IC, TDA6107Q/N2.	9352 576 50112		9420	Jumper Wire/Staple	0322 179 00003
	7401	IC,	9322 121 47687		9421	Jumper Wire/Staple	0322 179 00003
	7460	Transistor, NPN, BU1508DX.	9340 170 50127		9422	Jumper Wire/Staple	0322 179 00003
	7461	Transistor, NPN, BF819	9335 354 50127		9424	Jumper Wire/Staple	0322 179 00003
	7462	Transistor, NPN, BC547B.	3198 020 40030		9425	Jumper Wire/Staple	0322 179 00003
	7463	Transistor, PNP, BC557B.	3198 020 40110		9427	Jumper Wire/Staple	0322 179 00003
	7480	IC,	9322 028 93682		9428	Jumper Wire/Staple	0322 179 00003
	7481	Transistor, PNP, BC557B.	3198 020 40110		9460	Jumper Wire/Staple	0322 179 00003
	7482	Transistor, PNP, BC857B.	3198 010 42150		9461	Jumper Wire/Staple	0322 179 00003
	7518	STH10NC60FI SMPS FET.	9322 155 66687		9500	Jumper Wire/Staple	0322 179 00003
	7520	IC,	9322 108 36682		9501	Jumper Wire/Staple	0322 179 00003
	7570	IC,	9337 711 00676		9502	Jumper Wire/Staple	0322 179 00003
S	7581	Coupler, TCDT1101G	9338 431 30682		9503	Jumper Wire/Staple	0322 179 00003
	7590	Transistor, NPN, BC847B.	3198 010 42030		9505	Jumper Wire/Staple	0322 179 00003
	7591	Transistor, NPN, BC847B.	3198 010 42030		9509	Jumper Wire/Staple	0322 179 00003
	7592	Transistor, NPN, BC847B.	3198 010 42030		9510	Jumper Wire/Staple	0322 179 00003
	7600	IC,	9352 670 96112		9511	Jumper Wire/Staple	0322 179 00003
	7601	IC, ST24W04B6.	9322 097 23682		9512	Jumper Wire/Staple	0322 179 00003
	7603	Transistor, NPN, BC337	9331 796 00126		9513	Jumper Wire/Staple	0322 179 00003
	7604	Transistor, NPN, BC847B.	3198 010 42030		9515	Jumper Wire/Staple	0322 179 00003
	7605	Transistor, NPN, BC847B.	3198 010 42030		9516	Jumper Wire/Staple	0322 179 00003
	7608	Transistor, NPN, BC847B.	3198 010 42030		9517	Jumper Wire/Staple	0322 179 00003
	7609	Transistor, NPN, BC847B.	3198 010 42030		9518	Jumper Wire/Staple	0322 179 00003
	7680	IR RECEIVER.	9322 154 48667		9526	Jumper Wire/Staple	0322 179 00003
	7821	IC,	9352 374 70112		9601	Jumper Wire/Staple	0322 179 00003
	7822	IC, HEF4052BT.	9333 729 50653		9602	Jumper Wire/Staple	0322 179 00003
	7823	Transistor, NPN, BC337-25.	3198 020 43530		9603	Jumper Wire/Staple	0322 179 00003
	7904	Transistor, NPN, BC847B.	3198 010 42030		9604	Jumper Wire/Staple	0322 179 00003
	7905	Transistor, NPN, BC847B.	3198 010 42030		9605	Jumper Wire/Staple	0322 179 00003
	7906	Transistor, NPN, BC847B.	3198 010 42030		9606	Jumper Wire/Staple	0322 179 00003
	7908	Transistor, NPN, BC847B.	3198 010 42030		9608	Jumper Wire/Staple	0322 179 00003
	7909	Transistor, NPN, BC847B.	3198 010 42030		9609	Jumper Wire/Staple	0322 179 00003
	7910	Transistor, NPN, BC847B.	3198 010 42030		9610	Jumper Wire/Staple	0322 179 00003
	7951	IC,	9351 861 60112		9611	Jumper Wire/Staple	0322 179 00003
	7960	ISOPROPYL ALCOHOL.	1306 500 43201		9612	Jumper Wire/Staple	0322 179 00003
	9001	Jumper Wire/Staple	0322 179 00003		9613	Jumper Wire/Staple	0322 179 00003
	9003	Jumper Wire/Staple	0322 179 00003		9614	Jumper Wire/Staple	0322 179 00003
	9005	Jumper Wire/Staple	0322 179 00003		9615	Jumper Wire/Staple	0322 179 00003
	9011	Jumper Wire/Staple	0322 179 00003		9618	Jumper Wire/Staple	0322 179 00003
	9012	Jumper Wire/Staple	0322 179 00003		9621	Jumper Wire/Staple	0322 179 00003
	9105	Jumper Wire/Staple	0322 179 00003		9622	Jumper Wire/Staple	0322 179 00003

S = Safety Part Be sure to use exact replacement part.

25TS56C221 (continued)

9624	Jumper Wire/Staple	0322 179 00003
9625	Jumper Wire/Staple	0322 179 00003
9626	Jumper Wire/Staple	0322 179 00003
9629	Jumper Wire/Staple	0322 179 00003
9631	Jumper Wire/Staple	0322 179 00003
9632	Jumper Wire/Staple	0322 179 00003
9637	Jumper Wire/Staple	0322 179 00003
9640	Jumper Wire/Staple	0322 179 00003
9642	Jumper Wire/Staple	0322 179 00003
9643	Jumper Wire/Staple	0322 179 00003
9644	Jumper Wire/Staple	0322 179 00003
9660	Jumper Wire/Staple	0322 179 00003
9754	Jumper Wire/Staple	0322 179 00003
9788	Jumper Wire/Staple	0322 179 00003
9793	Jumper Wire/Staple	0322 179 00003
9800	Jumper Wire/Staple	0322 179 00003
9805	Jumper Wire/Staple	0322 179 00003
9806	Jumper Wire/Staple	0322 179 00003
9807	Jumper Wire/Staple	0322 179 00003
9810	Jumper Wire/Staple	0322 179 00003
9901	Jumper Wire/Staple	0322 179 00003
9904	Jumper Wire/Staple	0322 179 00003
9905	Jumper Wire/Staple	0322 179 00003
9906	Jumper Wire/Staple	0322 179 00003
9920	Jumper Wire/Staple	0322 179 00003
9933	Jumper Wire/Staple	0322 179 00003
9936	Jumper Wire/Staple	0322 179 00003
9940	Jumper Wire/Staple	0322 179 00003
9941	Jumper Wire/Staple	0322 179 00003
9942	Jumper Wire/Staple	0322 179 00003
9943	Jumper Wire/Staple	0322 179 00003
9944	Jumper Wire/Staple	0322 179 00003
9945	Jumper Wire/Staple	0322 179 00003
9946	Jumper Wire/Staple	0322 179 00003
9947	Jumper Wire/Staple	0322 179 00003
9948	Jumper Wire/Staple	0322 179 00003
9949	Jumper Wire/Staple	0322 179 00003
9950	Jumper Wire/Staple	0322 179 00003
9951	Jumper Wire/Staple	0322 179 00003
9952	Jumper Wire/Staple	0322 179 00003
9953	Jumper Wire/Staple	0322 179 00003
9955	Jumper Wire/Staple	0322 179 00003
9956	Jumper Wire/Staple	0322 179 00003
9957	Jumper Wire/Staple	0322 179 00003
9958	Jumper Wire/Staple	0322 179 00003
9959	Jumper Wire/Staple	0322 179 00003
9960	Jumper Wire/Staple	0322 179 00003
9962	Jumper Wire/Staple	0322 179 00003
9963	Jumper Wire/Staple	0322 179 00003
9964	Jumper Wire/Staple	0322 179 00003
9965	Jumper Wire/Staple	0322 179 00003
9966	Jumper Wire/Staple	0322 179 00003
9967	Jumper Wire/Staple	0322 179 00003
9968	Jumper Wire/Staple	0322 179 00003
9969	Jumper Wire/Staple	0322 179 00003
9970	Jumper Wire/Staple	0322 179 00003
9971	Jumper Wire/Staple	0322 179 00003
9972	Jumper Wire/Staple	0322 179 00003
9974	Jumper Wire/Staple	0322 179 00003
9975	Jumper Wire/Staple	0322 179 00003
9976	Jumper Wire/Staple	0322 179 00003
9977	Jumper Wire/Staple	0322 179 00003
9981	Jumper Wire/Staple	0322 179 00003
9982	Jumper Wire/Staple	0322 179 00003
9983	Jumper Wire/Staple	0322 179 00003
9984	Jumper Wire/Staple	0322 179 00003
9987	Jumper Wire/Staple	0322 179 00003
9989	Jumper Wire/Staple	0322 179 00003
9990	Jumper Wire/Staple	0322 179 00003
9991	Jumper Wire/Staple	0322 179 00003
9992	Jumper Wire/Staple	0322 179 00003
9993	Jumper Wire/Staple	0322 179 00003
CBA	313917887141 Main Chassis Board Asm.	3139 178 87141

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Mainscord, 125V, 10A	3135 010 03831
AC02	Clip, Anode Lead	3135 014 04471
AC03	Cabinet Back	3139 124 27731
AC04	Cabinet Front.	3139 137 65931
AC05	Chassis Guide.	3139 124 31381
AC06	Customer Control Buttons	3139 124 30901
S AC07	Convergence and Purity Assembly.	2422 549 43385
S AC08	CRT A63AFW36X (C121 Version)	9301 763 20443
S AC08	CRT A63QDB891X01	9322 151 39682
S AC09	Coil, Degaussing	2422 549 44489
AC10	Holder, Degaussing (4 Used).	3135 013 01641
AC11	Light Guide.	3139 124 26461
AC13	Owner's Manual, English.	3135 015 10752
AC14	Power Button	3139 124 26444
REMOTE	Remote Transmitter, RC282901/04.	3139 228 81451
AC16	Speaker 242226400312 16ohm 1.5W.	3121 230 40031
S AC18	Yoke (C121 Version).	3321 203 00121
S AC18	Yoke, Vendor # DSE2603CL(M), (C125 Version)	4835 310 57502
AC19	Yoke Wedge (3 used).	3135 013 00311
AC21	Battery, 1.5V AA, 2-Pack, (Not Shown	9299 000 10137
AC24	Spring	3139 121 26231

S = Safety Part Be sure to use exact replacement part.

25TS56C225 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts	
0113	L9 SOPS HEATSINK	3139 121 62041
0119	DIODE HEATSINK L9.	3139 121 26691
0121	LINE HEATSINK (CINCH).	3139 121 61942
S 0127	Holder, Fuse, 2 Pin.	3122 358 71251
0211	Connector, 2 Pin	2422 025 11196
0212	Connector, 2 Pin	2422 025 15396
0220	4 Pin Board Connector.	2422 025 04852
0221	Connector, 4 Pin	2422 025 15503
0222	Connector, 2 Pin	2422 025 10646
0223	3 Pin Board Connector.	2422 026 04963
0225	1 Pin Board Connector.	2422 034 20021
0226	1 Pin Board Connector.	2422 034 20021
0234	Connector, 4 Pin	2422 025 15847
S 0243	Connector, 6 Pin	2422 025 04854
0244	4 Pin Board Connector.	2422 025 04852
S 0245	Connector, 6 Pin	2422 025 04854
S 0254	CRT Socket (9 Pin)	2422 500 80022
0267	Connector, 3 Pin	2412 020 00725
1000	TUNER.	3139 147 16412
1001	Filter	2422 549 42501
1003	45 MHz SAW, Filter,.	2422 549 42433
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807
1208	Crystal Resonator, 3.58MHz	2422 543 00832
S 1500	Fue, 4 A, 250V	2422 086 10905
S 1571	FUSE 1A 250V	2422 086 10779
S 1572	FUSE 1A 250V	2422 086 10779
S 1580	Relay, 12V, 5A G5PA-1.	2422 132 07444
1600	Switch, Tactile.	2422 128 02742
1601	Switch, Tactile.	2422 128 02742
1602	Switch, Tactile.	2422 128 02742
1603	Switch, Tactile.	2422 128 02742
1606	Switch, Tactile.	2422 128 02742
1660	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488
1821	Ceramic Resonator, 514KHz5, CSB503F58	2422 540 98344
2001	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2002	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2003	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2004	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2011	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2102	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2103	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2104	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2201	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2202	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2203	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2204	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2205	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2208	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2209	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2211	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2212	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2213	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2214	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2215	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 15654
2220	Cap, 18p, 5%, 50V, Ceramic	3198 016 01890
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2222	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2226	Cap, 33u, 20%, 25V, Electrolytic . .	2020 021 90124
2227	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2247	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2248	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2249	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2330	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2340	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320
S 2343	Cap, 3n3, 10%, 2KV, Ceramic.	2020 558 90529
2345	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2401	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2402	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2404	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2405	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2407	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2409	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2420	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2426	Cap, 100n, 10%, 63V, Metalized Polyes ter.	2222 370 75104
2428	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2429	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2430	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2431	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2437	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2438	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2448	Cap, 33p, 5%, 500V, Ceramic.	2020 557 90192
2450	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91139
2451	Cap, 15n, 10%, 50V, Polyester. . . .	2020 300 90575
2456	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176
2457	Cap, 390n, 5%, 250V, Metalized Polypr opylene.	2222 479 90021
2458	Cap, 2u2, 20%, 100V, Electrolytic. .	2020 021 91331
2459	Cap, 680p, 10%, 500V, Ceramic. . . .	3198 019 46810
2461	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2462	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176
S 2463	Cap, 470p, 10%, 2KV, Ceramic	2020 558 90483
S 2465	Cap, 10n, 5%, 1600V, Polypropylene .	2222 375 90154
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050
2473	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2481	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2482	Cap, 68n, 10%, 250V, Polyester . . .	2222 347 90234
2484	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2485	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2486	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2487	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2488	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2489	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2490	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2491	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810
2499	Cap, 220n, 10%, 100V, Metalized Polye ster	2222 365 25224
2500	Cap, 470n, 20%, 275V, Polypropylene.	2222 336 29148
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2507	Cap, 1n5, 10%, 1KV, Ceramic.	3198 019 61520
2508	Cap, 470u, 20%, 200V, Electrolytic .	2020 024 90647
2511	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
2518	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2530	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 021 91147
2531	Cap, 1n, 2%, 50V, Polypropylene. . .	2020 310 90049
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2540	Cap, 100u, 20%, 25V, Electrolytic. .	2020 021 90547
S 2545	Cap, 1n5, 20%, v, Ceramic.	2020 554 90128
2550	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2551	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91358
2561	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2562	Cap, 220p, 10%, 1KV, Ceramic	3198 019 62210
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2572	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2575	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2577	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2586	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2604	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2613	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2615	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2619	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2622	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2629	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2679	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2681	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2821	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280
2823	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2825	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2826	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090
2827	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010

S = Safety Part Be sure to use exact replacement part.

25TS56C225 (continued)

2828	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	3198 013 01020
2829	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
2830	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280		3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	3198 013 01020
2831	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	S	3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
2832	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280	S	3341	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
2833	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280	S	3342	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
2834	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780		3343	Res, 1K5, 20%, 1/2W, Carbon Film . .	3198 013 01520
2835	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
2836	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3345	VDR DC 1MA/50V S MAX 110V A . . .	2122 550 00152
2837	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740		3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
2838	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3401	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2839	Cap, 1u, 10%, 50V, Polyester	3198 014 01050		3402	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2840	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3403	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2841	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3405	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002
2842	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3406	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3407	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002
2844	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2845	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3409	Res, 1R5, 5%, 1/3W, Metal Film . . .	2306 204 03158
2913	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280		3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2914	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330		3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2915	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3420	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
2916	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648		3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2917	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2918	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330		3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840
2919	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606
2920	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648		3425	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
2921	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3426	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
2931	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280		3428	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3429	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
2952	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3431	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
2954	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3432	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
2955	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3433	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3436	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3437	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3438	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
2960	Cap, 220u, 20%, 50V, Electrolytic. .	3198 026 52210		3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090		3447	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090		3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090		3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3452	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	3198 012 32290
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3453	Res, 4R7, 5%, 5W, Wire Wound	2322 251 41478
3010	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610	S	3454	Res, 33K, 5%, 1 1/3W, Metal Film . .	2322 194 63333
3013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020		3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720		3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3015	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	S	3462	Res, 6K8, 5%, 5W, Metal Film	2322 257 41682
3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810		3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3021	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020		3464	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3103	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220	S	3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
3104	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030		3466	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903
3108	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3467	Res, 14K, 1%, 3/5W, Metal Film . . .	2322 156 21403
3109	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030		3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3123	Res, 75 ohm, 5%, 1/10W, Metalized Gla			3469	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
	ss.	3198 021 57590		3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010		3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703
3201	Res, 390 ohm, 5%, 1/10W, Metalized Gl			3481	Res, 100K, 1%, 3/5W, Metal Film. . .	2322 156 21004
	ass.	3198 021 53910		3482	Res, 32K4, 1%, 3/5W, Metal Film. . .	2322 156 23243
3203	Res, 330 ohm, 5%, 1/10W, Metalized Gl			3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
	ass.	3198 021 53310		3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	S	3486	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
3205	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	S	3487	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
3206	Res, 560 ohm, 5%, 1/10W, Metalized Gl		S	3488	Res, 4R7, 5%, 1/2W, Metal Film . . .	2306 207 03478
	ass.	3198 021 55610	S	3490	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3491	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
3209	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	S	3492	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
3212	Res, 390 ohm, 5%, 1/10W, Metalized Gl			3495	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
	ass.	3198 021 53910		3496	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3213	Res, 560 ohm, 5%, 1/10W, Metalized Gl			3497	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	ass.	3198 021 55610		3500	Res, 1M5, 5%, 1/2W, Metalized Glass.	2322 242 13155
3215	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230		3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	3198 013 04710
3216	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	S	3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225
3217	Res, 1M5, 5%, 1/8W, Metalized Glass.	2322 730 61155		3503	PTC DC ZPB 120V S 10R PM30 B . . .	2120 661 00019
3218	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	S	3505	Surge Protector.	2422 549 43073
3219	Res, 560 ohm, 5%, 1/10W, Metalized Gl		S	3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
	ass.	3198 021 55610	S	3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333
3220	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	S	3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102
3225	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040		3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010		3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184
3243	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720		3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204
3246	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230	S	3515	2.5 ohm, 20%, 3.6W, Negative Temperat	
3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010			ure Coefficient.	2122 612 00023
3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340		3517	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3250	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	S	3518	Res, 0R22, 5%, 2 1/2W, Metal Film. .	3198 012 32270
3251	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040		3520	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3252	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220		3521	Res, 330 ohm, 5%, 1/10W, Metalized Gl	
3253	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220			ass.	3198 021 53310
3257	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	S	3525	Res, 47 ohm, 5%, 1/3W, Metal Film. .	2306 204 03479
3258	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010		3528	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3259	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010		3529	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3530	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	3198 013 01020		3532	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3534	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530

S = Safety Part Be sure to use exact replacement part.

25TS56C225 (continued)

3536	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3537	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
S 3542	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3570	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3571	Res, 150K, 1%, 3/5W, Metal Film. . .	2322 156 21504
3573	Res, 2K, 1%, 1/8W, Metalized Glass .	2322 734 62002
3574	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3577	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3578	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3579	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3592	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3594	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3595	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3596	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3597	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3598	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3599	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3607	RST NETW RGLE 10X 8K2 PM5 B . . .	2120 108 93916
3608	RST NETW RGLE 6X 2K2 PM5 B . . .	2120 108 93913
3609	RST NETW RGLE 7X 2K2 PM5 B . . .	2120 108 93915
3611	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3612	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3613	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3615	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3616	Jumper Wire/Staple	0322 179 00003
3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3619	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3629	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
3631	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
S 3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210
3634	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3635	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3636	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3637	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3653	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3654	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3655	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710
3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3662	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3663	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220
3664	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220
3665	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3666	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3667	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3672	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3673	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3674	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3675	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3676	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3677	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3680	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3681	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3682	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220
3683	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3684	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3821	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3822	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3823	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3824	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3825	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3826	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3827	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3828	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3829	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3830	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3831	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198 011 03310
3832	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3908	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710
3909	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3910	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3911	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230
3912	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
3913	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3914	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820
3915	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3916	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3917	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
3918	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3919	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3920	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3921	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230
3922	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820
3923	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3924	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3925	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3926	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3929	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3930	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710
3931	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810
3951	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3953	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3955	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3957	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4004	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4011	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4012	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4020	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4051	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4100	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4144	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4203	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4207	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4212	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4215	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4216	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4465	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4501	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4650	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4651	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4654	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4833	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4911	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4912	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4914	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4957	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4999	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 5u6.	3198 018 25680
5004	Coil, 820n	2422 535 97314
5201	Coil, 22u.	3198 018 22290
5202	Coil, 6u8.	3198 018 16880
5342	Coil, 22u.	3198 018 22290
S 5445	Transformer, L.O.T., models ending in C221 and C225.	3128 138 20941
5451	Coil, 27u.	2422 535 96614
5457	Coil, Linear Correction.	3128 138 53241
5461	TFM SIG SLOT UU-1522S WIRE B . . .	2422 531 02318
5461	Transformer.	3128 138 33811
5480	Coil, 33u.	2422 535 97335
S 5500	Filter, Mains, 5mH, 2A	2422 549 43432
5516	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5518	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5521	Coil, 2u2.	3198 018 12280
5540	Coil, 4u7.	3198 018 14780
S 5545	Transfomer,.	2422 531 02314
5551	Coil, 27u.	2422 535 95366
5552	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5572	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5573	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5576	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5577	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5600	Coil, 8u2.	3198 018 18280
5601	Coil, 8u2.	3198 018 18280
5620	Coil, 6u8.	3198 018 16880
5821	Coil, 100u	3198 018 21010
5822	Coil, 18u.	3198 018 21890
6008	Zener Diode, 33 volt	3198 010 23390
6113	Zener Diode, 6.8 volt.	9340 386 40115
6211	Diode, Signal, 1N4148.	3198 010 10010
6212	Diode, Signal, 1N4148.	3198 010 10010
6213	Diode, Signal, 1N4148.	3198 010 10010
6331	Diode, Signal, BAV21	3198 010 10070
6333	Diode, Signal, BAV21	3198 010 10070
6335	Diode, Signal, BAV21	3198 010 10070

S = Safety Part Be sure to use exact replacement part.

25TS56C225 (continued)

6401	Diode, Rect, BYD33D	9337 234 00133	9126	Jumper Wire/Staple	0322 179 00003
6402	Zener Diode, 33 volt	3198 010 23390	9132	Jumper Wire/Staple	0322 179 00003
6403	Diode, Rect, BYD33D	9337 234 00133	9140	Jumper Wire/Staple	0322 179 00003
6404	Zener Diode, 75 volt	9331 180 00133	9200	Jumper Wire/Staple	0322 179 00003
6449	Diode, Signal, 1N4148.	3198 010 10010	9202	Jumper Wire/Staple	0322 179 00003
6450	Diode, Signal, 1N4148.	3198 010 10010	9203	Jumper Wire/Staple	0322 179 00003
6460	Diode, Rect, BY228/20	9336 215 80112	9204	Jumper Wire/Staple	0322 179 00003
6463	Diode, Signal, 1N4148.	3198 010 10010	9205	Jumper Wire/Staple	0322 179 00003
6464	Zener Diode, 6.2 volt.	9331 668 30133	9206	Jumper Wire/Staple	0322 179 00003
6465	Diode, Rect, BYD33J	9337 234 20133	9207	Jumper Wire/Staple	0322 179 00003
6466	Diode, Rect, BYD33J	9337 234 20133	9208	Jumper Wire/Staple	0322 179 00003
6480	Zener Diode, 27 volt	3198 010 22790	9209	Jumper Wire/Staple	0322 179 00003
6481	Diode, Signal, 1N4148.	3198 010 10010	9210	Jumper Wire/Staple	0322 179 00003
6485	Diode, Rect, BYD33J	9337 234 20133	9211	Jumper Wire/Staple	0322 179 00003
6486	Diode, Rect, EGP20DL-5300	9322 100 13682	9214	Jumper Wire/Staple	0322 179 00003
6487	Diode, Rect, BYD33D	9337 234 00133	9215	Jumper Wire/Staple	0322 179 00003
6488	Diode, Rect, BYV27-200.	9322 126 72673	9216	Jumper Wire/Staple	0322 179 00003
6490	Diode, Rect, BYV27-200.	9322 126 72673	9217	Jumper Wire/Staple	0322 179 00003
6505	Diode, Bridge Rect, GBU6JL-7002	9322 138 08667	9218	Jumper Wire/Staple	0322 179 00003
6507	Diode, Rect, BYD33J	9337 234 20133	9220	Jumper Wire/Staple	0322 179 00003
6508	Diode, Rect, BYD33J	9337 234 20133	9221	Jumper Wire/Staple	0322 179 00003
6510	Zener Diode, 20 volt	9331 178 60133	9222	Jumper Wire/Staple	0322 179 00003
6511	Diode, Rect, BYV95C	9335 001 80133	9225	Jumper Wire/Staple	0322 179 00003
6512	Diode, Rect, 1N5062	3198 010 10120	9226	Jumper Wire/Staple	0322 179 00003
6513	Diode, Rect, 1N5062	3198 010 10120	9227	Jumper Wire/Staple	0322 179 00003
6514	Zener Diode, 18 volt	3198 010 21890	9228	Jumper Wire/Staple	0322 179 00003
6540	Diode, Signal, BAV21	3198 010 10070	9229	Jumper Wire/Staple	0322 179 00003
6550	Diode, Rect, BY229X-800	9340 380 30127	9230	Jumper Wire/Staple	0322 179 00003
6560	Diode, Rect, EGP20DL-5300	9322 100 13682	9231	Jumper Wire/Staple	0322 179 00003
6580	Diode, Rect, SB140.	9339 577 60673	9232	Jumper Wire/Staple	0322 179 00003
6584	Diode, Signal, 1N4148.	3198 010 10010	9233	Jumper Wire/Staple	0322 179 00003
6585	Diode, Signal, 1N4148.	3198 010 10010	9234	Jumper Wire/Staple	0322 179 00003
6591	Diode, Signal, BAS16WS	9322 031 99685	9236	Jumper Wire/Staple	0322 179 00003
6601	Zener Diode, 3.9 volt.	3198 010 23980	9237	Jumper Wire/Staple	0322 179 00003
6603	Jumper Wire/Staple	0322 179 00003	9238	Jumper Wire/Staple	0322 179 00003
6604	Jumper Wire/Staple	0322 179 00003	9240	Jumper Wire/Staple	0322 179 00003
6605	Jumper Wire/Staple	0322 179 00003	9241	Jumper Wire/Staple	0322 179 00003
6606	Zener Diode, 4.7 volt.	3198 010 24780	9242	Jumper Wire/Staple	0322 179 00003
6607	Zener Diode, 6.8 volt.	3198 010 26880	9243	Jumper Wire/Staple	0322 179 00003
6690	LED VS LTL-307P (LITO) B	9322 033 95682	9245	Jumper Wire/Staple	0322 179 00003
6821	Zener Diode, 9.1 volt.	9331 177 80133	9301	Jumper Wire/Staple	0322 179 00003
6822	Diode, Signal, 1N4148.	3198 010 10010	9401	Jumper Wire/Staple	0322 179 00003
6951	Diode, Signal, BAS16WS	9322 031 99685	9402	Jumper Wire/Staple	0322 179 00003
6961	Diode, Signal, BAS16WS	9322 031 99685	9403	Jumper Wire/Staple	0322 179 00003
7250	IC,	9352 620 26112	9404	Jumper Wire/Staple	0322 179 00003
7251	IC, LM317T	9337 220 80682	9407	Jumper Wire/Staple	0322 179 00003
7254	Transistor, NPN, BC847B.	3198 010 42030	9408	Jumper Wire/Staple	0322 179 00003
7256	Transistor, NPN, BC847B.	3198 010 42030	9411	Jumper Wire/Staple	0322 179 00003
7258	Transistor, NPN, BC847B.	3198 010 42030	9414	Jumper Wire/Staple	0322 179 00003
7263	Transistor, PNP, BC857B.	3198 010 42150	9417	Jumper Wire/Staple	0322 179 00003
7266	Transistor, NPN, BC847B.	3198 010 42030	9419	Jumper Wire/Staple	0322 179 00003
7330	IC, TDA6107Q/N2.	9352 576 50112	9420	Jumper Wire/Staple	0322 179 00003
7401	IC,	9322 121 47687	9421	Jumper Wire/Staple	0322 179 00003
7460	Transistor, NPN, BU1508DX.	9340 170 50127	9422	Jumper Wire/Staple	0322 179 00003
7461	Transistor, NPN, BF819	9335 354 50127	9424	Jumper Wire/Staple	0322 179 00003
7462	Transistor, NPN, BC547B.	3198 020 40030	9425	Jumper Wire/Staple	0322 179 00003
7463	Transistor, PNP, BC557B.	3198 020 40110	9427	Jumper Wire/Staple	0322 179 00003
7480	IC,	9322 028 93682	9428	Jumper Wire/Staple	0322 179 00003
7481	Transistor, PNP, BC557B.	3198 020 40110	9460	Jumper Wire/Staple	0322 179 00003
7482	Transistor, PNP, BC857B.	3198 010 42150	9461	Jumper Wire/Staple	0322 179 00003
7518	STH10NC60FI SMPS FET.	9322 155 66687	9500	Jumper Wire/Staple	0322 179 00003
7520	IC,	9322 108 36682	9501	Jumper Wire/Staple	0322 179 00003
7570	IC,	9337 711 00676	9502	Jumper Wire/Staple	0322 179 00003
S 7581	Coupler, TCDT1101G	9338 431 30682	9503	Jumper Wire/Staple	0322 179 00003
7590	Transistor, NPN, BC847B.	3198 010 42030	9505	Jumper Wire/Staple	0322 179 00003
7591	Transistor, NPN, BC847B.	3198 010 42030	9509	Jumper Wire/Staple	0322 179 00003
7592	Transistor, NPN, BC847B.	3198 010 42030	9510	Jumper Wire/Staple	0322 179 00003
7600	IC,	9352 670 96112	9511	Jumper Wire/Staple	0322 179 00003
7601	IC, ST24W04B6.	9322 097 23682	9512	Jumper Wire/Staple	0322 179 00003
7603	Transistor, NPN, BC337	9331 796 00126	9513	Jumper Wire/Staple	0322 179 00003
7604	Transistor, NPN, BC847B.	3198 010 42030	9515	Jumper Wire/Staple	0322 179 00003
7605	Transistor, NPN, BC847B.	3198 010 42030	9516	Jumper Wire/Staple	0322 179 00003
7608	Transistor, NPN, BC847B.	3198 010 42030	9517	Jumper Wire/Staple	0322 179 00003
7609	Transistor, NPN, BC847B.	3198 010 42030	9518	Jumper Wire/Staple	0322 179 00003
7680	IR RECEIVER.	9322 154 48667	9526	Jumper Wire/Staple	0322 179 00003
7821	IC,	9352 374 70112	9601	Jumper Wire/Staple	0322 179 00003
7822	IC, HEF4052BT.	9333 729 50653	9602	Jumper Wire/Staple	0322 179 00003
7823	Transistor, NPN, BC337-25.	3198 020 43530	9603	Jumper Wire/Staple	0322 179 00003
7904	Transistor, NPN, BC847B.	3198 010 42030	9604	Jumper Wire/Staple	0322 179 00003
7905	Transistor, NPN, BC847B.	3198 010 42030	9605	Jumper Wire/Staple	0322 179 00003
7906	Transistor, NPN, BC847B.	3198 010 42030	9606	Jumper Wire/Staple	0322 179 00003
7908	Transistor, NPN, BC847B.	3198 010 42030	9608	Jumper Wire/Staple	0322 179 00003
7909	Transistor, NPN, BC847B.	3198 010 42030	9609	Jumper Wire/Staple	0322 179 00003
7910	Transistor, NPN, BC847B.	3198 010 42030	9610	Jumper Wire/Staple	0322 179 00003
7951	IC,	9351 861 60112	9611	Jumper Wire/Staple	0322 179 00003
7960	ISOPROPYL ALCOHOL.	1306 500 43201	9612	Jumper Wire/Staple	0322 179 00003
9001	Jumper Wire/Staple	0322 179 00003	9613	Jumper Wire/Staple	0322 179 00003
9003	Jumper Wire/Staple	0322 179 00003	9614	Jumper Wire/Staple	0322 179 00003
9005	Jumper Wire/Staple	0322 179 00003	9615	Jumper Wire/Staple	0322 179 00003
9011	Jumper Wire/Staple	0322 179 00003	9618	Jumper Wire/Staple	0322 179 00003
9012	Jumper Wire/Staple	0322 179 00003	9621	Jumper Wire/Staple	0322 179 00003
9105	Jumper Wire/Staple	0322 179 00003	9622	Jumper Wire/Staple	0322 179 00003

S = Safety Part Be sure to use exact replacement part.

25TS56C225 (continued)

9624	Jumper Wire/Staple	0322 179 00003
9625	Jumper Wire/Staple	0322 179 00003
9626	Jumper Wire/Staple	0322 179 00003
9629	Jumper Wire/Staple	0322 179 00003
9631	Jumper Wire/Staple	0322 179 00003
9632	Jumper Wire/Staple	0322 179 00003
9637	Jumper Wire/Staple	0322 179 00003
9640	Jumper Wire/Staple	0322 179 00003
9642	Jumper Wire/Staple	0322 179 00003
9643	Jumper Wire/Staple	0322 179 00003
9644	Jumper Wire/Staple	0322 179 00003
9660	Jumper Wire/Staple	0322 179 00003
9754	Jumper Wire/Staple	0322 179 00003
9788	Jumper Wire/Staple	0322 179 00003
9793	Jumper Wire/Staple	0322 179 00003
9800	Jumper Wire/Staple	0322 179 00003
9805	Jumper Wire/Staple	0322 179 00003
9806	Jumper Wire/Staple	0322 179 00003
9807	Jumper Wire/Staple	0322 179 00003
9810	Jumper Wire/Staple	0322 179 00003
9901	Jumper Wire/Staple	0322 179 00003
9904	Jumper Wire/Staple	0322 179 00003
9905	Jumper Wire/Staple	0322 179 00003
9906	Jumper Wire/Staple	0322 179 00003
9920	Jumper Wire/Staple	0322 179 00003
9933	Jumper Wire/Staple	0322 179 00003
9936	Jumper Wire/Staple	0322 179 00003
9940	Jumper Wire/Staple	0322 179 00003
9941	Jumper Wire/Staple	0322 179 00003
9942	Jumper Wire/Staple	0322 179 00003
9943	Jumper Wire/Staple	0322 179 00003
9944	Jumper Wire/Staple	0322 179 00003
9945	Jumper Wire/Staple	0322 179 00003
9946	Jumper Wire/Staple	0322 179 00003
9947	Jumper Wire/Staple	0322 179 00003
9948	Jumper Wire/Staple	0322 179 00003
9949	Jumper Wire/Staple	0322 179 00003
9950	Jumper Wire/Staple	0322 179 00003
9951	Jumper Wire/Staple	0322 179 00003
9952	Jumper Wire/Staple	0322 179 00003
9953	Jumper Wire/Staple	0322 179 00003
9955	Jumper Wire/Staple	0322 179 00003
9956	Jumper Wire/Staple	0322 179 00003
9957	Jumper Wire/Staple	0322 179 00003
9958	Jumper Wire/Staple	0322 179 00003
9959	Jumper Wire/Staple	0322 179 00003
9960	Jumper Wire/Staple	0322 179 00003
9962	Jumper Wire/Staple	0322 179 00003
9963	Jumper Wire/Staple	0322 179 00003
9964	Jumper Wire/Staple	0322 179 00003
9965	Jumper Wire/Staple	0322 179 00003
9966	Jumper Wire/Staple	0322 179 00003
9967	Jumper Wire/Staple	0322 179 00003
9968	Jumper Wire/Staple	0322 179 00003
9969	Jumper Wire/Staple	0322 179 00003
9970	Jumper Wire/Staple	0322 179 00003
9971	Jumper Wire/Staple	0322 179 00003
9972	Jumper Wire/Staple	0322 179 00003
9974	Jumper Wire/Staple	0322 179 00003
9975	Jumper Wire/Staple	0322 179 00003
9976	Jumper Wire/Staple	0322 179 00003
9977	Jumper Wire/Staple	0322 179 00003
9981	Jumper Wire/Staple	0322 179 00003
9982	Jumper Wire/Staple	0322 179 00003
9983	Jumper Wire/Staple	0322 179 00003
9984	Jumper Wire/Staple	0322 179 00003
9987	Jumper Wire/Staple	0322 179 00003
9989	Jumper Wire/Staple	0322 179 00003
9990	Jumper Wire/Staple	0322 179 00003
9991	Jumper Wire/Staple	0322 179 00003
9992	Jumper Wire/Staple	0322 179 00003
9993	Jumper Wire/Staple	0322 179 00003
CBA	313917887141 Main Chassis Board Asm.	3139 178 87141

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Mainscord, 125V, 10A	3135 010 03831
AC02	Clip, Anode Lead	3135 014 04471
AC03	Cabinet Back	3139 124 27731
AC04	Cabinet Front.	3139 137 65931
AC05	Chassis Guide.	3139 124 31381
AC06	Customer Control Buttons	3139 124 30901
S AC07	Convergence and Purity Assembly.	2422 549 43385
S AC08	CRT A63AFW36X (C121 Version)	9301 763 20443
S AC08	CRT A63QDB891X01	9322 151 39682
S AC09	Coil, Degaussing	2422 549 44489
AC10	Holder, Degaussing (4 Used).	3135 013 01641
AC11	Light Guide.	3139 124 26461
AC13	Owner's Manual, English.	3135 015 10752
AC14	Power Button	3139 124 26444
REMOTE	Remote Transmitter, RC282901/04.	3139 228 81451
AC16	Speaker 242226400312 16ohm 1.5W.	3121 230 40031
S AC18	Yoke (C121 Version).	3321 203 00121
S AC18	Yoke, Vendor # DSE2603CL(M), (C125 Version)	4835 310 57502
AC19	Yoke Wedge (3 used).	3135 013 00311
AC21	Battery, 1.5V AA, 2-Pack, (Not Shown	9299 000 10137
AC24	Spring	3139 121 26231

S = Safety Part Be sure to use exact replacement part.

26LL590121 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts	
S 0127	3.15 Amp Fuse, ...	3122 358 72141
0152	Cable, DIP, 6 Pin, 400mm	3104 301 09421
0153	4 Pin Cable.	3104 301 09431
0212	Connector, 2 Pin	2422 025 15396
0220	4 Pin Board Connector.	2422 025 04852
0223	3 Pin Board Connector.	2422 026 04963
0224	1 Pin Board Connector.	2422 034 20021
0228	1 Pin Board Connector.	2422 034 20021
0234	Connector, 4 Pin	2422 025 12479
S 0243	Connector, 6 Pin	2422 025 04854
0244	4 Pin Board Connector.	2422 025 04852
S 0245	Connector, 6 Pin	2422 025 04854
S 0254	CRT Socket (9 Pin)	2422 500 80022
0267	Connector, 3 Pin	2412 020 00725
1000	Tuner.	2422 542 90057
1001	Filter	2422 549 42501
1003	45 MHz SAW, Filter,.	2422 549 42433
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807
1208	Crystal Resonator.	4835 242 77276
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10869
S 1572	1 Amp, Radial Fuse,.	4835 253 97162
S 1573	2.5 Amp Fuse, Radial,.	2422 086 10422
S 1580	Relay, 12V	2422 132 07317
1600	Switch, Tactile.	2422 128 02742
1601	Switch, Tactile.	2422 128 02742
1602	Switch, Tactile.	2422 128 02742
1603	Switch, Tactile.	2422 128 02742
1606	Switch, Tactile.	2422 128 02742
1660	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488
1822	Crystal Resonator, 18MHz432, 12 Pin, HC49/U A	2422 543 00842
2001	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2002	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2003	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2004	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2011	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2102	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2103	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2104	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2201	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2202	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2203	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2204	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2205	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2208	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2209	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2211	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2212	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2213	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2214	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2215	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 16654
2220	Cap, 15p, 5%, 50V, Ceramic	3198 016 01590
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2222	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2226	Cap, 33u, 20%, 25V, Electrolytic . .	2020 021 90124
2227	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2247	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2248	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2249	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2330	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2340	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320
S 2343	Cap, 3n3, 10%, 2KV, Ceramic.	2020 558 90529
2345	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2401	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2402	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2404	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2405	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2407	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2409	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2420	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2426	Cap, 100n, 10%, 63V, Metalized Polyester.	2222 370 75104
2428	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2429	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2430	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2431	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2437	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2438	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2448	Cap, 220p, 10%, 500V, Ceramic. . . .	3198 019 42210
2450	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91139
2451	Cap, 15n, 10%, 50V, Polyester. . . .	2020 300 90575
2451	0.01uF., 10%, 50V, Polyester, only 27	3198 138 20941
2456	Cap, 47n, 10%, 250V, Metalized Polyester.	2222 368 90176
2457	Cap, 390n, 5%, 250V, Metalized Polypropylene.	2222 479 90021
2458	Cap, 2u2, 20%, 100V, Electrolytic. .	2020 021 91331
2459	Cap, 680p, 10%, 500V, Ceramic. . . .	3198 019 46810
2461	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2462	Cap, 47n, 10%, 250V, Metalized Polyester.	2222 368 90176
2463	470pF., 10%, 2KV, Ceramic.	4835 122 47638
S 2465	Cap, 10n, 5%, 1600V, Polypropylene .	2222 375 90154
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050
2473	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2481	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2482	Cap, 68n, 10%, 250V, Polyester . . .	2222 347 90234
2484	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2485	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2486	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2487	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2488	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2489	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2490	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2491	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810
2500	0.47uF., 250V, Polyester	4835 121 47569
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
S 2507	Cap, 1n5, 10%, 1KV, Ceramic.	2020 558 90443
2508	Cap, 470u, 20%, 200V, Electrolytic .	2020 024 90647
S 2511	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
S 2518	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2530	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 021 91147
2531	Cap, 1n, 2%, 50V, Polypropylene. . .	2020 310 90049
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2540	Cap, 100u, 20%, 25V, Electrolytic. .	2020 021 90547
S 2545	1500pF., 250VAC, Ceramic	4835 122 47621
S 2550	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2551	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91358
2561	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
S 2562	Cap, 220p, 10%, 1KV, Ceramic	2020 558 90424
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2571	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91353
2572	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2575	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2586	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2604	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2613	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2615	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2619	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2622	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2629	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2679	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2681	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2851	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2852	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2853	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2854	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2855	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2856	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2857	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2858	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2860	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090

S = Safety Part Be sure to use exact replacement part.

26LL590121 (continued)

	2861	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3405	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002
	2862	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3406	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
	2863	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090		3407	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002
	2864	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
	2865	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3409	1.5 ohm, 5%, 1/3W, Metal Film. . . .	4835 116 57664
	2866	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
	2867	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
	2868	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780		3420	470k, 5%, 1/10W, Metal Film.	4835 111 37407
	2869	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
	2870	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
	2871	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090		3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840
	2874	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790		3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606
	2875	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790		3425	150k, 5%, 1/10W, Metal Film.	4835 111 27045
	2877	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3426	39k, 5%, 1/10W, Metal Film	4835 111 27051
	2882	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3428	22k, 5%, 1/10W, Metal Film	4835 111 37441
	2883	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090		3429	27k, 5%, 1/10W, Metal Film	4835 111 37442
	2884	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3431	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
	2888	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3432	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
	2889	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3436	Res, 1K, 2%, 0,25W	4822 051 10102
	2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3437	10k, 5%, 1/10W, Metal Film	4835 111 37216
	2952	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3438	33k, 1/4W, Carbon Film	4835 110 57375
	2954	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
	2955	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3447	10k, 5%, 1/10W, Metal Film	4835 111 37216
	2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
	2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
	2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	S	3452	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63229
	2960	Cap, 2u2, 20%, 25V, Electrolytic . .	3198 026 32220	S	3453	Res, 4R7, 5%, 5W, Wire Wound	2322 251 41478
	2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090	S	3454	Res, 33K, 5%, 1 1/3W, Metal Film . .	2322 194 63333
	2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090		3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
	2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090		3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
	3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3462	Res, 6K8, 5%, 5W, Metal Film	2322 257 41682
	3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
	3010	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610		3464	Res, 1K, 2%, 0,25W	4822 051 10102
	3013	Zero ohm,.	4835 111 27056	S	3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
	3014	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052		3466	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903
	3015	22k, 5%, 1/10W, Metal Film	4835 111 37441		3467	Res, 14K, 1%, 3/5W, Metal Film . . .	2322 156 21403
	3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810		3467	Res, 15K, 1%, 3/5W, Metal Film . . .	2322 156 21503
	3021	Res, 1K, 2%, 0,25W	4822 051 10102		3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
	3103	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3469	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
	3104	10k, 5%, 1/10W, Metal Film	4835 111 37216		3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
	3108	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703
	3109	10k, 5%, 1/10W, Metal Film	4835 111 37216		3481	Res, 100K, 1%, 3/5W, Metal Film. . .	2322 156 21004
	3123	75 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37276		3482	Res, 32K4, 1%, 3/5W, Metal Film. . .	2322 156 23243
	3200	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
	3201	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253		3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3203	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443	S	3485	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
	3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	S	3486	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3205	Res, 1K, 2%, 0,25W	4822 051 10102	S	3487	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3206	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	S	3488	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
	3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3490	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3209	22k, 5%, 1/10W, Metal Film	4835 111 37441	S	3491	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3212	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253	S	3492	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3213	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3495	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272
	3215	22k, 5%, 1/10W, Metal Film	4835 111 37441		3496	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3216	Zero ohm,.	4835 111 27056		3497	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3217	Res, 1M5, 5%, 1/8W, Metalized Glass.	2322 730 61155		3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
	3218	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225
	3219	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3503	10ohm, 120VAC, Positive Temperature C	
	3220	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432			oefficient	4835 116 47001
	3225	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S	3505	Surge Protector.	2422 549 43073
	3228	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
	3231	Zero ohm,.	4835 111 27056	S	3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333
	3232	Zero ohm,.	4835 111 27056	S	3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102
	3233	Zero ohm,.	4835 111 27056		3512	15k, 5%, 1/10W, Metal Film	4835 111 37458
	3243	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052		3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184
	3246	82k, 5%, 1/10W, Metal Film	4835 111 37277		3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204
	3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3515	2.5 ohm, 20%, 3.6W, Negative Temperat	
	3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010			ure Coefficient.	2122 612 00023
	3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340		3516	Res, 1K, 2%, 0,25W	4822 051 10102
	3250	Zero ohm,.	4835 111 27056		3517	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
	3251	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S	3518	Res, 0R22, 5%, 3W, Metal Film. . . .	2120 106 90548
	3252	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		3520	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
	3253	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		3521	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443
	3257	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3525	33 ohm, 5%, 1/3W, Metal Film	4835 116 57665
	3258	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3528	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3259	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3529	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3530	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
	3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3532	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3534	15k, 5%, 1/10W, Metal Film	4835 111 37458
	3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3536	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3537	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046	S	3542	4.7 Megohm, 5%, 1/2W, Metal Film . .	4835 116 57009
S	3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109		3570	15k, 5%, 1/10W, Metal Film	4835 111 37458
S	3341	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483		3571	Res, 150K, 1%, 3/5W, Metal Film. . .	2322 156 21504
S	3342	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483		3573	Res, 2K, 1%, 1/10W, Metalized Glass.	2120 108 92657
	3343	1.5k, 20%, 1/2W, Carbon Composition.	4835 110 47034		3574	33k, 5%, 1/10W, Metal Film	4835 111 37248
	3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290		3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
S	3345	VDR, DC, 1mA, 50V, MAX 115V	2322 593 13507		3577	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290		3578	Res, 1K, 2%, 0,25W	4822 051 10102
	3401	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380		3579	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
	3402	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380		3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3403	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380		3592	10k, 5%, 1/10W, Metal Film	4835 111 37216

S = Safety Part Be sure to use exact replacement part.

26LL590121 (continued)

3594	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3595	68k, 5%, 1/6W, Carbon Film	4835 111 37205	
3596	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030	
3597	100 ohm, 5%, 1/10W, Metal Film	4835 111 37432	
3598	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3599	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3607	8.2k, 5%, 1/8W, Inline Package	4835 111 97046	
3608	2.2k, 5%, 1/8W, Inline Package	4835 111 97049	
3609	2.2k, 5%, Resistor Network	2120 108 93868	
3611	Res, 1K, 2%, 0,25W	4822 051 10102	
3612	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3613	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3615	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3617	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3619	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3629	470 ohm, 5%, 1/10W, Metal Film	4835 111 37259	
3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3631	27k, 5%, 1/10W, Metal Film	4835 111 37442	
S 3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63479	
3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210	
3634	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3635	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3636	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3637	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3653	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030	
3654	100 ohm, 5%, 1/10W, Metal Film	4835 111 37432	
3655	100 ohm, 5%, 1/10W, Metal Film	4835 111 37432	
3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3662	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3663	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3664	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3665	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3666	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376	
3667	27k, 5%, 1/10W, Metal Film	4835 111 37442	
3672	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3673	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3674	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231	
3675	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3676	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3677	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3680	680 ohm, 5%, 1/10W, Metal Film	4835 111 37271	
3681	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3682	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3683	100 ohm, 5%, 1/10W, Metal Film	4835 111 37432	
3684	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3841	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3842	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3843	47k, 5%, 1/10W, Metal Film	4835 111 37445	
3844	470 ohm, 5%, 1/10W, Metal Film	4835 111 37259	
3845	470 ohm, 5%, 1/10W, Metal Film	4835 111 37259	
3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810	
3951	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3953	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272	
3954	1.5k, 5%, 1/10W, Metal Film.	4835 111 37437	
3955	Res, 4K7, 5%, 1/6W, Carbon Film.	3198 011 04720	
3956	1.5k, 5%, 1/10W, Metal Film.	4835 111 37437	
3957	Res, 4K7, 5%, 1/6W, Carbon Film.	3198 011 04720	
4001	Zero ohm,	4835 111 27056	
4002	Zero ohm,	4835 111 27056	
4004	Zero ohm,	4835 111 27056	
4007	Zero ohm,	4835 111 27056	
4009	Zero ohm,	4835 111 27056	
4010	Zero ohm,	4835 111 27056	
4011	Zero ohm,	4835 111 27056	
4012	Zero ohm,	4835 111 27056	
4013	Zero ohm,	4835 111 27056	
4020	Zero ohm,	4835 111 27056	
4051	Zero ohm,	4835 111 27056	
4100	Zero ohm,	4835 111 27056	
4101	Zero ohm,	4835 111 27056	
4102	Zero ohm,	4835 111 27056	
4103	Zero ohm,	4835 111 27056	
4143	Zero ohm,	4835 111 27056	
4144	Zero ohm,	4835 111 27056	
4203	Zero ohm,	4835 111 27056	
4207	Zero ohm,	4835 111 27056	
4212	Zero ohm,	4835 111 27056	
4214	Zero ohm,	4835 111 27056	
4215	Zero ohm,	4835 111 27056	
4216	Zero ohm,	4835 111 27056	
4501	Zero ohm,	4835 111 27056	
4602	Zero ohm,	4835 111 27056	
4650	Zero ohm,	4835 111 27056	
4651	Zero ohm,	4835 111 27056	
4652	Zero ohm,	4835 111 27056	
4654	Zero ohm,	4835 111 27056	
4655	Zero ohm,	4835 111 27056	
4684	Zero ohm,	4835 111 27056	
4687	Zero ohm,	4835 111 27056	
4831	Zero ohm,	4835 111 27056	
4832	Zero ohm,	4835 111 27056	
4833	Zero ohm,	4835 111 27056	
4902	Zero ohm,	4835 111 27056	
4903	Zero ohm,	4835 111 27056	
4904	Zero ohm,	4835 111 27056	
4905	Zero ohm,	4835 111 27056	
4909	Zero ohm,	4835 111 27056	
4911	Zero ohm,	4835 111 27056	
4912	Zero ohm,	4835 111 27056	
4914	Zero ohm,	4835 111 27056	
4957	Zero ohm,	4835 111 27056	
4999	Zero ohm,	4835 111 27056	
5000	Coil, 5u6	3198 018 25680	
5004	Coil, 820n	2422 535 97314	
5201	Coil, 22u	3198 018 22290	
5202	Coil, 6u8	3198 018 16880	
5342	22uH., 10%, Coil, Peaking	4835 157 67069	
S 5445	Transformer, L.O.T., models ending in C101, C121, and C125	2422 531 02327	
S 5445	Transformer, L.O.T., models ending in C221 and C225	3128 138 20941	
5451	Coil, 27u	2422 535 96614	
5457	Coil, Linear Correction	3128 138 53241	
5461	Transformer	3128 138 33811	
5480	Coil, 27u	2422 535 97334	
5480	Coil, 39u	2422 535 97336	
5480	33uH., Peaking Coil, only in 25.	4835 157 58205	
S 5500	Filter, Mains, 5mH, 2A	2422 549 43432	
5516	100uH., Coil	4835 157 67078	
5518	Fixed, Inductor, 100MHz, 50R.	3198 018 90010	
5521	Coil, 2u2	3198 018 12280	
5540	Coil, 4u7	3198 018 14780	
S 5545	Transfomer,	2422 531 02314	
5551	27uH., 5%, Coil, Peaking	4835 157 67052	
5552	Fixed, Inductor, 100MHz, 50R.	3198 018 90010	
5572	100uH., Coil	4835 157 67078	
5573	100uH., Coil	4835 157 67078	
5575	100uH., Coil	4835 157 67078	
5576	100uH., Coil	4835 157 67078	
5577	Fixed, Inductor, 100MHz, 50R.	3198 018 90010	
5600	Coil, 8u2	3198 018 18280	
5601	Coil, 8u2	3198 018 18280	
5620	Coil, 6u8	3198 018 16880	
5821	Coil, 100u	3198 018 21010	
5831	Coil, 12u	3198 018 21290	
5832	Coil, 12u	3198 018 21290	
6008	Zener, 33 Volt BZX79-C33	4835 130 37904	
6113	Zener Diode, 6.8 volt	9340 386 40115	
6211	Diode, 1N4148	4835 130 37048	
6212	Diode, 1N4148	4835 130 37048	
6213	Diode, 1N4148	4835 130 37048	
6331	Diode	4835 130 37294	
6333	Diode	4835 130 37294	
6335	Diode	4835 130 37294	
6401	Diode	4835 130 37094	
6402	Zener, 33 Volt, BZX79-C33	4835 130 37904	
6403	Diode	4835 130 37094	
6404	Diode	4835 130 37094	
6449	Diode, 1N4148	4835 130 37048	
6450	Diode, 1N4148	4835 130 37048	
6460	Diode, Rect, BY228/20	9336 215 80112	
6463	Diode, 1N4148	4835 130 37048	
6465	Diode, BYD33J	4835 130 37094	
6466	Diode, BYD33J	4835 130 37094	
6480	Diode, Zener	4835 130 37947	
6481	Diode, 1N4148	4835 130 37048	
6485	Diode, BYD33J	4835 130 37094	
6486	Diode, EGP20DL-530	4835 130 37919	
6487	Diode	4835 130 37094	
6488	Diode, Rect, BYV27-200	9322 126 72673	
6490	Diode, Rect, BYV27-200	9322 126 72673	
6505	Diode, Bridge Rect, GBU6JL-7002	9322 138 08667	
6507	Diode, BYD33J	4835 130 37094	
6508	Diode, BYD33J	4835 130 37094	
6510	Zener Diode, 20 volt	9331 178 60133	
6511	Diode, BYV95C	4835 130 37052	
6512	Diode, Rect, BY228/20	4822 130 41275	
6513	Diode, Rect, BY228/20	4822 130 41275	
6514	Zener, 18 Volt, BZX79-C18	4835 130 37908	
6540	Diode	4835 130 37294	
6550	Diode, Rect, BY229X-800	9340 380 30127	
6560	Diode, EGP20DL-530	4835 130 37919	
6570	Diode, EGP20DL-530	4835 130 37919	
6582	Diode, EGP20DL-530	4835 130 37919	
6584	Diode, 1N4148	4835 130 37048	
6585	Diode, 1N4148	4835 130 37048	

S = Safety Part Be sure to use exact replacement part.

26LL590121 (continued)

6590	Diode, EGP20DL-530	4835	130 37919
6591	Diode, BAS216.	4835	130 37905
6601	Diode, Zener	4835	130 37684
6606	Zener, 4.7 Volt, BZX79-C4V7.	4835	130 37005
6607	Zener, 6.8 Volt, BZX79-C6V8.	4835	130 37945
6690	LED, LTL-307P.	4835	130 97096
6831	Diode, BAS216.	4835	130 37905
6951	Diode, BAS216.	4835	130 37905
6961	Diode, BAS216.	4835	130 37905
7250	IC,.	9352	620 26112
7251	IC, LM317T	9337	220 80682
7254	Transistor, NPN, BC847B.	4822	130 60511
7256	Transistor, NPN, BC847B.	4822	130 60511
7258	Transistor, NPN, BC847B.	4822	130 60511
7263	Transistor, PNP, BC857B.	5322	130 60508
7266	Transistor, NPN, BC847B.	4822	130 60511
7330	IC,.	9352	184 10112
7401	IC,.	9322	121 47687
7460	Transistor, NPN, BU1508DX.	9340	170 50127
7461	Transistor, NPN, BF819	9335	354 50127
7462	Transistor, BC547B	4835	130 47055
7463	Transistor, BC557B	4835	130 47409
7480	IC,.	9322	028 93682
7481	Transistor, BC557B	4835	130 47409
7482	Transistor, PNP, BC857B.	5322	130 60508
7518	STH8NA60FI SMPS FET	9322	068 92687
7518	STH10NC60FI SMPS FET.	9322	155 66687
7520	IC, MC44603A	4835	209 88537
7570	IC,.	9337	711 00676
S 7581	Coupler, TCDT1101G	9338	431 30682
7590	Transistor, NPN, BC847B.	4822	130 60511
7591	Transistor, NPN, BC847B.	4822	130 60511
7592	Transistor, NPN, BC847B.	4822	130 60511
7600	IC, SAA5543PS/M4/1046 L90US1-1.4	4835	310 57477
7601	IC, ST24W04B6.	9322	097 23682
7603	Transistor, NPN, BC337	9331	796 00126
7604	Transistor, NPN, BC847B.	4822	130 60511
7605	Transistor, NPN, BC847B.	4822	130 60511
7608	Transistor, NPN, BC847B.	4822	130 60511
7609	Transistor, NPN, BC847B.	4822	130 60511
7680	IR Receiver.	9322	127 53667
7833	IC,.	9322	135 49682
7950	IC,.	4835	209 88543
9423	Res, 10K, 5%, 1/6W, Carbon Film.	3198	011 01030
CBA	00EMF820A002 Main Chassis Board Asm.	00EM	F82 0A002

Cabinet & Accessory Parts

	Cabinet & Accessory Parts		
S AC01	Power Cord	3135	010 04731
S AC02	Anode Clip	4835	256 97264
AC03	Cabinet Back	3139	124 27731
AC04	Cabinet Front.	3139	137 52851
AC05	Chassis Guide.	3139	124 31381
AC06	Control Buttons.	3139	124 27351
S AC07	Convergence and Purity Assembly.	2422	549 43385
S AC08	CRT A63AFW86X (26LL59 1121).	9301	734 20443
S AC08	CRT A63AFW36X (C121 Version)	9301	763 20443
S AC09	Coil, Degaussing	3121	218 62961
S AC09	Coil, Degaussing	3121	218 62971
AC11	Light Guide.	3139	124 26461
AC12	Nameplate.	4835	459 17546
AC13	Owner's Manual, English & Spanish (26 LL59 0121)	3135	015 10711
AC13	Owner's Manual, Spanish (26LL59 1121)	3135	015 10721
AC14	Power Button	3139	124 26444
REMOTE	Remote Transmitter, RC282901/01.	3139	228 81441
AC16	Speaker, 5W, 16 ohm (2 Used)	2422	264 00333
S AC18	Yoke	3313	203 00121
AC19	Yoke Wedge (3 Used).	4835	535 27001
S AC20	AC Adapt, UL - IEC (26LL59 1121)	3135	010 03071
AC21	Battery, 1.5V AA, 2-Pack, (Not Shown	9299	000 10137
AC24	Spring	3139	121 26231

S = Safety Part Be sure to use exact replacement part.

26LL590221 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts	
0113	L9 SOPS HEATSINK	3139 121 62041
0119	DIODE HEATSINK L9.	3139 121 26691
0121	LINE HEATSINK (CINCH).	3139 121 61942
0122	L9L AUDIO HEATSINK (STERO)	3139 121 61952
S 0127	Holder, Fuse, 2 Pin.	3122 358 71251
0211	Connector, 2 Pin	2422 025 11196
0212	Connector, 2 Pin	2422 025 15396
0220	4 Pin Board Connector.	2422 025 04852
0221	Connector, 4 Pin	2422 025 15503
0222	Connector, 2 Pin	2422 025 10646
0223	3 Pin Board Connector.	2422 026 04963
0225	1 Pin Board Connector.	2422 034 20021
0226	1 Pin Board Connector.	2422 034 20021
0234	Connector, 4 Pin	2422 025 12479
S 0243	Connector, 6 Pin	2422 025 04854
0244	4 Pin Board Connector.	2422 025 04852
S 0245	Connector, 6 Pin	2422 025 04854
S 0254	CRT Socket (9 Pin)	2422 500 80022
0267	Connector, 3 Pin	2412 020 00725
1000	TUNER.	3139 147 16412
1001	Filter	2422 549 42501
1003	45 MHz SAW, Filter,.	2422 549 42433
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807
1208	Crystal Resonator, 3.58MHz	2422 543 00832
S 1500	Fue, 4 A, 250V	2422 086 10905
S 1572	FUSE 1A 250V	2422 086 10779
S 1573	2.5 Amp Fuse, Radial,.	2422 086 10422
S 1580	Relay, 12V, 5A G5PA-1.	2422 132 07444
1600	Switch, Tactile.	2422 128 02742
1601	Switch, Tactile.	2422 128 02742
1602	Switch, Tactile.	2422 128 02742
1603	Switch, Tactile.	2422 128 02742
1606	Switch, Tactile.	2422 128 02742
1660	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488
1822	Crystal Resonator, 18MHz432, 12 Pin, HC49/U A	2422 543 00842
2001	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2002	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2003	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2004	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2011	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2102	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2103	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2104	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2201	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2202	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2203	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2204	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2205	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2208	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2209	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2211	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2212	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2213	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2214	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2215	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 15654
2220	Cap, 18p, 5%, 50V, Ceramic	3198 016 01890
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2222	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2226	Cap, 33u, 20%, 25V, Electrolytic . .	2020 021 90124
2227	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2247	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2248	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2249	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2330	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2340	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320
S 2343	Cap, 3n3, 10%, 2KV, Ceramic.	2020 558 90529
2345	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2401	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2402	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2404	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2405	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2407	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2409	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2420	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2426	Cap, 100n, 10%, 63V, Metalized Polyester.	2222 370 75104
2428	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2429	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2430	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2431	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2437	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2438	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2448	Cap, 33p, 5%, 500V, Ceramic.	2020 557 90192
2450	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91139
2451	Cap, 15n, 10%, 50V, Polyester. . . .	2020 300 90575
2456	Cap, 47n, 10%, 250V, Metalized Polyester.	2222 368 90176
2457	Cap, 390n, 5%, 250V, Metalized Polypropylene.	2222 479 90021
2458	Cap, 2u2, 20%, 100V, Electrolytic. .	2020 021 91331
2459	Cap, 680p, 10%, 500V, Ceramic. . . .	3198 019 46810
2461	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2462	Cap, 47n, 10%, 250V, Metalized Polyester.	2222 368 90176
S 2463	Cap, 470p, 10%, 2KV, Ceramic	2020 558 90483
S 2465	Cap, 10n, 5%, 1600V, Polypropylene .	2222 375 90154
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050
2473	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2481	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2482	Cap, 68n, 10%, 250V, Polyester . . .	2222 347 90234
2484	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2485	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2486	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2487	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2488	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2489	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2490	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2491	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810
2499	Cap, 220n, 10%, 100V, Metalized Polyester	2222 365 25224
2500	Cap, 470n, 20%, 275V, Polypropylene.	2222 336 29148
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2507	Cap, 1n5, 10%, 1KV, Ceramic.	3198 019 61520
2508	Cap, 470u, 20%, 200V, Electrolytic .	2020 024 90647
2511	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
2518	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2530	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 021 91147
2531	Cap, 1n, 2%, 50V, Polypropylene. . .	2020 310 90049
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2540	Cap, 100u, 20%, 25V, Electrolytic. .	2020 021 90547
S 2545	Cap, 1n5, 20%, v, Ceramic.	2020 554 90128
2550	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2551	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91358
2561	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2562	Cap, 220p, 10%, 1KV, Ceramic	3198 019 62210
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2571	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91353
2572	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2575	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2586	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2604	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2613	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2615	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2619	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2622	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2629	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2679	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2681	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2851	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2852	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2853	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020

S = Safety Part Be sure to use exact replacement part.

26LL590221 (continued)

2854	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	3198 013 01020
2855	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380	S	3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
2856	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380	S	3341	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
2857	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	S	3342	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
2858	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790		3343	Res, 1K5, 20%, 1/2W, Carbon Film . .	3198 013 01520
2860	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090		3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
2861	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3345	VDR DC 1MA/50V S MAX 110V A . . .	2122 550 00152
2862	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
2863	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090		3401	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2864	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3402	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2865	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3403	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2866	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3405	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002
2867	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3406	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2868	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780		3407	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002
2869	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2870	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3409	Res, 1R5, 5%, 1/3W, Metal Film . . .	2306 204 03158
2871	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090		3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2872	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2874	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790		3420	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
2875	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790		3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2877	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2882	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840
2883	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090		3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606
2884	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3425	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
2888	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3426	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
2889	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3428	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3429	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
2952	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3431	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
2954	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3432	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
2955	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3433	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3436	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3437	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3438	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
2960	Cap, 2u2, 20%, 25V, Electrolytic . .	3198 026 32220		3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090		3447	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090		3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090		3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3452	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	3198 012 32290
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3453	Res, 4R7, 5%, 5W, Wire Wound	2322 251 41478
3010	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610	S	3454	Res, 33K, 5%, 1 1/3W, Metal Film . .	2322 194 63333
3013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020		3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720		3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3015	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	S	3462	Res, 6K8, 5%, 5W, Metal Film	2322 257 41682
3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810		3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3021	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020		3464	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3103	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220	S	3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
3104	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030		3466	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903
3108	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3467	Res, 14K, 1%, 3/5W, Metal Film . . .	2322 156 21403
3109	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030		3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3123	Res, 75 ohm, 5%, 1/10W, Metalized Gla			3469	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
	ss.	3198 021 57590		3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3200	Res, 560 ohm, 5%, 1/10W, Metalized Gl			3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703
	ass.	3198 021 55610		3481	Res, 100K, 1%, 3/5W, Metal Film. . .	2322 156 21004
3201	Res, 390 ohm, 5%, 1/10W, Metalized Gl			3482	Res, 32K4, 1%, 3/5W, Metal Film. . .	2322 156 23243
	ass.	3198 021 53910		3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3203	Res, 330 ohm, 5%, 1/10W, Metalized Gl			3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	ass.	3198 021 53310	S	3486	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	S	3487	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
3205	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	S	3488	Res, 4R7, 5%, 1/2W, Metal Film . . .	2306 207 03478
3206	Res, 560 ohm, 5%, 1/10W, Metalized Gl		S	3490	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
	ass.	3198 021 55610	S	3491	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3492	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
3209	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230		3495	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3212	Res, 390 ohm, 5%, 1/10W, Metalized Gl			3496	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	ass.	3198 021 53910		3497	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3213	Res, 560 ohm, 5%, 1/10W, Metalized Gl			3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
	ass.	3198 021 55610	S	3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225
3215	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230		3503	PTC DC ZPB 120V S 10R PM30 B . . .	2120 661 00019
3216	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	S	3505	Surge Protector.	2422 549 43073
3218	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	S	3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3219	Res, 560 ohm, 5%, 1/10W, Metalized Gl		S	3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333
	ass.	3198 021 55610	S	3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102
3220	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010		3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3225	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040		3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010		3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204
3243	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	S	3515	2.5 ohm, 20%, 3.6W, Negative Temperat	
3246	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230			ure Coefficient.	2122 612 00023
3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3517	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340	S	3518	Res, 0R22, 5%, 2 1/2W, Metal Film. .	3198 012 32270
3250	Res, Zero ohm, 'Chip' Jumper	3198 021 90020		3520	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3251	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040		3521	Res, 330 ohm, 5%, 1/10W, Metalized Gl	
3252	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220			ass.	3198 021 53310
3253	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	S	3525	Res, 47 ohm, 5%, 1/3W, Metal Film. .	2306 204 03479
3257	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010		3528	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3258	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010		3529	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3259	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010		3530	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3532	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	3198 013 01020		3534	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3536	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	3198 013 01020		3537	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3542	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475

S = Safety Part Be sure to use exact replacement part.

26LL590221 (continued)

3570	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530	
3571	Res, 150K, 1%, 3/5W, Metal Film. . .	2322 156 21504	
3573	Res, 2K, 1%, 1/8W, Metalized Glass .	2322 734 62002	
3574	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330	
3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3577	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3578	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3579	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002	
3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3592	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3594	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	
3595	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830	
3596	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3597	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3598	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3599	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	
3607	RST NETW RGLE 10X 8K2 PM5 B . . .	2120 108 93916	
3608	RST NETW RGLE 6X 2K2 PM5 B . . .	2120 108 93913	
3609	RST NETW RGLE 7X 2K2 PM5 B . . .	2120 108 93915	
3611	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3612	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3613	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3615	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3616	Jumper Wire/Staple	0322 179 00003	
3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3619	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3629	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710	
3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3631	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730	
S 3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790	
3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210	
3634	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	
3635	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	
3636	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	
3637	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3653	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3654	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3655	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3662	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3663	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220	
3664	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220	
3665	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3666	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620	
3667	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730	
3672	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3673	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3674	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820	
3675	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3676	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3677	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3680	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810	
3681	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3682	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220	
3683	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3684	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	
3841	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3842	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3843	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	
3844	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710	
3845	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710	
3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810	
3951	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	
3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3953	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820	
3954	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520	
3955	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
3956	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520	
3957	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4004	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4011	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4012	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4020	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4051	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4100	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4144	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4203	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4207	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4212	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4215	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4216	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4465	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4501	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4650	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4651	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4654	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4833	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4911	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4914	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4957	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4999	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
5000	Coil, 5u6.	3198 018 25680	
5004	Coil, 820n	2422 535 97314	
5201	Coil, 22u.	3198 018 22290	
5202	Coil, 6u8.	3198 018 16880	
5342	Coil, 22u.	3198 018 22290	
S 5445	Transformer, L.O.T., models ending in C221 and C225.	3128 138 20941	
5451	Coil, 27u.	2422 535 96614	
5457	Coil, Linear Correction.	3128 138 53241	
5461	TFM SIG SLOT UU-1522S WIRE B . . .	2422 531 02318	
5461	Transformer.	3128 138 33811	
5480	Coil, 33u.	2422 535 97335	
S 5500	Filter, Mains, 5mH, 2A	2422 549 43432	
5516	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5518	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5521	Coil, 2u2.	3198 018 12280	
5540	Coil, 4u7.	3198 018 14780	
S 5545	Transfomer,.	2422 531 02314	
5551	Coil, 27u.	2422 535 95366	
5552	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5572	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5573	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5575	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5576	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5577	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5600	Coil, 8u2.	3198 018 18280	
5601	Coil, 8u2.	3198 018 18280	
5620	Coil, 6u8.	3198 018 16880	
5821	Coil, 100u	3198 018 21010	
5831	Coil, 12u.	3198 018 21290	
5832	Coil, 12u.	3198 018 21290	
6008	Zener Diode, 33 volt	3198 010 23390	
6113	Zener Diode, 6.8 volt.	9340 386 40115	
6211	Diode, Signal, 1N4148.	3198 010 10010	
6212	Diode, Signal, 1N4148.	3198 010 10010	
6213	Diode, Signal, 1N4148.	3198 010 10010	
6331	Diode, Signal, BAV21	3198 010 10070	
6333	Diode, Signal, BAV21	3198 010 10070	
6335	Diode, Signal, BAV21	3198 010 10070	
6401	Diode, Rect, BYD33D	9337 234 00133	
6402	Zener Diode, 33 volt	3198 010 23390	
6403	Diode, Rect, BYD33D	9337 234 00133	
6404	Zener Diode, 75 volt	9331 180 00133	
6449	Diode, Signal, 1N4148.	3198 010 10010	
6450	Diode, Signal, 1N4148.	3198 010 10010	
6460	Diode, Rect, BY228/20	9336 215 80112	
6463	Diode, Signal, 1N4148.	3198 010 10010	
6464	Zener Diode, 6.2 volt.	9331 668 30133	
6465	Diode, Rect, BYD33J	9337 234 20133	
6466	Diode, Rect, BYD33J	9337 234 20133	
6480	Zener Diode, 27 volt	3198 010 22790	
6481	Diode, Signal, 1N4148.	3198 010 10010	
6485	Diode, Rect, BYD33J	9337 234 20133	
6486	Diode, Rect, EGP20DL-5300	9322 100 13682	
6487	Diode, Rect, BYD33D	9337 234 00133	
6488	Diode, Rect, BYV27-200.	9322 126 72673	
6490	Diode, Rect, BYV27-200.	9322 126 72673	
6505	Diode, Bridge Rect, GBU6JL-7002 . .	9322 138 08667	
6507	Diode, Rect, BYD33J	9337 234 20133	
6508	Diode, Rect, BYD33J	9337 234 20133	
6510	Zener Diode, 20 volt	9331 178 60133	
6511	Diode, Rect, BYV95C	9335 001 80133	
6512	Diode, Rect, 1N5062	3198 010 10120	
6513	Diode, Rect, 1N5062	3198 010 10120	
6514	Zener Diode, 18 volt	3198 010 21890	
6540	Diode, Signal, BAV21	3198 010 10070	
6550	Diode, Rect, BY229X-800	9340 380 30127	
6560	Diode, Rect, EGP20DL-5300	9322 100 13682	
6570	Diode, Rect, EGP20DL-5300	9322 100 13682	
6582	Diode, Rect, EGP20DL-5300	9322 100 13682	
6584	Diode, Signal, 1N4148.	3198 010 10010	

S = Safety Part Be sure to use exact replacement part.

26LL590221 (continued)

6585	Diode, Signal, 1N4148.	3198 010 10010		9245	Jumper Wire/Staple	0322 179 00003	
6590	Diode, Rect, EGP20DL-5300	9322 100 13682		9301	Jumper Wire/Staple	0322 179 00003	
6591	Diode, Signal, BAS16WS	9322 031 99685		9401	Jumper Wire/Staple	0322 179 00003	
6601	Zener Diode, 3.9 volt.	3198 010 23980		9402	Jumper Wire/Staple	0322 179 00003	
6603	Jumper Wire/Staple	0322 179 00003		9403	Jumper Wire/Staple	0322 179 00003	
6604	Jumper Wire/Staple	0322 179 00003		9404	Jumper Wire/Staple	0322 179 00003	
6605	Jumper Wire/Staple	0322 179 00003		9407	Jumper Wire/Staple	0322 179 00003	
6606	Zener Diode, 4.7 volt.	3198 010 24780		9408	Jumper Wire/Staple	0322 179 00003	
6607	Zener Diode, 6.8 volt.	3198 010 26880		9411	Jumper Wire/Staple	0322 179 00003	
6690	LED VS LTL-307P (LITO) B	9322 033 95682		9414	Jumper Wire/Staple	0322 179 00003	
6831	Diode, Signal, BAS16WS	9322 031 99685		9417	Jumper Wire/Staple	0322 179 00003	
6951	Diode, Signal, BAS16WS	9322 031 99685		9419	Jumper Wire/Staple	0322 179 00003	
6961	Diode, Signal, BAS16WS	9322 031 99685		9420	Jumper Wire/Staple	0322 179 00003	
7250	IC,	9352 620 26112		9421	Jumper Wire/Staple	0322 179 00003	
7251	IC, LM317T	9337 220 80682		9422	Jumper Wire/Staple	0322 179 00003	
7254	Transistor, NPN, BC847B.	3198 010 42030		9424	Jumper Wire/Staple	0322 179 00003	
7256	Transistor, NPN, BC847B.	3198 010 42030		9425	Jumper Wire/Staple	0322 179 00003	
7258	Transistor, NPN, BC847B.	3198 010 42030		9427	Jumper Wire/Staple	0322 179 00003	
7263	Transistor, PNP, BC857B.	3198 010 42150		9428	Jumper Wire/Staple	0322 179 00003	
7266	Transistor, NPN, BC847B.	3198 010 42030		9460	Jumper Wire/Staple	0322 179 00003	
7330	IC, TDA6107Q/N2.	9352 576 50112		9461	Jumper Wire/Staple	0322 179 00003	
7401	IC,	9322 121 47687		9500	Jumper Wire/Staple	0322 179 00003	
7460	Transistor, NPN, BU1508DX.	9340 170 50127		9501	Jumper Wire/Staple	0322 179 00003	
7461	Transistor, NPN, BF819	9335 354 50127		9502	Jumper Wire/Staple	0322 179 00003	
7462	Transistor, NPN, BC547B.	3198 020 40030		9503	Jumper Wire/Staple	0322 179 00003	
7463	Transistor, PNP, BC557B.	3198 020 40110		9505	Jumper Wire/Staple	0322 179 00003	
7480	IC,	9322 028 93682		9510	Jumper Wire/Staple	0322 179 00003	
7481	Transistor, PNP, BC557B.	3198 020 40110		9511	Jumper Wire/Staple	0322 179 00003	
7482	Transistor, PNP, BC857B.	3198 010 42150		9512	Jumper Wire/Staple	0322 179 00003	
7518	STH10NC60FI SMPS FET.	9322 155 66687		9513	Jumper Wire/Staple	0322 179 00003	
7520	IC,	9322 108 36682		9515	Jumper Wire/Staple	0322 179 00003	
7570	IC,	9337 711 00676		9516	Jumper Wire/Staple	0322 179 00003	
S 7581	Coupler, TCDT1101G	9338 431 30682		9517	Jumper Wire/Staple	0322 179 00003	
7590	Transistor, NPN, BC847B.	3198 010 42030		9518	Jumper Wire/Staple	0322 179 00003	
7591	Transistor, NPN, BC847B.	3198 010 42030		9521	Jumper Wire/Staple	0322 179 00003	
7592	Transistor, NPN, BC847B.	3198 010 42030		9526	Jumper Wire/Staple	0322 179 00003	
7600	IC,	9352 670 96112		9601	Jumper Wire/Staple	0322 179 00003	
7601	IC, ST24W04B6.	9322 097 23682		9602	Jumper Wire/Staple	0322 179 00003	
7603	Transistor, NPN, BC337	9331 796 00126		9603	Jumper Wire/Staple	0322 179 00003	
7604	Transistor, NPN, BC847B.	3198 010 42030		9604	Jumper Wire/Staple	0322 179 00003	
7605	Transistor, NPN, BC847B.	3198 010 42030		9605	Jumper Wire/Staple	0322 179 00003	
7608	Transistor, NPN, BC847B.	3198 010 42030		9606	Jumper Wire/Staple	0322 179 00003	
7609	Transistor, NPN, BC847B.	3198 010 42030		9608	Jumper Wire/Staple	0322 179 00003	
7680	IR RECEIVER.	9322 154 48667		9609	Jumper Wire/Staple	0322 179 00003	
7833	IC,	9322 148 12682		9610	Jumper Wire/Staple	0322 179 00003	
7950	IC,	9351 861 80112		9611	Jumper Wire/Staple	0322 179 00003	
7970	ISOPROPYL ALCOHOL.	1306 500 43201		9612	Jumper Wire/Staple	0322 179 00003	
9001	Jumper Wire/Staple	0322 179 00003		9613	Jumper Wire/Staple	0322 179 00003	
9003	Jumper Wire/Staple	0322 179 00003		9614	Jumper Wire/Staple	0322 179 00003	
9005	Jumper Wire/Staple	0322 179 00003		9615	Jumper Wire/Staple	0322 179 00003	
9011	Jumper Wire/Staple	0322 179 00003		9618	Jumper Wire/Staple	0322 179 00003	
9012	Jumper Wire/Staple	0322 179 00003		9621	Jumper Wire/Staple	0322 179 00003	
9105	Jumper Wire/Staple	0322 179 00003		9622	Jumper Wire/Staple	0322 179 00003	
9126	Jumper Wire/Staple	0322 179 00003		9624	Jumper Wire/Staple	0322 179 00003	
9132	Jumper Wire/Staple	0322 179 00003		9625	Jumper Wire/Staple	0322 179 00003	
9140	Jumper Wire/Staple	0322 179 00003		9626	Jumper Wire/Staple	0322 179 00003	
9200	Jumper Wire/Staple	0322 179 00003		9629	Jumper Wire/Staple	0322 179 00003	
9202	Jumper Wire/Staple	0322 179 00003		9631	Jumper Wire/Staple	0322 179 00003	
9203	Jumper Wire/Staple	0322 179 00003		9632	Jumper Wire/Staple	0322 179 00003	
9204	Jumper Wire/Staple	0322 179 00003		9637	Jumper Wire/Staple	0322 179 00003	
9205	Jumper Wire/Staple	0322 179 00003		9640	Jumper Wire/Staple	0322 179 00003	
9206	Jumper Wire/Staple	0322 179 00003		9642	Jumper Wire/Staple	0322 179 00003	
9207	Jumper Wire/Staple	0322 179 00003		9643	Jumper Wire/Staple	0322 179 00003	
9208	Jumper Wire/Staple	0322 179 00003		9644	Jumper Wire/Staple	0322 179 00003	
9209	Jumper Wire/Staple	0322 179 00003		9660	Jumper Wire/Staple	0322 179 00003	
9210	Jumper Wire/Staple	0322 179 00003		9754	Jumper Wire/Staple	0322 179 00003	
9211	Jumper Wire/Staple	0322 179 00003		9788	Jumper Wire/Staple	0322 179 00003	
9214	Jumper Wire/Staple	0322 179 00003		9793	Jumper Wire/Staple	0322 179 00003	
9215	Jumper Wire/Staple	0322 179 00003		9800	Jumper Wire/Staple	0322 179 00003	
9216	Jumper Wire/Staple	0322 179 00003		9805	Jumper Wire/Staple	0322 179 00003	
9217	Jumper Wire/Staple	0322 179 00003		9806	Jumper Wire/Staple	0322 179 00003	
9218	Jumper Wire/Staple	0322 179 00003		9807	Jumper Wire/Staple	0322 179 00003	
9220	Jumper Wire/Staple	0322 179 00003		9810	Jumper Wire/Staple	0322 179 00003	
9221	Jumper Wire/Staple	0322 179 00003		9901	Jumper Wire/Staple	0322 179 00003	
9222	Jumper Wire/Staple	0322 179 00003		9903	Jumper Wire/Staple	0322 179 00003	
9225	Jumper Wire/Staple	0322 179 00003		9905	Jumper Wire/Staple	0322 179 00003	
9226	Jumper Wire/Staple	0322 179 00003		9906	Jumper Wire/Staple	0322 179 00003	
9227	Jumper Wire/Staple	0322 179 00003		9920	Jumper Wire/Staple	0322 179 00003	
9228	Jumper Wire/Staple	0322 179 00003		9933	Jumper Wire/Staple	0322 179 00003	
9229	Jumper Wire/Staple	0322 179 00003		9936	Jumper Wire/Staple	0322 179 00003	
9230	Jumper Wire/Staple	0322 179 00003		9939	Jumper Wire/Staple	0322 179 00003	
9231	Jumper Wire/Staple	0322 179 00003		9940	Jumper Wire/Staple	0322 179 00003	
9232	Jumper Wire/Staple	0322 179 00003		9941	Jumper Wire/Staple	0322 179 00003	
9233	Jumper Wire/Staple	0322 179 00003		9942	Jumper Wire/Staple	0322 179 00003	
9234	Jumper Wire/Staple	0322 179 00003		9943	Jumper Wire/Staple	0322 179 00003	
9236	Jumper Wire/Staple	0322 179 00003		9944	Jumper Wire/Staple	0322 179 00003	
9237	Jumper Wire/Staple	0322 179 00003		9945	Jumper Wire/Staple	0322 179 00003	
9238	Jumper Wire/Staple	0322 179 00003		9946	Jumper Wire/Staple	0322 179 00003	
9240	Jumper Wire/Staple	0322 179 00003		9947	Jumper Wire/Staple	0322 179 00003	
9241	Jumper Wire/Staple	0322 179 00003		9948	Jumper Wire/Staple	0322 179 00003	
9242	Jumper Wire/Staple	0322 179 00003		9949	Jumper Wire/Staple	0322 179 00003	
9243	Jumper Wire/Staple	0322 179 00003		9950	Jumper Wire/Staple	0322 179 00003	

S = Safety Part Be sure to use exact replacement part.

26LL590221 (continued)

9951	Jumper Wire/Staple	0322 179 00003
9953	Jumper Wire/Staple	0322 179 00003
9955	Jumper Wire/Staple	0322 179 00003
9956	Jumper Wire/Staple	0322 179 00003
9957	Jumper Wire/Staple	0322 179 00003
9958	Jumper Wire/Staple	0322 179 00003
9959	Jumper Wire/Staple	0322 179 00003
9960	Jumper Wire/Staple	0322 179 00003
9962	Jumper Wire/Staple	0322 179 00003
9963	Jumper Wire/Staple	0322 179 00003
9965	Jumper Wire/Staple	0322 179 00003
9966	Jumper Wire/Staple	0322 179 00003
9967	Jumper Wire/Staple	0322 179 00003
9968	Jumper Wire/Staple	0322 179 00003
9969	Jumper Wire/Staple	0322 179 00003
9970	Jumper Wire/Staple	0322 179 00003
9971	Jumper Wire/Staple	0322 179 00003
9972	Jumper Wire/Staple	0322 179 00003
9973	Jumper Wire/Staple	0322 179 00003
9974	Jumper Wire/Staple	0322 179 00003
9975	Jumper Wire/Staple	0322 179 00003
9976	Jumper Wire/Staple	0322 179 00003
9977	Jumper Wire/Staple	0322 179 00003
9981	Jumper Wire/Staple	0322 179 00003
9982	Jumper Wire/Staple	0322 179 00003
9983	Jumper Wire/Staple	0322 179 00003
9984	Jumper Wire/Staple	0322 179 00003
9987	Jumper Wire/Staple	0322 179 00003
9989	Jumper Wire/Staple	0322 179 00003
9990	Jumper Wire/Staple	0322 179 00003
9991	Jumper Wire/Staple	0322 179 00003
9992	Jumper Wire/Staple	0322 179 00003
9993	Jumper Wire/Staple	0322 179 00003
CBA	313917889161 Main Chassis Board Asm.	3139 178 89161

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Power Cord	3135 010 04731
AC02	Clip, Anode Lead	3135 014 04471
AC03	Cabinet Back	3139 124 27731
AC04	Cabinet Front.	3139 137 52851
AC05	Chassis Guide.	3139 124 31381
AC06	Control Buttons.	3139 124 27351
S AC07	Convergence and Purity Assembly. . .	2422 549 43385
S AC08	CRT A63AFW36X (C121 Version)	9301 763 20443
S AC09	Coil, Degaussing	2422 549 44489
AC10	Holder, Degaussing (4 Used).	3135 013 01641
AC11	Light Guide.	3139 124 26461
AC12	Nameplate.	3135 015 03571
AC13	Owner's Manual, English & Spanish (26 LL59 0121)	3135 015 10711
AC14	Power Button	3139 124 26444
REMOTE	Remote Transmitter, RC282901/01. . .	3139 228 81441
AC16	Speaker, 5W, 16 ohm (2 Used)	2422 264 00333
S AC18	Yoke (C121 Version).	3321 203 00121
AC19	Yoke Wedge (3 used).	3135 013 00311
AC21	Battery, 1.5V AA, 2-Pack, (Not Shown	9299 000 10137
AC24	Spring	3139 121 26231

S = Safety Part Be sure to use exact replacement part.

26LW592221 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts		
S 0127	3.15 Amp Fuse, ...	3122 358 72141	
0152	Cable, DIP, 6 Pin, 400mm	3104 301 09421	
0153	4 Pin Cable.	3104 301 09431	
0212	Connector, 2 Pin	2422 025 15396	
0220	4 Pin Board Connector.	2422 025 04852	
0223	Socket, Cinch, 6 Pin	2422 026 04827	
0224	1 Pin Board Connector.	2422 034 20021	
0228	1 Pin Board Connector.	2422 034 20021	
0234	Connector, 4 Pin	2422 025 12479	
S 0243	Connector, 6 Pin	2422 025 04854	
0244	4 Pin Board Connector.	2422 025 04852	
S 0245	Connector, 6 Pin	2422 025 04854	
S 0254	CRT Socket (9 Pin)	2422 500 80022	
0267	Connector, 3 Pin	2412 020 00725	
1000	Tuner.	2422 542 90057	
1003	45 MHz SAW, Filter,.	2422 549 42433	
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807	
1208	Crystal Resonator.	4835 242 77276	
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10869	
S 1572	1 Amp, Radial Fuse,.	4835 253 97162	
S 1573	2.5 Amp Fuse, Radial,.	2422 086 10422	
S 1580	Relay, 12V	2422 132 07317	
1600	Switch, Tactile.	2422 128 02742	
1601	Switch, Tactile.	2422 128 02742	
1602	Switch, Tactile.	2422 128 02742	
1603	Switch, Tactile.	2422 128 02742	
1606	Switch, Tactile.	2422 128 02742	
1660	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488	
1822	Crystal Resonator, 18MHz432, 12 Pin, HC49/U A	2422 543 00842	
2001	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2002	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2003	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2004	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2011	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2101	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2102	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2103	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2104	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2111	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2112	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2115	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2201	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2205	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2207	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2208	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2209	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2211	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2212	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2213	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2214	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2215	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280	
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 16654	
2220	Cap, 15p, 5%, 50V, Ceramic	3198 016 01590	
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2222	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2226	Cap, 33u, 20%, 25V, Electrolytic . .	2020 021 90124	
2227	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2247	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2248	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2249	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2330	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177	
2340	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495	
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320	
S 2343	Cap, 3n3, 10%, 2KV, Ceramic.	2020 558 90529	
2345	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020	
2401	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2402	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2404	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2405	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2407	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2409	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2420	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2426	Cap, 100n, 10%, 63V, Metalized Polyester.	2222 370 75104	
2428	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220	
2429	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2430	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2431	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2437	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2438	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2448	Cap, 220p, 10%, 500V, Ceramic. . . .	3198 019 42210	
2450	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91139	
2451	Cap, 15n, 10%, 50V, Polyester. . . .	2020 300 90575	
2451	0.01uF., 10%, 50V, Polyester, only 27	3198 138 20941	
2456	Cap, 47n, 10%, 250V, Metalized Polyester.	2222 368 90176	
2457	Cap, 390n, 5%, 250V, Metalized Polypropylene.	2222 479 90021	
2458	Cap, 2u2, 20%, 100V, Electrolytic. .	2020 021 91331	
2459	Cap, 680p, 10%, 500V, Ceramic. . . .	3198 019 46810	
2461	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020	
2462	Cap, 47n, 10%, 250V, Metalized Polyester.	2222 368 90176	
2463	470pF., 10%, 2KV, Ceramic.	4835 122 47638	
S 2465	Cap, 10n, 5%, 1600V, Polypropylene .	2222 375 90154	
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050	
2473	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790	
2481	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740	
2482	Cap, 68n, 10%, 250V, Polyester . . .	2222 347 90234	
2484	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2485	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293	
2486	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2487	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2488	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2489	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2490	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710	
2491	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710	
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810	
2500	0.47uF., 250V, Polyester	4835 121 47569	
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
S 2507	Cap, 1n5, 10%, 1KV, Ceramic.	2020 558 90443	
2508	Cap, 470u, 20%, 200V, Electrolytic .	2020 024 90647	
S 2511	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020	
S 2518	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290	
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320	
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320	
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2530	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 021 91147	
2531	Cap, 1n, 2%, 50V, Polypropylene. . .	2020 310 90049	
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220	
2540	Cap, 100u, 20%, 25V, Electrolytic. .	2020 021 90547	
S 2545	1500pF., 250VAC, Ceramic	4835 122 47621	
S 2550	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2551	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91358	
2561	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020	
S 2562	Cap, 220p, 10%, 1KV, Ceramic	2020 558 90424	
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020	
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020	
2571	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91353	
2572	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330	
2575	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820	
2586	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2604	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290	
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2613	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2615	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2619	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2622	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890	
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2629	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230	
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2631	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2679	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2681	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2850	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810	
2851	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2852	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2853	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2854	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2855	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380	
2856	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380	
2858	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790	
2859	Cap, 15p, 5%, 50V, Ceramic	3198 016 01590	
2860	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2861	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	

S = Safety Part Be sure to use exact replacement part.

26LW592221 (continued)

2862	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	S 3345	VDR, DC, 1mA, 50V, MAX 115V	2322 593 13507
2863	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
2864	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	3401	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2865	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	3402	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2866	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	3403	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2867	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	3405	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002
2868	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780	3406	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2869	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	3407	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002
2870	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2871	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	3409	1.5 ohm, 5%, 1/3W, Metal Film. . . .	4835 116 57664
2874	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790	3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2875	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790	3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2877	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	3420	470k, 5%, 1/10W, Metal Film.	4835 111 37407
2882	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2883	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2884	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840
2887	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810	3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606
2888	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	3425	150k, 5%, 1/10W, Metal Film.	4835 111 27045
2889	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	3426	39k, 5%, 1/10W, Metal Film	4835 111 27051
2891	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390	3428	22k, 5%, 1/10W, Metal Film	4835 111 37441
2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	3429	27k, 5%, 1/10W, Metal Film	4835 111 37442
2952	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	3431	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
2954	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	3432	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
2955	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	3436	Res, 1K, 2%, 0,25W	4822 051 10102
2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	3437	10k, 5%, 1/10W, Metal Film	4835 111 37216
2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	3438	33k, 1/4W, Carbon Film	4835 110 57375
2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
2960	Cap, 2u2, 20%, 25V, Electrolytic . .	3198 026 32220	3447	10k, 5%, 1/10W, Metal Film	4835 111 37216
2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090	3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090	3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090	S 3452	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63229
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S 3453	Res, 4R7, 5%, 5W, Wire Wound	2322 251 41478
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S 3454	Res, 33K, 5%, 1 1/3W, Metal Film . .	2322 194 63333
3013	Zero ohm,.	4835 111 27056	3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3014	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3015	22k, 5%, 1/10W, Metal Film	4835 111 37441	S 3462	Res, 6K8, 5%, 5W, Metal Film	2322 257 41682
3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810	3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3100	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510	3464	Res, 1K, 2%, 0,25W	4822 051 10102
3101	220k, 5%, 1/10W, Metal Film.	4835 111 37235	S 3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
3103	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220	3466	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903
3104	10k, 5%, 1/10W, Metal Film	4835 111 37216	3467	Res, 14K, 1%, 3/5W, Metal Film . . .	2322 156 21403
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510	3467	Res, 15K, 1%, 3/5W, Metal Film . . .	2322 156 21503
3108	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220	3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3109	10k, 5%, 1/10W, Metal Film	4835 111 37216	3469	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
3122	220k, 5%, 1/10W, Metal Film.	4835 111 37235	3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3123	75 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37276	3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703
3125	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890	3481	Res, 100K, 1%, 3/5W, Metal Film. . .	2322 156 21004
3145	Res, 1K, 2%, 0,25W	4822 051 10102	3482	Res, 32K4, 1%, 3/5W, Metal Film. . .	2322 156 23243
3155	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259	3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3201	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253	3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3203	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443	S 3485	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	S 3486	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3205	Res, 1K, 2%, 0,25W	4822 051 10102	S 3487	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3206	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	S 3488	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S 3490	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3209	22k, 5%, 1/10W, Metal Film	4835 111 37441	S 3491	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3212	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253	S 3492	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3213	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	3495	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272
3215	22k, 5%, 1/10W, Metal Film	4835 111 37441	3496	10k, 5%, 1/10W, Metal Film	4835 111 37216
3216	Zero ohm,.	4835 111 27056	3497	10k, 5%, 1/10W, Metal Film	4835 111 37216
3217	Res, 1M5, 5%, 1/8W, Metalized Glass.	2322 730 61155	3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3218	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S 3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225
3219	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	3503	10ohm, 120VAC, Positive Temperature C	
3220	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		oefficient	4835 116 47001
3225	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S 3505	Surge Protector.	2422 549 43073
3228	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S 3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3231	Zero ohm,.	4835 111 27056	S 3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333
3232	Zero ohm,.	4835 111 27056	S 3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102
3233	Zero ohm,.	4835 111 27056	3512	15k, 5%, 1/10W, Metal Film	4835 111 37458
3243	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184
3246	82k, 5%, 1/10W, Metal Film	4835 111 37277	3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204
3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S 3515	2.5 ohm, 20%, 3.6W, Negative Temperat	
3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		ure Coefficient.	2122 612 00023
3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340	3516	Res, 1K, 2%, 0,25W	4822 051 10102
3250	Zero ohm,.	4835 111 27056	3517	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3251	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S 3518	Res, 0R22, 5%, 3W, Metal Film. . . .	2120 106 90548
3252	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	3520	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3253	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	3521	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443
3257	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S 3525	33 ohm, 5%, 1/3W, Metal Film	4835 116 57665
3258	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	3528	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3259	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	3529	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	3530	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046	3532	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	3534	15k, 5%, 1/10W, Metal Film	4835 111 37458
3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046	3536	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	3537	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046	S 3542	4.7 Megohm, 5%, 1/2W, Metal Film . .	4835 116 57009
S 3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109	3570	15k, 5%, 1/10W, Metal Film	4835 111 37458
S 3341	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483	3571	Res, 150K, 1%, 3/5W, Metal Film. . .	2322 156 21504
S 3342	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483	3573	Res, 2K, 1%, 1/10W, Metalized Glass.	2120 108 92657
3343	1.5k, 20%, 1/2W, Carbon Composition.	4835 110 47034	3574	33k, 5%, 1/10W, Metal Film	4835 111 37248
3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290	3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010

S = Safety Part Be sure to use exact replacement part.

26LW592221 (continued)

3577	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3578	Res, 1K, 2%, 0,25W	4822 051 10102	
3579	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451	
3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3592	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3594	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3595	68k, 5%, 1/6W, Carbon Film	4835 111 37205	
3596	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3597	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3598	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3599	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3607	8.2k, 5%, 1/8W, Inline Package . . .	4835 111 97046	
3608	2.2k, 5%, 1/8W, Inline Package . . .	4835 111 97049	
3609	2.2k, 5%, Resistor Network	2120 108 93868	
3611	Res, 1K, 2%, 0,25W	4822 051 10102	
3612	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3613	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3615	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3617	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3619	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3629	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259	
3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3631	27k, 5%, 1/10W, Metal Film	4835 111 37442	
S 3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63479	
3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210	
3634	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3635	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3636	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3637	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3653	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3654	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3655	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3662	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3663	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3664	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3665	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3666	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376	
3667	27k, 5%, 1/10W, Metal Film	4835 111 37442	
3672	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3673	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3674	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231	
3675	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3676	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3677	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3680	680 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37271	
3681	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3682	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3683	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3684	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3841	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3842	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3843	47k, 5%, 1/10W, Metal Film	4835 111 37445	
3844	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259	
3845	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259	
3850	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810	
3951	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3953	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272	
3954	1.5k, 5%, 1/10W, Metal Film.	4835 111 37437	
3955	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
3956	1.5k, 5%, 1/10W, Metal Film.	4835 111 37437	
3957	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
4001	Zero ohm, ...	4835 111 27056	
4002	Zero ohm, ...	4835 111 27056	
4004	Zero ohm, ...	4835 111 27056	
4007	Zero ohm, ...	4835 111 27056	
4009	Zero ohm, ...	4835 111 27056	
4010	Zero ohm, ...	4835 111 27056	
4011	Zero ohm, ...	4835 111 27056	
4012	Zero ohm, ...	4835 111 27056	
4013	Zero ohm, ...	4835 111 27056	
4020	Zero ohm, ...	4835 111 27056	
4051	Zero ohm, ...	4835 111 27056	
4100	Zero ohm, ...	4835 111 27056	
4101	Zero ohm, ...	4835 111 27056	
4102	Zero ohm, ...	4835 111 27056	
4103	Zero ohm, ...	4835 111 27056	
4143	Zero ohm, ...	4835 111 27056	
4144	Zero ohm, ...	4835 111 27056	
4203	Zero ohm, ...	4835 111 27056	
4207	Zero ohm, ...	4835 111 27056	
4212	Zero ohm, ...	4835 111 27056	
4214	Zero ohm, ...	4835 111 27056	
4215	Zero ohm, ...	4835 111 27056	
4216	Zero ohm, ...	4835 111 27056	
4501	Zero ohm, ...	4835 111 27056	
4602	Zero ohm, ...	4835 111 27056	
4650	Zero ohm, ...	4835 111 27056	
4651	Zero ohm, ...	4835 111 27056	
4652	Zero ohm, ...	4835 111 27056	
4654	Zero ohm, ...	4835 111 27056	
4655	Zero ohm, ...	4835 111 27056	
4684	Zero ohm, ...	4835 111 27056	
4687	Zero ohm, ...	4835 111 27056	
4831	Zero ohm, ...	4835 111 27056	
4832	Zero ohm, ...	4835 111 27056	
4833	Zero ohm, ...	4835 111 27056	
4902	Zero ohm, ...	4835 111 27056	
4903	Zero ohm, ...	4835 111 27056	
4904	Zero ohm, ...	4835 111 27056	
4905	Zero ohm, ...	4835 111 27056	
4909	Zero ohm, ...	4835 111 27056	
4911	Zero ohm, ...	4835 111 27056	
4912	Zero ohm, ...	4835 111 27056	
4914	Zero ohm, ...	4835 111 27056	
4957	Zero ohm, ...	4835 111 27056	
4999	Zero ohm, ...	4835 111 27056	
5000	Coil, 5u6.	3198 018 25680	
5004	Coil, 820n	2422 535 97314	
5101	Coil, 5u6.	3198 018 15680	
5201	Coil, 22u.	3198 018 22290	
5202	Coil, 6u8.	3198 018 16880	
5342	22uH., 10%, Coil, Peaking.	4835 157 67069	
S 5445	Transformer, L.O.T., models ending in C101, C121, and C125	2422 531 02327	
S 5445	Transformer, L.O.T., models ending in C221 and C225.	3128 138 20941	
5451	Coil, 27u.	2422 535 96614	
5457	Coil, Linear Correction.	3128 138 53241	
5461	Transformer.	3128 138 33811	
5480	Coil, 27u.	2422 535 97334	
5480	Coil, 39u.	2422 535 97336	
5480	33uH., Peaking Coil, only in 25. . .	4835 157 58205	
S 5500	Filter, Mains, 5mH, 2A	2422 549 43432	
5516	100uH., Coil	4835 157 67078	
5518	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5521	Coil, 2u2.	3198 018 12280	
5540	Coil, 4u7.	3198 018 14780	
S 5545	Transfomer, ...	2422 531 02314	
5551	27uH., 5%, Coil, Peaking	4835 157 67052	
5552	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5572	100uH., Coil	4835 157 67078	
5573	100uH., Coil	4835 157 67078	
5575	100uH., Coil	4835 157 67078	
5576	100uH., Coil	4835 157 67078	
5577	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5600	Coil, 8u2.	3198 018 18280	
5601	Coil, 8u2.	3198 018 18280	
5620	Coil, 6u8.	3198 018 16880	
5821	Coil, 100u	3198 018 21010	
5831	Coil, 12u.	3198 018 21290	
5832	Coil, 12u.	3198 018 21290	
5833	Coil, 12u.	3198 018 11290	
6008	Zener, 33 Volt BZX79-C33	4835 130 37904	
6113	Zener Diode, 6.8 volt.	9340 386 40115	
6125	Zener Diode, 6.8 volt.	9340 386 40115	
6211	Diode, 1N4148.	4835 130 37048	
6212	Diode, 1N4148.	4835 130 37048	
6213	Diode, 1N4148.	4835 130 37048	
6331	Diode.	4835 130 37294	
6333	Diode.	4835 130 37294	
6335	Diode.	4835 130 37294	
6401	Diode.	4835 130 37094	
6402	Zener, 33 Volt, BZX79-C33.	4835 130 37904	
6403	Diode.	4835 130 37094	
6404	Diode.	4835 130 37094	
6449	Diode, 1N4148.	4835 130 37048	
6450	Diode, 1N4148.	4835 130 37048	
6460	Diode, Rect, BY228/20	9336 215 80112	
6463	Diode, 1N4148.	4835 130 37048	
6464	Zener Diode, 6.2 volt.	9337 242 70133	
6465	Diode, BYD33J.	4835 130 37094	
6466	Diode, BYD33J.	4835 130 37094	
6480	Diode, Zener	4835 130 37947	
6481	Diode, 1N4148.	4835 130 37048	
6485	Diode, BYD33J.	4835 130 37094	
6486	Diode, EGP20DL-530	4835 130 37919	
6487	Diode.	4835 130 37094	
6488	Diode, Rect, BYV27-200.	9322 126 72673	
6490	Diode, Rect, BYV27-200.	9322 126 72673	
6505	Diode, Bridge Rect, GBU6JL-7002 . .	9322 138 08667	
6507	Diode, BYD33J.	4835 130 37094	
6508	Diode, BYD33J.	4835 130 37094	
6510	Zener Diode, 20 volt	9331 178 60133	
6511	Diode, BYV95C.	4835 130 37052	

S = Safety Part Be sure to use exact replacement part.

26LW592221 (continued)

6512	Diode, Rect, BY228/20	4822 130 41275
6513	Diode, Rect, BY228/20	4822 130 41275
6514	Zener, 18 Volt, BZX79-C18.	4835 130 37908
6540	Diode.	4835 130 37294
6550	Diode, Rect, BY229X-800	9340 380 30127
6560	Diode, EGP20DL-530	4835 130 37919
6570	Diode, EGP20DL-530	4835 130 37919
6582	Diode, EGP20DL-530	4835 130 37919
6584	Diode, 1N4148.	4835 130 37048
6585	Diode, 1N4148.	4835 130 37048
6590	Diode, EGP20DL-530	4835 130 37919
6591	Diode, BAS216.	4835 130 37905
6601	Diode, Zener	4835 130 37684
6606	Zener, 4.7 Volt, BZX79-C4V7.	4835 130 37005
6607	Zener, 6.8 Volt, BZX79-C6V8.	4835 130 37945
6690	LED, LTL-307P.	4835 130 97096
6831	Diode, BAS216.	4835 130 37905
6951	Diode, BAS216.	4835 130 37905
6961	Diode, BAS216.	4835 130 37905
7134	Transistor, BC547B	4835 130 47055
7250	IC,.	9352 620 26112
7251	IC, LM317T	9337 220 80682
7254	Transistor, NPN, BC847B.	4822 130 60511
7256	Transistor, NPN, BC847B.	4822 130 60511
7258	Transistor, NPN, BC847B.	4822 130 60511
7263	Transistor, PNP, BC857B.	5322 130 60508
7266	Transistor, NPN, BC847B.	4822 130 60511
7330	IC,.	9352 184 10112
7401	IC,.	9322 121 47687
7460	Transistor, NPN, BU1508DX.	9340 170 50127
7461	Transistor, NPN, BF819	9335 354 50127
7462	Transistor, BC547B	4835 130 47055
7463	Transistor, BC557B	4835 130 47409
7480	IC,.	9322 028 93682
7481	Transistor, BC557B	4835 130 47409
7482	Transistor, PNP, BC857B.	5322 130 60508
7518	STH8NA60FI SMPS FET	9322 068 92687
7518	STH10NC60FI SMPS FET.	9322 155 66687
7520	IC, MC44603A	4835 209 88537
7570	IC,.	9337 711 00676
S 7581	Coupler, TCDT1101G	9338 431 30682
7590	Transistor, NPN, BC847B.	4822 130 60511
7591	Transistor, NPN, BC847B.	4822 130 60511
7592	Transistor, NPN, BC847B.	4822 130 60511
7600	IC, SAA5543PS/M4/1046 L90US1-1.4 . .	4835 310 57477
7601	IC, ST24W04B6.	9322 097 23682
7603	Transistor, NPN, BC337	9331 796 00126
7604	Transistor, NPN, BC847B.	4822 130 60511
7605	Transistor, NPN, BC847B.	4822 130 60511
7608	Transistor, NPN, BC847B.	4822 130 60511
7609	Transistor, NPN, BC847B.	4822 130 60511
7680	IR Receiver.	9322 127 53667
7833	IC,.	9322 136 54682
7950	IC,.	4835 209 88543
9423	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
CBA	00EMF822A002 Main Chassis Board Asm.	00EM F82 2A002

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Power Cord	3135 010 04731
S AC02	Anode Clip	4835 256 97264
AC03	Cabinet Back	3139 124 28681
AC04	Cabinet Front.	3139 137 55911
AC05	Chassis Guide.	3139 124 31381
AC06	Customer Control Button.	3139 124 27471
S AC07	Convergence and Purity Assembly. . .	2422 549 43385
S AC08	CRT A63AFW86X (26LL59 1121).	9301 734 20443
S AC08	CRT A63AFW36X (C121 Version)	9301 763 20443
S AC09	Coil, Degaussing	3121 218 62961
S AC09	Coil, Degaussing	3121 218 62971
AC11	Light Guide.	3139 124 26461
AC12	Nameplate.	4835 459 17546
AC13	Owner's Manual, English & Spanish (26 LW59 2221) Cabine.	3135 015 10861
AC13	Owner's Manual, Spanish (26LW59 3221)	3135 015 10881
AC14	Power Button	3139 124 30891
REMOTE	Remote Transmitter, RC282901/01. . .	3139 228 81441
AC16	Speaker, 5W, 16 ohm (2 Used)	2422 264 00333
S AC18	Yoke	3313 203 00121
AC19	Yoke Wedge (3 Used).	4835 535 27001
S AC20	AC Adapt, UL - IEC (26LL59 1121) . .	3135 010 03071
AC21	Battery, 1.5V AA, 2-Pack, (Not Shown	9299 000 10137
AC24	Spring	3139 121 26231

S = Safety Part Be sure to use exact replacement part.

27TS57C101 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts		
S 0127	3.15 Amp Fuse, ...	3122 358 72141	
0152	Cable, DIP, 6 Pin, 400mm	3104 301 09421	
0153	4 Pin Cable.	3104 301 09431	
0212	Connector, 2 Pin	2422 025 15396	
0220	4 Pin Board Connector.	2422 025 04852	
0223	3 Pin Board Connector.	2422 026 04963	
0224	1 Pin Board Connector.	2422 034 20021	
0228	1 Pin Board Connector.	2422 034 20021	
0234	Connector, 4 Pin	2422 025 15847	
S 0243	Connector, 6 Pin	2422 025 04854	
0244	4 Pin Board Connector.	2422 025 04852	
S 0245	Connector, 6 Pin	2422 025 04854	
S 0254	CRT Socket (9 Pin)	2422 500 80022	
0267	Connector, 3 Pin	2412 020 00725	
1000	Tuner.	2422 542 90057	
1001	Filter	2422 549 42501	
1003	45 MHz SAW, Filter,.	2422 549 42433	
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807	
1208	Crystal Resonator.	4835 242 77276	
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10869	
S 1571	1 Amp, Radial Fuse,.	4835 253 97162	
S 1572	1 Amp, Radial Fuse,.	4835 253 97162	
S 1580	Relay, 12V	2422 132 07317	
1600	Switch, Tactile.	2422 128 02742	
1601	Switch, Tactile.	2422 128 02742	
1602	Switch, Tactile.	2422 128 02742	
1603	Switch, Tactile.	2422 128 02742	
1606	Switch, Tactile.	2422 128 02742	
1660	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488	
1821	Ceramic Resonator.	4835 122 97102	
2001	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2002	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2003	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2004	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2006	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290	
2011	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2102	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2103	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2104	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2201	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2202	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2203	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2204	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2205	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2207	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2208	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2209	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2211	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2212	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2213	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2214	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2215	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280	
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 16654	
2220	Cap, 15p, 5%, 50V, Ceramic	3198 016 01590	
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2222	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2226	Cap, 33u, 20%, 25V, Electrolytic . .	2020 021 90124	
2227	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2247	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2248	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2249	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2330	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177	
2340	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495	
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320	
S 2343	Cap, 3n3, 10%, 2KV, Ceramic.	2020 558 90529	
2345	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020	
2401	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2402	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2404	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2405	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2407	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2409	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2420	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2426	Cap, 100n, 10%, 63V, Metalized Polyes ter.	2222 370 75104	
2428	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220	
2429	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2430	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2431	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2437	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2438	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2448	Cap, 220p, 10%, 500V, Ceramic. . . .	3198 019 42210	
2450	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91139	
2451	Cap, 15n, 10%, 50V, Polyester. . . .	2020 300 90575	
2451	0.01uF., 10%, 50V, Polyester, only 27	3198 138 20941	
2456	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176	
2457	Cap, 390n, 5%, 250V, Metalized Polypr opylene.	2222 479 90021	
2458	Cap, 2u2, 20%, 100V, Electrolytic. .	2020 021 91331	
2459	Cap, 680p, 10%, 500V, Ceramic. . . .	3198 019 46810	
2461	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020	
2462	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176	
2463	680pF., 10%, 2KV, Ceramic.	4835 122 47584	
S 2465	Cap, 10n, 5%, 1600V, Polypropylene .	2222 375 90154	
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050	
2473	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790	
2481	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740	
2482	Cap, 68n, 10%, 250V, Polyester . . .	2222 347 90234	
2484	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2485	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293	
2486	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2487	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2488	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2489	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2490	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710	
2491	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710	
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810	
2500	0.47uF., 250V, Polyester	4835 121 47569	
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
S 2507	Cap, 1n5, 10%, 1KV, Ceramic.	2020 558 90443	
2508	Cap, 470u, 20%, 200V, Electrolytic .	2020 024 90647	
S 2511	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020	
S 2518	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290	
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320	
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320	
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2530	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 021 91147	
2531	Cap, 1n, 2%, 50V, Polypropylene. . .	2020 310 90049	
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220	
2540	Cap, 100u, 20%, 25V, Electrolytic. .	2020 021 90547	
S 2545	1500pF., 250VAC, Ceramic	4835 122 47621	
S 2550	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2551	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91358	
2561	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020	
S 2562	Cap, 220p, 10%, 1KV, Ceramic	2020 558 90424	
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020	
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020	
2572	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330	
2575	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820	
2577	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020	
2586	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2604	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290	
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2613	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2615	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2619	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2622	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890	
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2629	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230	
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2631	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2679	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2681	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2821	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280	
2823	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2825	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2826	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090	
2827	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2828	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2829	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	
2830	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280	
2831	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	
2832	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280	

S = Safety Part Be sure to use exact replacement part.

27TS57C101 (continued)

	2833	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280		3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
	2834	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780		3401	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
	2835	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3402	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
	2836	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3403	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
	2837	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740		3405	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002
	2838	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3406	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
	2839	Cap, 1u, 5%, 50V, Metalized Polyester	2020 308 90124		3407	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002
	2840	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
	2841	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3409	1.5 ohm, 5%, 1/3W, Metal Film. . . .	4835 116 57664
	2842	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
	2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
	2844	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3420	470k, 5%, 1/10W, Metal Film.	4835 111 37407
	2845	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
	2913	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280		3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
	2914	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330		3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840
	2915	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606
	2916	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648		3425	Res, 120K, 5%, 1/10W, Metalized Glass	2120 108 91716
	2917	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3426	39k, 5%, 1/10W, Metal Film	4835 111 27051
	2918	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330		3428	22k, 5%, 1/10W, Metal Film	4835 111 37441
	2919	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3429	27k, 5%, 1/10W, Metal Film	4835 111 37442
	2920	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648		3431	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
	2921	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3432	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
	2931	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280		3436	Res, 1K, 2%, 0,25W	4822 051 10102
	2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3437	10k, 5%, 1/10W, Metal Film	4835 111 37216
	2952	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3438	33k, 1/4W, Carbon Film	4835 110 57375
	2954	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
	2955	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3447	10k, 5%, 1/10W, Metal Film	4835 111 37216
	2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
	2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
	2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	S	3452	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63229
	2960	Cap, 220u, 20%, 50V, Electrolytic. .	3198 026 52210	S	3453	Res, 4R7, 5%, 5W, Wire Wound	2322 251 41478
	2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090	S	3454	Res, 33K, 5%, 1 1/3W, Metal Film . .	2322 194 63333
	2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090		3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
	2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090		3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
	3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3462	Res, 6K8, 5%, 5W, Metal Film	2322 257 41682
	3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
	3010	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610		3464	Res, 1K, 2%, 0,25W	4822 051 10102
	3013	Zero ohm,.	4835 111 27056	S	3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
	3014	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052		3466	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903
	3015	22k, 5%, 1/10W, Metal Film	4835 111 37441		3467	Res, 14K, 1%, 3/5W, Metal Film . . .	2322 156 21403
	3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810		3467	Res, 15K, 1%, 3/5W, Metal Film . . .	2322 156 21503
	3021	Res, 1K, 2%, 0,25W	4822 051 10102		3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
	3103	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3469	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
	3104	10k, 5%, 1/10W, Metal Film	4835 111 37216		3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
	3108	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703
	3109	10k, 5%, 1/10W, Metal Film	4835 111 37216		3481	Res, 35K7, 1%, 3/5W, Metal Film. . .	2322 156 23573
	3123	75 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37276		3482	Res, 56K, 1%, 3/5W, Metal Film . . .	2322 156 25603
	3200	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
	3201	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253		3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3203	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443	S	3485	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
	3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	S	3486	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3205	Res, 1K, 2%, 0,25W	4822 051 10102	S	3487	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3206	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	S	3488	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
	3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3490	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3209	22k, 5%, 1/10W, Metal Film	4835 111 37441	S	3491	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3212	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253	S	3492	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3213	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3495	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272
	3215	22k, 5%, 1/10W, Metal Film	4835 111 37441		3496	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3216	Zero ohm,.	4835 111 27056		3497	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3217	Res, 1M5, 5%, 1/8W, Metalized Glass.	2322 730 61155		3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
	3218	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225
	3219	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3503	10ohm, 120VAC, Positive Temperature C	
	3220	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432			oefficient	4835 116 47001
	3225	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S	3505	Surge Protector.	2422 549 43073
	3228	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
	3231	Zero ohm,.	4835 111 27056	S	3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333
	3232	Zero ohm,.	4835 111 27056	S	3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102
	3233	Zero ohm,.	4835 111 27056		3512	15k, 5%, 1/10W, Metal Film	4835 111 37458
	3243	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052		3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184
	3246	82k, 5%, 1/10W, Metal Film	4835 111 37277		3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204
	3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3515	2.5 ohm, 20%, 3.6W, Negative Temperat	
	3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010			ure Coefficient.	2122 612 00023
	3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340		3516	Res, 1K, 2%, 0,25W	4822 051 10102
	3250	Zero ohm,.	4835 111 27056		3517	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
	3251	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S	3518	Res, 0R22, 5%, 3W, Metal Film. . . .	2120 106 90548
	3252	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		3520	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
	3253	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		3521	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443
	3257	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3525	33 ohm, 5%, 1/3W, Metal Film	4835 116 57665
	3258	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3528	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3259	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3529	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3530	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
	3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3532	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3534	15k, 5%, 1/10W, Metal Film	4835 111 37458
	3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3536	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3537	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046	S	3542	4.7 Megohm, 5%, 1/2W, Metal Film . .	4835 116 57009
S	3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109		3570	15k, 5%, 1/10W, Metal Film	4835 111 37458
S	3341	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483		3571	Res, 150K, 1%, 3/5W, Metal Film. . .	2322 156 21504
S	3342	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483		3573	Res, 2K, 1%, 1/10W, Metalized Glass.	2120 108 92657
	3343	1.5k, 20%, 1/2W, Carbon Composition.	4835 110 47034		3574	33k, 5%, 1/10W, Metal Film	4835 111 37248
	3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290		3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
S	3345	VDR, DC, 1mA, 50V, MAX 115V	2322 593 13507		3577	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030

S = Safety Part Be sure to use exact replacement part.

27TS57C101 (continued)

3578	Res, 1K, 2%, 0,25W	4822 051 10102	
3579	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451	
3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3592	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3594	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3595	68k, 5%, 1/6W, Carbon Film	4835 111 37205	
3596	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3597	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3598	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3599	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3607	8.2k, 5%, 1/8W, Inline Package . . .	4835 111 97046	
3608	2.2k, 5%, 1/8W, Inline Package . . .	4835 111 97049	
3609	2.2k, 5%, Resistor Network	2120 108 93868	
3611	Res, 1K, 2%, 0,25W	4822 051 10102	
3612	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3613	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3615	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3617	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3619	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3629	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259	
3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3631	27k, 5%, 1/10W, Metal Film	4835 111 37442	
S 3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63479	
3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210	
3634	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3635	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3636	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3637	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3653	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3654	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3655	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3662	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3663	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3664	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3665	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3666	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376	
3667	27k, 5%, 1/10W, Metal Film	4835 111 37442	
3672	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3673	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3674	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231	
3675	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3676	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3677	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3680	680 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37271	
3681	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3682	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3683	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3684	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3821	15k, 5%, 1/10W, Metal Film	4835 111 37458	
3822	1.2k, 5%, 1/10W, Metal Film.	4835 111 27042	
3823	100k, 5%, 1/10W, Metal Film.	4835 111 37434	
3824	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3825	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3826	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3827	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3828	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3829	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272	
3830	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272	
3831	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198 011 03310	
3832	47 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37262	
3908	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3909	Res, 1K, 2%, 0,25W	4822 051 10102	
3910	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376	
3911	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230	
3912	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3913	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3914	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	
3915	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231	
3916	220 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37371	
3917	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3918	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3919	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376	
3920	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231	
3921	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230	
3922	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	
3923	220 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37371	
3924	39k, 5%, 1/10W, Metal Film	4835 111 27051	
3925	39k, 5%, 1/10W, Metal Film	4835 111 27051	
3926	39k, 5%, 1/10W, Metal Film	4835 111 27051	
3929	39k, 5%, 1/10W, Metal Film	4835 111 27051	
3930	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3931	Res, 1K, 2%, 0,25W	4822 051 10102	
3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810	
3951	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3953	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3955	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
3957	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
4001	Zero ohm,.	4835 111 27056	
4002	Zero ohm,.	4835 111 27056	
4004	Zero ohm,.	4835 111 27056	
4007	Zero ohm,.	4835 111 27056	
4009	Zero ohm,.	4835 111 27056	
4010	Zero ohm,.	4835 111 27056	
4011	Zero ohm,.	4835 111 27056	
4012	Zero ohm,.	4835 111 27056	
4013	Zero ohm,.	4835 111 27056	
4020	Zero ohm,.	4835 111 27056	
4051	Zero ohm,.	4835 111 27056	
4100	Zero ohm,.	4835 111 27056	
4101	Zero ohm,.	4835 111 27056	
4102	Zero ohm,.	4835 111 27056	
4103	Zero ohm,.	4835 111 27056	
4143	Zero ohm,.	4835 111 27056	
4144	Zero ohm,.	4835 111 27056	
4203	Zero ohm,.	4835 111 27056	
4207	Zero ohm,.	4835 111 27056	
4212	Zero ohm,.	4835 111 27056	
4214	Zero ohm,.	4835 111 27056	
4215	Zero ohm,.	4835 111 27056	
4216	Zero ohm,.	4835 111 27056	
4501	Zero ohm,.	4835 111 27056	
4602	Zero ohm,.	4835 111 27056	
4650	Zero ohm,.	4835 111 27056	
4651	Zero ohm,.	4835 111 27056	
4652	Zero ohm,.	4835 111 27056	
4654	Zero ohm,.	4835 111 27056	
4655	Zero ohm,.	4835 111 27056	
4684	Zero ohm,.	4835 111 27056	
4687	Zero ohm,.	4835 111 27056	
4831	Zero ohm,.	4835 111 27056	
4832	Zero ohm,.	4835 111 27056	
4833	Zero ohm,.	4835 111 27056	
4902	Zero ohm,.	4835 111 27056	
4903	Zero ohm,.	4835 111 27056	
4904	Zero ohm,.	4835 111 27056	
4905	Zero ohm,.	4835 111 27056	
4909	Zero ohm,.	4835 111 27056	
4911	Zero ohm,.	4835 111 27056	
4912	Zero ohm,.	4835 111 27056	
4914	Zero ohm,.	4835 111 27056	
4957	Zero ohm,.	4835 111 27056	
4999	Zero ohm,.	4835 111 27056	
5000	Coil, 5u6.	3198 018 25680	
5004	Coil, 820n	2422 535 97314	
5201	Coil, 22u.	3198 018 22290	
5202	Coil, 6u8.	3198 018 16880	
5342	22uH., 10%, Coil, Peaking.	4835 157 67069	
S 5445	Transformer, L.O.T., models ending in C101, C121, and C125	2422 531 02327	
S 5445	Transformer, L.O.T., models ending in C221 and C225.	3128 138 20941	
5451	Coil, 27u.	2422 535 96614	
5457	Coil, Linear Correction.	3128 138 53241	
5461	Transformer.	3128 138 33811	
5480	Coil, 27u.	2422 535 97334	
5480	Coil, 39u.	2422 535 97336	
5480	33uH., Peaking Coil, only in 25. . .	4835 157 58205	
S 5500	Filter, Mains, 5mH, 2A	2422 549 43432	
5516	100uH., Coil	4835 157 67078	
5518	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5521	Coil, 2u2.	3198 018 12280	
5540	Coil, 4u7.	3198 018 14780	
S 5545	Transfomer,.	2422 531 02314	
5551	27uH., 5%, Coil, Peaking	4835 157 67052	
5552	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5572	100uH., Coil	4835 157 67078	
5573	100uH., Coil	4835 157 67078	
5576	100uH., Coil	4835 157 67078	
5577	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5600	Coil, 8u2.	3198 018 18280	
5601	Coil, 8u2.	3198 018 18280	
5620	Coil, 6u8.	3198 018 16880	
5821	Coil, 100u	3198 018 21010	
5822	Coil, 18u.	3198 018 21890	
6008	Zener, 33 Volt BZX79-C33	4835 130 37904	
6113	Zener Diode, 6.8 volt.	9340 386 40115	
6211	Diode, 1N4148.	4835 130 37048	
6212	Diode, 1N4148.	4835 130 37048	
6213	Diode, 1N4148.	4835 130 37048	
6331	Diode.	4835 130 37294	
6333	Diode.	4835 130 37294	
6335	Diode.	4835 130 37294	
6401	Diode.	4835 130 37094	
6402	Zener, 33 Volt, BZX79-C33.	4835 130 37904	
6403	Diode.	4835 130 37094	

S = Safety Part Be sure to use exact replacement part.

27TS57C101 (continued)

6404	Diode.	4835 130 37094	
6449	Diode, 1N4148.	4835 130 37048	
6450	Diode, 1N4148.	4835 130 37048	
6460	Diode, Rect, BY228/20	9336 215 80112	
6463	Diode, 1N4148.	4835 130 37048	
6464	Zener Diode, 6.2 volt.	9337 242 70133	
6465	Diode, BYD33J.	4835 130 37094	
6466	Diode, BYD33J.	4835 130 37094	
6480	Diode, Zener	4835 130 37947	
6481	Diode, 1N4148.	4835 130 37048	
6485	Diode, BYD33J.	4835 130 37094	
6486	Diode, EGP20DL-530	4835 130 37919	
6487	Diode.	4835 130 37094	
6488	Diode, Rect, BYV27-200.	9322 126 72673	
6490	Diode, Rect, BYV27-200.	9322 126 72673	
6505	Diode, Bridge Rect, GBU6JL-7002	9322 138 08667	
6507	Diode, BYD33J.	4835 130 37094	
6508	Diode, BYD33J.	4835 130 37094	
6510	Zener Diode, 20 volt	9331 178 60133	
6511	Diode, BYV95C.	4835 130 37052	
6512	Diode, Rect, BY228/20	4822 130 41275	
6513	Diode, Rect, BY228/20	4822 130 41275	
6514	Zener, 18 Volt, BZX79-C18.	4835 130 37908	
6540	Diode.	4835 130 37294	
6550	Diode, Rect, BY229X-800	9340 380 30127	
6560	Diode, EGP20DL-530	4835 130 37919	
6580	Diode, Rect, SB140.	9339 577 60673	
6584	Diode, 1N4148.	4835 130 37048	
6585	Diode, 1N4148.	4835 130 37048	
6591	Diode, BAS216.	4835 130 37905	
6601	Diode, Zener	4835 130 37684	
6606	Zener, 4.7 Volt, BZX79-C4V7.	4835 130 37005	
6607	Zener, 6.8 Volt, BZX79-C6V8.	4835 130 37945	
6690	LED, LTL-307P.	4835 130 97096	
6821	Zener Diode, 9.1 volt.	9331 177 80133	
6822	Fixed Coil	4835 130 37048	
6951	Diode, BAS216.	4835 130 37905	
6961	Diode, BAS216.	4835 130 37905	
7250	IC,.	9352 620 26112	
7251	IC, LM317T	9337 220 80682	
7254	Transistor, NPN, BC847B.	4822 130 60511	
7256	Transistor, NPN, BC847B.	4822 130 60511	
7258	Transistor, NPN, BC847B.	4822 130 60511	
7263	Transistor, PNP, BC857B.	5322 130 60508	
7266	Transistor, NPN, BC847B.	4822 130 60511	
7330	IC,.	9352 184 10112	
7401	IC,.	9322 121 47687	
7460	Transistor, NPN, BU1508DX.	9340 170 50127	
7461	Transistor, NPN, BF819	9335 354 50127	
7462	Transistor, BC547B	4835 130 47055	
7463	Transistor, BC557B	4835 130 47409	
7480	IC,.	9322 028 93682	
7481	Transistor, BC557B	4835 130 47409	
7482	Transistor, PNP, BC857B.	5322 130 60508	
7518	STH8NA60FI SMPS FET	9322 068 92687	
7518	STH10NC60FI SMPS FET.	9322 155 66687	
7520	IC, MC44603A	4835 209 88537	
7570	IC,.	9337 711 00676	
S 7581	Coupler, TCDT1101G	9338 431 30682	
7590	Transistor, NPN, BC847B.	4822 130 60511	
7591	Transistor, NPN, BC847B.	4822 130 60511	
7592	Transistor, NPN, BC847B.	4822 130 60511	
7600	IC, SAA5543PS/M4/1046 L90US1-1.4	4835 310 57477	
7601	IC, ST24W04B6.	9322 097 23682	
7603	Transistor, NPN, BC337	9331 796 00126	
7604	Transistor, NPN, BC847B.	4822 130 60511	
7605	Transistor, NPN, BC847B.	4822 130 60511	
7608	Transistor, NPN, BC847B.	4822 130 60511	
7609	Transistor, NPN, BC847B.	4822 130 60511	
7680	IR Receiver.	9322 127 53667	
7821	IC,.	9352 374 70112	
7822	IC, HEF4052BT.	9333 729 50653	
7823	Transistor, NPN, BC337-25.	3198 020 43530	
7904	Transistor, NPN, BC847B.	4822 130 60511	
7905	Transistor, NPN, BC847B.	4822 130 60511	
7906	Transistor, NPN, BC847B.	4822 130 60511	
7908	Transistor, NPN, BC847B.	4822 130 60511	
7909	Transistor, NPN, BC847B.	4822 130 60511	
7910	Transistor, NPN, BC847B.	4822 130 60511	
7951	IC,.	4822 209 13706	
9423	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030	
CBA	00EMF823A001 Main Chassis Board Asm.	00EM F82 3A001	

Cabinet & Accessory Parts

	Cabinet & Accessory Parts		
S AC01	Mainscord, 125V, 10A	3135 010 03831	
S AC02	Anode Clip	4835 256 97264	
AC03	Cabinet Back	3139 124 27871	
AC04	Cabinet Front.	3139 137 52951	
AC05	Chassis Guide.	3139 124 31381	
AC06	Control Buttons.	3139 124 27371	
S AC07	Convergence and Purity Assembly.	2422 549 43385	
S AC08	CRT A68AJB82X.	4835 131 27167	
S AC09	Coil, Degaussing	3121 218 62701	
AC11	Light Guide.	3139 124 26461	
AC13	Owner's Manual, English.	3135 015 10781	
AC14	Knob, Power.	3139 124 29981	
REMOTE	Remote Transmitter, RC2524/04.	3139 228 81592	
AC16	Speaker, 16R, 1W5 (2 Used)	2422 264 00343	
S AC18	Yoke	3313 203 01242	
AC19	Yoke Wedge (3 Used).	4835 535 27001	
AC21	Battery, 1.5V AA, 2-Pack, (Not Shown	9299 000 10137	
AC24	Spring	3139 121 26231	

S = Safety Part Be sure to use exact replacement part.

27TS57C121 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts		
S 0127	3.15 Amp Fuse, ...	3122 358 72141	
0152	Cable, DIP, 6 Pin, 400mm	3104 301 09421	
0153	4 Pin Cable.	3104 301 09431	
0212	Connector, 2 Pin	2422 025 15396	
0220	4 Pin Board Connector.	2422 025 04852	
0223	3 Pin Board Connector.	2422 026 04963	
0224	1 Pin Board Connector.	2422 034 20021	
0228	1 Pin Board Connector.	2422 034 20021	
0234	Connector, 4 Pin	2422 025 15847	
S 0243	Connector, 6 Pin	2422 025 04854	
0244	4 Pin Board Connector.	2422 025 04852	
S 0245	Connector, 6 Pin	2422 025 04854	
S 0254	CRT Socket (9 Pin)	2422 500 80022	
0267	Connector, 3 Pin	2412 020 00725	
1000	Tuner.	2422 542 90057	
1001	Filter	2422 549 42501	
1003	45 MHz SAW, Filter,.	2422 549 42433	
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807	
1208	Crystal Resonator.	4835 242 77276	
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10869	
S 1571	1 Amp, Radial Fuse,.	4835 253 97162	
S 1572	1 Amp, Radial Fuse,.	4835 253 97162	
S 1580	Relay, 12V	2422 132 07317	
1600	Switch, Tactile.	2422 128 02742	
1601	Switch, Tactile.	2422 128 02742	
1602	Switch, Tactile.	2422 128 02742	
1603	Switch, Tactile.	2422 128 02742	
1606	Switch, Tactile.	2422 128 02742	
1660	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488	
1821	Ceramic Resonator.	4835 122 97102	
2001	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2002	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2003	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2004	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2006	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290	
2011	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2102	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2103	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2104	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2201	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2202	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2203	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2204	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2205	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2207	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2208	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2209	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2211	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2212	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2213	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2214	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2215	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280	
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 16654	
2220	Cap, 15p, 5%, 50V, Ceramic	3198 016 01590	
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2222	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2226	Cap, 33u, 20%, 25V, Electrolytic . .	2020 021 90124	
2227	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2247	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2248	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2249	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2330	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177	
2340	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495	
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320	
S 2343	Cap, 3n3, 10%, 2KV, Ceramic.	2020 558 90529	
2345	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020	
2401	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2402	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2404	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2405	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2407	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2409	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2420	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2426	Cap, 100n, 10%, 63V, Metalized Polyes ter.	2222 370 75104	
2428	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220	
2429	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2430	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2431	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2437	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2438	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2448	Cap, 220p, 10%, 500V, Ceramic. . . .	3198 019 42210	
2450	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91139	
2451	Cap, 15n, 10%, 50V, Polyester. . . .	2020 300 90575	
2451	0.01uF., 10%, 50V, Polyester, only 27	3198 138 20941	
2456	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176	
2457	Cap, 390n, 5%, 250V, Metalized Polypr opylene.	2222 479 90021	
2458	Cap, 2u2, 20%, 100V, Electrolytic. .	2020 021 91331	
2459	Cap, 680p, 10%, 500V, Ceramic. . . .	3198 019 46810	
2461	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020	
2462	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176	
2463	680pF., 10%, 2KV, Ceramic.	4835 122 47584	
S 2465	Cap, 10n, 5%, 1600V, Polypropylene .	2222 375 90154	
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050	
2473	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790	
2481	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740	
2482	Cap, 68n, 10%, 250V, Polyester . . .	2222 347 90234	
2484	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2485	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293	
2486	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2487	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2488	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2489	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2490	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710	
2491	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710	
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810	
2500	0.47uF., 250V, Polyester	4835 121 47569	
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
S 2507	Cap, 1n5, 10%, 1KV, Ceramic.	2020 558 90443	
2508	Cap, 470u, 20%, 200V, Electrolytic .	2020 024 90647	
S 2511	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020	
S 2518	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290	
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320	
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320	
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2530	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 021 91147	
2531	Cap, 1n, 2%, 50V, Polypropylene. . .	2020 310 90049	
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220	
2540	Cap, 100u, 20%, 25V, Electrolytic. .	2020 021 90547	
S 2545	1500pF., 250VAC, Ceramic	4835 122 47621	
S 2550	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2551	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91358	
2561	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020	
S 2562	Cap, 220p, 10%, 1KV, Ceramic	2020 558 90424	
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020	
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020	
2572	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330	
2575	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820	
2577	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020	
2586	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2604	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290	
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2613	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2615	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2619	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2622	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890	
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2629	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230	
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2631	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2679	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2681	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2821	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280	
2823	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2825	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2826	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090	
2827	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2828	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2829	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	
2830	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280	
2831	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	
2832	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280	

S = Safety Part Be sure to use exact replacement part.

27TS57C121 (continued)

	2833	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280		3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
	2834	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780		3401	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
	2835	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3402	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
	2836	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3403	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
	2837	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740		3405	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002
	2838	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3406	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
	2839	Cap, 1u, 5%, 50V, Metalized Polyester	2020 308 90124		3407	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002
	2840	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
	2841	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3409	1.5 ohm, 5%, 1/3W, Metal Film. . . .	4835 116 57664
	2842	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
	2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
	2844	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3420	470k, 5%, 1/10W, Metal Film.	4835 111 37407
	2845	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
	2913	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280		3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
	2914	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330		3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840
	2915	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606
	2916	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648		3425	Res, 120K, 5%, 1/10W, Metalized Glass	2120 108 91716
	2917	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3426	39k, 5%, 1/10W, Metal Film	4835 111 27051
	2918	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330		3428	22k, 5%, 1/10W, Metal Film	4835 111 37441
	2919	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3429	27k, 5%, 1/10W, Metal Film	4835 111 37442
	2920	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648		3431	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
	2921	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3432	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
	2931	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280		3436	Res, 1K, 2%, 0,25W	4822 051 10102
	2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3437	10k, 5%, 1/10W, Metal Film	4835 111 37216
	2952	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3438	33k, 1/4W, Carbon Film	4835 110 57375
	2954	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
	2955	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3447	10k, 5%, 1/10W, Metal Film	4835 111 37216
	2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
	2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
	2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	S	3452	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63229
	2960	Cap, 220u, 20%, 50V, Electrolytic. .	3198 026 52210	S	3453	Res, 4R7, 5%, 5W, Wire Wound	2322 251 41478
	2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090	S	3454	Res, 33K, 5%, 1 1/3W, Metal Film . .	2322 194 63333
	2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090		3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
	2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090		3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
	3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3462	Res, 6K8, 5%, 5W, Metal Film	2322 257 41682
	3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
	3010	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610		3464	Res, 1K, 2%, 0,25W	4822 051 10102
	3013	Zero ohm,.	4835 111 27056	S	3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
	3014	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052		3466	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903
	3015	22k, 5%, 1/10W, Metal Film	4835 111 37441		3467	Res, 14K, 1%, 3/5W, Metal Film . . .	2322 156 21403
	3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810		3467	Res, 15K, 1%, 3/5W, Metal Film . . .	2322 156 21503
	3021	Res, 1K, 2%, 0,25W	4822 051 10102		3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
	3103	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3469	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
	3104	10k, 5%, 1/10W, Metal Film	4835 111 37216		3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
	3108	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703
	3109	10k, 5%, 1/10W, Metal Film	4835 111 37216		3481	Res, 35K7, 1%, 3/5W, Metal Film. . .	2322 156 23573
	3123	75 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37276		3482	Res, 56K, 1%, 3/5W, Metal Film . . .	2322 156 25603
	3200	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
	3201	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253		3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3203	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443	S	3485	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
	3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	S	3486	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3205	Res, 1K, 2%, 0,25W	4822 051 10102	S	3487	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3206	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	S	3488	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
	3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3490	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3209	22k, 5%, 1/10W, Metal Film	4835 111 37441	S	3491	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3212	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253	S	3492	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3213	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3495	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272
	3215	22k, 5%, 1/10W, Metal Film	4835 111 37441		3496	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3216	Zero ohm,.	4835 111 27056		3497	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3217	Res, 1M5, 5%, 1/8W, Metalized Glass.	2322 730 61155		3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
	3218	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225
	3219	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3503	10ohm, 120VAC, Positive Temperature C	
	3220	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432			oefficient	4835 116 47001
	3225	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S	3505	Surge Protector.	2422 549 43073
	3228	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
	3231	Zero ohm,.	4835 111 27056	S	3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333
	3232	Zero ohm,.	4835 111 27056	S	3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102
	3233	Zero ohm,.	4835 111 27056		3512	15k, 5%, 1/10W, Metal Film	4835 111 37458
	3243	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052		3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184
	3246	82k, 5%, 1/10W, Metal Film	4835 111 37277		3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204
	3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3515	2.5 ohm, 20%, 3.6W, Negative Temperat	
	3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010			ure Coefficient.	2122 612 00023
	3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340		3516	Res, 1K, 2%, 0,25W	4822 051 10102
	3250	Zero ohm,.	4835 111 27056		3517	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
	3251	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S	3518	Res, 0R22, 5%, 3W, Metal Film. . . .	2120 106 90548
	3252	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		3520	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
	3253	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		3521	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443
	3257	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3525	33 ohm, 5%, 1/3W, Metal Film	4835 116 57665
	3258	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3528	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3259	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3529	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3530	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
	3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3532	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3534	15k, 5%, 1/10W, Metal Film	4835 111 37458
	3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3536	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3537	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046	S	3542	4.7 Megohm, 5%, 1/2W, Metal Film . .	4835 116 57009
S	3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109		3570	15k, 5%, 1/10W, Metal Film	4835 111 37458
S	3341	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483		3571	Res, 150K, 1%, 3/5W, Metal Film. . .	2322 156 21504
S	3342	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483		3573	Res, 2K, 1%, 1/10W, Metalized Glass.	2120 108 92657
	3343	1.5k, 20%, 1/2W, Carbon Composition.	4835 110 47034		3574	33k, 5%, 1/10W, Metal Film	4835 111 37248
	3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290		3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
S	3345	VDR, DC, 1mA, 50V, MAX 115V	2322 593 13507		3577	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030

S = Safety Part Be sure to use exact replacement part.

27TS57C121 (continued)

3578	Res, 1K, 2%, 0,25W	4822 051 10102	
3579	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451	
3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3592	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3594	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3595	68k, 5%, 1/6W, Carbon Film	4835 111 37205	
3596	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3597	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3598	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3599	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3607	8.2k, 5%, 1/8W, Inline Package . . .	4835 111 97046	
3608	2.2k, 5%, 1/8W, Inline Package . . .	4835 111 97049	
3609	2.2k, 5%, Resistor Network	2120 108 93868	
3611	Res, 1K, 2%, 0,25W	4822 051 10102	
3612	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3613	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3615	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3617	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3619	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3629	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259	
3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3631	27k, 5%, 1/10W, Metal Film	4835 111 37442	
S 3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63479	
3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210	
3634	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3635	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3636	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3637	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3653	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3654	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3655	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3662	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3663	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3664	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3665	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3666	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376	
3667	27k, 5%, 1/10W, Metal Film	4835 111 37442	
3672	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3673	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3674	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231	
3675	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3676	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3677	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3680	680 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37271	
3681	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3682	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3683	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3684	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3821	15k, 5%, 1/10W, Metal Film	4835 111 37458	
3822	1.2k, 5%, 1/10W, Metal Film.	4835 111 27042	
3823	100k, 5%, 1/10W, Metal Film.	4835 111 37434	
3824	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3825	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3826	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3827	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3828	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3829	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272	
3830	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272	
3831	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198 011 03310	
3832	47 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37262	
3908	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3909	Res, 1K, 2%, 0,25W	4822 051 10102	
3910	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376	
3911	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230	
3912	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3913	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3914	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	
3915	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231	
3916	220 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37371	
3917	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3918	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3919	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376	
3920	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231	
3921	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230	
3922	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	
3923	220 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37371	
3924	39k, 5%, 1/10W, Metal Film	4835 111 27051	
3925	39k, 5%, 1/10W, Metal Film	4835 111 27051	
3926	39k, 5%, 1/10W, Metal Film	4835 111 27051	
3929	39k, 5%, 1/10W, Metal Film	4835 111 27051	
3930	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3931	Res, 1K, 2%, 0,25W	4822 051 10102	
3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810	
3951	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3953	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3955	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
3957	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
4001	Zero ohm,.	4835 111 27056	
4002	Zero ohm,.	4835 111 27056	
4004	Zero ohm,.	4835 111 27056	
4007	Zero ohm,.	4835 111 27056	
4009	Zero ohm,.	4835 111 27056	
4010	Zero ohm,.	4835 111 27056	
4011	Zero ohm,.	4835 111 27056	
4012	Zero ohm,.	4835 111 27056	
4013	Zero ohm,.	4835 111 27056	
4020	Zero ohm,.	4835 111 27056	
4051	Zero ohm,.	4835 111 27056	
4100	Zero ohm,.	4835 111 27056	
4101	Zero ohm,.	4835 111 27056	
4102	Zero ohm,.	4835 111 27056	
4103	Zero ohm,.	4835 111 27056	
4143	Zero ohm,.	4835 111 27056	
4144	Zero ohm,.	4835 111 27056	
4203	Zero ohm,.	4835 111 27056	
4207	Zero ohm,.	4835 111 27056	
4212	Zero ohm,.	4835 111 27056	
4214	Zero ohm,.	4835 111 27056	
4215	Zero ohm,.	4835 111 27056	
4216	Zero ohm,.	4835 111 27056	
4501	Zero ohm,.	4835 111 27056	
4602	Zero ohm,.	4835 111 27056	
4650	Zero ohm,.	4835 111 27056	
4651	Zero ohm,.	4835 111 27056	
4652	Zero ohm,.	4835 111 27056	
4654	Zero ohm,.	4835 111 27056	
4655	Zero ohm,.	4835 111 27056	
4684	Zero ohm,.	4835 111 27056	
4687	Zero ohm,.	4835 111 27056	
4831	Zero ohm,.	4835 111 27056	
4832	Zero ohm,.	4835 111 27056	
4833	Zero ohm,.	4835 111 27056	
4902	Zero ohm,.	4835 111 27056	
4903	Zero ohm,.	4835 111 27056	
4904	Zero ohm,.	4835 111 27056	
4905	Zero ohm,.	4835 111 27056	
4909	Zero ohm,.	4835 111 27056	
4911	Zero ohm,.	4835 111 27056	
4912	Zero ohm,.	4835 111 27056	
4914	Zero ohm,.	4835 111 27056	
4957	Zero ohm,.	4835 111 27056	
4999	Zero ohm,.	4835 111 27056	
5000	Coil, 5u6.	3198 018 25680	
5004	Coil, 820n	2422 535 97314	
5201	Coil, 22u.	3198 018 22290	
5202	Coil, 6u8.	3198 018 16880	
5342	22uH., 10%, Coil, Peaking.	4835 157 67069	
S 5445	Transformer, L.O.T., models ending in C101, C121, and C125	2422 531 02327	
S 5445	Transformer, L.O.T., models ending in C221 and C225.	3128 138 20941	
5451	Coil, 27u.	2422 535 96614	
5457	Coil, Linear Correction.	3128 138 53241	
5461	Transformer.	3128 138 33811	
5480	Coil, 27u.	2422 535 97334	
5480	Coil, 39u.	2422 535 97336	
5480	33uH., Peaking Coil, only in 25. . .	4835 157 58205	
S 5500	Filter, Mains, 5mH, 2A	2422 549 43432	
5516	100uH., Coil	4835 157 67078	
5518	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5521	Coil, 2u2.	3198 018 12280	
5540	Coil, 4u7.	3198 018 14780	
S 5545	Transfomer,.	2422 531 02314	
5551	27uH., 5%, Coil, Peaking	4835 157 67052	
5552	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5572	100uH., Coil	4835 157 67078	
5573	100uH., Coil	4835 157 67078	
5576	100uH., Coil	4835 157 67078	
5577	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5600	Coil, 8u2.	3198 018 18280	
5601	Coil, 8u2.	3198 018 18280	
5620	Coil, 6u8.	3198 018 16880	
5821	Coil, 100u	3198 018 21010	
5822	Coil, 18u.	3198 018 21890	
6008	Zener, 33 Volt BZX79-C33	4835 130 37904	
6113	Zener Diode, 6.8 volt.	9340 386 40115	
6211	Diode, 1N4148.	4835 130 37048	
6212	Diode, 1N4148.	4835 130 37048	
6213	Diode, 1N4148.	4835 130 37048	
6331	Diode.	4835 130 37294	
6333	Diode.	4835 130 37294	
6335	Diode.	4835 130 37294	
6401	Diode.	4835 130 37094	
6402	Zener, 33 Volt, BZX79-C33.	4835 130 37904	
6403	Diode.	4835 130 37094	

S = Safety Part Be sure to use exact replacement part.

27TS57C121 (continued)

6404	Diode.	4835 130 37094	
6449	Diode, 1N4148.	4835 130 37048	
6450	Diode, 1N4148.	4835 130 37048	
6460	Diode, Rect, BY228/20	9336 215 80112	
6463	Diode, 1N4148.	4835 130 37048	
6464	Zener Diode, 6.2 volt.	9337 242 70133	
6465	Diode, BYD33J.	4835 130 37094	
6466	Diode, BYD33J.	4835 130 37094	
6480	Diode, Zener	4835 130 37947	
6481	Diode, 1N4148.	4835 130 37048	
6485	Diode, BYD33J.	4835 130 37094	
6486	Diode, EGP20DL-530	4835 130 37919	
6487	Diode.	4835 130 37094	
6488	Diode, Rect, BYV27-200.	9322 126 72673	
6490	Diode, Rect, BYV27-200.	9322 126 72673	
6505	Diode, Bridge Rect, GBU6JL-7002	9322 138 08667	
6507	Diode, BYD33J.	4835 130 37094	
6508	Diode, BYD33J.	4835 130 37094	
6510	Zener Diode, 20 volt	9331 178 60133	
6511	Diode, BYV95C.	4835 130 37052	
6512	Diode, Rect, BY228/20	4822 130 41275	
6513	Diode, Rect, BY228/20	4822 130 41275	
6514	Zener, 18 Volt, BZX79-C18.	4835 130 37908	
6540	Diode.	4835 130 37294	
6550	Diode, Rect, BY229X-800	9340 380 30127	
6560	Diode, EGP20DL-530	4835 130 37919	
6580	Diode, Rect, SB140.	9339 577 60673	
6584	Diode, 1N4148.	4835 130 37048	
6585	Diode, 1N4148.	4835 130 37048	
6591	Diode, BAS216.	4835 130 37905	
6601	Diode, Zener	4835 130 37684	
6606	Zener, 4.7 Volt, BZX79-C4V7.	4835 130 37005	
6607	Zener, 6.8 Volt, BZX79-C6V8.	4835 130 37945	
6690	LED, LTL-307P.	4835 130 97096	
6821	Zener Diode, 9.1 volt.	9331 177 80133	
6822	Fixed Coil	4835 130 37048	
6951	Diode, BAS216.	4835 130 37905	
6961	Diode, BAS216.	4835 130 37905	
7250	IC,.	9352 620 26112	
7251	IC, LM317T	9337 220 80682	
7254	Transistor, NPN, BC847B.	4822 130 60511	
7256	Transistor, NPN, BC847B.	4822 130 60511	
7258	Transistor, NPN, BC847B.	4822 130 60511	
7263	Transistor, PNP, BC857B.	5322 130 60508	
7266	Transistor, NPN, BC847B.	4822 130 60511	
7330	IC,.	9352 184 10112	
7401	IC,.	9322 121 47687	
7460	Transistor, NPN, BU1508DX.	9340 170 50127	
7461	Transistor, NPN, BF819	9335 354 50127	
7462	Transistor, BC547B	4835 130 47055	
7463	Transistor, BC557B	4835 130 47409	
7480	IC,.	9322 028 93682	
7481	Transistor, BC557B	4835 130 47409	
7482	Transistor, PNP, BC857B.	5322 130 60508	
7518	STH8NA60FI SMPS FET	9322 068 92687	
7518	STH10NC60FI SMPS FET.	9322 155 66687	
7520	IC, MC44603A	4835 209 88537	
7570	IC,.	9337 711 00676	
S 7581	Coupler, TCDT1101G	9338 431 30682	
7590	Transistor, NPN, BC847B.	4822 130 60511	
7591	Transistor, NPN, BC847B.	4822 130 60511	
7592	Transistor, NPN, BC847B.	4822 130 60511	
7600	IC, SAA5543PS/M4/1046 L90US1-1.4	4835 310 57477	
7601	IC, ST24W04B6.	9322 097 23682	
7603	Transistor, NPN, BC337	9331 796 00126	
7604	Transistor, NPN, BC847B.	4822 130 60511	
7605	Transistor, NPN, BC847B.	4822 130 60511	
7608	Transistor, NPN, BC847B.	4822 130 60511	
7609	Transistor, NPN, BC847B.	4822 130 60511	
7680	IR Receiver.	9322 127 53667	
7821	IC,.	9352 374 70112	
7822	IC, HEF4052BT.	9333 729 50653	
7823	Transistor, NPN, BC337-25.	3198 020 43530	
7904	Transistor, NPN, BC847B.	4822 130 60511	
7905	Transistor, NPN, BC847B.	4822 130 60511	
7906	Transistor, NPN, BC847B.	4822 130 60511	
7908	Transistor, NPN, BC847B.	4822 130 60511	
7909	Transistor, NPN, BC847B.	4822 130 60511	
7910	Transistor, NPN, BC847B.	4822 130 60511	
7951	IC,.	4822 209 13706	
9423	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030	
CBA	00EMF823A001 Main Chassis Board Asm.	00EM F82 3A001	

Cabinet & Accessory Parts

	Cabinet & Accessory Parts		
S AC01	Mainscord, 125V, 10A	3135 010 03831	
S AC02	Anode Clip	4835 256 97264	
AC03	Cabinet Back	3139 124 27871	
AC04	Cabinet Front.	3139 137 52951	
AC05	Chassis Guide.	3139 124 31381	
AC06	Control Buttons.	3139 124 27371	
S AC07	Convergence and Purity Assembly.	2422 549 43385	
S AC08	CRT A68AJB82X.	4835 131 27167	
S AC09	Coil, Degaussing	3121 218 62701	
AC11	Light Guide.	3139 124 26461	
AC13	Owner's Manual, English.	3135 015 10781	
AC14	Knob, Power.	3139 124 29981	
REMOTE	Remote Transmitter, RC2524/04.	3139 228 81592	
AC16	Speaker, 16R, 1W5 (2 Used)	2422 264 00343	
S AC18	Yoke	3313 203 01242	
AC19	Yoke Wedge (3 Used).	4835 535 27001	
AC21	Battery, 1.5V AA, 2-Pack, (Not Shown	9299 000 10137	
AC24	Spring	3139 121 26231	

S = Safety Part Be sure to use exact replacement part.

29LL690121 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts	
S 0127	3.15 Amp Fuse, ...	3122 358 72141
0152	Cable, DIP, 6 Pin, 400mm	3104 301 09421
0153	4 Pin Cable.	3104 301 09431
0212	Connector, 2 Pin	2422 025 15396
0220	4 Pin Board Connector.	2422 025 04852
0223	Socket, Cinch, 6 Pin	2422 026 04827
0224	1 Pin Board Connector.	2422 034 20021
0228	1 Pin Board Connector.	2422 034 20021
0234	Connector, 4 Pin	2422 025 12479
S 0243	Connector, 6 Pin	2422 025 04854
0244	4 Pin Board Connector.	2422 025 04852
S 0245	Connector, 6 Pin	2422 025 04854
S 0254	CRT Socket (9 Pin)	2422 500 80022
0267	Connector, 3 Pin	2412 020 00725
1000	Tuner.	2422 542 90057
1003	45 MHz SAW, Filter,.	2422 549 42433
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807
1208	Crystal Resonator.	4835 242 77276
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10869
S 1572	1 Amp, Radial Fuse,.	4835 253 97162
S 1573	2.5 Amp Fuse, Radial,.	2422 086 10422
S 1580	Relay, 12V	2422 132 07317
1600	Switch, Tactile.	2422 128 02742
1601	Switch, Tactile.	2422 128 02742
1602	Switch, Tactile.	2422 128 02742
1603	Switch, Tactile.	2422 128 02742
1606	Switch, Tactile.	2422 128 02742
1660	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488
1822	Crystal Resonator, 18MHz432, 12 Pin, HC49/U A	2422 543 00842
2001	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2002	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2003	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2004	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2011	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2101	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2102	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2103	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2104	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2111	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2112	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2115	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2201	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2205	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2208	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2209	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2211	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2212	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2213	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2214	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2215	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 16654
2220	Cap, 15p, 5%, 50V, Ceramic	3198 016 01590
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2222	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2226	Cap, 33u, 20%, 25V, Electrolytic . .	2020 021 90124
2227	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2247	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2248	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2249	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2330	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2340	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320
S 2343	Cap, 3n3, 10%, 2KV, Ceramic.	2020 558 90529
2345	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2401	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2402	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2404	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2405	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2407	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2409	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2420	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2426	Cap, 100n, 10%, 63V, Metalized Polyester.	2222 370 75104
2428	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2429	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2430	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2431	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2437	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2438	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2448	Cap, 220p, 10%, 500V, Ceramic. . . .	3198 019 42210
2450	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91139
2451	Cap, 15n, 10%, 50V, Polyester. . . .	2020 300 90575
2451	0.01uF., 10%, 50V, Polyester, only 27	3198 138 20941
2456	Cap, 47n, 10%, 250V, Metalized Polyester.	2222 368 90176
2457	Cap, 390n, 5%, 250V, Metalized Polypropylene.	2222 479 90021
2458	Cap, 2u2, 20%, 100V, Electrolytic. .	2020 021 91331
2459	Cap, 680p, 10%, 500V, Ceramic. . . .	3198 019 46810
2461	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2462	Cap, 47n, 10%, 250V, Metalized Polyester.	2222 368 90176
2463	680pF., 10%, 2KV, Ceramic.	4835 122 47584
S 2465	Cap, 10n, 5%, 1600V, Polypropylene .	2222 375 90154
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050
2473	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2481	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2482	Cap, 68n, 10%, 250V, Polyester . . .	2222 347 90234
2484	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2485	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2486	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2487	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2488	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2489	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2490	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2491	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810
2500	0.47uF., 250V, Polyester	4835 121 47569
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
S 2507	Cap, 1n5, 10%, 1KV, Ceramic.	2020 558 90443
2508	Cap, 470u, 20%, 200V, Electrolytic .	2020 024 90647
S 2511	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
S 2518	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2530	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 021 91147
2531	Cap, 1n, 2%, 50V, Polypropylene. . .	2020 310 90049
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2540	Cap, 100u, 20%, 25V, Electrolytic. .	2020 021 90547
S 2545	1500pF., 250VAC, Ceramic	4835 122 47621
S 2550	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2551	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91358
2561	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
S 2562	Cap, 220p, 10%, 1KV, Ceramic	2020 558 90424
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2571	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91353
2572	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2575	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2586	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2604	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2613	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2615	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2619	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2622	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2629	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2679	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2681	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2850	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810
2851	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2852	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2853	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2854	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2855	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2856	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2858	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2859	Cap, 15p, 5%, 50V, Ceramic	3198 016 01590
2860	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2861	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040

S = Safety Part Be sure to use exact replacement part.

29LL690121 (continued)

2862	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	S 3345	VDR, DC, 1mA, 50V, MAX 115V	2322 593 13507
2863	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
2864	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	3401	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2865	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	3402	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2866	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	3403	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2867	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	3405	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002
2868	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780	3406	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2869	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	3407	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002
2870	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2871	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	3409	1.5 ohm, 5%, 1/3W, Metal Film. . . .	4835 116 57664
2874	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790	3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2875	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790	3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2877	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	3420	470k, 5%, 1/10W, Metal Film.	4835 111 37407
2882	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2883	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2884	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840
2887	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810	3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606
2888	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	3425	Res, 120K, 5%, 1/10W, Metalized Glass	2120 108 91716
2889	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	3426	39k, 5%, 1/10W, Metal Film	4835 111 27051
2891	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390	3428	22k, 5%, 1/10W, Metal Film	4835 111 37441
2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	3429	27k, 5%, 1/10W, Metal Film	4835 111 37442
2952	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	3431	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
2954	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	3432	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
2955	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	3436	Res, 1K, 2%, 0,25W	4822 051 10102
2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	3437	10k, 5%, 1/10W, Metal Film	4835 111 37216
2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	3438	33k, 1/4W, Carbon Film	4835 110 57375
2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
2960	Cap, 2u2, 20%, 25V, Electrolytic . .	3198 026 32220	3447	10k, 5%, 1/10W, Metal Film	4835 111 37216
2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090	3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090	3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090	S 3452	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63229
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S 3453	Res, 4R7, 5%, 5W, Wire Wound	2322 251 41478
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S 3454	Res, 33K, 5%, 1 1/3W, Metal Film . .	2322 194 63333
3013	Zero ohm,.	4835 111 27056	3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3014	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3015	22k, 5%, 1/10W, Metal Film	4835 111 37441	S 3462	Res, 6K8, 5%, 5W, Metal Film	2322 257 41682
3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810	3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3100	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510	3464	Res, 1K, 2%, 0,25W	4822 051 10102
3101	220k, 5%, 1/10W, Metal Film.	4835 111 37235	S 3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
3103	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220	3466	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903
3104	10k, 5%, 1/10W, Metal Film	4835 111 37216	3467	Res, 14K, 1%, 3/5W, Metal Film . . .	2322 156 21403
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510	3467	Res, 15K, 1%, 3/5W, Metal Film . . .	2322 156 21503
3108	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220	3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3109	10k, 5%, 1/10W, Metal Film	4835 111 37216	3469	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
3122	220k, 5%, 1/10W, Metal Film.	4835 111 37235	3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3123	75 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37276	3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703
3125	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890	3481	Res, 35K7, 1%, 3/5W, Metal Film. . .	2322 156 23573
3145	Res, 1K, 2%, 0,25W	4822 051 10102	3482	Res, 56K, 1%, 3/5W, Metal Film . . .	2322 156 25603
3155	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259	3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3201	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253	3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3203	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443	S 3485	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	S 3486	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3205	Res, 1K, 2%, 0,25W	4822 051 10102	S 3487	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3206	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	S 3488	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S 3490	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3209	22k, 5%, 1/10W, Metal Film	4835 111 37441	S 3491	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3212	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253	S 3492	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3213	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	3495	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272
3215	22k, 5%, 1/10W, Metal Film	4835 111 37441	3496	10k, 5%, 1/10W, Metal Film	4835 111 37216
3216	Zero ohm,.	4835 111 27056	3497	10k, 5%, 1/10W, Metal Film	4835 111 37216
3217	Res, 1M5, 5%, 1/8W, Metalized Glass.	2322 730 61155	3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3218	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S 3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225
3219	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	3503	10ohm, 120VAC, Positive Temperature C	
3220	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		oefficient	4835 116 47001
3225	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S 3505	Surge Protector.	2422 549 43073
3228	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S 3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3231	Zero ohm,.	4835 111 27056	S 3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333
3232	Zero ohm,.	4835 111 27056	S 3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102
3233	Zero ohm,.	4835 111 27056	3512	15k, 5%, 1/10W, Metal Film	4835 111 37458
3243	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184
3246	82k, 5%, 1/10W, Metal Film	4835 111 37277	3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204
3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S 3515	2.5 ohm, 20%, 3.6W, Negative Temperat	
3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		ure Coefficient.	2122 612 00023
3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340	3516	Res, 1K, 2%, 0,25W	4822 051 10102
3250	Zero ohm,.	4835 111 27056	3517	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3251	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S 3518	Res, 0R22, 5%, 3W, Metal Film. . . .	2120 106 90548
3252	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	3520	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3253	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	3521	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443
3257	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S 3525	33 ohm, 5%, 1/3W, Metal Film	4835 116 57665
3258	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	3528	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3259	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	3529	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	3530	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046	3532	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	3534	15k, 5%, 1/10W, Metal Film	4835 111 37458
3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046	3536	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	3537	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046	S 3542	4.7 Megohm, 5%, 1/2W, Metal Film . .	4835 116 57009
S 3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109	3570	15k, 5%, 1/10W, Metal Film	4835 111 37458
S 3341	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483	3571	Res, 150K, 1%, 3/5W, Metal Film. . .	2322 156 21504
S 3342	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483	3573	Res, 2K, 1%, 1/10W, Metalized Glass.	2120 108 92657
3343	1.5k, 20%, 1/2W, Carbon Composition.	4835 110 47034	3574	33k, 5%, 1/10W, Metal Film	4835 111 37248
3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290	3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010

S = Safety Part Be sure to use exact replacement part.

29LL690121 (continued)

3577	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3578	Res, 1K, 2%, 0,25W	4822 051 10102	
3579	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451	
3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3592	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3594	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3595	68k, 5%, 1/6W, Carbon Film	4835 111 37205	
3596	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3597	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3598	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3599	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3607	8.2k, 5%, 1/8W, Inline Package . . .	4835 111 97046	
3608	2.2k, 5%, 1/8W, Inline Package . . .	4835 111 97049	
3609	2.2k, 5%, Resistor Network	2120 108 93868	
3611	Res, 1K, 2%, 0,25W	4822 051 10102	
3612	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3613	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3615	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3617	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3619	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3629	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259	
3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3631	27k, 5%, 1/10W, Metal Film	4835 111 37442	
S 3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63479	
3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210	
3634	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3635	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3636	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3637	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3653	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3654	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3655	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3662	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3663	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3664	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3665	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3666	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376	
3667	27k, 5%, 1/10W, Metal Film	4835 111 37442	
3672	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3673	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3674	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231	
3675	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3676	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3677	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3680	680 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37271	
3681	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3682	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3683	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3684	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3841	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3842	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3843	47k, 5%, 1/10W, Metal Film	4835 111 37445	
3844	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259	
3845	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259	
3850	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810	
3951	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3953	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272	
3954	1.5k, 5%, 1/10W, Metal Film.	4835 111 37437	
3955	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
3956	1.5k, 5%, 1/10W, Metal Film.	4835 111 37437	
3957	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
4001	Zero ohm,.	4835 111 27056	
4002	Zero ohm,.	4835 111 27056	
4004	Zero ohm,.	4835 111 27056	
4007	Zero ohm,.	4835 111 27056	
4009	Zero ohm,.	4835 111 27056	
4010	Zero ohm,.	4835 111 27056	
4011	Zero ohm,.	4835 111 27056	
4012	Zero ohm,.	4835 111 27056	
4013	Zero ohm,.	4835 111 27056	
4020	Zero ohm,.	4835 111 27056	
4051	Zero ohm,.	4835 111 27056	
4100	Zero ohm,.	4835 111 27056	
4101	Zero ohm,.	4835 111 27056	
4102	Zero ohm,.	4835 111 27056	
4103	Zero ohm,.	4835 111 27056	
4143	Zero ohm,.	4835 111 27056	
4144	Zero ohm,.	4835 111 27056	
4203	Zero ohm,.	4835 111 27056	
4207	Zero ohm,.	4835 111 27056	
4212	Zero ohm,.	4835 111 27056	
4214	Zero ohm,.	4835 111 27056	
4215	Zero ohm,.	4835 111 27056	
4216	Zero ohm,.	4835 111 27056	
4501	Zero ohm,.	4835 111 27056	
4602	Zero ohm,.	4835 111 27056	
4650	Zero ohm,.	4835 111 27056	
4651	Zero ohm,.	4835 111 27056	
4652	Zero ohm,.	4835 111 27056	
4654	Zero ohm,.	4835 111 27056	
4655	Zero ohm,.	4835 111 27056	
4684	Zero ohm,.	4835 111 27056	
4687	Zero ohm,.	4835 111 27056	
4831	Zero ohm,.	4835 111 27056	
4832	Zero ohm,.	4835 111 27056	
4833	Zero ohm,.	4835 111 27056	
4902	Zero ohm,.	4835 111 27056	
4903	Zero ohm,.	4835 111 27056	
4904	Zero ohm,.	4835 111 27056	
4905	Zero ohm,.	4835 111 27056	
4909	Zero ohm,.	4835 111 27056	
4911	Zero ohm,.	4835 111 27056	
4912	Zero ohm,.	4835 111 27056	
4914	Zero ohm,.	4835 111 27056	
4957	Zero ohm,.	4835 111 27056	
4999	Zero ohm,.	4835 111 27056	
5000	Coil, 5u6.	3198 018 25680	
5004	Coil, 820n	2422 535 97314	
5101	Coil, 5u6.	3198 018 15680	
5201	Coil, 22u.	3198 018 22290	
5202	Coil, 6u8.	3198 018 16880	
5342	22uH., 10%, Coil, Peaking.	4835 157 67069	
S 5445	Transformer, L.O.T., models ending in C101, C121, and C125	2422 531 02327	
S 5445	Transformer, L.O.T., models ending in C221 and C225.	3128 138 20941	
5451	Coil, 27u.	2422 535 96614	
5457	Coil, Linear Correction.	3128 138 53241	
5461	Transformer.	3128 138 33811	
5480	Coil, 27u.	2422 535 97334	
5480	Coil, 39u.	2422 535 97336	
5480	33uH., Peaking Coil, only in 25. . .	4835 157 58205	
S 5500	Filter, Mains, 5mH, 2A	2422 549 43432	
5516	100uH., Coil	4835 157 67078	
5518	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5521	Coil, 2u2.	3198 018 12280	
5540	Coil, 4u7.	3198 018 14780	
S 5545	Transfomer,.	2422 531 02314	
5551	27uH., 5%, Coil, Peaking	4835 157 67052	
5552	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5572	100uH., Coil	4835 157 67078	
5573	100uH., Coil	4835 157 67078	
5575	100uH., Coil	4835 157 67078	
5576	100uH., Coil	4835 157 67078	
5577	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5600	Coil, 8u2.	3198 018 18280	
5601	Coil, 8u2.	3198 018 18280	
5620	Coil, 6u8.	3198 018 16880	
5821	Coil, 100u	3198 018 21010	
5831	Coil, 12u.	3198 018 21290	
5832	Coil, 12u.	3198 018 21290	
5833	Coil, 12u.	3198 018 11290	
6008	Zener, 33 Volt BZX79-C33	4835 130 37904	
6113	Zener Diode, 6.8 volt.	9340 386 40115	
6125	Zener Diode, 6.8 volt.	9340 386 40115	
6211	Diode, 1N4148.	4835 130 37048	
6212	Diode, 1N4148.	4835 130 37048	
6213	Diode, 1N4148.	4835 130 37048	
6331	Diode.	4835 130 37294	
6333	Diode.	4835 130 37294	
6335	Diode.	4835 130 37294	
6401	Diode.	4835 130 37094	
6402	Zener, 33 Volt, BZX79-C33.	4835 130 37904	
6403	Diode.	4835 130 37094	
6404	Diode.	4835 130 37094	
6449	Diode, 1N4148.	4835 130 37048	
6450	Diode, 1N4148.	4835 130 37048	
6460	Diode, Rect, BY228/20	9336 215 80112	
6463	Diode, 1N4148.	4835 130 37048	
6464	Zener Diode, 6.2 volt.	9337 242 70133	
6465	Diode, BYD33J.	4835 130 37094	
6466	Diode, BYD33J.	4835 130 37094	
6480	Diode, Zener	4835 130 37947	
6481	Diode, 1N4148.	4835 130 37048	
6485	Diode, BYD33J.	4835 130 37094	
6486	Diode, EGP20DL-530	4835 130 37919	
6487	Diode.	4835 130 37094	
6488	Diode, Rect, BYV27-200.	9322 126 72673	
6490	Diode, Rect, BYV27-200.	9322 126 72673	
6505	Diode, Bridge Rect, GBU6JL-7002 . .	9322 138 08667	
6507	Diode, BYD33J.	4835 130 37094	
6508	Diode, BYD33J.	4835 130 37094	
6510	Zener Diode, 20 volt	9331 178 60133	
6511	Diode, BYV95C.	4835 130 37052	

S = Safety Part Be sure to use exact replacement part.

29LL690121 (continued)

6512	Diode, Rect, BY228/20	4822 130 41275
6513	Diode, Rect, BY228/20	4822 130 41275
6514	Zener, 18 Volt, BZX79-C18.	4835 130 37908
6540	Diode.	4835 130 37294
6550	Diode, Rect, BY229X-800	9340 380 30127
6560	Diode, EGP20DL-530	4835 130 37919
6570	Diode, EGP20DL-530	4835 130 37919
6582	Diode, EGP20DL-530	4835 130 37919
6584	Diode, 1N4148.	4835 130 37048
6585	Diode, 1N4148.	4835 130 37048
6590	Diode, EGP20DL-530	4835 130 37919
6591	Diode, BAS216.	4835 130 37905
6601	Diode, Zener	4835 130 37684
6606	Zener, 4.7 Volt, BZX79-C4V7.	4835 130 37005
6607	Zener, 6.8 Volt, BZX79-C6V8.	4835 130 37945
6690	LED, LTL-307P.	4835 130 97096
6831	Diode, BAS216.	4835 130 37905
6951	Diode, BAS216.	4835 130 37905
6961	Diode, BAS216.	4835 130 37905
7134	Transistor, BC547B	4835 130 47055
7250	IC,.	9352 620 26112
7251	IC, LM317T	9337 220 80682
7254	Transistor, NPN, BC847B.	4822 130 60511
7256	Transistor, NPN, BC847B.	4822 130 60511
7258	Transistor, NPN, BC847B.	4822 130 60511
7263	Transistor, PNP, BC857B.	5322 130 60508
7266	Transistor, NPN, BC847B.	4822 130 60511
7330	IC,.	9352 184 10112
7401	IC,.	9322 121 47687
7460	Transistor, NPN, BU1508DX.	9340 170 50127
7461	Transistor, NPN, BF819	9335 354 50127
7462	Transistor, BC547B	4835 130 47055
7463	Transistor, BC557B	4835 130 47409
7480	IC,.	9322 028 93682
7481	Transistor, BC557B	4835 130 47409
7482	Transistor, PNP, BC857B.	5322 130 60508
7518	STH8NA60FI SMPS FET	9322 068 92687
7518	STH10NC60FI SMPS FET.	9322 155 66687
7520	IC, MC44603A	4835 209 88537
7570	IC,.	9337 711 00676
S 7581	Coupler, TCDT1101G	9338 431 30682
7590	Transistor, NPN, BC847B.	4822 130 60511
7591	Transistor, NPN, BC847B.	4822 130 60511
7592	Transistor, NPN, BC847B.	4822 130 60511
7600	IC, SAA5543PS/M4/1046 L90US1-1.4 . .	4835 310 57477
7601	IC, ST24W04B6.	9322 097 23682
7603	Transistor, NPN, BC337	9331 796 00126
7604	Transistor, NPN, BC847B.	4822 130 60511
7605	Transistor, NPN, BC847B.	4822 130 60511
7608	Transistor, NPN, BC847B.	4822 130 60511
7609	Transistor, NPN, BC847B.	4822 130 60511
7680	IR Receiver.	9322 127 53667
7833	IC,.	9322 136 54682
7950	IC,.	4835 209 88543
9423	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
CBA	00EMF850A002 Main Chassis Board Asm.	00EM F85 0A002

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Power Cord	3135 010 04731
S AC02	Anode Clip	4835 256 97264
AC03	Cabinet Back	3139 124 27321
AC04	Cabinet Front.	3139 137 53691
AC05	Chassis Guide.	3139 124 31381
AC06	Control Buttons.	3139 124 27371
S AC07	Convergence and Purity Assembly. . .	2422 549 43385
S AC08	CRT A68AJB82X.	4835 131 27167
S AC09	Coil, Degaussing	3121 218 62701
S AC09	Coil, Degaussing	3121 218 62711
AC11	Light Guide.	3139 124 26461
AC12	Nameplate.	4835 459 17546
AC13	Owner's Manual, English & Spanish (29 LL69 0121)	3135 015 10621
AC13	Owner's Manual, Spanish (29LL69 1121)	3135 015 10631
AC14	Knob, Power.	3139 124 29981
REMOTE	Remote Transmitter, RC282901/01. . .	3139 228 81441
AC16	Speaker, 5W, 16 ohm (2 Used)	2422 264 00333
S AC18	Yoke	3313 203 01242
AC19	Yoke Wedge (3 Used).	4835 535 27001
S AC20	AC Adapt, UL - IEC (26LL59 1121) . .	3135 010 03071
AC21	Battery, 1.5V AA, 2-Pack, (Not Shown	9299 000 10137
AC24	Spring	3139 121 26231

S = Safety Part Be sure to use exact replacement part.

29LL690221 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts	
0113	L9 SOPS HEATSINK	3139 121 62041
0119	DIODE HEATSINK L9.	3139 121 26691
0121	LINE HEATSINK (CINCH).	3139 121 61942
0122	L9L AUDIO HEATSINK (STERO)	3139 121 61952
S 0127	Holder, Fuse, 2 Pin.	3122 358 71251
0211	Connector, 2 Pin	2422 025 11196
0212	Connector, 2 Pin	2422 025 15396
0220	4 Pin Board Connector.	2422 025 04852
0221	Connector, 4 Pin	2422 025 15503
0222	Connector, 2 Pin	2422 025 10646
0223	Socket, Cinch, 6 Pin	2422 026 04827
0225	1 Pin Board Connector.	2422 034 20021
0226	1 Pin Board Connector.	2422 034 20021
0234	Connector, 4 Pin	2422 025 12479
S 0243	Connector, 6 Pin	2422 025 04854
0244	4 Pin Board Connector.	2422 025 04852
S 0245	Connector, 6 Pin	2422 025 04854
S 0254	CRT Socket (9 Pin)	2422 500 80022
0267	Connector, 3 Pin	2412 020 00725
1000	TUNER.	3139 147 16412
1003	45 MHz SAW, Filter,.	2422 549 42433
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807
1208	Crystal Resonator, 3.58MHz	2422 543 00832
S 1500	Fue, 4 A, 250V	2422 086 10905
S 1572	FUSE 1A 250V	2422 086 10779
S 1573	2.5 Amp Fuse, Radial,.	2422 086 10422
S 1580	Relay, 12V, 5A G5PA-1.	2422 132 07444
1600	Switch, Tactile.	2422 128 02742
1601	Switch, Tactile.	2422 128 02742
1602	Switch, Tactile.	2422 128 02742
1603	Switch, Tactile.	2422 128 02742
1606	Switch, Tactile.	2422 128 02742
1660	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488
1822	Crystal Resonator, 18MHz432, 12 Pin, HC49/U A	2422 543 00842
2001	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2002	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2003	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2004	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2011	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2101	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2102	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2103	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2104	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2111	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2112	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2115	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2201	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2205	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2208	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2209	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2211	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2212	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2213	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2214	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2215	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 15654
2220	Cap, 18p, 5%, 50V, Ceramic	3198 016 01890
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2222	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2226	Cap, 33u, 20%, 25V, Electrolytic . .	2020 021 90124
2227	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2247	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2248	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2249	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2330	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2340	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320
S 2343	Cap, 3n3, 10%, 2KV, Ceramic.	2020 558 90529
2345	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2401	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2402	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2404	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2405	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2407	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2409	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2420	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2426	Cap, 100n, 10%, 63V, Metalized Polyester.	2222 370 75104
2428	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2429	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2430	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2431	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2437	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2438	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2448	Cap, 33p, 5%, 500V, Ceramic.	2020 557 90192
2450	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91139
2451	Cap, 10n, 10%, 50V, Polyester. . . .	3198 014 01030
2456	Cap, 47n, 10%, 250V, Metalized Polyester.	2222 368 90176
2457	Cap, 390n, 5%, 250V, Metalized Polypropylene.	2222 479 90021
2458	Cap, 2u2, 20%, 100V, Electrolytic. .	2020 021 91331
2459	Cap, 680p, 10%, 500V, Ceramic. . . .	3198 019 46810
2461	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2462	Cap, 47n, 10%, 250V, Metalized Polyester.	2222 368 90176
S 2463	Cap, 680p, 10%, 2KV, Ceramic	2020 558 90485
S 2465	Cap, 10n, 5%, 1600V, Polypropylene .	2222 375 90154
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050
2473	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2481	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2482	Cap, 68n, 10%, 250V, Polyester . . .	2222 347 90234
2484	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2485	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2486	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2487	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2488	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2489	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2490	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2491	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810
2499	Cap, 220n, 10%, 100V, Metalized Polyester	2222 365 25224
2500	Cap, 470n, 20%, 275V, Polypropylene.	2222 336 29148
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2507	Cap, 1n5, 10%, 1KV, Ceramic.	3198 019 61520
2508	Cap, 470u, 20%, 200V, Electrolytic .	2020 024 90647
2511	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
2518	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2530	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 021 91147
2531	Cap, 1n, 2%, 50V, Polypropylene. . .	2020 310 90049
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2540	Cap, 100u, 20%, 25V, Electrolytic. .	2020 021 90547
S 2545	Cap, 1n5, 20%, v, Ceramic.	2020 554 90128
2550	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2551	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91358
2561	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2562	Cap, 220p, 10%, 1KV, Ceramic	3198 019 62210
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2571	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91353
2572	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2575	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2586	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2604	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2613	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2615	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2619	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2622	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2629	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2679	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2681	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2850	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810
2851	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2852	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2853	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2854	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020

S = Safety Part Be sure to use exact replacement part.

29LL690221 (continued)

2855	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380		3259	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
2856	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380		3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
2858	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790		3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	3198 013 01020
2859	Cap, 15p, 5%, 50V, Ceramic	3198 016 01590		3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
2860	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090		3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	3198 013 01020
2861	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
2862	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	3198 013 01020
2863	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	S	3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
2864	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	S	3341	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
2865	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	S	3342	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
2866	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3343	Res, 1K5, 20%, 1/2W, Carbon Film . .	3198 013 01520
2867	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
2868	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780		3345	VDR DC 1MA/50V S MAX 110V A . . .	2122 550 00152
2869	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
2870	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3401	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2871	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090		3402	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2872	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3403	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2874	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790		3405	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002
2875	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790		3406	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2877	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3407	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002
2882	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2883	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090		3409	Res, 1R5, 5%, 1/3W, Metal Film . . .	2306 204 03158
2884	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2887	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810		3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2888	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3420	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
2889	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2891	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390		3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840
2952	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606
2954	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3425	Res, 120K, 5%, 1/10W, Metalized Glass	2120 108 91716
2955	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3426	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3428	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3429	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3431	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
2960	Cap, 2u2, 20%, 25V, Electrolytic . .	3198 026 32220		3432	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090		3433	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090		3436	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090		3437	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3438	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
3013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020		3447	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720		3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3015	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230		3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810	S	3452	Res, 33 ohm, 5%, 2 1/2W, Metal Film.	3198 012 33390
3100	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510	S	3453	Res, 4R7, 5%, 5W, Wire Wound	2322 251 41478
3101	Res, 220K, 5%, 1/10W, Metalized Glass	3198 021 52240	S	3454	Res, 33K, 5%, 1 1/3W, Metal Film . .	2322 194 63333
3103	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3104	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030		3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510	S	3462	Res, 6K8, 5%, 5W, Metal Film	2322 257 41682
3108	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3109	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030		3464	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3122	Res, 220K, 5%, 1/10W, Metalized Glass	3198 021 52240	S	3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
3123	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590		3466	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903
				3467	Res, 14K, 1%, 3/5W, Metal Film . . .	2322 156 21403
3125	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890		3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3134	Jumper Wire/Staple	0322 179 00003		3469	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3145	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020		3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3155	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710		3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703
				3481	Res, 35K7, 1%, 3/5W, Metal Film. . .	2322 156 23573
3201	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910		3482	Res, 56K, 1%, 3/5W, Metal Film . . .	2322 156 25603
				3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3203	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310		3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
			S	3486	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	S	3487	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
3205	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	S	3488	Res, 4R7, 5%, 1/2W, Metal Film . . .	2306 207 03478
3206	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610	S	3490	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
			S	3491	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3492	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
3209	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230		3495	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3212	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910		3496	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
				3497	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3213	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610		3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
			S	3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225
3215	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230		3503	PTC DC ZPB 120V S 10R PM30 B . . .	2120 661 00019
3216	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	S	3505	Surge Protector.	2422 549 43073
3218	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	S	3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3219	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610	S	3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333
			S	3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102
3220	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010		3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3225	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040		3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010		3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204
3243	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	S	3515	2.5 ohm, 20%, 3.6W, Negative Temperat ure Coefficient.	2122 612 00023
3246	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230				
3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3517	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340	S	3518	Res, 0R22, 5%, 2 1/2W, Metal Film. .	3198 012 32270
3250	Res, Zero ohm, 'Chip' Jumper	3198 021 90020		3520	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3251	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040		3521	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3252	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220				
3253	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	S	3525	Res, 47 ohm, 5%, 1/3W, Metal Film. .	2306 204 03479
3257	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010		3528	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3258	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010		3529	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890

S = Safety Part Be sure to use exact replacement part.

29LL690221 (continued)

3530	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320	
3532	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3534	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530	
3536	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830	
3537	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
S 3542	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475	
3570	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530	
3571	Res, 150K, 1%, 3/5W, Metal Film. . .	2322 156 21504	
3573	Res, 2K, 1%, 1/8W, Metalized Glass .	2322 734 62002	
3574	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330	
3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3577	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3578	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3579	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002	
3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3592	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3594	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	
3595	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830	
3596	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3597	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3598	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3599	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	
3607	RST NETW RGLE 10X 8K2 PM5 B . . .	2120 108 93916	
3608	RST NETW RGLE 6X 2K2 PM5 B . . .	2120 108 93913	
3609	RST NETW RGLE 7X 2K2 PM5 B . . .	2120 108 93915	
3611	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3612	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3613	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3615	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3616	Jumper Wire/Staple	0322 179 00003	
3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3619	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3629	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710	
3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3631	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730	
S 3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790	
3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210	
3634	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	
3635	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	
3636	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	
3637	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3653	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3654	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3655	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3662	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3663	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220	
3664	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220	
3665	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3666	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620	
3667	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730	
3672	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3673	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3674	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820	
3675	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3676	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3677	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3680	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810	
3681	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3682	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220	
3683	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3684	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	
3841	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3842	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3843	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	
3844	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710	
3845	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710	
3850	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	
3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810	
3951	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	
3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3953	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820	
3954	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520	
3955	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
3956	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520	
3957	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4004	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4011	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4020	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4051	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4100	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4144	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4203	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4207	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4212	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4214	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4465	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4501	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4650	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4651	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4654	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4831	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4833	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4911	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4914	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4957	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4999	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
5000	Coil, 5u6.	3198 018 25680	
5004	Coil, 820n	2422 535 97314	
5101	Coil, 5u6.	3198 018 15680	
5201	Coil, 22u.	3198 018 22290	
5202	Coil, 6u8.	3198 018 16880	
5342	Coil, 22u.	3198 018 22290	
S 5445	Transformer, L.O.T., models ending in C221 and C225.	3128 138 20941	
5451	Coil, 27u.	2422 535 96614	
5457	Coil, Linear Correction.	3128 138 53241	
5461	TFM SIG SLOT UU-1522S WIRE B . . .	2422 531 02318	
5461	Transformer.	3128 138 33811	
5480	Coil, 39u.	2422 535 97336	
S 5500	Filter, Mains, 5mH, 2A	2422 549 43432	
5516	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5518	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5521	Coil, 2u2.	3198 018 12280	
5540	Coil, 4u7.	3198 018 14780	
S 5545	Transfomer,.	2422 531 02314	
5551	Coil, 27u.	2422 535 95366	
5552	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5572	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5573	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5575	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5576	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5577	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5600	Coil, 8u2.	3198 018 18280	
5601	Coil, 8u2.	3198 018 18280	
5620	Coil, 6u8.	3198 018 16880	
5821	Coil, 100u	3198 018 21010	
5831	Coil, 12u.	3198 018 21290	
5832	Coil, 12u.	3198 018 21290	
5833	Coil, 12u.	3198 018 11290	
6008	Zener Diode, 33 volt	3198 010 23390	
6113	Zener Diode, 6.8 volt.	9340 386 40115	
6125	Zener Diode, 6.8 volt.	9340 386 40115	
6211	Diode, Signal, 1N4148.	3198 010 10010	
6212	Diode, Signal, 1N4148.	3198 010 10010	
6213	Diode, Signal, 1N4148.	3198 010 10010	
6331	Diode, Signal, BAV21	3198 010 10070	
6333	Diode, Signal, BAV21	3198 010 10070	
6335	Diode, Signal, BAV21	3198 010 10070	
6401	Diode, Rect, BYD33D	9337 234 00133	
6402	Zener Diode, 33 volt	3198 010 23390	
6403	Diode, Rect, BYD33D	9337 234 00133	
6404	Zener Diode, 75 volt	9331 180 00133	
6449	Diode, Signal, 1N4148.	3198 010 10010	
6450	Diode, Signal, 1N4148.	3198 010 10010	
6460	Diode, Rect, BY228/20	9336 215 80112	
6463	Diode, Signal, 1N4148.	3198 010 10010	
6464	Zener Diode, 6.2 volt.	9331 668 30133	
6465	Diode, Rect, BYD33J	9337 234 20133	
6466	Diode, Rect, BYD33J	9337 234 20133	
6480	Zener Diode, 27 volt	3198 010 22790	
6481	Diode, Signal, 1N4148.	3198 010 10010	
6485	Diode, Rect, BYD33J	9337 234 20133	
6486	Diode, Rect, EGP20DL-5300	9322 100 13682	
6487	Diode, Rect, BYD33D	9337 234 00133	
6488	Diode, Rect, BYV27-200.	9322 126 72673	
6490	Diode, Rect, BYV27-200.	9322 126 72673	
6505	Diode, Bridge Rect, GBU6JL-7002 . .	9322 138 08667	
6507	Diode, Rect, BYD33J	9337 234 20133	
6508	Diode, Rect, BYD33J	9337 234 20133	
6510	Zener Diode, 20 volt	9331 178 60133	

S = Safety Part Be sure to use exact replacement part.

29LL690221 (continued)

6511	Diode, Rect, BYV95C	9335 001 80133	9231	Jumper Wire/Staple	0322 179 00003
6512	Diode, Rect, 1N5062	3198 010 10120	9232	Jumper Wire/Staple	0322 179 00003
6513	Diode, Rect, 1N5062	3198 010 10120	9233	Jumper Wire/Staple	0322 179 00003
6514	Zener Diode, 18 volt	3198 010 21890	9234	Jumper Wire/Staple	0322 179 00003
6540	Diode, Signal, BAV21	3198 010 10070	9236	Jumper Wire/Staple	0322 179 00003
6550	Diode, Rect, BY229X-800	9340 380 30127	9237	Jumper Wire/Staple	0322 179 00003
6560	Diode, Rect, EGP20DL-5300	9322 100 13682	9238	Jumper Wire/Staple	0322 179 00003
6570	Diode, Rect, EGP20DL-5300	9322 100 13682	9240	Jumper Wire/Staple	0322 179 00003
6582	Diode, Rect, EGP20DL-5300	9322 100 13682	9241	Jumper Wire/Staple	0322 179 00003
6584	Diode, Signal, 1N4148.	3198 010 10010	9242	Jumper Wire/Staple	0322 179 00003
6585	Diode, Signal, 1N4148.	3198 010 10010	9243	Jumper Wire/Staple	0322 179 00003
6590	Diode, Rect, EGP20DL-5300	9322 100 13682	9245	Jumper Wire/Staple	0322 179 00003
6591	Diode, Signal, BAS16WS	9322 031 99685	9301	Jumper Wire/Staple	0322 179 00003
6601	Zener Diode, 3.9 volt.	3198 010 23980	9401	Jumper Wire/Staple	0322 179 00003
6603	Jumper Wire/Staple	0322 179 00003	9402	Jumper Wire/Staple	0322 179 00003
6604	Jumper Wire/Staple	0322 179 00003	9403	Jumper Wire/Staple	0322 179 00003
6605	Jumper Wire/Staple	0322 179 00003	9404	Jumper Wire/Staple	0322 179 00003
6606	Zener Diode, 4.7 volt.	3198 010 24780	9407	Jumper Wire/Staple	0322 179 00003
6607	Zener Diode, 6.8 volt.	3198 010 26880	9408	Jumper Wire/Staple	0322 179 00003
6690	LED VS LTL-307P (LITO) B	9322 033 95682	9411	Jumper Wire/Staple	0322 179 00003
6831	Diode, Signal, BAS16WS	9322 031 99685	9414	Jumper Wire/Staple	0322 179 00003
6951	Diode, Signal, BAS16WS	9322 031 99685	9417	Jumper Wire/Staple	0322 179 00003
6961	Diode, Signal, BAS16WS	9322 031 99685	9419	Jumper Wire/Staple	0322 179 00003
7134	Transistor, NPN, BC547B.	3198 020 40030	9420	Jumper Wire/Staple	0322 179 00003
7250	IC,	9352 620 26112	9421	Jumper Wire/Staple	0322 179 00003
7251	IC, LM317T	9337 220 80682	9422	Jumper Wire/Staple	0322 179 00003
7254	Transistor, NPN, BC847B.	3198 010 42030	9424	Jumper Wire/Staple	0322 179 00003
7256	Transistor, NPN, BC847B.	3198 010 42030	9425	Jumper Wire/Staple	0322 179 00003
7258	Transistor, NPN, BC847B.	3198 010 42030	9427	Jumper Wire/Staple	0322 179 00003
7263	Transistor, PNP, BC857B.	3198 010 42150	9428	Jumper Wire/Staple	0322 179 00003
7266	Transistor, NPN, BC847B.	3198 010 42030	9460	Jumper Wire/Staple	0322 179 00003
7330	IC, TDA6107Q/N2.	9352 576 50112	9461	Jumper Wire/Staple	0322 179 00003
7401	IC,	9322 121 47687	9500	Jumper Wire/Staple	0322 179 00003
7460	Transistor, NPN, BU1508DX.	9340 170 50127	9501	Jumper Wire/Staple	0322 179 00003
7461	Transistor, NPN, BF819	9335 354 50127	9502	Jumper Wire/Staple	0322 179 00003
7462	Transistor, NPN, BC547B.	3198 020 40030	9503	Jumper Wire/Staple	0322 179 00003
7463	Transistor, PNP, BC557B.	3198 020 40110	9505	Jumper Wire/Staple	0322 179 00003
7480	IC,	9322 028 93682	9510	Jumper Wire/Staple	0322 179 00003
7481	Transistor, PNP, BC557B.	3198 020 40110	9511	Jumper Wire/Staple	0322 179 00003
7482	Transistor, PNP, BC857B.	3198 010 42150	9512	Jumper Wire/Staple	0322 179 00003
7518	STH10NC60FI SMPS FET.	9322 155 66687	9513	Jumper Wire/Staple	0322 179 00003
7520	IC,	9322 108 36682	9515	Jumper Wire/Staple	0322 179 00003
7570	IC,	9337 711 00676	9516	Jumper Wire/Staple	0322 179 00003
S 7581	Coupler, TCDT1101G	9338 431 30682	9517	Jumper Wire/Staple	0322 179 00003
7590	Transistor, NPN, BC847B.	3198 010 42030	9518	Jumper Wire/Staple	0322 179 00003
7591	Transistor, NPN, BC847B.	3198 010 42030	9526	Jumper Wire/Staple	0322 179 00003
7592	Transistor, NPN, BC847B.	3198 010 42030	9601	Jumper Wire/Staple	0322 179 00003
7600	IC,	9352 670 96112	9602	Jumper Wire/Staple	0322 179 00003
7601	IC, ST24W04B6.	9322 097 23682	9603	Jumper Wire/Staple	0322 179 00003
7603	Transistor, NPN, BC337	9331 796 00126	9604	Jumper Wire/Staple	0322 179 00003
7604	Transistor, NPN, BC847B.	3198 010 42030	9605	Jumper Wire/Staple	0322 179 00003
7605	Transistor, NPN, BC847B.	3198 010 42030	9606	Jumper Wire/Staple	0322 179 00003
7608	Transistor, NPN, BC847B.	3198 010 42030	9608	Jumper Wire/Staple	0322 179 00003
7609	Transistor, NPN, BC847B.	3198 010 42030	9609	Jumper Wire/Staple	0322 179 00003
7680	IR RECEIVER.	9322 154 48667	9610	Jumper Wire/Staple	0322 179 00003
7833	IC,	9322 136 54682	9611	Jumper Wire/Staple	0322 179 00003
7950	IC,	9351 861 80112	9612	Jumper Wire/Staple	0322 179 00003
7970	ISOPROPYL ALCOHOL.	1306 500 43201	9613	Jumper Wire/Staple	0322 179 00003
9001	Jumper Wire/Staple	0322 179 00003	9614	Jumper Wire/Staple	0322 179 00003
9003	Jumper Wire/Staple	0322 179 00003	9615	Jumper Wire/Staple	0322 179 00003
9005	Jumper Wire/Staple	0322 179 00003	9618	Jumper Wire/Staple	0322 179 00003
9011	Jumper Wire/Staple	0322 179 00003	9621	Jumper Wire/Staple	0322 179 00003
9012	Jumper Wire/Staple	0322 179 00003	9622	Jumper Wire/Staple	0322 179 00003
9105	Jumper Wire/Staple	0322 179 00003	9624	Jumper Wire/Staple	0322 179 00003
9126	Jumper Wire/Staple	0322 179 00003	9625	Jumper Wire/Staple	0322 179 00003
9132	Jumper Wire/Staple	0322 179 00003	9626	Jumper Wire/Staple	0322 179 00003
9140	Jumper Wire/Staple	0322 179 00003	9629	Jumper Wire/Staple	0322 179 00003
9200	Jumper Wire/Staple	0322 179 00003	9631	Jumper Wire/Staple	0322 179 00003
9202	Jumper Wire/Staple	0322 179 00003	9632	Jumper Wire/Staple	0322 179 00003
9203	Jumper Wire/Staple	0322 179 00003	9637	Jumper Wire/Staple	0322 179 00003
9204	Jumper Wire/Staple	0322 179 00003	9640	Jumper Wire/Staple	0322 179 00003
9205	Jumper Wire/Staple	0322 179 00003	9642	Jumper Wire/Staple	0322 179 00003
9206	Jumper Wire/Staple	0322 179 00003	9643	Jumper Wire/Staple	0322 179 00003
9207	Jumper Wire/Staple	0322 179 00003	9644	Jumper Wire/Staple	0322 179 00003
9208	Jumper Wire/Staple	0322 179 00003	9660	Jumper Wire/Staple	0322 179 00003
9209	Jumper Wire/Staple	0322 179 00003	9754	Jumper Wire/Staple	0322 179 00003
9210	Jumper Wire/Staple	0322 179 00003	9788	Jumper Wire/Staple	0322 179 00003
9211	Jumper Wire/Staple	0322 179 00003	9793	Jumper Wire/Staple	0322 179 00003
9214	Jumper Wire/Staple	0322 179 00003	9800	Jumper Wire/Staple	0322 179 00003
9215	Jumper Wire/Staple	0322 179 00003	9805	Jumper Wire/Staple	0322 179 00003
9216	Jumper Wire/Staple	0322 179 00003	9806	Jumper Wire/Staple	0322 179 00003
9217	Jumper Wire/Staple	0322 179 00003	9807	Jumper Wire/Staple	0322 179 00003
9218	Jumper Wire/Staple	0322 179 00003	9810	Jumper Wire/Staple	0322 179 00003
9220	Jumper Wire/Staple	0322 179 00003	9901	Jumper Wire/Staple	0322 179 00003
9221	Jumper Wire/Staple	0322 179 00003	9903	Jumper Wire/Staple	0322 179 00003
9222	Jumper Wire/Staple	0322 179 00003	9905	Jumper Wire/Staple	0322 179 00003
9225	Jumper Wire/Staple	0322 179 00003	9906	Jumper Wire/Staple	0322 179 00003
9226	Jumper Wire/Staple	0322 179 00003	9920	Jumper Wire/Staple	0322 179 00003
9227	Jumper Wire/Staple	0322 179 00003	9933	Jumper Wire/Staple	0322 179 00003
9228	Jumper Wire/Staple	0322 179 00003	9936	Jumper Wire/Staple	0322 179 00003
9229	Jumper Wire/Staple	0322 179 00003	9939	Jumper Wire/Staple	0322 179 00003
9230	Jumper Wire/Staple	0322 179 00003	9940	Jumper Wire/Staple	0322 179 00003

S = Safety Part Be sure to use exact replacement part.

29LL690221 (continued)

	9941	Jumper Wire/Staple	0322 179 00003
	9942	Jumper Wire/Staple	0322 179 00003
	9943	Jumper Wire/Staple	0322 179 00003
	9944	Jumper Wire/Staple	0322 179 00003
	9945	Jumper Wire/Staple	0322 179 00003
	9946	Jumper Wire/Staple	0322 179 00003
	9947	Jumper Wire/Staple	0322 179 00003
	9948	Jumper Wire/Staple	0322 179 00003
	9949	Jumper Wire/Staple	0322 179 00003
	9950	Jumper Wire/Staple	0322 179 00003
	9951	Jumper Wire/Staple	0322 179 00003
	9953	Jumper Wire/Staple	0322 179 00003
	9955	Jumper Wire/Staple	0322 179 00003
	9956	Jumper Wire/Staple	0322 179 00003
	9957	Jumper Wire/Staple	0322 179 00003
	9958	Jumper Wire/Staple	0322 179 00003
	9959	Jumper Wire/Staple	0322 179 00003
	9960	Jumper Wire/Staple	0322 179 00003
	9962	Jumper Wire/Staple	0322 179 00003
	9963	Jumper Wire/Staple	0322 179 00003
	9965	Jumper Wire/Staple	0322 179 00003
	9966	Jumper Wire/Staple	0322 179 00003
	9967	Jumper Wire/Staple	0322 179 00003
	9968	Jumper Wire/Staple	0322 179 00003
	9969	Jumper Wire/Staple	0322 179 00003
	9970	Jumper Wire/Staple	0322 179 00003
	9971	Jumper Wire/Staple	0322 179 00003
	9972	Jumper Wire/Staple	0322 179 00003
	9973	Jumper Wire/Staple	0322 179 00003
	9974	Jumper Wire/Staple	0322 179 00003
	9975	Jumper Wire/Staple	0322 179 00003
	9976	Jumper Wire/Staple	0322 179 00003
	9977	Jumper Wire/Staple	0322 179 00003
	9981	Jumper Wire/Staple	0322 179 00003
	9982	Jumper Wire/Staple	0322 179 00003
	9983	Jumper Wire/Staple	0322 179 00003
	9984	Jumper Wire/Staple	0322 179 00003
	9987	Jumper Wire/Staple	0322 179 00003
	9989	Jumper Wire/Staple	0322 179 00003
	9990	Jumper Wire/Staple	0322 179 00003
	9991	Jumper Wire/Staple	0322 179 00003
	9992	Jumper Wire/Staple	0322 179 00003
	9993	Jumper Wire/Staple	0322 179 00003
	CBA	313917889171 Main Chassis Board Asm.	3139 178 89171

Cabinet & Accessory Parts

		Cabinet & Accessory Parts	
S	AC01	Power Cord	3135 010 04731
	AC02	Clip, Anode Lead	3135 014 04471
	AC03	Cabinet Back	3139 124 27321
	AC04	Cabinet Front.	3139 137 53691
	AC05	Chassis Guide.	3139 124 31381
	AC06	Control Buttons.	3139 124 27371
S	AC07	Convergence and Purity Assembly. . .	2422 549 43385
S	AC08	CRT A68AJB82X.	9301 787 60472
S	AC09	Coil, Degaussing	2422 549 43967
	AC10	Holder, Degaussing (4 Used).	3135 013 01641
	AC11	Light Guide.	3139 124 26461
	AC12	Nameplate.	3135 015 03571
	AC13	Owner's Manual, English & Spanish (29 LL69 0121)	3135 015 10621
	AC14	Knob, Power.	3139 124 29981
	REMOTE	Remote Transmitter, RC282901/01. . .	3139 228 81441
	AC16	Speaker, 5W, 16 ohm (2 Used)	2422 264 00333
S	AC18	Yoke	3313 203 01242
	AC19	Yoke Wedge (3 used).	3135 013 00311
	AC21	Battery, 1.5V AA, 2-Pack, (Not Shown	9299 000 10137
	AC24	Spring	3139 121 26231

S = Safety Part Be sure to use exact replacement part.

CH1927C101 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts	
S 0127	3.15 Amp Fuse, ...	3122 358 72141
0152	Cable, DIP, 6 Pin, 400mm	3104 301 09421
0153	4 Pin Cable.	3104 301 09431
0212	Connector, 2 Pin	2422 025 15396
0214	Connector, 3 Pin	2422 025 16382
0215	Connector, 2 Pin,.	2422 025 16343
0216	Connector, 4 Pin	2422 025 15847
0219	Connector, 5 Pin	2422 025 15848
0220	4 Pin Board Connector.	2422 025 04852
0224	1 Pin Board Connector.	2422 034 20021
0228	1 Pin Board Connector.	2422 034 20021
0234	Connector, 4 Pin	2422 025 15847
0236	4 Pin Board Connector.	2422 025 16384
0237	Connector, 4 Pin	2422 025 12479
0238	5 Pin Board Connector.	2422 025 16387
S 0243	Connector, 6 Pin	2422 025 04854
0244	4 Pin Board Connector.	2422 025 04852
S 0245	Connector, 6 Pin	2422 025 04854
S 0254	CRT Socket (9 Pin)	2422 500 80022
0259	Connector, 3 Pin	2422 025 16383
0262	Connector, 4 Pin	2422 025 16385
0267	Connector, 3 Pin	2412 020 00725
1000	Tuner.	2422 542 90051
1001	Filter	2422 549 42501
1003	45 MHz SAW, Filter,.	2422 549 42433
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807
1208	Crystal Resonator.	4835 242 77276
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10869
S 1571	1 Amp, Radial Fuse,.	4835 253 97162
S 1572	1 Amp, Radial Fuse,.	4835 253 97162
S 1580	Relay, 12V	2422 132 07317
1600	Switch, Tactile.	2422 128 02742
1601	Switch, Tactile.	2422 128 02742
1602	Switch, Tactile.	2422 128 02742
1603	Switch, Tactile.	2422 128 02742
1606	Switch, Tactile.	2422 128 02742
1660	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488
1821	Ceramic Resonator.	4835 122 97102
2001	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2002	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2003	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2004	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2011	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2102	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2103	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2104	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2201	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2202	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2203	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2204	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2205	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2208	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2209	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2211	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2212	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2213	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2214	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2215	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 16654
2220	Cap, 18p, 5%, 50V, Ceramic	3198 016 01890
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2222	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2226	Cap, 33u, 20%, 25V, Electrolytic . .	2020 021 90124
2227	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2247	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2248	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2249	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2330	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2340	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320
S 2343	Cap, 3n3, 10%, 2KV, Ceramic.	2020 558 90529
2345	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2401	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2402	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2404	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2405	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2407	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2409	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2420	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2426	Cap, 100n, 10%, 63V, Metalized Polyes ter.	2222 370 75104
2428	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2429	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2430	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2431	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2437	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2438	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2448	Cap, 220p, 10%, 500V, Ceramic. . . .	3198 019 42210
2450	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91139
2451	Cap, 15n, 10%, 50V, Polyester. . . .	2020 300 90575
2451	0.01uF., 10%, 50V, Polyester, only 27	3198 138 20941
2456	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176
2457	Cap, 390n, 5%, 250V, Metalized Polypr opylene.	2222 479 90021
2458	Cap, 2u2, 20%, 100V, Electrolytic. .	2020 021 91331
2459	Cap, 680p, 10%, 500V, Ceramic. . . .	3198 019 46810
2461	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2462	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176
2463	680pF., 10%, 2KV, Ceramic.	4835 122 47584
S 2465	Cap, 10n, 5%, 1600V, Polypropylene .	2222 375 90154
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050
2473	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2481	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2482	Cap, 68n, 10%, 250V, Polyester . . .	2222 347 90234
2484	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2485	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2486	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2487	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2488	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2489	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2490	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2491	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810
2500	0.47uF., 250V, Polyester	4835 121 47569
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
S 2507	Cap, 1n5, 10%, 1KV, Ceramic.	2020 558 90443
2508	Cap, 470u, 20%, 200V, Electrolytic .	2020 024 90647
S 2511	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
S 2518	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2530	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 021 91147
2531	Cap, 1n, 2%, 50V, Polypropylene. . .	2020 310 90049
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2540	Cap, 100u, 20%, 25V, Electrolytic. .	2020 021 90547
S 2545	1500pF., 250VAC, Ceramic	4835 122 47621
S 2550	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2551	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91358
2561	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
S 2562	Cap, 220p, 10%, 1KV, Ceramic	2020 558 90424
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2572	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2575	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2577	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2586	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2604	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2613	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2615	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2619	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2622	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2629	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2679	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2681	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2821	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280
2823	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720

S = Safety Part Be sure to use exact replacement part.

CH1927C101 (continued)

2825	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080		3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
2826	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090		3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046
2827	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	S	3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
2828	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	S	3341	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483
2829	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	S	3342	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483
2830	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280		3343	1.5k, 20%, 1/2W, Carbon Composition.	4835 110 47034
2831	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
2832	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280	S	3345	VDR, DC, 1mA, 50V, MAX 115V	2322 593 13507
2833	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280		3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
2834	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780		3401	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2835	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3402	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2836	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3403	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2837	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740		3405	Res, 1K8, 1%, 3/5W, Metal Film . . .	2322 156 21802
2838	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3406	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2839	Cap, 1u, 5%, 50V, Metalized Polyester	2020 308 90124		3407	Res, 1K8, 1%, 3/5W, Metal Film . . .	2322 156 21802
2840	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2841	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3409	1.5 ohm, 5%, 1/3W, Metal Film. . . .	4835 116 57664
2842	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2844	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3420	470k, 5%, 1/10W, Metal Film.	4835 111 37407
2845	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2913	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280		3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2914	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330		3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840
2915	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606
2916	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648		3425	Res, 120K, 5%, 1/10W, Metalized Glass	2120 108 91716
2917	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3426	39k, 5%, 1/10W, Metal Film	4835 111 27051
2918	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330		3428	22k, 5%, 1/10W, Metal Film	4835 111 37441
2919	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3429	27k, 5%, 1/10W, Metal Film	4835 111 37442
2920	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648		3431	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
2921	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3432	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
2931	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280		3436	Res, 1K, 2%, 0,25W	4822 051 10102
2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3437	10k, 5%, 1/10W, Metal Film	4835 111 37216
2952	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3438	33k, 1/4W, Carbon Film	4835 110 57375
2954	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
2955	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3447	10k, 5%, 1/10W, Metal Film	4835 111 37216
2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	S	3452	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63229
2960	Cap, 220u, 20%, 50V, Electrolytic. .	3198 026 52210	S	3453	Res, 4R7, 5%, 5W, Wire Wound	2322 251 41478
2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090	S	3454	Res, 33K, 5%, 1 1/3W, Metal Film . .	2322 194 63333
2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090		3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090		3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3462	Res, 6K8, 5%, 5W, Metal Film	2322 257 41682
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3010	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610		3464	Res, 1K, 2%, 0,25W	4822 051 10102
3013	Zero ohm,.	4835 111 27056	S	3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
3014	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052		3466	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903
3015	22k, 5%, 1/10W, Metal Film	4835 111 37441		3467	Res, 14K, 1%, 3/5W, Metal Film . . .	2322 156 21403
3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810		3467	Res, 15K, 1%, 3/5W, Metal Film . . .	2322 156 21503
3021	Res, 1K, 2%, 0,25W	4822 051 10102		3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3103	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3469	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
3104	10k, 5%, 1/10W, Metal Film	4835 111 37216		3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3108	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703
3109	10k, 5%, 1/10W, Metal Film	4835 111 37216		3481	Res, 35K7, 1%, 3/5W, Metal Film. . .	2322 156 23573
3123	75 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37276		3482	Res, 56K, 1%, 3/5W, Metal Film . . .	2322 156 25603
3200	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3201	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253		3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3203	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443	S	3485	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	S	3486	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3205	Res, 1K, 2%, 0,25W	4822 051 10102	S	3487	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3206	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	S	3488	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3490	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3209	22k, 5%, 1/10W, Metal Film	4835 111 37441	S	3491	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3212	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253	S	3492	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3213	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3495	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272
3215	22k, 5%, 1/10W, Metal Film	4835 111 37441		3496	10k, 5%, 1/10W, Metal Film	4835 111 37216
3216	Zero ohm,.	4835 111 27056		3497	10k, 5%, 1/10W, Metal Film	4835 111 37216
3217	Res, 1M5, 5%, 1/8W, Metalized Glass.	2322 730 61155		3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3218	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225
3219	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3503	10ohm, 120VAC, Positive Temperature C	
3220	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432			oefficient	4835 116 47001
3225	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S	3505	Surge Protector.	2422 549 43073
3228	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3231	Zero ohm,.	4835 111 27056	S	3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333
3232	Zero ohm,.	4835 111 27056	S	3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102
3233	Zero ohm,.	4835 111 27056		3512	15k, 5%, 1/10W, Metal Film	4835 111 37458
3243	1.2k, 5%, 1/10W, Metal Film.	4835 111 27042		3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184
3246	82k, 5%, 1/10W, Metal Film	4835 111 37277		3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204
3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3515	2.5 ohm, 20%, 3.6W, Negative Temperat	
3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010			ure Coefficient.	2122 612 00023
3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340		3516	Res, 1K, 2%, 0,25W	4822 051 10102
3250	Zero ohm,.	4835 111 27056		3517	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3251	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S	3518	Res, 0R22, 5%, 3W, Metal Film. . . .	2120 106 90548
3252	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		3520	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3253	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		3521	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443
3257	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3525	33 ohm, 5%, 1/3W, Metal Film	4835 116 57665
3258	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3528	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3259	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3529	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3530	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3532	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3534	15k, 5%, 1/10W, Metal Film	4835 111 37458
3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3536	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830

S = Safety Part Be sure to use exact replacement part.

CH1927C101 (continued)

	3537	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
S	3542	4.7 Megohm, 5%, 1/2W, Metal Film . .	4835 116 57009
	3570	15k, 5%, 1/10W, Metal Film	4835 111 37458
	3571	Res, 150K, 1%, 3/5W, Metal Film. . .	2322 156 21504
	3573	Res, 2K, 1%, 1/10W, Metalized Glass.	2120 108 92657
	3574	33k, 5%, 1/10W, Metal Film	4835 111 37248
	3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3577	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3578	Res, 1K, 2%, 0,25W	4822 051 10102
	3579	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
	3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3592	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3594	22k, 5%, 1/10W, Metal Film	4835 111 37441
	3595	68k, 5%, 1/6W, Carbon Film	4835 111 37205
	3596	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3597	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
	3598	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3599	22k, 5%, 1/10W, Metal Film	4835 111 37441
	3607	8.2k, 5%, 1/8W, Inline Package . . .	4835 111 97046
	3608	2.2k, 5%, 1/8W, Inline Package . . .	4835 111 97049
	3609	2.2k, 5%, Resistor Network	2120 108 93868
	3611	Res, 1K, 2%, 0,25W	4822 051 10102
	3612	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3613	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3615	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3617	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
	3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3619	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
	3629	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259
	3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
	3631	27k, 5%, 1/10W, Metal Film	4835 111 37442
S	3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63479
	3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210
	3634	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
	3635	22k, 5%, 1/10W, Metal Film	4835 111 37441
	3636	22k, 5%, 1/10W, Metal Film	4835 111 37441
	3637	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
	3649	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
	3650	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
	3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3653	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3654	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
	3655	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
	3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710
	3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3662	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
	3663	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
	3664	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
	3665	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
	3666	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376
	3667	27k, 5%, 1/10W, Metal Film	4835 111 37442
	3672	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
	3673	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3674	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259
	3675	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510
	3676	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510
	3677	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510
	3680	680 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37271
	3681	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
	3682	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
	3683	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
	3684	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
	3685	220 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37371
	3687	220 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37371
	3821	15k, 5%, 1/10W, Metal Film	4835 111 37458
	3822	1.2k, 5%, 1/10W, Metal Film.	4835 111 27042
	3823	100k, 5%, 1/10W, Metal Film.	4835 111 37434
	3824	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
	3825	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
	3826	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
	3827	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3828	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3829	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272
	3830	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272
	3831	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198 011 03310
	3832	47 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37262
	3908	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710
	3909	Res, 1K, 2%, 0,25W	4822 051 10102
	3910	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376
	3911	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230
	3912	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
	3913	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
	3914	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820
	3915	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231
	3916	220 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37371
	3917	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
	3918	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
	3919	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376
	3920	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231
	3921	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230
	3922	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820
	3923	220 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37371
	3924	39k, 5%, 1/10W, Metal Film	4835 111 27051
	3925	39k, 5%, 1/10W, Metal Film	4835 111 27051
	3926	39k, 5%, 1/10W, Metal Film	4835 111 27051
	3929	39k, 5%, 1/10W, Metal Film	4835 111 27051
	3930	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710
	3931	Res, 1K, 2%, 0,25W	4822 051 10102
	3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810
	3951	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
	3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3953	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3955	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
	3957	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
	4001	Zero ohm,.	4835 111 27056
	4002	Zero ohm,.	4835 111 27056
	4004	Zero ohm,.	4835 111 27056
	4007	Zero ohm,.	4835 111 27056
	4009	Zero ohm,.	4835 111 27056
	4010	Zero ohm,.	4835 111 27056
	4011	Zero ohm,.	4835 111 27056
	4012	Zero ohm,.	4835 111 27056
	4013	Zero ohm,.	4835 111 27056
	4020	Zero ohm,.	4835 111 27056
	4051	Zero ohm,.	4835 111 27056
	4100	Zero ohm,.	4835 111 27056
	4101	Zero ohm,.	4835 111 27056
	4102	Zero ohm,.	4835 111 27056
	4103	Zero ohm,.	4835 111 27056
	4143	Zero ohm,.	4835 111 27056
	4144	Zero ohm,.	4835 111 27056
	4203	Zero ohm,.	4835 111 27056
	4207	Zero ohm,.	4835 111 27056
	4212	Zero ohm,.	4835 111 27056
	4214	Zero ohm,.	4835 111 27056
	4215	Zero ohm,.	4835 111 27056
	4216	Zero ohm,.	4835 111 27056
	4501	Zero ohm,.	4835 111 27056
	4602	Zero ohm,.	4835 111 27056
	4650	Zero ohm,.	4835 111 27056
	4651	Zero ohm,.	4835 111 27056
	4652	Zero ohm,.	4835 111 27056
	4654	Zero ohm,.	4835 111 27056
	4655	Zero ohm,.	4835 111 27056
	4684	Zero ohm,.	4835 111 27056
	4687	Zero ohm,.	4835 111 27056
	4831	Zero ohm,.	4835 111 27056
	4832	Zero ohm,.	4835 111 27056
	4833	Zero ohm,.	4835 111 27056
	4902	Zero ohm,.	4835 111 27056
	4903	Zero ohm,.	4835 111 27056
	4904	Zero ohm,.	4835 111 27056
	4905	Zero ohm,.	4835 111 27056
	4909	Zero ohm,.	4835 111 27056
	4911	Zero ohm,.	4835 111 27056
	4912	Zero ohm,.	4835 111 27056
	4914	Zero ohm,.	4835 111 27056
	4957	Zero ohm,.	4835 111 27056
	4999	Zero ohm,.	4835 111 27056
	5000	Coil, 5u6.	3198 018 25680
	5004	Coil, 820n	2422 535 97314
	5201	Coil, 22u.	3198 018 22290
	5202	Coil, 6u8.	3198 018 16880
	5342	22uH., 10%, Coil, Peaking.	4835 157 67069
S	5445	Transformer, L.O.T., models ending in C101, C121, and C125	2422 531 02327
S	5445	Transformer, L.O.T., models ending in C221 and C225.	3128 138 20941
	5451	Coil, 27u.	2422 535 96614
	5457	Coil, Linear Correction.	3128 138 53241
	5461	Transformer.	3128 138 33811
	5480	Coil, 27u.	2422 535 97334
	5480	Coil, 39u.	2422 535 97336
	5480	33uH., Peaking Coil, only in 25. . .	4835 157 58205
S	5500	Filter, Mains, 5mH, 2A	2422 549 43432
	5516	100uH., Coil	4835 157 67078
	5518	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
	5521	Coil, 2u2.	3198 018 12280
	5540	Coil, 4u7.	3198 018 14780
S	5545	Transfomer,.	2422 531 02314
	5551	27uH., 5%, Coil, Peaking	4835 157 67052
	5552	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
	5572	100uH., Coil	4835 157 67078
	5573	100uH., Coil	4835 157 67078
	5576	100uH., Coil	4835 157 67078
	5577	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
	5600	Coil, 8u2.	3198 018 18280
	5601	Coil, 8u2.	3198 018 18280
	5620	Coil, 6u8.	3198 018 16880
	5821	Coil, 100u	3198 018 21010

S = Safety Part Be sure to use exact replacement part.

CH1927C101 (continued)

5822	Coil, 18u.	3198 018 21890
6008	Zener, 33 Volt BZX79-C33	4835 130 37904
6113	Zener Diode, 6.8 volt.	9340 386 40115
6211	Diode, 1N4148.	4835 130 37048
6212	Diode, 1N4148.	4835 130 37048
6213	Diode, 1N4148.	4835 130 37048
6331	Diode.	4835 130 37294
6333	Diode.	4835 130 37294
6335	Diode.	4835 130 37294
6401	Diode.	4835 130 37094
6402	Zener, 33 Volt, BZX79-C33.	4835 130 37904
6403	Diode.	4835 130 37094
6404	Diode.	4835 130 37094
6449	Diode, 1N4148.	4835 130 37048
6450	Diode, 1N4148.	4835 130 37048
6460	Diode, Rect, BY228/20	9336 215 80112
6463	Diode, 1N4148.	4835 130 37048
6464	Zener, 6.2 Volt, BZX79-B6V2.	4835 130 37948
6465	Diode, BYD33J.	4835 130 37094
6466	Diode, BYD33J.	4835 130 37094
6480	Diode, Zener	4835 130 37947
6481	Diode, 1N4148.	4835 130 37048
6485	Diode, BYD33J.	4835 130 37094
6486	Diode, EGP20DL-530	4835 130 37919
6487	Diode.	4835 130 37094
6488	Diode, Rect, BYV27-200.	9322 126 72673
6490	Diode, Rect, BYV27-200.	9322 126 72673
6505	Diode, Bridge Rect, GBU6JL-7002	9322 138 08667
6507	Diode, BYD33J.	4835 130 37094
6508	Diode, BYD33J.	4835 130 37094
6510	Zener Diode, 20 volt	9331 178 60133
6511	Diode, BYV95C.	4835 130 37052
6512	Diode, Rect, BY228/20	4822 130 41275
6513	Diode, Rect, BY228/20	4822 130 41275
6514	Zener, 18 Volt, BZX79-C18.	4835 130 37908
6540	Diode.	4835 130 37294
6550	Diode, Rect, BY229X-800	9340 380 30127
6560	Diode, EGP20DL-530	4835 130 37919
6580	Diode, Rect, SB140.	9339 577 60673
6584	Diode, 1N4148.	4835 130 37048
6585	Diode, 1N4148.	4835 130 37048
6591	Diode, BAS216.	4835 130 37905
6601	Diode, Zener	4835 130 37684
6602	Diode, 1N4148.	4835 130 37048
6603	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
6604	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
6605	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
6606	Zener, 4.7 Volt, BZX79-C4V7.	4835 130 37005
6607	Zener, 6.8 Volt, BZX79-C6V8.	4835 130 37945
6690	LED, LTL-307P.	4835 130 97096
6821	Zener Diode, 9.1 volt.	9331 177 80133
6822	Fixed Coil	4835 130 37048
6951	Diode, BAS216.	4835 130 37905
6961	Diode, BAS216.	4835 130 37905
7250	IC,.	9352 620 26112
7251	IC, LM317T	9337 220 80682
7254	Transistor, NPN, BC847B.	4822 130 60511
7256	Transistor, NPN, BC847B.	4822 130 60511
7258	Transistor, NPN, BC847B.	4822 130 60511
7263	Transistor, PNP, BC857B.	5322 130 60508
7266	Transistor, NPN, BC847B.	4822 130 60511
7330	IC,.	9352 184 10112
7401	IC,.	9322 121 47687
7460	Transistor, NPN, BU1508DX.	9340 170 50127
7461	Transistor, NPN, BF819	9335 354 50127
7462	Transistor, BC547B	4835 130 47055
7463	Transistor, BC557B	4835 130 47409
7480	IC,.	9322 028 93682
7481	Transistor, BC557B	4835 130 47409
7482	Transistor, PNP, BC857B.	5322 130 60508
7518	STH8NA60FI SMPS FET	9322 068 92687
7518	STH10NC60FI SMPS FET.	9322 155 66687
7520	IC, MC44603A	4835 209 88537
7570	IC,.	9337 711 00676
S 7581	Coupler, TCDT1101G	9338 431 30682
7590	Transistor, NPN, BC847B.	4822 130 60511
7591	Transistor, NPN, BC847B.	4822 130 60511
7592	Transistor, NPN, BC847B.	4822 130 60511
7600	IC, SAA5543-PS/M4/0167 L9 v3.2 (Commercial Models - NON Pro Plus)	9352 670 84112
7600	IC, SAA5565-PS/M3/0195 L9 v3.2 (Commercial Models - Pro Plus Models).	9352 673 97112
7601	IC, ST24W16B6, commercial models only	9322 095 35682
7603	Transistor, NPN, BC337	9331 796 00126
7604	Transistor, NPN, BC847B.	4822 130 60511
7605	Transistor, NPN, BC847B.	4822 130 60511
7608	Transistor, NPN, BC847B.	4822 130 60511
7609	Transistor, NPN, BC847B.	4822 130 60511
7680	IR Receiver.	9322 127 53667
7821	IC,.	9352 374 70112
7822	IC, HEF4052BT.	9333 729 50653
7823	Transistor, NPN, BC337-25.	3198 020 43530
7904	Transistor, NPN, BC847B.	4822 130 60511
7905	Transistor, NPN, BC847B.	4822 130 60511
7906	Transistor, NPN, BC847B.	4822 130 60511
7908	Transistor, NPN, BC847B.	4822 130 60511
7909	Transistor, NPN, BC847B.	4822 130 60511
7910	Transistor, NPN, BC847B.	4822 130 60511
7951	IC,.	4822 209 13706
9423	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
CBA	00EMF893A102 Main Chassis Board Asm.	00EM F89 3A102

A10680 Channel One Card Parts

	A10680 Channel One Card Parts	
CBA	00A10680B002 Channel One Card Asm.	00A1 068 0B002
C01	1000pF., 10%, 50V, Polyester	4835 121 47662
C02	0.1uF., 50V, Polyester	4835 121 47658
C03	1pF., 25%, 50V, Ceramic.	4835 122 47665
C04	1000pF., 10%, 50V, Polyester	4835 121 47662
C05	0.01uF., 10%, 50V, Polyester	4835 121 47657
C06	1000pF., 10%, 50V, Polyester	4835 121 47662
C07	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
C08	0.1uF., 50V, Polyester	4835 121 47658
C09	0.1uF., 50V, Polyester	4835 121 47658
C10	0.1uF., 50V, Polyester	4835 121 47658
C11	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
C12	0.1uF., 50V, Polyester	4835 121 47658
C13	47pF., 5%, 50V, Ceramic.	4835 122 47608
C14	12pF., 5%, 50V, Ceramic.	4835 122 47667
C15	4.7pF., 25%, 50V, Ceramic.	4835 122 47666
C16	4.7uF., 20%, 50V, Electrolytic	4835 124 47506
C17	0.1uF., 50V, Polyester	4835 121 47658
C18	Cap, 100p, 5%, 50V, Ceramic.	2020 552 90603
C19	0.01uF., 10%, 50V, Polyester	4835 121 47657
C20	0.01uF., 10%, 50V, Polyester	4835 121 47657
C23	100uF., 25V, Electrolytic.	4835 124 47501
C24	0.1uF., 50V, Polyester	4835 121 47658
C25	0.01uF., 10%, 50V, Polyester	4835 121 47657
D1	Zener Diode, 8.2V, BZX79-C8V2.	4835 130 37503
D2	Zener Diode, 8.2V, BZX79-C8V2.	4835 130 37503
D3	Zener Diode, 8.2V, BZX79-C8V2.	4835 130 37503
D4	Zener Diode, 16V, BZX79-C16.	3198 010 21690
IC1	IC,.	9339 954 00602
IC2	IC,.	4835 209 87081
IC3	IC,.	9334 536 00682
IC4	IC,.	3135 019 01011
IC5	IC,.	4835 209 17603
J1	Connector.	2422 026 04366
J2	Socket, Antenna, 1 Pin	2422 031 10792
J3	Connector, 32 Pin.	3135 010 03541
J7	6 Pin Board Connector.	2422 025 14552
L1	Peaking Coil, 1uH., 20%.	4835 157 67061
L2	Variable Coil.	4835 150 57092
L3	Variable Coil.	4835 150 57092
Q1	Transistor, BC547B	4835 130 47055
Q2	Transistor, BC547B	4835 130 47055
Q3	Transistor, BC547B	4835 130 47055
Q4	Transistor, BC547B	4835 130 47055
Q5	Transistor, BC557B	4835 130 47409
Q6	Transistor, BC557B	4835 130 47409
Q7	Transistor, BC547B	4835 130 47055
Q8	Transistor, BC547B	4835 130 47055
Q9	Transistor, BC547B	4835 130 47055
R01	3.3k, 5%, 1/2W, Metal Film	4835 116 57714
R02	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R03	1k, 5%, 1/2W, Metal Film	4835 116 57685
R04	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R05	1k, 5%, 1/2W, Metal Film	4835 116 57685
R06	1k, 5%, 1/2W, Metal Film	4835 116 57685
R07	220 ohm, 5%, 1/2W, Metal Film.	4835 116 57705
R08	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R10	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R11	47k, 5%, 1/2W, Metal Film.	4835 116 57725
R12	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R13	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R14	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R15	47k, 5%, 1/2W, Metal Film.	4835 116 57725
R16	47k, 5%, 1/2W, Metal Film.	4835 116 57725
R17	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R18	47k, 5%, 1/2W, Metal Film.	4835 116 57725
R19	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R20	24k, 5%, 1/4W, Carbon Film	4835 110 47219
R21	16k, 5%, 1/4W, Carbon Film	4835 110 47218
R22	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R23	270k, 5%, 1/4W, Carbon Film.	4835 110 47221
R24	47k, 5%, 1/2W, Metal Film.	4835 116 57725
R25	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R26	47k, 5%, 1/2W, Metal Film.	4835 116 57725
R27	47k, 5%, 1/2W, Metal Film.	4835 116 57725
R28	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R29	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
R30	100 ohm, 5%, 1/2W, Metal Film.	4835 116 57684
Y1	Ceramic Resonator, 12MHz	4835 122 97101

A10777 Interface Module Parts

A10777 Interface Module Parts

CH1927C101 (continued)

CBA	00A10777A001 Interface Module Asm. .	00A1 077 7A001
BR711	Zero ohm,.	4835 111 27056
BR712	Zero ohm,.	4835 111 27056
BR713	Zero ohm,.	4835 111 27056
BR714	Zero ohm,.	4835 111 27056
BRS15	Zero ohm,.	4835 111 27056
BRS16	Zero ohm,.	4835 111 27056
C702	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
C703	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
J0215	Connector, 2 Pin,.	2422 025 16343
J0237	Connector, 4 Pin	2422 025 12479
J0238	5 Pin Board Connector.	2422 025 16387
J0259	Connector, 3 Pin	2412 020 00725
J1215	Connector, 2 Pin,.	2422 025 16343
J1227	Connector, 4 Pin	2422 025 16385
J1238	Connector, 5 Pin	2422 025 12481
J1259	Connector, 3 Pin	2422 025 16383
J214	Connector, 3 Pin	2422 025 16382
J216	Connector, 4 Pin	2422 025 15847
J219	Connector, 5 Pin	2422 025 15848
J228	Connector, 3 Pin	2422 025 16407
J236	4 Pin Board Connector.	2422 025 16384
J775	Contact Pin.	2422 024 00626
J800	Connector, 32 Pin.	3135 010 03531
Q700	Transistor, NPN, BC847B.	4822 130 60511
Q701	Transistor, NPN, BC847B.	4822 130 60511
Q704	Transistor, PNP, BC857B.	5322 130 60508
Q705	Transistor, PNP, BC857B.	5322 130 60508
Q706	Transistor, NPN, BC847B.	4822 130 60511
Q707	Transistor, NPN, BC847B.	4822 130 60511
R700	10k, 5%, 1/10W, Metal Film	4835 111 37216
R701	47k, 5%, 1/10W, Metal Film	4835 111 37445
R702	75 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37276
R703	75 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37276
R711	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
R712	10k, 5%, 1/10W, Metal Film	4835 111 37216
R713	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
R714	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
R715	10k, 5%, 1/10W, Metal Film	4835 111 37216
R716	47k, 5%, 1/10W, Metal Film	4835 111 37445
R717	10k, 5%, 1/10W, Metal Film	4835 111 37216
R718	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
R719	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443
R720	Res, 1K, 2%, 0,25W	4822 051 10102
R721	75 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37276
R722	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231
Z700	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z701	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z702	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z703	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z704	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z705	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z706	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z707	Zener Diode, 8.2V, BZX284-C8	4835 130 37922

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	AC Power Cord.	3135 010 08051
S AC02	Anode Clip	4835 256 97264
AC03	Cabinet Back	3135 014 07921
AC04	Cabinet Front.	3135 017 04121
AC05	Chassis Guide.	3139 124 31381
AC06	Control Buttons.	3139 124 27351
S AC07	Convergence and Purity Assembly. . .	2422 549 43385
S AC08	CRT A68AJB82X.	4835 131 27167
S AC09	Coil, Degaussing	3121 218 62701
AC11	Light Guide.	3139 124 26461
AC12	Nameplate.	4835 459 17546
AC14	Power Button	3139 124 26444
AC16	Speaker, 5W, 16 ohm (2 Used)	2422 264 00333
S AC18	Yoke	3313 203 01242
AC19	Yoke Wedge (3 Used).	4835 535 27006
AC22	Card Do Cover.	4835 432 17971
AC23	Card Housing	3135 014 08741
AC24	Spring	3139 121 26231
AC25	Instruction Sheet.	3135 015 16051

CH1927C121 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts	
0113	L9 SOPS HEATSINK	3139 121 62041
0119	DIODE HEATSINK L9.	3139 121 26691
0121	LINE HEATSINK (CINCH).	3139 121 61942
0123	L9L AUDIO HEATSINK (STERO)	3139 121 61952
S 0127	Holder, Fuse, 2 Pin.	3122 358 71251
0211	Connector, 2 Pin	2422 025 11196
0212	Connector, 2 Pin	2422 025 15396
0213	Connector, 2 Pin	2422 025 15395
0214	Connector, 3 Pin	2422 025 16382
0215	Connector, 2 Pin,.	2422 025 16343
0216	Connector, 4 Pin	2422 025 15847
0219	Connector, 5 Pin	2422 025 15848
0220	4 Pin Board Connector.	2422 025 04852
0221	Connector, 4 Pin	2422 025 15503
0222	Connector, 2 Pin	2422 025 10646
0224	1 Pin Board Connector.	2422 034 20021
0228	1 Pin Board Connector.	2422 034 20021
0234	Connector, 4 Pin	2422 025 15847
0236	4 Pin Board Connector.	2422 025 16384
0237	Connector, 4 Pin	2422 025 12479
0238	5 Pin Board Connector.	2422 025 16387
S 0243	Connector, 6 Pin	2422 025 04854
0244	4 Pin Board Connector.	2422 025 04852
S 0245	Connector, 6 Pin	2422 025 04854
S 0254	CRT Socket (9 Pin)	2422 500 80022
0259	Connector, 3 Pin	2422 025 16383
0262	Connector, 4 Pin	2422 025 16385
0267	Connector, 3 Pin	2412 020 00725
1000	Tuner, V+U PLL PH MN B.	2422 542 90069
1001	Filter	2422 549 42501
1003	45 MHz SAW, Filter,.	2422 549 42433
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807
1208	Crystal Resonator, 3.58MHz	2422 543 00832
S 1500	Fue, 4 A, 250V	2422 086 10905
S 1571	FUSE 1A 250V	2422 086 10779
S 1572	FUSE 1A 250V	2422 086 10779
S 1580	Relay, 12V, 5A G5PA-1.	2422 132 07444
1600	Switch, Tactile.	2422 128 02742
1601	Switch, Tactile.	2422 128 02742
1602	Switch, Tactile.	2422 128 02742
1603	Switch, Tactile.	2422 128 02742
1606	Switch, Tactile.	2422 128 02742
1660	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488
1703	L9 ITV SMARTPORT	3139 178 08561
1821	Ceramic Resonator, 514KHz5, CSB503F58	2422 540 98344
2001	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2002	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2003	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2004	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2011	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2102	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2103	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2104	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2201	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2202	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2203	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2204	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2205	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2208	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2209	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2211	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2212	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2213	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2214	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2215	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 16654
2220	Cap, 18p, 5%, 50V, Ceramic	3198 016 01890
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2222	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2226	Cap, 33u, 20%, 25V, Electrolytic . .	2020 021 90124
2227	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2247	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2248	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2249	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2330	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2340	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320
S 2343	Cap, 3n3, 10%, 2KV, Ceramic.	2020 558 90529
2345	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2401	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2402	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2404	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2405	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2407	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2409	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2420	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2426	Cap, 100n, 10%, 63V, Metalized Polyes ter.	2222 370 75104
2428	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2429	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2430	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2431	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2437	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2438	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2448	Cap, 33p, 5%, 500V, Ceramic.	2020 557 90192
2450	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91139
2451	Cap, 15n, 10%, 50V, Polyester. . . .	2020 300 90575
2456	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176
2457	Cap, 390n, 5%, 250V, Metalized Polypr opylene.	2222 479 90021
2458	Cap, 2u2, 20%, 100V, Electrolytic. .	2020 021 91331
2459	Cap, 680p, 10%, 500V, Ceramic. . . .	3198 019 46810
2461	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2462	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176
S 2463	Cap, 680p, 10%, 2KV, Ceramic	2020 558 90485
S 2465	Cap, 10n, 5%, 1600V, Polypropylene .	2222 375 90154
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050
2473	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2481	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2482	Cap, 68n, 10%, 250V, Polyester . . .	2222 347 90234
2484	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2485	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2486	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2487	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2488	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2489	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2490	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2491	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810
2499	Cap, 220n, 10%, 100V, Metalized Polye ster	2222 365 25224
2500	Cap, 470n, 20%, 275V, Polypropylene.	2222 336 29148
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2507	Cap, 1n5, 10%, 1KV, Ceramic.	3198 019 61520
2508	Cap, 470u, 20%, 200V, Electrolytic .	2020 024 90647
2511	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
2518	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2530	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 021 91147
2531	Cap, 1n, 2%, 50V, Polypropylene. . .	2020 310 90049
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2540	Cap, 100u, 20%, 25V, Electrolytic. .	2020 021 90547
S 2545	Cap, 1n5, 20%, v, Ceramic.	2020 554 90128
2550	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2551	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91358
2561	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2562	Cap, 220p, 10%, 1KV, Ceramic	3198 019 62210
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2572	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2575	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2577	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2586	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2604	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2613	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2615	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2619	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2622	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2629	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040

S = Safety Part Be sure to use exact replacement part.

CH1927C121 (continued)

2631	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3246	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230	
2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
2679	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
2681	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210		3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340	
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3250	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
2821	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280		3251	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040	
2823	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230		3252	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720		3253	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	
2825	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080		3257	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
2826	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090		3258	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
2827	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3259	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
2828	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
2829	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	3198 013 01020	
2830	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280		3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
2831	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	3198 013 01020	
2832	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280		3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
2833	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280		3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	3198 013 01020	
2834	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780	S	3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109	
2835	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	S	3341	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108	
2836	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	S	3342	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108	
2837	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740		3343	Res, 1K5, 20%, 1/2W, Carbon Film . .	3198 013 01520	
2838	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290	
2839	Cap, 1u, 10%, 50V, Polyester	3198 014 01050		3345	VDR DC 1MA/50V S MAX 110V A . . .	2122 550 00152	
2840	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290	
2841	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3401	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380	
2842	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3402	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380	
2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3403	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380	
2844	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3405	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002	
2845	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3406	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
2913	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280		3407	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002	
2914	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330		3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
2915	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3409	Res, 1R5, 5%, 1/3W, Metal Film . . .	2306 204 03158	
2916	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648		3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210	
2917	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210	
2918	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330		3420	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740	
2919	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220	
2920	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648		3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220	
2921	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840	
2931	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280		3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606	
2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3425	Res, 120K, 5%, 1/10W, Metalized Glass	2120 108 91716	
2952	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3426	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930	
2954	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3428	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	
2955	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3429	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730	
2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3431	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	
2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3432	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3433	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
2960	Cap, 220u, 20%, 50V, Electrolytic. .	3198 026 52210		3436	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090		3437	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090		3438	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330	
2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090		3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920	
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3447	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220	
3010	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610		3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320	
3013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	S	3452	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	3198 012 32290	
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	S	3453	Res, 4R7, 5%, 5W, Wire Wound	2322 251 41478	
3015	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	S	3454	Res, 33K, 5%, 1 1/3W, Metal Film . .	2322 194 63333	
3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810		3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
3021	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020		3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
3103	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220	S	3462	Res, 6K8, 5%, 5W, Metal Film	2322 257 41682	
3104	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030		3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790	
3108	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3464	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3109	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	S	3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109	
3123	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590		3466	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903	
				3467	Res, 15K, 1%, 3/5W, Metal Film . . .	2322 156 21503	
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010		3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
3201	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910		3469	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	
				3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240	
3203	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310		3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703	
				3481	Res, 35K7, 1%, 3/5W, Metal Film. . .	2322 156 23573	
3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820		3482	Res, 56K, 1%, 3/5W, Metal Film . . .	2322 156 25603	
3205	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020		3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230	
3206	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610		3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
			S	3486	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108	
3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3487	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108	
3209	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	S	3488	Res, 4R7, 5%, 1/2W, Metal Film . . .	2306 207 03478	
3212	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910	S	3490	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108	
			S	3491	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108	
3213	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610	S	3492	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108	
				3495	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820	
3215	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230		3496	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3216	Res, Zero ohm, 'Chip' Jumper	3198 021 90020		3497	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3217	Res, 1M5, 5%, 1/8W, Metalized Glass.	2322 730 61155		3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	3198 013 04710	
3218	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	S	3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225	
3219	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610	S	3503	PTC, DC, 120V,P3020 B.	2120 661 00025	
			S	3505	Surge Protector.	2422 549 43073	
3220	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	S	3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223	
3225	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040	S	3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333	
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	S	3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102	
3231	Res, Zero ohm, 'Chip' Jumper	3198 021 90020		3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530	
3232	Res, Zero ohm, 'Chip' Jumper	3198 021 90020		3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184	
3233	Res, Zero ohm, 'Chip' Jumper	3198 021 90020		3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204	
3243	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220	S	3515	2.5 ohm, 20%, 3.6W, Negative Temperat ure Coefficient.	2122 612 00023	

S = Safety Part Be sure to use exact replacement part.

CH1927C121 (continued)

3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3517	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
S 3518	Res, 0R22, 5%, 2 1/2W, Metal Film. .	3198 012 32270	
3520	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230	
3521	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310	
S 3525	Res, 47 ohm, 5%, 1/3W, Metal Film. .	2306 204 03479	
3528	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3529	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890	
3530	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320	
3532	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3534	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530	
3536	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830	
3537	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
S 3542	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475	
3570	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530	
3571	Res, 150K, 1%, 3/5W, Metal Film. . .	2322 156 21504	
3573	Res, 2K, 1%, 1/8W, Metalized Glass .	2322 734 62002	
3574	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330	
3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3577	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3578	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3579	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002	
3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3592	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3594	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	
3595	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830	
3596	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3597	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3598	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3599	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	
3607	RST NETW RGLE 10X 8K2 PM5 B . . .	2120 108 93916	
3608	RST NETW RGLE 6X 2K2 PM5 B . . .	2120 108 93913	
3609	RST NETW RGLE 7X 2K2 PM5 B . . .	2120 108 93915	
3611	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3612	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3613	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3615	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3616	Jumper Wire/Staple	0322 179 00003	
3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3619	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3629	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710	
3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3631	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730	
S 3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790	
3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210	
3634	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	
3635	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	
3636	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	
3637	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3649	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3650	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3654	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3655	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3662	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3663	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220	
3664	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220	
3665	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3666	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620	
3667	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730	
3672	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3673	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3674	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710	
3675	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3676	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3677	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3680	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810	
3681	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3682	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220	
3683	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3684	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	
3687	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210	
3821	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530	
3822	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220	
3823	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040	
3824	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	
3825	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3826	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3827	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3828	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3829	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820	
3830	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820	
3831	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198 011 03310	
3832	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790	
3908	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3909	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3910	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620	
3911	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230	
3912	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3913	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3914	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	
3915	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820	
3916	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210	
3917	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3918	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3919	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620	
3920	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820	
3921	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230	
3922	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	
3923	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210	
3924	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930	
3925	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930	
3926	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930	
3929	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930	
3930	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3931	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810	
3951	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	
3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3953	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3955	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
3957	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4004	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4011	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4012	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4020	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4051	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4100	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4102	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4144	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4203	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4207	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4212	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4215	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4216	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4465	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4501	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4650	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4651	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4654	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4655	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4833	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4911	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4912	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4914	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4957	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4999	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
5000	Coil, 5u6.	3198 018 25680	
5004	Coil, 820n	2422 535 97314	
5201	Coil, 22u.	3198 018 22290	
5202	Coil, 6u8.	3198 018 16880	
5342	Coil, 22u.	3198 018 22290	
S 5445	Transformer, L.O.T., models ending in C101, C121, and C125	2422 531 02327	
5451	Coil, 27u.	2422 535 96614	
5457	Coil, Linear Correction.	3128 138 53241	
5461	Transformer.	3128 138 33811	
5480	Coil, 27u.	2422 535 97334	
S 5500	Filter, Mains, 5mH, 2A	2422 549 43432	
5516	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5518	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5521	Coil, 2u2.	3198 018 12280	
5540	Coil, 4u7.	3198 018 14780	
S 5545	Transfomer,.	2422 531 02314	
5551	Coil, 27u.	2422 535 95366	
5552	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	

S = Safety Part Be sure to use exact replacement part.

CH1927C121 (continued)

5572	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5573	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5576	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5577	Fixed, Inductor, 100MHz, 50R. . .	3198 018 90010
5600	Coil, 8u2.	3198 018 18280
5601	Coil, 8u2.	3198 018 18280
5620	Coil, 6u8.	3198 018 16880
5821	Coil, 100u	3198 018 21010
5822	Coil, 18u.	3198 018 21890
6008	Zener Diode, 33 volt	3198 010 23390
6113	Zener Diode, 6.8 volt.	9340 386 40115
6211	Diode, Signal, 1N4148.	3198 010 10010
6212	Diode, Signal, 1N4148.	3198 010 10010
6213	Diode, Signal, 1N4148.	3198 010 10010
6331	Diode, Signal, BAV21	3198 010 10070
6333	Diode, Signal, BAV21	3198 010 10070
6335	Diode, Signal, BAV21	3198 010 10070
6401	Diode, Rect, BYD33D	9337 234 00133
6402	Zener Diode, 33 volt	3198 010 23390
6403	Diode, Rect, BYD33D	9337 234 00133
6404	Zener Diode, 75 volt	9331 180 00133
6449	Diode, Signal, 1N4148.	3198 010 10010
6450	Diode, Signal, 1N4148.	3198 010 10010
6460	Diode, Rect, BY228/20	9336 215 80112
6463	Diode, Signal, 1N4148.	3198 010 10010
6464	Zener Diode, 6.2 volt.	9331 668 30133
6465	Diode, Rect, BYD33J	9337 234 20133
6466	Diode, Rect, BYD33J	9337 234 20133
6480	Zener Diode, 27 volt	3198 010 22790
6481	Diode, Signal, 1N4148.	3198 010 10010
6485	Diode, Rect, BYD33J	9337 234 20133
6486	Diode, Rect, EGP20DL-5300	9322 100 13682
6487	Diode, Rect, BYD33D	9337 234 00133
6488	Diode, Rect, BYV27-200.	9322 126 72673
6490	Diode, Rect, BYV27-200.	9322 126 72673
6505	Diode, Bridge Rect, GBU6JL-7002 . .	9322 138 08667
6507	Diode, Rect, BYD33J	9337 234 20133
6508	Diode, Rect, BYD33J	9337 234 20133
6510	Zener Diode, 20 volt	9331 178 60133
6511	Diode, Rect, BYV95C	9335 001 80133
6512	Diode, Rect, 1N5062	3198 010 10120
6513	Diode, Rect, 1N5062	3198 010 10120
6514	Zener Diode, 18 volt	3198 010 21890
6540	Diode, Signal, BAV21	3198 010 10070
6550	Diode, Rect, BY229X-800	9340 380 30127
6560	Diode, Rect, EGP20DL-5300	9322 100 13682
6580	Diode, Rect, SB140.	9339 577 60673
6584	Diode, Signal, 1N4148.	3198 010 10010
6585	Diode, Signal, 1N4148.	3198 010 10010
6591	Diode, Signal, BAS16WS	9322 031 99685
6601	Zener Diode, 3.9 volt.	3198 010 23980
6602	Diode, Signal, 1N4148.	3198 010 10010
6603	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
6604	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
6605	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
6606	Zener Diode, 4.7 volt.	3198 010 24780
6607	Zener Diode, 6.8 volt.	3198 010 26880
6690	LED VS LTL-307P (LITO) B . . .	9322 033 95682
6821	Zener Diode, 9.1 volt.	9331 177 80133
6822	Diode, Signal, 1N4148.	3198 010 10010
6951	Diode, Signal, BAS16WS	9322 031 99685
6961	Diode, Signal, BAS16WS	9322 031 99685
7250	IC,.	9352 620 26112
7251	IC, LM317T	9337 220 80682
7254	Transistor, NPN, BC847B.	3198 010 42030
7256	Transistor, NPN, BC847B.	3198 010 42030
7258	Transistor, NPN, BC847B.	3198 010 42030
7263	Transistor, PNP, BC857B.	3198 010 42150
7266	Transistor, NPN, BC847B.	3198 010 42030
7330	IC, TDA6107Q/N2.	9352 576 50112
7401	IC,.	9322 121 47687
7460	Transistor, NPN, BU1508DX.	9340 170 50127
7461	Transistor, NPN, BF819	9335 354 50127
7462	Transistor, NPN, BC547B.	3198 020 40030
7463	Transistor, PNP, BC557B.	3198 020 40110
7480	IC,.	9322 028 93682
7481	Transistor, PNP, BC557B.	3198 020 40110
7482	Transistor, PNP, BC857B.	3198 010 42150
7518	STH10NC60FI SMPS FET.	9322 155 66687
7520	IC,.	9322 108 36682
7570	IC,.	9337 711 00676
S 7581	Coupler, TCDT1101G	9338 431 30682
7590	Transistor, NPN, BC847B.	3198 010 42030
7591	Transistor, NPN, BC847B.	3198 010 42030
7592	Transistor, NPN, BC847B.	3198 010 42030
7600	IC, SAA5543-PS/M4/0167 L9 v3.2 (Comme rcial Models - NON Pro Plus)	9352 670 84112
7601	IC, ST24W16B6, commercial models only	9322 095 35682
7603	Transistor, NPN, BC337	9331 796 00126
7604	Transistor, NPN, BC847B.	3198 010 42030
7605	Transistor, NPN, BC847B.	3198 010 42030
7608	Transistor, NPN, BC847B.	3198 010 42030
7609	Transistor, NPN, BC847B.	3198 010 42030
7680	IR Receiver.	9322 127 53667
7821	IC,.	9352 374 70112
7822	IC, HEF4052BT.	9333 729 50653
7823	Transistor, NPN, BC337-25.	3198 020 43530
7904	Transistor, NPN, BC847B.	3198 010 42030
7905	Transistor, NPN, BC847B.	3198 010 42030
7906	Transistor, NPN, BC847B.	3198 010 42030
7908	Transistor, NPN, BC847B.	3198 010 42030
7909	Transistor, NPN, BC847B.	3198 010 42030
7910	Transistor, NPN, BC847B.	3198 010 42030
7951	IC,.	9351 861 60112
9001	Jumper Wire/Staple	0322 179 00003
9003	Jumper Wire/Staple	0322 179 00003
9005	Jumper Wire/Staple	0322 179 00003
9011	Jumper Wire/Staple	0322 179 00003
9012	Jumper Wire/Staple	0322 179 00003
9105	Jumper Wire/Staple	0322 179 00003
9126	Jumper Wire/Staple	0322 179 00003
9132	Jumper Wire/Staple	0322 179 00003
9140	Jumper Wire/Staple	0322 179 00003
9141	Jumper Wire/Staple	0322 179 00003
9200	Jumper Wire/Staple	0322 179 00003
9202	Jumper Wire/Staple	0322 179 00003
9203	Jumper Wire/Staple	0322 179 00003
9204	Jumper Wire/Staple	0322 179 00003
9205	Jumper Wire/Staple	0322 179 00003
9206	Jumper Wire/Staple	0322 179 00003
9207	Jumper Wire/Staple	0322 179 00003
9208	Jumper Wire/Staple	0322 179 00003
9209	Jumper Wire/Staple	0322 179 00003
9210	Jumper Wire/Staple	0322 179 00003
9211	Jumper Wire/Staple	0322 179 00003
9214	Jumper Wire/Staple	0322 179 00003
9215	Jumper Wire/Staple	0322 179 00003
9216	Jumper Wire/Staple	0322 179 00003
9217	Jumper Wire/Staple	0322 179 00003
9218	Jumper Wire/Staple	0322 179 00003
9220	Jumper Wire/Staple	0322 179 00003
9221	Jumper Wire/Staple	0322 179 00003
9222	Jumper Wire/Staple	0322 179 00003
9225	Jumper Wire/Staple	0322 179 00003
9226	Jumper Wire/Staple	0322 179 00003
9227	Jumper Wire/Staple	0322 179 00003
9228	Jumper Wire/Staple	0322 179 00003
9229	Jumper Wire/Staple	0322 179 00003
9230	Jumper Wire/Staple	0322 179 00003
9231	Jumper Wire/Staple	0322 179 00003
9232	Jumper Wire/Staple	0322 179 00003
9233	Jumper Wire/Staple	0322 179 00003
9234	Jumper Wire/Staple	0322 179 00003
9236	Jumper Wire/Staple	0322 179 00003
9237	Jumper Wire/Staple	0322 179 00003
9238	Jumper Wire/Staple	0322 179 00003
9240	Jumper Wire/Staple	0322 179 00003
9241	Jumper Wire/Staple	0322 179 00003
9242	Jumper Wire/Staple	0322 179 00003
9243	Jumper Wire/Staple	0322 179 00003
9245	Jumper Wire/Staple	0322 179 00003
9301	Jumper Wire/Staple	0322 179 00003
9401	Jumper Wire/Staple	0322 179 00003
9402	Jumper Wire/Staple	0322 179 00003
9403	Jumper Wire/Staple	0322 179 00003
9404	Jumper Wire/Staple	0322 179 00003
9407	Jumper Wire/Staple	0322 179 00003
9408	Jumper Wire/Staple	0322 179 00003
9411	Jumper Wire/Staple	0322 179 00003
9414	Jumper Wire/Staple	0322 179 00003
9417	Jumper Wire/Staple	0322 179 00003
9419	Jumper Wire/Staple	0322 179 00003
9420	Jumper Wire/Staple	0322 179 00003
9421	Jumper Wire/Staple	0322 179 00003
9422	Jumper Wire/Staple	0322 179 00003
9424	Jumper Wire/Staple	0322 179 00003
9425	Jumper Wire/Staple	0322 179 00003
9427	Jumper Wire/Staple	0322 179 00003
9428	Jumper Wire/Staple	0322 179 00003
9460	Jumper Wire/Staple	0322 179 00003
9461	Jumper Wire/Staple	0322 179 00003
9500	Jumper Wire/Staple	0322 179 00003
9501	Jumper Wire/Staple	0322 179 00003
9502	Jumper Wire/Staple	0322 179 00003
9503	Jumper Wire/Staple	0322 179 00003
9505	Jumper Wire/Staple	0322 179 00003
9509	Jumper Wire/Staple	0322 179 00003
9510	Jumper Wire/Staple	0322 179 00003
9511	Jumper Wire/Staple	0322 179 00003
9512	Jumper Wire/Staple	0322 179 00003
9513	Jumper Wire/Staple	0322 179 00003
9515	Jumper Wire/Staple	0322 179 00003
9516	Jumper Wire/Staple	0322 179 00003
9517	Jumper Wire/Staple	0322 179 00003

S = Safety Part Be sure to use exact replacement part.

CH1927C121 (continued)

9518	Jumper Wire/Staple	0322 179 00003
9521	Jumper Wire/Staple	0322 179 00003
9526	Jumper Wire/Staple	0322 179 00003
9601	Jumper Wire/Staple	0322 179 00003
9602	Jumper Wire/Staple	0322 179 00003
9603	Jumper Wire/Staple	0322 179 00003
9604	Jumper Wire/Staple	0322 179 00003
9605	Jumper Wire/Staple	0322 179 00003
9606	Jumper Wire/Staple	0322 179 00003
9608	Jumper Wire/Staple	0322 179 00003
9609	Jumper Wire/Staple	0322 179 00003
9610	Jumper Wire/Staple	0322 179 00003
9611	Jumper Wire/Staple	0322 179 00003
9612	Jumper Wire/Staple	0322 179 00003
9613	Jumper Wire/Staple	0322 179 00003
9614	Jumper Wire/Staple	0322 179 00003
9615	Jumper Wire/Staple	0322 179 00003
9618	Jumper Wire/Staple	0322 179 00003
9621	Jumper Wire/Staple	0322 179 00003
9622	Jumper Wire/Staple	0322 179 00003
9624	Jumper Wire/Staple	0322 179 00003
9625	Jumper Wire/Staple	0322 179 00003
9626	Jumper Wire/Staple	0322 179 00003
9629	Jumper Wire/Staple	0322 179 00003
9631	Jumper Wire/Staple	0322 179 00003
9632	Jumper Wire/Staple	0322 179 00003
9637	Jumper Wire/Staple	0322 179 00003
9640	Jumper Wire/Staple	0322 179 00003
9642	Jumper Wire/Staple	0322 179 00003
9643	Jumper Wire/Staple	0322 179 00003
9644	Jumper Wire/Staple	0322 179 00003
9754	Jumper Wire/Staple	0322 179 00003
9788	Jumper Wire/Staple	0322 179 00003
9793	Jumper Wire/Staple	0322 179 00003
9800	Jumper Wire/Staple	0322 179 00003
9805	Jumper Wire/Staple	0322 179 00003
9806	Jumper Wire/Staple	0322 179 00003
9807	Jumper Wire/Staple	0322 179 00003
9810	Jumper Wire/Staple	0322 179 00003
9901	Jumper Wire/Staple	0322 179 00003
9904	Jumper Wire/Staple	0322 179 00003
9905	Jumper Wire/Staple	0322 179 00003
9906	Jumper Wire/Staple	0322 179 00003
9920	Jumper Wire/Staple	0322 179 00003
9933	Jumper Wire/Staple	0322 179 00003
9936	Jumper Wire/Staple	0322 179 00003
9940	Jumper Wire/Staple	0322 179 00003
9941	Jumper Wire/Staple	0322 179 00003
9942	Jumper Wire/Staple	0322 179 00003
9943	Jumper Wire/Staple	0322 179 00003
9944	Jumper Wire/Staple	0322 179 00003
9945	Jumper Wire/Staple	0322 179 00003
9946	Jumper Wire/Staple	0322 179 00003
9947	Jumper Wire/Staple	0322 179 00003
9948	Jumper Wire/Staple	0322 179 00003
9949	Jumper Wire/Staple	0322 179 00003
9950	Jumper Wire/Staple	0322 179 00003
9951	Jumper Wire/Staple	0322 179 00003
9952	Jumper Wire/Staple	0322 179 00003
9953	Jumper Wire/Staple	0322 179 00003
9955	Jumper Wire/Staple	0322 179 00003
9956	Jumper Wire/Staple	0322 179 00003
9957	Jumper Wire/Staple	0322 179 00003
9958	Jumper Wire/Staple	0322 179 00003
9959	Jumper Wire/Staple	0322 179 00003
9960	Jumper Wire/Staple	0322 179 00003
9962	Jumper Wire/Staple	0322 179 00003
9963	Jumper Wire/Staple	0322 179 00003
9964	Jumper Wire/Staple	0322 179 00003
9965	Jumper Wire/Staple	0322 179 00003
9966	Jumper Wire/Staple	0322 179 00003
9967	Jumper Wire/Staple	0322 179 00003
9968	Jumper Wire/Staple	0322 179 00003
9969	Jumper Wire/Staple	0322 179 00003
9970	Jumper Wire/Staple	0322 179 00003
9971	Jumper Wire/Staple	0322 179 00003
9972	Jumper Wire/Staple	0322 179 00003
9974	Jumper Wire/Staple	0322 179 00003
9975	Jumper Wire/Staple	0322 179 00003
9976	Jumper Wire/Staple	0322 179 00003
9977	Jumper Wire/Staple	0322 179 00003
9981	Jumper Wire/Staple	0322 179 00003
9982	Jumper Wire/Staple	0322 179 00003
9983	Jumper Wire/Staple	0322 179 00003
9984	Jumper Wire/Staple	0322 179 00003
9987	Jumper Wire/Staple	0322 179 00003
9989	Jumper Wire/Staple	0322 179 00003
9990	Jumper Wire/Staple	0322 179 00003
9991	Jumper Wire/Staple	0322 179 00003
9992	Jumper Wire/Staple	0322 179 00003
9993	Jumper Wire/Staple	0322 179 00003
CBA	00EMF893A002 Main Chassis Board Asm.	00EM F89 3A002

S = Safety Part Be sure to use exact replacement part.

A10680 Channel One Card Parts

	A10680 Channel One Card Parts	
CBA	00A10680B002 Channel One Card Asm. .	00A1 068 0B002
C01	1000pF., 10%, 50V, Polyester	4835 121 47662
C02	0.1uF., 50V, Polyester	4835 121 47658
C03	1pF., 25%, 50V, Ceramic.	4835 122 47665
C04	1000pF., 10%, 50V, Polyester	4835 121 47662
C05	0.01uF., 10%, 50V, Polyester	4835 121 47657
C06	1000pF., 10%, 50V, Polyester	4835 121 47662
C07	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
C08	0.1uF., 50V, Polyester	4835 121 47658
C09	0.1uF., 50V, Polyester	4835 121 47658
C10	0.1uF., 50V, Polyester	4835 121 47658
C11	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
C12	0.1uF., 50V, Polyester	4835 121 47658
C13	47pF., 5%, 50V, Ceramic.	4835 122 47608
C14	12pF., 5%, 50V, Ceramic.	4835 122 47667
C15	4.7pF., 25%, 50V, Ceramic.	4835 122 47666
C16	4.7uF., 20%, 50V, Electrolytic . . .	4835 124 47506
C17	0.1uF., 50V, Polyester	4835 121 47658
C18	Cap, 100p, 5%, 50V, Ceramic.	2020 552 90603
C19	0.01uF., 10%, 50V, Polyester	4835 121 47657
C20	0.01uF., 10%, 50V, Polyester	4835 121 47657
C23	100uF., 25V, Electrolytic.	4835 124 47501
C24	0.1uF., 50V, Polyester	4835 121 47658
C25	0.01uF., 10%, 50V, Polyester	4835 121 47657
D1	Zener Diode, 8.2V, BZX79-C8V2. . . .	4835 130 37503
D2	Zener Diode, 8.2V, BZX79-C8V2. . . .	4835 130 37503
D3	Zener Diode, 8.2V, BZX79-C8V2. . . .	4835 130 37503
D4	Zener Diode, 16V, BZX79-C16.	3198 010 21690
IC1	IC,.	9339 954 00602
IC2	IC,.	4835 209 87081
IC3	IC,.	9334 536 00682
IC4	IC,.	3135 019 01011
IC5	IC,.	4835 209 17603
J1	Connector.	2422 026 04366
J2	Socket, Antenna, 1 Pin	2422 031 10792
J3	Connector, 32 Pin.	3135 010 03541
J7	6 Pin Board Connector.	2422 025 14552
L1	Peaking Coil, 1uH., 20%.	4835 157 67061
L2	Variable Coil.	4835 150 57092
L3	Variable Coil.	4835 150 57092
Q1	Transistor, BC547B	4835 130 47055
Q2	Transistor, BC547B	4835 130 47055
Q3	Transistor, BC547B	4835 130 47055
Q4	Transistor, BC547B	4835 130 47055
Q5	Transistor, BC557B	4835 130 47409
Q6	Transistor, BC557B	4835 130 47409
Q7	Transistor, BC547B	4835 130 47055
Q8	Transistor, BC547B	4835 130 47055
Q9	Transistor, BC547B	4835 130 47055
R01	3.3k, 5%, 1/2W, Metal Film	4835 116 57714
R02	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R03	1k, 5%, 1/2W, Metal Film	4835 116 57685
R04	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R05	1k, 5%, 1/2W, Metal Film	4835 116 57685
R06	1k, 5%, 1/2W, Metal Film	4835 116 57685
R07	220 ohm, 5%, 1/2W, Metal Film. . . .	4835 116 57705
R08	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R10	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R11	47k, 5%, 1/2W, Metal Film.	4835 116 57725
R12	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R13	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R14	100 ohm, 5%, 1/2W, Metal Film. . . .	4835 116 57684
R15	47k, 5%, 1/2W, Metal Film.	4835 116 57725
R16	47k, 5%, 1/2W, Metal Film.	4835 116 57725
R17	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R18	47k, 5%, 1/2W, Metal Film.	4835 116 57725
R19	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R20	24k, 5%, 1/4W, Carbon Film	4835 110 47219
R21	16k, 5%, 1/4W, Carbon Film	4835 110 47218
R22	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R23	270k, 5%, 1/4W, Carbon Film.	4835 110 47221
R24	47k, 5%, 1/2W, Metal Film.	4835 116 57725
R25	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R26	47k, 5%, 1/2W, Metal Film.	4835 116 57725
R27	47k, 5%, 1/2W, Metal Film.	4835 116 57725
R28	100 ohm, 5%, 1/2W, Metal Film. . . .	4835 116 57684
R29	100 ohm, 5%, 1/2W, Metal Film. . . .	4835 116 57684
R30	100 ohm, 5%, 1/2W, Metal Film. . . .	4835 116 57684
Y1	Ceramic Resonator, 12MHz	4835 122 97101

A10777 Interface Module Parts

	A10777 Interface Module Parts	
CBA	00A10777A001 Interface Module Asm. .	00A1 077 7A001
BR711	Zero ohm,.	4835 111 27056
BR712	Zero ohm,.	4835 111 27056
BR713	Zero ohm,.	4835 111 27056
BR714	Zero ohm,.	4835 111 27056
BRS15	Zero ohm,.	4835 111 27056
BRS16	Zero ohm,.	4835 111 27056

CH1927C121 (continued)

C702	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
C703	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
J0215	Connector, 2 Pin,.	2422 025 16343
J0237	Connector, 4 Pin	2422 025 12479
J0238	5 Pin Board Connector.	2422 025 16387
J0259	Connector, 3 Pin	2412 020 00725
J1215	Connector, 2 Pin,.	2422 025 16343
J1227	Connector, 4 Pin	2422 025 16385
J1238	Connector, 5 Pin	2422 025 12481
J1259	Connector, 3 Pin	2422 025 16383
J214	Connector, 3 Pin	2422 025 16382
J216	Connector, 4 Pin	2422 025 15847
J219	Connector, 5 Pin	2422 025 15848
J228	Connector, 3 Pin	2422 025 16407
J236	4 Pin Board Connector.	2422 025 16384
J775	Contact Pin.	2422 024 00626
J800	Connector, 32 Pin.	3135 010 03531
Q700	Transistor, NPN, BC847B.	4822 130 60511
Q701	Transistor, NPN, BC847B.	4822 130 60511
Q704	Transistor, PNP, BC857B.	5322 130 60508
Q705	Transistor, PNP, BC857B.	5322 130 60508
Q706	Transistor, NPN, BC847B.	4822 130 60511
Q707	Transistor, NPN, BC847B.	4822 130 60511
R700	10k, 5%, 1/10W, Metal Film	4835 111 37216
R701	47k, 5%, 1/10W, Metal Film	4835 111 37445
R702	75 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37276
R703	75 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37276
R711	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
R712	10k, 5%, 1/10W, Metal Film	4835 111 37216
R713	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
R714	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
R715	10k, 5%, 1/10W, Metal Film	4835 111 37216
R716	47k, 5%, 1/10W, Metal Film	4835 111 37445
R717	10k, 5%, 1/10W, Metal Film	4835 111 37216
R718	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
R719	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443
R720	Res, 1K, 2%, 0,25W	4822 051 10102
R721	75 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37276
R722	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231
Z700	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z701	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z702	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z703	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z704	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z705	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z706	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z707	Zener Diode, 8.2V, BZX284-C8	4835 130 37922

Cabinet & Accessory Parts

		Cabinet & Accessory Parts	
S	AC01	AC Power Cord.	3135 010 08051
	AC02	Clip, Anode Lead	3135 014 04471
	AC03	Cabinet Back	3135 014 07921
	AC04	Cabinet Front.	3135 017 04121
	AC05	Chassis Guide.	3139 124 31381
	AC06	Control Buttons.	3139 124 27351
S	AC07	Convergence and Purity Assembly. . .	2422 549 43385
S	AC08	CRT A68AJB82X.	9301 787 60472
S	AC09	Coil, Degaussing	2422 549 43967
	AC10	Holder, Degaussing (4 Used).	3135 013 01641
	AC11	Light Guide.	3139 124 26461
	AC12	Nameplate.	3135 015 03571
	AC14	Power Button	3139 124 26753
	AC16	Speaker, 16R, 1W5 (2 Used)	2422 264 00343
S	AC18	Yoke	3313 203 01242
	AC19	Yoke Wedge (3 used).	3135 013 00311
	AC24	Spring	3139 121 26231

S = Safety Part Be sure to use exact replacement part.

CH1927C221 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts	
0113	L9 SOPS HEATSINK	3139 121 62041
0119	DIODE HEATSINK L9.	3139 121 26691
0121	LINE HEATSINK (CINCH).	3139 121 61942
0123	L9L AUDIO HEATSINK (STERO)	3139 121 61952
S 0127	Holder, Fuse, 2 Pin.	3122 358 71251
0211	Connector, 2 Pin	2422 025 11196
0212	Connector, 2 Pin	2422 025 15396
0213	Connector, 2 Pin	2422 025 15395
0214	Connector, 3 Pin	2422 025 16382
0215	Connector, 2 Pin,.	2422 025 16343
0216	Connector, 4 Pin	2422 025 15847
0219	Connector, 5 Pin	2422 025 15848
0220	4 Pin Board Connector.	2422 025 04852
0221	Connector, 4 Pin	2422 025 15503
0222	Connector, 2 Pin	2422 025 10646
0224	1 Pin Board Connector.	2422 034 20021
0228	1 Pin Board Connector.	2422 034 20021
0234	Connector, 4 Pin	2422 025 15847
0236	4 Pin Board Connector.	2422 025 16384
0237	Connector, 4 Pin	2422 025 12479
0238	5 Pin Board Connector.	2422 025 16387
S 0243	Connector, 6 Pin	2422 025 04854
0244	4 Pin Board Connector.	2422 025 04852
S 0245	Connector, 6 Pin	2422 025 04854
S 0254	CRT Socket (9 Pin)	2422 500 80022
0259	Connector, 3 Pin	2422 025 16383
0262	Connector, 4 Pin	2422 025 16385
0267	Connector, 3 Pin	2412 020 00725
1000	Tuner, V+U PLL PH MN B.	2422 542 90069
1001	Filter	2422 549 42501
1003	45 MHz SAW, Filter,.	2422 549 42433
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807
1208	Crystal Resonator, 3.58MHz	2422 543 00832
S 1500	Fue, 4 A, 250V	2422 086 10905
S 1571	FUSE 1A 250V	2422 086 10779
S 1572	FUSE 1A 250V	2422 086 10779
S 1580	Relay, 12V, 5A G5PA-1.	2422 132 07444
1600	Switch, Tactile.	2422 128 02742
1601	Switch, Tactile.	2422 128 02742
1602	Switch, Tactile.	2422 128 02742
1603	Switch, Tactile.	2422 128 02742
1606	Switch, Tactile.	2422 128 02742
1660	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488
1703	L9 ITV SMARTPORT	3139 178 08561
1821	Ceramic Resonator, 514KHz5, CSB503F58	2422 540 98344
2001	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2002	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2003	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2004	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2011	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2102	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2103	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2104	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2201	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2202	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2203	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2204	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2205	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2208	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2209	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2211	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2212	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2213	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2214	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2215	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 16654
2220	Cap, 18p, 5%, 50V, Ceramic	3198 016 01890
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2222	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2226	Cap, 33u, 20%, 25V, Electrolytic . .	2020 021 90124
2227	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2247	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2248	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2249	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2330	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2340	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320
S 2343	Cap, 3n3, 10%, 2KV, Ceramic.	2020 558 90529
2345	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2401	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2402	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2404	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2405	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2407	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2409	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2420	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2426	Cap, 100n, 10%, 63V, Metalized Polyes ter.	2222 370 75104
2428	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2429	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2430	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2431	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2437	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2438	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2448	Cap, 33p, 5%, 500V, Ceramic.	2020 557 90192
2450	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91139
2451	Cap, 15n, 10%, 50V, Polyester. . . .	2020 300 90575
2456	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176
2457	Cap, 390n, 5%, 250V, Metalized Polypr opylene.	2222 479 90021
2458	Cap, 2u2, 20%, 100V, Electrolytic. .	2020 021 91331
2459	Cap, 680p, 10%, 500V, Ceramic. . . .	3198 019 46810
2461	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2462	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176
S 2463	Cap, 1n, 10%, 2KV, Ceramic	2020 558 90487
S 2465	Cap, 9n1, 5%, 1600V, Polypropylene .	2022 333 00118
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050
2473	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2481	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2482	Cap, 68n, 10%, 250V, Polyester . . .	2222 347 90234
2484	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2485	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2486	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2487	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2488	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2489	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2490	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2491	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810
2499	Cap, 220n, 10%, 100V, Metalized Polye ster	2222 365 25224
2500	Cap, 470n, 20%, 275V, Polypropylene.	2222 336 29148
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2507	Cap, 1n5, 10%, 1KV, Ceramic.	3198 019 61520
2508	Cap, 470u, 20%, 200V, Electrolytic .	2020 024 90647
S 2511	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
S 2518	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2530	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 021 91147
2531	Cap, 1n, 2%, 50V, Polypropylene. . .	2020 310 90049
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2540	Cap, 100u, 20%, 25V, Electrolytic. .	2020 021 90547
S 2545	Cap, 1n5, 20%, v, Ceramic.	2020 554 90128
S 2550	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2551	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91358
2561	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
S 2562	Cap, 220p, 10%, 1KV, Ceramic	2020 558 90424
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2572	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2575	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2577	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2586	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2604	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2613	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2615	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2619	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2622	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2629	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040

S = Safety Part Be sure to use exact replacement part.

CH1927C221 (continued)

2631	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3246	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230	
2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
2679	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
2681	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210		3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340	
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3250	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
2821	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280		3251	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040	
2823	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230		3252	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720		3253	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	
2825	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080		3257	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
2826	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090		3258	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
2827	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3259	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
2828	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
2829	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046	
2830	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280		3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
2831	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046	
2832	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280		3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
2833	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280		3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046	
2834	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780	S	3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109	
2835	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	S	3341	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108	
2836	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	S	3342	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108	
2837	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740		3343	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90047	
2838	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290	
2839	Cap, 1u, 5%, 50V, Metalized Polyester	2020 308 90124		3345	VDR DC 1MA/50V S MAX 110V A . . .	2122 550 00152	
2840	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290	
2841	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3401	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380	
2842	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3402	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380	
2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3403	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380	
2844	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3405	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002	
2845	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3406	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
2913	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280		3407	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002	
2914	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330		3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
2915	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3409	Res, 1R5, 5%, 1/3W, Metal Film . . .	2306 204 03158	
2916	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648		3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210	
2917	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210	
2918	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330		3420	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740	
2919	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220	
2920	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648		3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220	
2921	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840	
2931	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280		3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606	
2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3425	Res, 120K, 5%, 1/10W, Metalized Glass	2120 108 91716	
2952	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3426	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930	
2954	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3428	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	
2955	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3429	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730	
2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3431	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	
2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3432	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3433	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
2960	Cap, 220u, 20%, 50V, Electrolytic. .	3198 026 52210		3436	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090		3437	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090		3438	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330	
2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090		3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920	
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3447	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220	
3010	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610		3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320	
3013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	S	3452	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	3198 012 32290	
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	S	3453	Res, 4R7, 5%, 5W, Wire Wound	2322 251 41478	
3015	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	S	3454	Res, 33K, 5%, 1 1/3W, Metal Film . .	2322 194 63333	
3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810		3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
3021	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020		3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
3103	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220	S	3462	Res, 6K8, 5%, 5W, Metal Film	2322 257 41682	
3104	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030		3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790	
3108	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3464	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3109	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	S	3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109	
3123	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590		3466	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903	
				3467	Res, 13K, 1%, 3/5W, Metal Film . . .	2322 156 21303	
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010		3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
3201	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910		3469	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	
				3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240	
3203	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310		3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703	
				3481	Res, 35K7, 1%, 3/5W, Metal Film. . .	2322 156 23573	
3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820		3482	Res, 56K, 1%, 3/5W, Metal Film . . .	2322 156 25603	
3205	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020		3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230	
3206	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610		3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
			S	3486	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108	
3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3487	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108	
3209	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	S	3488	Res, 4R7, 5%, 1/2W, Metal Film . . .	2306 207 03478	
3212	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910	S	3490	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108	
			S	3491	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108	
3213	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610	S	3492	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108	
				3495	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820	
3215	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230		3496	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3216	Res, Zero ohm, 'Chip' Jumper	3198 021 90020		3497	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3217	Res, 1M5, 5%, 1/8W, Metalized Glass.	2322 730 61155		3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	3198 013 04710	
3218	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	S	3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225	
3219	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610		3503	PTC DC ZPB 120V S 10R PM30 B . . .	2120 661 00019	
			S	3505	Surge Protector.	2422 549 43073	
3220	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	S	3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223	
3225	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040	S	3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333	
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	S	3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102	
3231	Res, Zero ohm, 'Chip' Jumper	3198 021 90020		3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530	
3232	Res, Zero ohm, 'Chip' Jumper	3198 021 90020		3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184	
3233	Res, Zero ohm, 'Chip' Jumper	3198 021 90020		3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204	
3243	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220	S	3515	2.5 ohm, 20%, 3.6W, Negative Temperat ure Coefficient.	2122 612 00023	

S = Safety Part Be sure to use exact replacement part.

CH1927C221 (continued)

3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3517	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
S 3518	Res, 0R22, 5%, 2 1/2W, Metal Film. .	3198 012 32270	
3520	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230	
3521	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310	
S 3525	Res, 47 ohm, 5%, 1/3W, Metal Film. .	2306 204 03479	
3528	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3529	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890	
3530	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320	
3532	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3534	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530	
3536	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830	
3537	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
S 3542	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475	
3570	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530	
3571	Res, 150K, 1%, 3/5W, Metal Film. . .	2322 156 21504	
3573	Res, 2K, 1%, 1/8W, Metalized Glass .	2322 734 62002	
3574	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330	
3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3577	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3578	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3579	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002	
3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3592	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3594	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	
3595	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830	
3596	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3597	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3598	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3599	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	
3607	RST NETW RGLE 10X 8K2 PM5 B . . .	2120 108 93916	
3608	RST NETW RGLE 6X 2K2 PM5 B . . .	2120 108 93913	
3609	RST NETW RGLE 7X 2K2 PM5 B . . .	2120 108 93915	
3611	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3612	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3613	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3615	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3616	Jumper Wire/Staple	0322 179 00003	
3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3619	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3629	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710	
3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3631	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730	
S 3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790	
3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210	
3634	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	
3635	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	
3636	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	
3637	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3649	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3650	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3654	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3655	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3662	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3663	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220	
3664	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220	
3665	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3666	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620	
3667	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730	
3672	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3673	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3674	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710	
3675	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3676	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3677	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3680	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810	
3681	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3682	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220	
3683	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3684	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	
3687	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210	
3821	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530	
3822	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220	
3823	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040	
3824	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	
3825	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3826	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3827	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3828	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3829	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820	
3830	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820	
3831	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198 011 03310	
3832	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790	
3908	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3909	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3910	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620	
3911	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230	
3912	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3913	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3914	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	
3915	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820	
3916	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210	
3917	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3918	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3919	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620	
3920	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820	
3921	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230	
3922	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	
3923	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210	
3924	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930	
3925	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930	
3926	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930	
3929	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930	
3930	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3931	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810	
3951	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	
3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3953	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3955	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
3957	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4004	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4011	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4012	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4020	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4051	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4100	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4102	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4144	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4203	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4207	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4212	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4215	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4216	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4465	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4501	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4650	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4651	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4654	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4655	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4833	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4911	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4912	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4914	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4957	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4999	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
5000	Coil, 5u6.	3198 018 25680	
5004	Coil, 820n	2422 535 97314	
5201	Coil, 22u.	3198 018 22290	
5202	Coil, 6u8.	3198 018 16880	
5342	Coil, 22u.	3198 018 22290	
S 5445	Transformer, L.O.T., models ending in C101, C121, and C125	2422 531 02327	
5451	Coil, 27u.	2422 535 96614	
5457	Coil, Linear Correction.	3128 138 53241	
5461	Transformer.	3128 138 33811	
5463	Coil, 126u	3135 019 02161	
5480	Coil, 27u.	2422 535 97334	
S 5500	Filter, Mains, 5mH, 2A	2422 549 43432	
5516	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5518	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5521	Coil, 2u2.	3198 018 12280	
5540	Coil, 4u7.	3198 018 14780	
S 5545	Transfomer,.	2422 531 02314	
5551	Coil, 27u.	2422 535 95366	

S = Safety Part Be sure to use exact replacement part.

CH1927C221 (continued)

5552	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5572	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5573	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5576	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5577	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5600	Coil, 8u2.	3198 018 18280	
5601	Coil, 8u2.	3198 018 18280	
5620	Coil, 6u8.	3198 018 16880	
5821	Coil, 100u	3198 018 21010	
5822	Coil, 18u.	3198 018 21890	
6008	Zener Diode, 33 volt	3198 010 23390	
6113	Zener Diode, 6.8 volt.	9340 386 40115	
6211	Diode, Signal, 1N4148.	3198 010 10010	
6212	Diode, Signal, 1N4148.	3198 010 10010	
6213	Diode, Signal, 1N4148.	3198 010 10010	
6331	Diode, Signal, BAV21	3198 010 10070	
6333	Diode, Signal, BAV21	3198 010 10070	
6335	Diode, Signal, BAV21	3198 010 10070	
6401	Diode, Rect, BYD33D	9337 234 00133	
6402	Zener Diode, 33 volt	3198 010 23390	
6403	Diode, Rect, BYD33D	9337 234 00133	
6404	Zener Diode, 75 volt	9331 180 00133	
6449	Diode, Signal, 1N4148.	3198 010 10010	
6450	Diode, Signal, 1N4148.	3198 010 10010	
6460	Diode, Rect, BY228/20	9336 215 80112	
6463	Diode, Signal, 1N4148.	3198 010 10010	
6464	Zener Diode, 6.2 volt.	9331 668 30133	
6465	Diode, Rect, BYD33J	9337 234 20133	
6466	Diode, Rect, BYD33J	9337 234 20133	
6480	Zener Diode, 27 volt	3198 010 22790	
6481	Diode, Signal, 1N4148.	3198 010 10010	
6485	Diode, Rect, BYD33J	9337 234 20133	
6486	Diode, Rect, EGP20DL-5300	9322 100 13682	
6487	Diode, Rect, BYD33D	9337 234 00133	
6488	Diode, Rect, BYV27-200.	9322 126 72673	
6490	Diode, Rect, BYV27-200.	9322 126 72673	
6505	Diode, Bridge Rect, GBU6JL-7002 . .	9322 138 08667	
6507	Diode, Rect, BYD33J	9337 234 20133	
6508	Diode, Rect, BYD33J	9337 234 20133	
6510	Zener Diode, 20 volt	9331 178 60133	
6511	Diode, Rect, BYV95C	9335 001 80133	
6512	Diode, Rect, 1N5062	3198 010 10120	
6513	Diode, Rect, 1N5062	3198 010 10120	
6514	Zener Diode, 18 volt	3198 010 21890	
6540	Diode, Signal, BAV21	3198 010 10070	
6550	Diode, Rect, BY229X-800	9340 380 30127	
6560	Diode, Rect, EGP20DL-5300	9322 100 13682	
6580	Diode, Rect, SB140.	9339 577 60673	
6584	Diode, Signal, 1N4148.	3198 010 10010	
6585	Diode, Signal, 1N4148.	3198 010 10010	
6591	Diode, Signal, BAS16WS	9322 031 99685	
6601	Zener Diode, 3.9 volt.	3198 010 23980	
6602	Diode, Signal, 1N4148.	3198 010 10010	
6603	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610	
6604	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610	
6605	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610	
6606	Zener Diode, 4.7 volt.	3198 010 24780	
6607	Zener Diode, 6.8 volt.	3198 010 26880	
6690	LED VS LTL-307P (LITO) B . . .	9322 033 95682	
6821	Zener Diode, 9.1 volt.	9331 177 80133	
6822	Diode, Signal, 1N4148.	3198 010 10010	
6951	Diode, Signal, BAS16WS	9322 031 99685	
6961	Diode, Signal, BAS16WS	9322 031 99685	
7250	IC,.	9352 620 26112	
7251	IC, LM317T	9337 220 80682	
7254	Transistor, NPN, BC847B.	3198 010 42030	
7256	Transistor, NPN, BC847B.	3198 010 42030	
7258	Transistor, NPN, BC847B.	3198 010 42030	
7263	Transistor, PNP, BC857B.	3198 010 42150	
7266	Transistor, NPN, BC847B.	3198 010 42030	
7330	IC, TDA6107Q/N2.	9352 576 50112	
7401	IC,.	9322 121 47687	
7460	Transistor, NPN, BU1508DX.	9340 170 50127	
7461	Transistor, NPN, BF819	9335 354 50127	
7462	Transistor, NPN, BC547B.	3198 020 40030	
7463	Transistor, PNP, BC557B.	3198 020 40110	
7480	IC,.	9322 028 93682	
7481	Transistor, PNP, BC557B.	3198 020 40110	
7482	Transistor, PNP, BC857B.	3198 010 42150	
7518	STH10NC60FI SMPS FET.	9322 155 66687	
7520	IC,.	9322 108 36682	
7570	IC,.	9337 711 00676	
S 7581	Coupler, TCDT1101G	9338 431 30682	
7590	Transistor, NPN, BC847B.	3198 010 42030	
7591	Transistor, NPN, BC847B.	3198 010 42030	
7592	Transistor, NPN, BC847B.	3198 010 42030	
7600	IC, SAA5543-PS/M4/0167 L9 v3.2 (Commercial Models - NON Pro Plus)	9352 670 84112	
7601	IC, ST24W16B6, commercial models only	9322 095 35682	
7603	Transistor, NPN, BC337	9331 796 00126	
7604	Transistor, NPN, BC847B.	3198 010 42030	
7605	Transistor, NPN, BC847B.	3198 010 42030	
7608	Transistor, NPN, BC847B.	3198 010 42030	
7609	Transistor, NPN, BC847B.	3198 010 42030	
7680	IR Receiver.	9322 127 53667	
7821	IC,.	9352 374 70112	
7822	IC, HEF4052BT.	9333 729 50653	
7823	Transistor, NPN, BC337-25.	3198 020 43530	
7904	Transistor, NPN, BC847B.	3198 010 42030	
7905	Transistor, NPN, BC847B.	3198 010 42030	
7906	Transistor, NPN, BC847B.	3198 010 42030	
7908	Transistor, NPN, BC847B.	3198 010 42030	
7909	Transistor, NPN, BC847B.	3198 010 42030	
7910	Transistor, NPN, BC847B.	3198 010 42030	
7951	IC,.	9351 861 60112	
9001	Jumper Wire/Staple	0322 179 00003	
9003	Jumper Wire/Staple	0322 179 00003	
9005	Jumper Wire/Staple	0322 179 00003	
9011	Jumper Wire/Staple	0322 179 00003	
9012	Jumper Wire/Staple	0322 179 00003	
9105	Jumper Wire/Staple	0322 179 00003	
9126	Jumper Wire/Staple	0322 179 00003	
9132	Jumper Wire/Staple	0322 179 00003	
9140	Jumper Wire/Staple	0322 179 00003	
9141	Jumper Wire/Staple	0322 179 00003	
9200	Jumper Wire/Staple	0322 179 00003	
9202	Jumper Wire/Staple	0322 179 00003	
9203	Jumper Wire/Staple	0322 179 00003	
9204	Jumper Wire/Staple	0322 179 00003	
9205	Jumper Wire/Staple	0322 179 00003	
9206	Jumper Wire/Staple	0322 179 00003	
9207	Jumper Wire/Staple	0322 179 00003	
9208	Jumper Wire/Staple	0322 179 00003	
9209	Jumper Wire/Staple	0322 179 00003	
9210	Jumper Wire/Staple	0322 179 00003	
9211	Jumper Wire/Staple	0322 179 00003	
9214	Jumper Wire/Staple	0322 179 00003	
9215	Jumper Wire/Staple	0322 179 00003	
9216	Jumper Wire/Staple	0322 179 00003	
9217	Jumper Wire/Staple	0322 179 00003	
9218	Jumper Wire/Staple	0322 179 00003	
9220	Jumper Wire/Staple	0322 179 00003	
9221	Jumper Wire/Staple	0322 179 00003	
9222	Jumper Wire/Staple	0322 179 00003	
9225	Jumper Wire/Staple	0322 179 00003	
9226	Jumper Wire/Staple	0322 179 00003	
9227	Jumper Wire/Staple	0322 179 00003	
9228	Jumper Wire/Staple	0322 179 00003	
9229	Jumper Wire/Staple	0322 179 00003	
9230	Jumper Wire/Staple	0322 179 00003	
9231	Jumper Wire/Staple	0322 179 00003	
9232	Jumper Wire/Staple	0322 179 00003	
9233	Jumper Wire/Staple	0322 179 00003	
9234	Jumper Wire/Staple	0322 179 00003	
9236	Jumper Wire/Staple	0322 179 00003	
9237	Jumper Wire/Staple	0322 179 00003	
9238	Jumper Wire/Staple	0322 179 00003	
9240	Jumper Wire/Staple	0322 179 00003	
9241	Jumper Wire/Staple	0322 179 00003	
9242	Jumper Wire/Staple	0322 179 00003	
9243	Jumper Wire/Staple	0322 179 00003	
9245	Jumper Wire/Staple	0322 179 00003	
9301	Jumper Wire/Staple	0322 179 00003	
9401	Jumper Wire/Staple	0322 179 00003	
9402	Jumper Wire/Staple	0322 179 00003	
9403	Jumper Wire/Staple	0322 179 00003	
9404	Jumper Wire/Staple	0322 179 00003	
9407	Jumper Wire/Staple	0322 179 00003	
9408	Jumper Wire/Staple	0322 179 00003	
9411	Jumper Wire/Staple	0322 179 00003	
9414	Jumper Wire/Staple	0322 179 00003	
9417	Jumper Wire/Staple	0322 179 00003	
9419	Jumper Wire/Staple	0322 179 00003	
9420	Jumper Wire/Staple	0322 179 00003	
9421	Jumper Wire/Staple	0322 179 00003	
9422	Jumper Wire/Staple	0322 179 00003	
9424	Jumper Wire/Staple	0322 179 00003	
9425	Jumper Wire/Staple	0322 179 00003	
9427	Jumper Wire/Staple	0322 179 00003	
9428	Jumper Wire/Staple	0322 179 00003	
9461	Jumper Wire/Staple	0322 179 00003	
9464	Jumper Wire/Staple	0322 179 00003	
9500	Jumper Wire/Staple	0322 179 00003	
9501	Jumper Wire/Staple	0322 179 00003	
9502	Jumper Wire/Staple	0322 179 00003	
9503	Jumper Wire/Staple	0322 179 00003	
9505	Jumper Wire/Staple	0322 179 00003	
9509	Jumper Wire/Staple	0322 179 00003	
9510	Jumper Wire/Staple	0322 179 00003	
9511	Jumper Wire/Staple	0322 179 00003	
9512	Jumper Wire/Staple	0322 179 00003	
9513	Jumper Wire/Staple	0322 179 00003	
9515	Jumper Wire/Staple	0322 179 00003	
9516	Jumper Wire/Staple	0322 179 00003	

S = Safety Part Be sure to use exact replacement part.

CH1927C221 (continued)

9517	Jumper Wire/Staple	0322 179 00003
9518	Jumper Wire/Staple	0322 179 00003
9521	Jumper Wire/Staple	0322 179 00003
9526	Jumper Wire/Staple	0322 179 00003
9601	Jumper Wire/Staple	0322 179 00003
9602	Jumper Wire/Staple	0322 179 00003
9603	Jumper Wire/Staple	0322 179 00003
9604	Jumper Wire/Staple	0322 179 00003
9605	Jumper Wire/Staple	0322 179 00003
9606	Jumper Wire/Staple	0322 179 00003
9608	Jumper Wire/Staple	0322 179 00003
9609	Jumper Wire/Staple	0322 179 00003
9610	Jumper Wire/Staple	0322 179 00003
9611	Jumper Wire/Staple	0322 179 00003
9612	Jumper Wire/Staple	0322 179 00003
9613	Jumper Wire/Staple	0322 179 00003
9614	Jumper Wire/Staple	0322 179 00003
9615	Jumper Wire/Staple	0322 179 00003
9618	Jumper Wire/Staple	0322 179 00003
9621	Jumper Wire/Staple	0322 179 00003
9622	Jumper Wire/Staple	0322 179 00003
9624	Jumper Wire/Staple	0322 179 00003
9625	Jumper Wire/Staple	0322 179 00003
9626	Jumper Wire/Staple	0322 179 00003
9629	Jumper Wire/Staple	0322 179 00003
9631	Jumper Wire/Staple	0322 179 00003
9632	Jumper Wire/Staple	0322 179 00003
9637	Jumper Wire/Staple	0322 179 00003
9640	Jumper Wire/Staple	0322 179 00003
9642	Jumper Wire/Staple	0322 179 00003
9643	Jumper Wire/Staple	0322 179 00003
9644	Jumper Wire/Staple	0322 179 00003
9754	Jumper Wire/Staple	0322 179 00003
9788	Jumper Wire/Staple	0322 179 00003
9793	Jumper Wire/Staple	0322 179 00003
9800	Jumper Wire/Staple	0322 179 00003
9805	Jumper Wire/Staple	0322 179 00003
9806	Jumper Wire/Staple	0322 179 00003
9807	Jumper Wire/Staple	0322 179 00003
9810	Jumper Wire/Staple	0322 179 00003
9901	Jumper Wire/Staple	0322 179 00003
9904	Jumper Wire/Staple	0322 179 00003
9905	Jumper Wire/Staple	0322 179 00003
9906	Jumper Wire/Staple	0322 179 00003
9920	Jumper Wire/Staple	0322 179 00003
9933	Jumper Wire/Staple	0322 179 00003
9936	Jumper Wire/Staple	0322 179 00003
9940	Jumper Wire/Staple	0322 179 00003
9941	Jumper Wire/Staple	0322 179 00003
9942	Jumper Wire/Staple	0322 179 00003
9943	Jumper Wire/Staple	0322 179 00003
9944	Jumper Wire/Staple	0322 179 00003
9945	Jumper Wire/Staple	0322 179 00003
9946	Jumper Wire/Staple	0322 179 00003
9947	Jumper Wire/Staple	0322 179 00003
9948	Jumper Wire/Staple	0322 179 00003
9949	Jumper Wire/Staple	0322 179 00003
9950	Jumper Wire/Staple	0322 179 00003
9951	Jumper Wire/Staple	0322 179 00003
9952	Jumper Wire/Staple	0322 179 00003
9953	Jumper Wire/Staple	0322 179 00003
9955	Jumper Wire/Staple	0322 179 00003
9956	Jumper Wire/Staple	0322 179 00003
9957	Jumper Wire/Staple	0322 179 00003
9958	Jumper Wire/Staple	0322 179 00003
9959	Jumper Wire/Staple	0322 179 00003
9960	Jumper Wire/Staple	0322 179 00003
9962	Jumper Wire/Staple	0322 179 00003
9963	Jumper Wire/Staple	0322 179 00003
9964	Jumper Wire/Staple	0322 179 00003
9965	Jumper Wire/Staple	0322 179 00003
9966	Jumper Wire/Staple	0322 179 00003
9967	Jumper Wire/Staple	0322 179 00003
9968	Jumper Wire/Staple	0322 179 00003
9969	Jumper Wire/Staple	0322 179 00003
9970	Jumper Wire/Staple	0322 179 00003
9971	Jumper Wire/Staple	0322 179 00003
9972	Jumper Wire/Staple	0322 179 00003
9974	Jumper Wire/Staple	0322 179 00003
9975	Jumper Wire/Staple	0322 179 00003
9976	Jumper Wire/Staple	0322 179 00003
9977	Jumper Wire/Staple	0322 179 00003
9981	Jumper Wire/Staple	0322 179 00003
9982	Jumper Wire/Staple	0322 179 00003
9983	Jumper Wire/Staple	0322 179 00003
9984	Jumper Wire/Staple	0322 179 00003
9987	Jumper Wire/Staple	0322 179 00003
9989	Jumper Wire/Staple	0322 179 00003
9990	Jumper Wire/Staple	0322 179 00003
9991	Jumper Wire/Staple	0322 179 00003
9992	Jumper Wire/Staple	0322 179 00003
9993	Jumper Wire/Staple	0322 179 00003

	CBA	00EMF893A003 Main Chassis Board Asm.	00EM F89 3A003

Cabinet & Accessory Parts

		Cabinet & Accessory Parts	
S	AC01	AC Power Cord.	3135 010 08051
	AC02	Clip, Anode Lead	3135 014 04471
	AC03	Cabinet Back	3135 014 07921
	AC04	Cabinet Front.	3135 017 04121
	AC05	Chassis Guide.	3139 124 31381
	AC06	Control Buttons.	3139 124 27351
S	AC07	Convergence and Purity Assembly.	2422 549 43385
S	AC08	CRT A68AHB82X.	9301 759 20405
S	AC09	Coil, Degaussing	3121 218 62701
	AC10	Holder, Degaussing (4 Used).	3135 013 01641
	AC11	Light Guide.	3139 124 26461
	AC12	Nameplate.	3135 015 03571
	AC14	Power Button	3139 124 26444
	AC16	Speaker, 5W, 16 ohm (2 Used)	2422 264 00333
S	AC18	Yoke	2422 549 43727
	AC19	Yoke Wedge (3 used).	3135 013 01961
	AC24	Spring	3139 121 26231

S = Safety Part Be sure to use exact replacement part.

EP9125C221 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts		
0113	L9 SOPS HEATSINK	3139 121 62041	
0119	DIODE HEATSINK L9.	3139 121 26691	
0121	LINE HEATSINK (CINCH).	3139 121 61942	
S 0127	Holder, Fuse, 2 Pin.	3122 358 71251	
0211	Connector, 2 Pin	2422 025 11196	
0212	Connector, 2 Pin	2422 025 15396	
0215	Connector, 2 Pin,.	2422 025 16343	
0220	4 Pin Board Connector.	2422 025 04852	
0221	Connector, 4 Pin	2422 025 15503	
0222	Connector, 2 Pin	2422 025 10646	
0224	1 Pin Board Connector.	2422 034 20021	
0228	1 Pin Board Connector.	2422 034 20021	
S 0243	Connector, 6 Pin	2422 025 04854	
0244	4 Pin Board Connector.	2422 025 04852	
S 0245	Connector, 6 Pin	2422 025 04854	
S 0254	CRT Socket (9 Pin)	2422 500 80022	
0267	Connector, 3 Pin	2412 020 00725	
1000	TUNER.	3139 147 16412	
1001	Filter	2422 549 42501	
1003	45 MHz SAW, Filter,.	2422 549 42433	
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807	
1208	Crystal Resonator, 3.58MHz	2422 543 00832	
S 1500	Fue, 4 A, 250V	2422 086 10905	
S 1571	FUSE 1A 250V	2422 086 10779	
S 1572	FUSE 1A 250V	2422 086 10779	
S 1580	Relay, 12V, 5A G5PA-1.	2422 132 07444	
1600	Switch, Tactile.	2422 128 02742	
1601	Switch, Tactile.	2422 128 02742	
1602	Switch, Tactile.	2422 128 02742	
1603	Switch, Tactile.	2422 128 02742	
1606	Switch, Tactile.	2422 128 02742	
1660	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488	
2001	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2002	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2003	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2004	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2006	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290	
2011	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2201	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2202	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2203	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2204	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2205	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2207	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2208	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2209	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2211	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2212	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2213	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2214	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2215	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280	
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 16654	
2220	Cap, 18p, 5%, 50V, Ceramic	3198 016 01890	
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2222	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2226	Cap, 33u, 20%, 25V, Electrolytic . .	2020 021 90124	
2227	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2228	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780	
2247	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2248	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2249	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2330	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177	
2340	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495	
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320	
S 2343	Cap, 3n3, 10%, 2KV, Ceramic.	2020 558 90529	
2345	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020	
2401	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2402	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2404	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2405	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2407	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2409	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2420	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2426	Cap, 100n, 10%, 63V, Metalized Polyes ter.	2222 370 75104	
2428	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220	
2429	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2430	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2431	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2437	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2438	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2448	Cap, 33p, 5%, 500V, Ceramic.	2020 557 90192	
2450	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91139	
2451	Cap, 15n, 10%, 50V, Polyester. . . .	2020 300 90575	
2456	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176	
2457	Cap, 390n, 5%, 250V, Metalized Polypr opylene.	2222 479 90021	
2458	Cap, 2u2, 20%, 100V, Electrolytic. .	2020 021 91331	
2459	Cap, 680p, 10%, 500V, Ceramic. . . .	3198 019 46810	
2461	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020	
2462	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176	
S 2463	Cap, 470p, 10%, 2KV, Ceramic	2020 558 90483	
S 2465	Cap, 10n, 5%, 1600V, Polypropylene .	2222 375 90154	
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050	
2473	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790	
2481	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740	
2482	Cap, 68n, 10%, 250V, Polyester . . .	2222 347 90234	
2484	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2485	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293	
2486	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2487	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2488	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2489	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2490	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710	
2491	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710	
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810	
2499	Cap, 220n, 10%, 100V, Metalized Polye ster	2222 365 25224	
2500	Cap, 470n, 20%, 275V, Polypropylene.	2222 336 29148	
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
2507	Cap, 1n5, 10%, 1KV, Ceramic.	3198 019 61520	
2508	Cap, 470u, 20%, 200V, Electrolytic .	2020 024 90647	
2511	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020	
2518	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290	
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320	
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320	
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2530	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 021 91147	
2531	Cap, 1n, 2%, 50V, Polypropylene. . .	2020 310 90049	
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220	
2540	Cap, 100u, 20%, 25V, Electrolytic. .	2020 021 90547	
S 2545	Cap, 1n5, 20%, v, Ceramic.	2020 554 90128	
2550	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710	
2551	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91358	
2561	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020	
2562	Cap, 220p, 10%, 1KV, Ceramic	3198 019 62210	
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020	
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020	
2572	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330	
2575	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820	
2577	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020	
2586	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2604	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290	
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2613	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2615	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2619	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2622	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890	
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2629	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230	
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2631	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2679	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2681	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2913	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280	
2914	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330	
2915	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	
2916	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648	
2917	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	

S = Safety Part Be sure to use exact replacement part.

EP9125C221 (continued)

2960	Cap, 220u, 20%, 50V, Electrolytic. .	3198 026 52210		3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090	S	3452	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	3198 012 32290
2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090	S	3453	Res, 4R7, 5%, 5W, Wire Wound	2322 251 41478
2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090	S	3454	Res, 33K, 5%, 1 1/3W, Metal Film . .	2322 194 63333
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3010	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610	S	3462	Res, 6K8, 5%, 5W, Metal Film	2322 257 41682
3013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020		3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720		3464	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3015	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	S	3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810		3466	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903
3021	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020		3467	Res, 15K, 1%, 3/5W, Metal Film . . .	2322 156 21503
3200	Res, 560 ohm, 5%, 1/10W, Metalized Gl			3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
	ass.	3198 021 55610		3469	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3201	Res, 390 ohm, 5%, 1/10W, Metalized Gl			3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
	ass.	3198 021 53910		3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703
3203	Res, 330 ohm, 5%, 1/10W, Metalized Gl			3481	Res, 100K, 1%, 3/5W, Metal Film. . .	2322 156 21004
	ass.	3198 021 53310		3482	Res, 32K4, 1%, 3/5W, Metal Film. . .	2322 156 23243
3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820		3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3205	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020		3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3206	Res, 560 ohm, 5%, 1/10W, Metalized Gl		S	3486	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
	ass.	3198 021 55610	S	3487	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3488	Res, 4R7, 5%, 1/2W, Metal Film . . .	2306 207 03478
3209	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	S	3490	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
3212	Res, 390 ohm, 5%, 1/10W, Metalized Gl		S	3491	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
	ass.	3198 021 53910	S	3492	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
3213	Res, 560 ohm, 5%, 1/10W, Metalized Gl			3495	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
	ass.	3198 021 55610		3496	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3215	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230		3497	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3216	Res, Zero ohm, 'Chip' Jumper	3198 021 90020		3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	3198 013 04710
3218	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	S	3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225
3219	Res, 560 ohm, 5%, 1/10W, Metalized Gl			3503	PTC DC ZPB 120V S 10R PM30 B . . .	2120 661 00019
	ass.	3198 021 55610	S	3505	Surge Protector.	2422 549 43073
3220	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	S	3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3225	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040	S	3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	S	3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102
3231	Res, Zero ohm, 'Chip' Jumper	3198 021 90020		3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3232	Res, Zero ohm, 'Chip' Jumper	3198 021 90020		3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184
3233	Res, Zero ohm, 'Chip' Jumper	3198 021 90020		3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204
3243	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220	S	3515	2.5 ohm, 20%, 3.6W, Negative Temperat	
3246	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230			ure Coefficient.	2122 612 00023
3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3517	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340	S	3518	Res, 0R22, 5%, 2 1/2W, Metal Film. .	3198 012 32270
3250	Res, Zero ohm, 'Chip' Jumper	3198 021 90020		3520	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3251	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040		3521	Res, 330 ohm, 5%, 1/10W, Metalized Gl	
3252	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220			ass.	3198 021 53310
3253	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	S	3525	Res, 47 ohm, 5%, 1/3W, Metal Film. .	2306 204 03479
3257	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010		3528	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3258	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010		3529	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3259	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010		3530	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3532	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	3198 013 01020		3534	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3536	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	3198 013 01020		3537	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3542	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	3198 013 01020		3570	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
S 3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109		3571	Res, 150K, 1%, 3/5W, Metal Film. . .	2322 156 21504
S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108		3573	Res, 2K, 1%, 1/8W, Metalized Glass .	2322 734 62002
S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108		3574	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3343	Res, 1K5, 20%, 1/2W, Carbon Film . .	3198 013 01520		3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290		3577	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3345	VDR DC 1MA/50V S MAX 110V A . . .	2122 550 00152		3578	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290		3579	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3401	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380		3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3402	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380		3592	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3403	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380		3594	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3405	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002		3595	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3406	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020		3596	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3407	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002		3597	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020		3598	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3409	Res, 1R5, 5%, 1/3W, Metal Film . . .	2306 204 03158		3599	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210		3607	RST NETW RGLE 10X 8K2 PM5 B . . .	2120 108 93916
3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210		3608	RST NETW RGLE 6X 2K2 PM5 B . . .	2120 108 93913
3420	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740		3609	RST NETW RGLE 7X 2K2 PM5 B . . .	2120 108 93915
3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220		3611	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220		3612	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840		3613	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606		3615	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3425	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540		3616	Jumper Wire/Staple	0322 179 00003
3426	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930		3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3428	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230		3619	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3429	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730		3629	Res, 470 ohm, 5%, 1/10W, Metalized Gl	
3431	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320			ass.	3198 021 54710
3432	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010		3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
3433	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030		3631	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3436	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	S	3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3437	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030		3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210
3438	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330		3634	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920		3635	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3447	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030		3636	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3637	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720

S = Safety Part Be sure to use exact replacement part.

EP9125C221 (continued)

3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3653	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3654	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3655	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3662	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3663	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220	
3664	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220	
3665	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3666	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620	
3667	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730	
3672	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3673	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3674	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710	
3675	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3676	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3677	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3680	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810	
3681	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3682	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220	
3683	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3684	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	
3687	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210	
3908	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3909	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3910	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620	
3911	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230	
3912	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3913	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3914	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	
3915	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820	
3916	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210	
3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810	
3951	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	
3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3953	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820	
3955	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4004	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4011	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4012	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4020	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4051	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4100	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4203	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4212	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4215	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4216	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4465	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4501	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4650	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4651	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4654	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4655	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4911	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4914	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4957	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4999	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
5000	Coil, 5u6.	3198 018 25680	
5004	Coil, 820n	2422 535 97314	
5201	Coil, 22u.	3198 018 22290	
5202	Coil, 6u8.	3198 018 16880	
5342	Coil, 22u.	3198 018 22290	
S 5445	Transformer, L.O.T., models ending in C101, C121, and C125	2422 531 02327	
5451	Coil, 27u.	2422 535 96614	
5457	Coil, Linear Correction.	3128 138 53241	
5461	Transformer.	3128 138 33811	
5480	Coil, 27u.	2422 535 97334	
S 5500	Filter, Mains, 5mH, 2A	2422 549 43432	
5516	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5518	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5521	Coil, 2u2.	3198 018 12280	
5540	Coil, 4u7.	3198 018 14780	
S 5545	Transfomer,.	2422 531 02314	
5551	Coil, 27u.	2422 535 95366	
5552	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5572	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5573	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5576	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5577	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5600	Coil, 8u2.	3198 018 18280	
5601	Coil, 8u2.	3198 018 18280	
5620	Coil, 6u8.	3198 018 16880	
5821	Coil, 100u	3198 018 21010	
6008	Zener Diode, 33 volt	3198 010 23390	
6211	Diode, Signal, 1N4148.	3198 010 10010	
6212	Diode, Signal, 1N4148.	3198 010 10010	
6213	Diode, Signal, 1N4148.	3198 010 10010	
6331	Diode, Signal, BAV21	3198 010 10070	
6333	Diode, Signal, BAV21	3198 010 10070	
6335	Diode, Signal, BAV21	3198 010 10070	
6401	Diode, Rect, BYD33D	9337 234 00133	
6402	Zener Diode, 33 volt	3198 010 23390	
6403	Diode, Rect, BYD33D	9337 234 00133	
6404	Diode, Rect, BYD33D	9337 234 00133	
6449	Diode, Signal, 1N4148.	3198 010 10010	
6450	Diode, Signal, 1N4148.	3198 010 10010	
6460	Diode, Rect, BY228/20	9336 215 80112	
6463	Diode, Signal, 1N4148.	3198 010 10010	
6464	Zener Diode, 6.2 volt.	9331 668 30133	
6465	Diode, Rect, BYD33J	9337 234 20133	
6466	Diode, Rect, BYD33J	9337 234 20133	
6480	Zener Diode, 27 volt	3198 010 22790	
6481	Diode, Signal, 1N4148.	3198 010 10010	
6485	Diode, Rect, BYD33J	9337 234 20133	
6486	Diode, Rect, EGP20DL-5300	9322 100 13682	
6487	Diode, Rect, BYD33D	9337 234 00133	
6488	Diode, Rect, BYV27-200.	9322 126 72673	
6490	Diode, Rect, BYV27-200.	9322 126 72673	
6505	Diode, Bridge Rect, GBU6JL-7002 . .	9322 138 08667	
6507	Diode, Rect, BYD33J	9337 234 20133	
6508	Diode, Rect, BYD33J	9337 234 20133	
6510	Zener Diode, 20 volt	9331 178 60133	
6511	Diode, Rect, BYV95C	9335 001 80133	
6512	Diode, Rect, 1N5062	3198 010 10120	
6513	Diode, Rect, 1N5062	3198 010 10120	
6514	Zener Diode, 18 volt	3198 010 21890	
6540	Diode, Signal, BAV21	3198 010 10070	
6550	Diode, Rect, BY229X-800	9340 380 30127	
6560	Diode, Rect, EGP20DL-5300	9322 100 13682	
6580	Diode, Rect, BYV27-200.	9322 126 72673	
6584	Diode, Signal, 1N4148.	3198 010 10010	
6585	Diode, Signal, 1N4148.	3198 010 10010	
6591	Diode, Signal, BAS16WS	9322 031 99685	
6601	Zener Diode, 3.9 volt.	3198 010 23980	
6602	Diode, Signal, 1N4148.	3198 010 10010	
6603	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610	
6604	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610	
6605	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610	
6606	Zener Diode, 4.7 volt.	3198 010 24780	
6607	Zener Diode, 6.8 volt.	3198 010 26880	
6690	LED VS LTL-307P (LITO) B . . .	9322 033 95682	
6951	Diode, Signal, BAS16WS	9322 031 99685	
6961	Diode, Signal, BAS16WS	9322 031 99685	
7250	IC,.	9352 620 26112	
7251	IC, LM317T	9337 220 80682	
7254	Transistor, NPN, BC847B.	3198 010 42030	
7256	Transistor, NPN, BC847B.	3198 010 42030	
7258	Transistor, NPN, BC847B.	3198 010 42030	
7263	Transistor, PNP, BC857B.	3198 010 42150	
7266	Transistor, NPN, BC847B.	3198 010 42030	
7330	IC, TDA6107Q/N2.	9352 576 50112	
7401	IC,.	9322 121 47687	
7460	Transistor, NPN, BU1508DX.	9340 170 50127	
7461	Transistor, NPN, BF819	9335 354 50127	
7462	Transistor, NPN, BC547B.	3198 020 40030	
7463	Transistor, PNP, BC557B.	3198 020 40110	
7480	IC,.	9322 028 93682	
7481	Transistor, PNP, BC557B.	3198 020 40110	
7482	Transistor, PNP, BC857B.	3198 010 42150	
7518	STH10NC60FI SMPS FET.	9322 155 66687	
7520	IC,.	9322 108 36682	
7570	IC,.	9337 711 00676	
S 7581	Coupler, TCDT1101G	9338 431 30682	
7590	Transistor, NPN, BC847B.	3198 010 42030	
7591	Transistor, NPN, BC847B.	3198 010 42030	
7592	Transistor, NPN, BC847B.	3198 010 42030	
7600	IC, SAA5543-PS/M4/0167 L9 v3.2 (Comme rcial Models - NON Pro Plus)	9352 670 84112	
7601	IC, ST24W16B6, commercial models only	9322 095 35682	
7603	Transistor, NPN, BC337	9331 796 00126	
7604	Transistor, NPN, BC847B.	3198 010 42030	
7605	Transistor, NPN, BC847B.	3198 010 42030	
7608	Transistor, NPN, BC847B.	3198 010 42030	

S = Safety Part Be sure to use exact replacement part.

EP9125C221 (continued)

7609	Transistor, NPN, BC847B.	3198 010 42030
7680	IR Receiver.	9322 127 53667
7904	Transistor, NPN, BC847B.	3198 010 42030
7952	IC,.	9350 662 70112
9001	Jumper Wire/Staple	0322 179 00003
9003	Jumper Wire/Staple	0322 179 00003
9005	Jumper Wire/Staple	0322 179 00003
9011	Jumper Wire/Staple	0322 179 00003
9012	Jumper Wire/Staple	0322 179 00003
9105	Jumper Wire/Staple	0322 179 00003
9126	Jumper Wire/Staple	0322 179 00003
9200	Jumper Wire/Staple	0322 179 00003
9202	Jumper Wire/Staple	0322 179 00003
9203	Jumper Wire/Staple	0322 179 00003
9204	Jumper Wire/Staple	0322 179 00003
9205	Jumper Wire/Staple	0322 179 00003
9206	Jumper Wire/Staple	0322 179 00003
9207	Jumper Wire/Staple	0322 179 00003
9208	Jumper Wire/Staple	0322 179 00003
9209	Jumper Wire/Staple	0322 179 00003
9210	Jumper Wire/Staple	0322 179 00003
9211	Jumper Wire/Staple	0322 179 00003
9214	Jumper Wire/Staple	0322 179 00003
9215	Jumper Wire/Staple	0322 179 00003
9216	Jumper Wire/Staple	0322 179 00003
9217	Jumper Wire/Staple	0322 179 00003
9218	Jumper Wire/Staple	0322 179 00003
9220	Jumper Wire/Staple	0322 179 00003
9221	Jumper Wire/Staple	0322 179 00003
9222	Jumper Wire/Staple	0322 179 00003
9225	Jumper Wire/Staple	0322 179 00003
9226	Jumper Wire/Staple	0322 179 00003
9227	Jumper Wire/Staple	0322 179 00003
9228	Jumper Wire/Staple	0322 179 00003
9229	Jumper Wire/Staple	0322 179 00003
9230	Jumper Wire/Staple	0322 179 00003
9231	Jumper Wire/Staple	0322 179 00003
9232	Jumper Wire/Staple	0322 179 00003
9233	Jumper Wire/Staple	0322 179 00003
9234	Jumper Wire/Staple	0322 179 00003
9236	Jumper Wire/Staple	0322 179 00003
9237	Jumper Wire/Staple	0322 179 00003
9238	Jumper Wire/Staple	0322 179 00003
9240	Jumper Wire/Staple	0322 179 00003
9241	Jumper Wire/Staple	0322 179 00003
9242	Jumper Wire/Staple	0322 179 00003
9243	Jumper Wire/Staple	0322 179 00003
9245	Jumper Wire/Staple	0322 179 00003
9301	Jumper Wire/Staple	0322 179 00003
9401	Jumper Wire/Staple	0322 179 00003
9402	Jumper Wire/Staple	0322 179 00003
9403	Jumper Wire/Staple	0322 179 00003
9404	Jumper Wire/Staple	0322 179 00003
9407	Jumper Wire/Staple	0322 179 00003
9408	Jumper Wire/Staple	0322 179 00003
9411	Jumper Wire/Staple	0322 179 00003
9414	Jumper Wire/Staple	0322 179 00003
9417	Jumper Wire/Staple	0322 179 00003
9419	Jumper Wire/Staple	0322 179 00003
9420	Jumper Wire/Staple	0322 179 00003
9421	Jumper Wire/Staple	0322 179 00003
9422	Jumper Wire/Staple	0322 179 00003
9424	Jumper Wire/Staple	0322 179 00003
9425	Jumper Wire/Staple	0322 179 00003
9427	Jumper Wire/Staple	0322 179 00003
9428	Jumper Wire/Staple	0322 179 00003
9460	Jumper Wire/Staple	0322 179 00003
9461	Jumper Wire/Staple	0322 179 00003
9500	Jumper Wire/Staple	0322 179 00003
9501	Jumper Wire/Staple	0322 179 00003
9502	Jumper Wire/Staple	0322 179 00003
9503	Jumper Wire/Staple	0322 179 00003
9505	Jumper Wire/Staple	0322 179 00003
9509	Jumper Wire/Staple	0322 179 00003
9510	Jumper Wire/Staple	0322 179 00003
9511	Jumper Wire/Staple	0322 179 00003
9512	Jumper Wire/Staple	0322 179 00003
9513	Jumper Wire/Staple	0322 179 00003
9515	Jumper Wire/Staple	0322 179 00003
9516	Jumper Wire/Staple	0322 179 00003
9517	Jumper Wire/Staple	0322 179 00003
9518	Jumper Wire/Staple	0322 179 00003
9521	Jumper Wire/Staple	0322 179 00003
9526	Jumper Wire/Staple	0322 179 00003
9601	Jumper Wire/Staple	0322 179 00003
9602	Jumper Wire/Staple	0322 179 00003
9603	Jumper Wire/Staple	0322 179 00003
9604	Jumper Wire/Staple	0322 179 00003
9605	Jumper Wire/Staple	0322 179 00003
9606	Jumper Wire/Staple	0322 179 00003
9608	Jumper Wire/Staple	0322 179 00003
9609	Jumper Wire/Staple	0322 179 00003
9610	Jumper Wire/Staple	0322 179 00003
9611	Jumper Wire/Staple	0322 179 00003
9612	Jumper Wire/Staple	0322 179 00003
9613	Jumper Wire/Staple	0322 179 00003
9614	Jumper Wire/Staple	0322 179 00003
9615	Jumper Wire/Staple	0322 179 00003
9618	Jumper Wire/Staple	0322 179 00003
9621	Jumper Wire/Staple	0322 179 00003
9622	Jumper Wire/Staple	0322 179 00003
9624	Jumper Wire/Staple	0322 179 00003
9625	Jumper Wire/Staple	0322 179 00003
9626	Jumper Wire/Staple	0322 179 00003
9629	Jumper Wire/Staple	0322 179 00003
9631	Jumper Wire/Staple	0322 179 00003
9632	Jumper Wire/Staple	0322 179 00003
9637	Jumper Wire/Staple	0322 179 00003
9640	Jumper Wire/Staple	0322 179 00003
9642	Jumper Wire/Staple	0322 179 00003
9643	Jumper Wire/Staple	0322 179 00003
9644	Jumper Wire/Staple	0322 179 00003
9754	Jumper Wire/Staple	0322 179 00003
9788	Jumper Wire/Staple	0322 179 00003
9793	Jumper Wire/Staple	0322 179 00003
9800	Jumper Wire/Staple	0322 179 00003
9805	Jumper Wire/Staple	0322 179 00003
9806	Jumper Wire/Staple	0322 179 00003
9807	Jumper Wire/Staple	0322 179 00003
9810	Jumper Wire/Staple	0322 179 00003
9901	Jumper Wire/Staple	0322 179 00003
9902	Jumper Wire/Staple	0322 179 00003
9904	Jumper Wire/Staple	0322 179 00003
9905	Jumper Wire/Staple	0322 179 00003
9906	Jumper Wire/Staple	0322 179 00003
9933	Jumper Wire/Staple	0322 179 00003
9936	Jumper Wire/Staple	0322 179 00003
9940	Jumper Wire/Staple	0322 179 00003
9941	Jumper Wire/Staple	0322 179 00003
9942	Jumper Wire/Staple	0322 179 00003
9943	Jumper Wire/Staple	0322 179 00003
9944	Jumper Wire/Staple	0322 179 00003
9945	Jumper Wire/Staple	0322 179 00003
9946	Jumper Wire/Staple	0322 179 00003
9947	Jumper Wire/Staple	0322 179 00003
9948	Jumper Wire/Staple	0322 179 00003
9949	Jumper Wire/Staple	0322 179 00003
9950	Jumper Wire/Staple	0322 179 00003
9951	Jumper Wire/Staple	0322 179 00003
9952	Jumper Wire/Staple	0322 179 00003
9953	Jumper Wire/Staple	0322 179 00003
9955	Jumper Wire/Staple	0322 179 00003
9956	Jumper Wire/Staple	0322 179 00003
9957	Jumper Wire/Staple	0322 179 00003
9958	Jumper Wire/Staple	0322 179 00003
9959	Jumper Wire/Staple	0322 179 00003
9960	Jumper Wire/Staple	0322 179 00003
9962	Jumper Wire/Staple	0322 179 00003
9963	Jumper Wire/Staple	0322 179 00003
9964	Jumper Wire/Staple	0322 179 00003
9965	Jumper Wire/Staple	0322 179 00003
9966	Jumper Wire/Staple	0322 179 00003
9967	Jumper Wire/Staple	0322 179 00003
9968	Jumper Wire/Staple	0322 179 00003
9969	Jumper Wire/Staple	0322 179 00003
9970	Jumper Wire/Staple	0322 179 00003
9971	Jumper Wire/Staple	0322 179 00003
9972	Jumper Wire/Staple	0322 179 00003
9974	Jumper Wire/Staple	0322 179 00003
9975	Jumper Wire/Staple	0322 179 00003
9976	Jumper Wire/Staple	0322 179 00003
9977	Jumper Wire/Staple	0322 179 00003
9981	Jumper Wire/Staple	0322 179 00003
9982	Jumper Wire/Staple	0322 179 00003
9983	Jumper Wire/Staple	0322 179 00003
9984	Jumper Wire/Staple	0322 179 00003
9987	Jumper Wire/Staple	0322 179 00003
9989	Jumper Wire/Staple	0322 179 00003
9990	Jumper Wire/Staple	0322 179 00003
9991	Jumper Wire/Staple	0322 179 00003
9992	Jumper Wire/Staple	0322 179 00003
9993	Jumper Wire/Staple	0322 179 00003
CBA	00EMF898A002 Main Chassis Board Asm.	00EM F89 8A002

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Mains Cord	3135 010 07161
AC02	Clip, Anode Lead	3135 014 04471
AC03	Cabinet Back	3135 014 09841
AC04	Cabinet Front.	3135 017 04101
AC05	Chassis Guide.	3139 124 31381
AC06	Control Buttons.	3139 124 27351
S AC07	Convergence and Purity Assembly. . .	2422 549 43385
S AC08	CRT A63AFW36X (C121 Version)	9301 763 20443

S = Safety Part Be sure to use exact replacement part.

EP9125C221 (continued)

S	AC09	Coil, Degaussing	2422 549 44489
	AC10	Holder, Degaussing (4 Used).	3135 013 01641
	AC11	Light Guide.	3139 124 26461
	AC12	Nameplate.	3135 015 03571
	AC14	Power Button	3139 124 26444
	AC16	Speaker, 16R, 1W5 (2 Used)	2422 264 00343
S	AC18	Yoke (C121 Version).	3321 203 00121
	AC19	Yoke Wedge (3 used).	3135 013 00311
	AC24	Spring	3139 121 26231

S = Safety Part Be sure to use exact replacement part.

HD2530C121 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts		
S 0127	3.15 Amp Fuse, ...	3122 358 72141	
0152	Cable, DIP, 6 Pin, 400mm	3104 301 09421	
0153	4 Pin Cable.	3104 301 09431	
0212	Connector, 2 Pin	2422 025 15396	
0220	4 Pin Board Connector.	2422 025 04852	
0223	3 Pin Board Connector.	2422 026 04963	
0224	1 Pin Board Connector.	2422 034 20021	
0228	1 Pin Board Connector.	2422 034 20021	
0234	Connector, 4 Pin	2422 025 15847	
S 0243	Connector, 6 Pin	2422 025 04854	
0244	4 Pin Board Connector.	2422 025 04852	
S 0245	Connector, 6 Pin	2422 025 04854	
S 0254	CRT Socket (9 Pin)	2422 500 80022	
0267	Connector, 3 Pin	2412 020 00725	
1000	Tuner.	2422 542 90057	
1001	Filter	2422 549 42501	
1003	45 MHz SAW, Filter,.	2422 549 42433	
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807	
1208	Crystal Resonator.	4835 242 77276	
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10869	
S 1571	1 Amp, Radial Fuse,.	4835 253 97162	
S 1572	1 Amp, Radial Fuse,.	4835 253 97162	
S 1580	Relay, 12V	2422 132 07317	
1600	Switch, Tactile.	2422 128 02742	
1601	Switch, Tactile.	2422 128 02742	
1602	Switch, Tactile.	2422 128 02742	
1603	Switch, Tactile.	2422 128 02742	
1606	Switch, Tactile.	2422 128 02742	
1660	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488	
1821	Ceramic Resonator.	4835 122 97102	
2001	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2002	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2003	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2004	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2006	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290	
2011	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2102	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2103	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2104	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2201	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2202	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2203	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2204	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2205	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2207	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2208	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2209	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2211	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2212	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2213	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2214	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2215	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280	
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 16654	
2220	Cap, 15p, 5%, 50V, Ceramic	3198 016 01590	
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2222	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2226	Cap, 33u, 20%, 25V, Electrolytic . .	2020 021 90124	
2227	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2247	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2248	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2249	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2330	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177	
2340	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495	
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320	
S 2343	Cap, 3n3, 10%, 2KV, Ceramic.	2020 558 90529	
2345	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020	
2401	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2402	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2404	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2405	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2407	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2409	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2420	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2426	Cap, 100n, 10%, 63V, Metalized Polyes ter.	2222 370 75104	
2428	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220	
2429	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2430	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2431	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2437	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2438	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2448	Cap, 220p, 10%, 500V, Ceramic. . . .	3198 019 42210	
2450	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91139	
2451	Cap, 15n, 10%, 50V, Polyester. . . .	2020 300 90575	
2451	0.01uF., 10%, 50V, Polyester, only 27	3198 138 20941	
2456	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176	
2457	Cap, 390n, 5%, 250V, Metalized Polypr opylene.	2222 479 90021	
2458	Cap, 2u2, 20%, 100V, Electrolytic. .	2020 021 91331	
2459	Cap, 680p, 10%, 500V, Ceramic. . . .	3198 019 46810	
2461	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020	
2462	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176	
2463	470pF., 10%, 2KV, Ceramic.	4835 122 47638	
S 2465	Cap, 10n, 5%, 1600V, Polypropylene .	2222 375 90154	
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050	
2473	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790	
2481	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740	
2482	Cap, 68n, 10%, 250V, Polyester . . .	2222 347 90234	
2484	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2485	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293	
2486	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2487	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2488	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2489	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2490	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710	
2491	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710	
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810	
2500	0.47uF., 250V, Polyester	4835 121 47569	
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
S 2507	Cap, 1n5, 10%, 1KV, Ceramic.	2020 558 90443	
2508	Cap, 470u, 20%, 200V, Electrolytic .	2020 024 90647	
S 2511	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020	
S 2518	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290	
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320	
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320	
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2530	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 021 91147	
2531	Cap, 1n, 2%, 50V, Polypropylene. . .	2020 310 90049	
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220	
2540	Cap, 100u, 20%, 25V, Electrolytic. .	2020 021 90547	
S 2545	1500pF., 250VAC, Ceramic	4835 122 47621	
S 2550	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2551	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91358	
2561	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020	
S 2562	Cap, 220p, 10%, 1KV, Ceramic	2020 558 90424	
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020	
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020	
2572	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330	
2575	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820	
2577	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020	
2586	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2604	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290	
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2613	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2615	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2619	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2622	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890	
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2629	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230	
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2631	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2679	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2681	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2821	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280	
2823	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2825	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2826	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090	
2827	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2828	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2829	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	
2830	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280	
2831	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	
2832	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280	

S = Safety Part Be sure to use exact replacement part.

HD2530C121 (continued)

2833	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280	
2834	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780	
2835	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	
2836	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2837	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740	
2838	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2839	Cap, 1u, 5%, 50V, Metalized Polyester	2020 308 90124	
2840	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2841	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2842	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2844	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2845	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2913	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280	
2914	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330	
2915	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	
2916	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648	
2917	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2918	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330	
2919	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	
2920	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648	
2921	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2931	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280	
2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2960	Cap, 220u, 20%, 50V, Electrolytic. .	3198 026 52210	
2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090	
2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090	
2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090	
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3010	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610	
3013	Zero ohm,.	4835 111 27056	
3014	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3015	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810	
3021	Res, 1K, 2%, 0,25W	4822 051 10102	
3103	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220	
3104	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3108	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220	
3109	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3123	75 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37276	
3200	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3201	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253	
3203	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443	
3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	
3205	Res, 1K, 2%, 0,25W	4822 051 10102	
3206	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	
3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3209	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3212	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253	
3213	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	
3215	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3216	Zero ohm,.	4835 111 27056	
3217	Res, 1M5, 5%, 1/8W, Metalized Glass.	2322 730 61155	
3218	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3219	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	
3220	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3225	100k, 5%, 1/10W, Metal Film.	4835 111 37434	
3228	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3231	Zero ohm,.	4835 111 27056	
3232	Zero ohm,.	4835 111 27056	
3233	Zero ohm,.	4835 111 27056	
3243	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3246	82k, 5%, 1/10W, Metal Film	4835 111 37277	
3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340	
3250	Zero ohm,.	4835 111 27056	
3251	100k, 5%, 1/10W, Metal Film.	4835 111 37434	
3252	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3253	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3257	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3258	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3259	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046	
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046	
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046	
S 3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109	
S 3341	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483	
S 3342	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483	
3343	1.5k, 20%, 1/2W, Carbon Composition.	4835 110 47034	
3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290	
S 3345	VDR, DC, 1mA, 50V, MAX 115V	2322 593 13507	
3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290	
3401	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380	
3402	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380	
3403	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380	
3405	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002	
3406	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
3407	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002	
3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
3409	1.5 ohm, 5%, 1/3W, Metal Film. . . .	4835 116 57664	
3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210	
3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210	
3420	470k, 5%, 1/10W, Metal Film.	4835 111 37407	
3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220	
3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220	
3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840	
3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606	
3425	150k, 5%, 1/10W, Metal Film.	4835 111 27045	
3426	39k, 5%, 1/10W, Metal Film	4835 111 27051	
3428	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3429	27k, 5%, 1/10W, Metal Film	4835 111 37442	
3431	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3432	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3436	Res, 1K, 2%, 0,25W	4822 051 10102	
3437	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3438	33k, 1/4W, Carbon Film	4835 110 57375	
3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920	
3447	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220	
3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320	
S 3452	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63229	
S 3453	Res, 4R7, 5%, 5W, Wire Wound	2322 251 41478	
S 3454	Res, 33K, 5%, 1 1/3W, Metal Film . .	2322 194 63333	
3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
S 3462	Res, 6K8, 5%, 5W, Metal Film	2322 257 41682	
3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790	
3464	Res, 1K, 2%, 0,25W	4822 051 10102	
S 3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109	
3466	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903	
3467	Res, 14K, 1%, 3/5W, Metal Film . . .	2322 156 21403	
3467	Res, 15K, 1%, 3/5W, Metal Film . . .	2322 156 21503	
3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
3469	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240	
3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703	
3481	Res, 100K, 1%, 3/5W, Metal Film. . .	2322 156 21004	
3482	Res, 32K4, 1%, 3/5W, Metal Film. . .	2322 156 23243	
3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230	
3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
S 3485	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023	
S 3486	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012	
S 3487	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012	
S 3488	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023	
S 3490	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012	
S 3491	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012	
S 3492	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012	
3495	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272	
3496	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3497	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019	
S 3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225	
3503	10ohm, 120VAC, Positive Temperature C oefficient	4835 116 47001	
S 3505	Surge Protector.	2422 549 43073	
S 3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223	
S 3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333	
S 3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102	
3512	15k, 5%, 1/10W, Metal Film	4835 111 37458	
3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184	
3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204	
S 3515	2.5 ohm, 20%, 3.6W, Negative Temperat ure Coefficient.	2122 612 00023	
3516	Res, 1K, 2%, 0,25W	4822 051 10102	
3517	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
S 3518	Res, 0R22, 5%, 3W, Metal Film. . . .	2120 106 90548	
3520	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230	
3521	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443	
S 3525	33 ohm, 5%, 1/3W, Metal Film	4835 116 57665	
3528	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3529	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890	
3530	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320	
3532	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3534	15k, 5%, 1/10W, Metal Film	4835 111 37458	
3536	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830	
3537	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
S 3542	4.7 Megohm, 5%, 1/2W, Metal Film . .	4835 116 57009	
3570	15k, 5%, 1/10W, Metal Film	4835 111 37458	
3571	Res, 150K, 1%, 3/5W, Metal Film. . .	2322 156 21504	
3573	Res, 2K, 1%, 1/10W, Metalized Glass.	2120 108 92657	
3574	33k, 5%, 1/10W, Metal Film	4835 111 37248	
3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3577	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3578	Res, 1K, 2%, 0,25W	4822 051 10102	
3579	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451	
3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	

S = Safety Part Be sure to use exact replacement part.

HD2530C121 (continued)

3592	10k, 5%, 1/10W, Metal Film	4835 111 37216		4001	Zero ohm,.	4835 111 27056	
3594	22k, 5%, 1/10W, Metal Film	4835 111 37441		4002	Zero ohm,.	4835 111 27056	
3595	68k, 5%, 1/6W, Carbon Film	4835 111 37205		4004	Zero ohm,.	4835 111 27056	
3596	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030		4007	Zero ohm,.	4835 111 27056	
3597	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		4009	Zero ohm,.	4835 111 27056	
3598	10k, 5%, 1/10W, Metal Film	4835 111 37216		4010	Zero ohm,.	4835 111 27056	
3599	22k, 5%, 1/10W, Metal Film	4835 111 37441		4011	Zero ohm,.	4835 111 27056	
3607	8.2k, 5%, 1/8W, Inline Package . . .	4835 111 97046		4012	Zero ohm,.	4835 111 27056	
3608	2.2k, 5%, 1/8W, Inline Package . . .	4835 111 97049		4013	Zero ohm,.	4835 111 27056	
3609	2.2k, 5%, Resistor Network	2120 108 93868		4020	Zero ohm,.	4835 111 27056	
3611	Res, 1K, 2%, 0,25W	4822 051 10102		4051	Zero ohm,.	4835 111 27056	
3612	10k, 5%, 1/10W, Metal Film	4835 111 37216		4100	Zero ohm,.	4835 111 27056	
3613	10k, 5%, 1/10W, Metal Film	4835 111 37216		4101	Zero ohm,.	4835 111 27056	
3615	10k, 5%, 1/10W, Metal Film	4835 111 37216		4102	Zero ohm,.	4835 111 27056	
3617	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448		4103	Zero ohm,.	4835 111 27056	
3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		4143	Zero ohm,.	4835 111 27056	
3619	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052		4144	Zero ohm,.	4835 111 27056	
3629	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259		4203	Zero ohm,.	4835 111 27056	
3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710		4207	Zero ohm,.	4835 111 27056	
3631	27k, 5%, 1/10W, Metal Film	4835 111 37442		4212	Zero ohm,.	4835 111 27056	
S 3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63479		4214	Zero ohm,.	4835 111 27056	
3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210		4215	Zero ohm,.	4835 111 27056	
3634	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		4216	Zero ohm,.	4835 111 27056	
3635	22k, 5%, 1/10W, Metal Film	4835 111 37441		4501	Zero ohm,.	4835 111 27056	
3636	22k, 5%, 1/10W, Metal Film	4835 111 37441		4602	Zero ohm,.	4835 111 27056	
3637	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		4650	Zero ohm,.	4835 111 27056	
3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		4651	Zero ohm,.	4835 111 27056	
3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		4652	Zero ohm,.	4835 111 27056	
3653	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030		4654	Zero ohm,.	4835 111 27056	
3654	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		4655	Zero ohm,.	4835 111 27056	
3655	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		4684	Zero ohm,.	4835 111 27056	
3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710		4687	Zero ohm,.	4835 111 27056	
3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		4831	Zero ohm,.	4835 111 27056	
3662	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052		4832	Zero ohm,.	4835 111 27056	
3663	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448		4833	Zero ohm,.	4835 111 27056	
3664	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448		4902	Zero ohm,.	4835 111 27056	
3665	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052		4903	Zero ohm,.	4835 111 27056	
3666	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376		4904	Zero ohm,.	4835 111 27056	
3667	27k, 5%, 1/10W, Metal Film	4835 111 37442		4905	Zero ohm,.	4835 111 27056	
3672	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052		4909	Zero ohm,.	4835 111 27056	
3673	10k, 5%, 1/10W, Metal Film	4835 111 37216		4911	Zero ohm,.	4835 111 27056	
3674	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231		4912	Zero ohm,.	4835 111 27056	
3675	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510		4914	Zero ohm,.	4835 111 27056	
				4957	Zero ohm,.	4835 111 27056	
3676	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510		4999	Zero ohm,.	4835 111 27056	
				5000	Coil, 5u6.	3198 018 25680	
3677	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510		5004	Coil, 820n	2422 535 97314	
				5201	Coil, 22u.	3198 018 22290	
3680	680 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37271		5202	Coil, 6u8.	3198 018 16880	
3681	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052		5342	22uH., 10%, Coil, Peaking.	4835 157 67069	
3682	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	S	5445	Transformer, L.O.T., models ending in		
3683	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432			C101, C121, and C125	2422 531 02327	
3684	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	S	5445	Transformer, L.O.T., models ending in		
3821	15k, 5%, 1/10W, Metal Film	4835 111 37458			C221 and C225.	3128 138 20941	
3822	1.2k, 5%, 1/10W, Metal Film.	4835 111 27042		5451	Coil, 27u.	2422 535 96614	
3823	100k, 5%, 1/10W, Metal Film.	4835 111 37434		5457	Coil, Linear Correction.	3128 138 53241	
3824	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247		5461	Transformer.	3128 138 33811	
3825	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820		5480	Coil, 27u.	2422 535 97334	
3826	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820		5480	Coil, 39u.	2422 535 97336	
3827	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		5480	33uH., Peaking Coil, only in 25. . .	4835 157 58205	
3828	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	5500	Filter, Mains, 5mH, 2A	2422 549 43432	
3829	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272		5516	100uH., Coil	4835 157 67078	
3830	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272		5518	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
3831	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198 011 03310		5521	Coil, 2u2.	3198 018 12280	
3832	47 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37262		5540	Coil, 4u7.	3198 018 14780	
3908	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	S	5545	Transfomer,.	2422 531 02314	
3909	Res, 1K, 2%, 0,25W	4822 051 10102		5551	27uH., 5%, Coil, Peaking	4835 157 67052	
3910	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376		5552	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
3911	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230		5572	100uH., Coil	4835 157 67078	
3912	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710		5573	100uH., Coil	4835 157 67078	
3913	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820		5576	100uH., Coil	4835 157 67078	
3914	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820		5577	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
3915	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231		5600	Coil, 8u2.	3198 018 18280	
3916	220 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37371		5601	Coil, 8u2.	3198 018 18280	
3917	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710		5620	Coil, 6u8.	3198 018 16880	
3918	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820		5821	Coil, 100u	3198 018 21010	
3919	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376		5822	Coil, 18u.	3198 018 21890	
3920	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231		6008	Zener, 33 Volt BZX79-C33	4835 130 37904	
3921	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230		6113	Zener Diode, 6.8 volt.	9340 386 40115	
3922	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820		6211	Diode, 1N4148.	4835 130 37048	
3923	220 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37371		6212	Diode, 1N4148.	4835 130 37048	
3924	39k, 5%, 1/10W, Metal Film	4835 111 27051		6213	Diode, 1N4148.	4835 130 37048	
3925	39k, 5%, 1/10W, Metal Film	4835 111 27051		6331	Diode.	4835 130 37294	
3926	39k, 5%, 1/10W, Metal Film	4835 111 27051		6333	Diode.	4835 130 37294	
3929	39k, 5%, 1/10W, Metal Film	4835 111 27051		6335	Diode.	4835 130 37294	
3930	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710		6401	Diode.	4835 130 37094	
3931	Res, 1K, 2%, 0,25W	4822 051 10102		6402	Zener, 33 Volt, BZX79-C33.	4835 130 37904	
3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810		6403	Diode.	4835 130 37094	
3951	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247		6404	Diode.	4835 130 37094	
3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		6449	Diode, 1N4148.	4835 130 37048	
3953	10k, 5%, 1/10W, Metal Film	4835 111 37216		6450	Diode, 1N4148.	4835 130 37048	
3955	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720		6460	Diode, Rect, BY228/20	9336 215 80112	

S = Safety Part Be sure to use exact replacement part.

HD2530C121 (continued)

6463	Diode, 1N4148.	4835 130 37048
6464	Zener Diode, 6.2 volt.	9337 242 70133
6465	Diode, BYD33J.	4835 130 37094
6466	Diode, BYD33J.	4835 130 37094
6480	Diode, Zener	4835 130 37947
6481	Diode, 1N4148.	4835 130 37048
6485	Diode, BYD33J.	4835 130 37094
6486	Diode, EGP20DL-530	4835 130 37919
6487	Diode.	4835 130 37094
6488	Diode, Rect, BYV27-200.	9322 126 72673
6490	Diode, Rect, BYV27-200.	9322 126 72673
6505	Diode, Bridge Rect, GBU6JL-7002 . .	9322 138 08667
6507	Diode, BYD33J.	4835 130 37094
6508	Diode, BYD33J.	4835 130 37094
6510	Zener Diode, 20 volt	9331 178 60133
6511	Diode, BYV95C.	4835 130 37052
6512	Diode, Rect, BY228/20	4822 130 41275
6513	Diode, Rect, BY228/20	4822 130 41275
6514	Zener, 18 Volt, BZX79-C18.	4835 130 37908
6540	Diode.	4835 130 37294
6550	Diode, Rect, BY229X-800	9340 380 30127
6560	Diode, EGP20DL-530	4835 130 37919
6580	Diode, Rect, SB140.	9339 577 60673
6584	Diode, 1N4148.	4835 130 37048
6585	Diode, 1N4148.	4835 130 37048
6591	Diode, BAS216.	4835 130 37905
6601	Diode, Zener	4835 130 37684
6606	Zener, 4.7 Volt, BZX79-C4V7.	4835 130 37005
6607	Zener, 6.8 Volt, BZX79-C6V8.	4835 130 37945
6690	LED, LTL-307P.	4835 130 97096
6821	Zener Diode, 9.1 volt.	9331 177 80133
6822	Fixed Coil	4835 130 37048
6951	Diode, BAS216.	4835 130 37905
6961	Diode, BAS216.	4835 130 37905
7250	IC,.	9352 620 26112
7251	IC, LM317T	9337 220 80682
7254	Transistor, NPN, BC847B.	4822 130 60511
7256	Transistor, NPN, BC847B.	4822 130 60511
7258	Transistor, NPN, BC847B.	4822 130 60511
7263	Transistor, PNP, BC857B.	5322 130 60508
7266	Transistor, NPN, BC847B.	4822 130 60511
7330	IC,.	9352 184 10112
7401	IC,.	9322 121 47687
7460	Transistor, NPN, BU1508DX.	9340 170 50127
7461	Transistor, NPN, BF819	9335 354 50127
7462	Transistor, BC547B	4835 130 47055
7463	Transistor, BC557B	4835 130 47409
7480	IC,.	9322 028 93682
7481	Transistor, BC557B	4835 130 47409
7482	Transistor, PNP, BC857B.	5322 130 60508
7518	STH8NA60FI SMPS FET	9322 068 92687
7518	STH10NC60FI SMPS FET.	9322 155 66687
7520	IC, MC44603A	4835 209 88537
7570	IC,.	9337 711 00676
S 7581	Coupler, TCDT1101G	9338 431 30682
7590	Transistor, NPN, BC847B.	4822 130 60511
7591	Transistor, NPN, BC847B.	4822 130 60511
7592	Transistor, NPN, BC847B.	4822 130 60511
7600	IC, SAA5543PS/M4/1046 L90US1-1.4 . .	4835 310 57477
7601	IC, ST24W04B6.	9322 097 23682
7603	Transistor, NPN, BC337	9331 796 00126
7604	Transistor, NPN, BC847B.	4822 130 60511
7605	Transistor, NPN, BC847B.	4822 130 60511
7608	Transistor, NPN, BC847B.	4822 130 60511
7609	Transistor, NPN, BC847B.	4822 130 60511
7680	IR Receiver.	9322 127 53667
7821	IC,.	9352 374 70112
7822	IC, HEF4052BT.	9333 729 50653
7823	Transistor, NPN, BC337-25.	3198 020 43530
7904	Transistor, NPN, BC847B.	4822 130 60511
7908	Transistor, NPN, BC847B.	4822 130 60511
7951	IC,.	4822 209 13706
9423	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
CBA	00EMF804A001 Main Chassis Board Asm.	00EM F80 4A001

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	AC Power Cord.	3135 010 04821
S AC02	Anode Clip	4835 256 97264
AC03	Cabinet Back	3139 124 27731
AC04	Cabinet Front.	3139 137 55901
AC05	Chassis Guide.	3139 124 31381
AC06	Control Buttons.	3139 124 27461
S AC07	Convergence and Purity Assembly. . .	2422 549 43385
S AC08	CRT A63AFW36X (C121 Version)	9301 763 20443
S AC08	CRT A63QDB891X01	9322 151 39682
S AC09	Coil, Degaussing	3121 218 62961
AC11	Light Guide.	3139 124 26461
AC13	Owner's Manual, English.	3135 015 10932
AC14	Power Button	3139 124 26444
REMOTE	Remote Transmitter	3139 148 54201
AC16	Speaker, 16R, 1W5 (2 Used)	2422 264 00343
S AC18	Yoke (C121 Version).	3321 203 00121
S AC18	Yoke, Vendor # DSE2603CL(M), (C125 Version)	4835 310 57502
AC19	Yoke Wedge (3 Used).	4835 535 27001
AC21	Batteries f/Remote Transmitter . . .	9299 000 13827
AC24	Spring	3139 121 26231

S = Safety Part Be sure to use exact replacement part.

HD2530C221 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts	
0113	L9 SOPS HEATSINK	3139 121 62041
0119	DIODE HEATSINK L9.	3139 121 26691
0121	LINE HEATSINK (CINCH).	3139 121 61942
S 0127	Holder, Fuse, 2 Pin.	3122 358 71251
0211	Connector, 2 Pin	2422 025 11196
0212	Connector, 2 Pin	2422 025 15396
0220	4 Pin Board Connector.	2422 025 04852
0221	Connector, 4 Pin	2422 025 15503
0222	Connector, 2 Pin	2422 025 10646
0223	3 Pin Board Connector.	2422 026 04963
0225	1 Pin Board Connector.	2422 034 20021
0226	1 Pin Board Connector.	2422 034 20021
0234	Connector, 4 Pin	2422 025 15847
S 0243	Connector, 6 Pin	2422 025 04854
0244	4 Pin Board Connector.	2422 025 04852
S 0245	Connector, 6 Pin	2422 025 04854
S 0254	CRT Socket (9 Pin)	2422 500 80022
0267	Connector, 3 Pin	2412 020 00725
1000	TUNER.	3139 147 16412
1001	Filter	2422 549 42501
1003	45 MHz SAW, Filter,.	2422 549 42433
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807
1208	Crystal Resonator, 3.58MHz	2422 543 00832
S 1500	Fue, 4 A, 250V	2422 086 10905
S 1571	FUSE 1A 250V	2422 086 10779
S 1572	FUSE 1A 250V	2422 086 10779
S 1580	Relay, 12V, 5A G5PA-1.	2422 132 07444
1600	Switch, Tactile.	2422 128 02742
1601	Switch, Tactile.	2422 128 02742
1602	Switch, Tactile.	2422 128 02742
1603	Switch, Tactile.	2422 128 02742
1606	Switch, Tactile.	2422 128 02742
1660	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488
1821	Ceramic Resonator, 514KHz5, CSB503F58	2422 540 98344
2001	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2002	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2003	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2004	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2011	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2102	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2103	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2104	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2201	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2202	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2203	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2204	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2205	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2208	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2209	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2211	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2212	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2213	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2214	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2215	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 15654
2220	Cap, 18p, 5%, 50V, Ceramic	3198 016 01890
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2222	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2226	Cap, 33u, 20%, 25V, Electrolytic . .	2020 021 90124
2227	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2247	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2248	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2249	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2330	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2340	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320
S 2343	Cap, 3n3, 10%, 2KV, Ceramic.	2020 558 90529
2345	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2401	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2402	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2404	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2405	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2407	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2409	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2420	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2426	Cap, 100n, 10%, 63V, Metalized Polyes ter.	2222 370 75104
2428	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2429	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2430	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2431	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2437	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2438	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2448	Cap, 33p, 5%, 500V, Ceramic.	2020 557 90192
2450	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91139
2451	Cap, 15n, 10%, 50V, Polyester. . . .	2020 300 90575
2456	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176
2457	Cap, 390n, 5%, 250V, Metalized Polypr opylene.	2222 479 90021
2458	Cap, 2u2, 20%, 100V, Electrolytic. .	2020 021 91331
2459	Cap, 680p, 10%, 500V, Ceramic. . . .	3198 019 46810
2461	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2462	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176
S 2463	Cap, 470p, 10%, 2KV, Ceramic	2020 558 90483
S 2465	Cap, 10n, 5%, 1600V, Polypropylene .	2222 375 90154
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050
2473	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2481	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2482	Cap, 68n, 10%, 250V, Polyester . . .	2222 347 90234
2484	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2485	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2486	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2487	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2488	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2489	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2490	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2491	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810
2499	Cap, 220n, 10%, 100V, Metalized Polye ster	2222 365 25224
2500	Cap, 470n, 20%, 275V, Polypropylene.	2222 336 29148
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2507	Cap, 1n5, 10%, 1KV, Ceramic.	3198 019 61520
2508	Cap, 470u, 20%, 200V, Electrolytic .	2020 024 90647
2511	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
2518	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2530	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 021 91147
2531	Cap, 1n, 2%, 50V, Polypropylene. . .	2020 310 90049
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2540	Cap, 100u, 20%, 25V, Electrolytic. .	2020 021 90547
S 2545	Cap, 1n5, 20%, v, Ceramic.	2020 554 90128
2550	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2551	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91358
2561	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2562	Cap, 220p, 10%, 1KV, Ceramic	3198 019 62210
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2572	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2575	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2577	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2586	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2604	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2613	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2615	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2619	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2622	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2629	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2679	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2681	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2821	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280
2823	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2825	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2826	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090
2827	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010

S = Safety Part Be sure to use exact replacement part.

HD2530C221 (continued)

2828	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	3198 013 01020
2829	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
2830	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280		3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	3198 013 01020
2831	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	S	3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
2832	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280	S	3341	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
2833	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280	S	3342	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
2834	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780		3343	Res, 1K5, 20%, 1/2W, Carbon Film . .	3198 013 01520
2835	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
2836	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3345	VDR DC 1MA/50V S MAX 110V A . . .	2122 550 00152
2837	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740		3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
2838	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3401	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2839	Cap, 1u, 10%, 50V, Polyester	3198 014 01050		3402	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2840	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3403	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2841	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3405	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002
2842	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3406	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3407	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002
2844	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2845	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3409	Res, 1R5, 5%, 1/3W, Metal Film . . .	2306 204 03158
2913	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280		3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2914	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330		3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2915	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3420	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
2916	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648		3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2917	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2918	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330		3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840
2919	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606
2920	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648		3425	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
2921	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3426	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
2931	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280		3428	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3429	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
2952	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3431	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
2954	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3432	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
2955	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3433	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3436	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3437	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3438	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
2960	Cap, 220u, 20%, 50V, Electrolytic. .	3198 026 52210		3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090		3447	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090		3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090		3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3452	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	3198 012 32290
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3453	Res, 4R7, 5%, 5W, Wire Wound	2322 251 41478
3010	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610	S	3454	Res, 33K, 5%, 1 1/3W, Metal Film . .	2322 194 63333
3013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020		3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720		3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3015	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	S	3462	Res, 6K8, 5%, 5W, Metal Film	2322 257 41682
3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810		3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3021	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020		3464	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3103	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220	S	3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
3104	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030		3466	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903
3108	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3467	Res, 14K, 1%, 3/5W, Metal Film . . .	2322 156 21403
3109	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030		3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3123	Res, 75 ohm, 5%, 1/10W, Metalized Gla			3469	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
	ss.	3198 021 57590		3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010		3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703
3201	Res, 390 ohm, 5%, 1/10W, Metalized Gl			3481	Res, 100K, 1%, 3/5W, Metal Film. . .	2322 156 21004
	ass.	3198 021 53910		3482	Res, 32K4, 1%, 3/5W, Metal Film. . .	2322 156 23243
3203	Res, 330 ohm, 5%, 1/10W, Metalized Gl			3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
	ass.	3198 021 53310		3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	S	3486	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
3205	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	S	3487	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
3206	Res, 560 ohm, 5%, 1/10W, Metalized Gl		S	3488	Res, 4R7, 5%, 1/2W, Metal Film . . .	2306 207 03478
	ass.	3198 021 55610	S	3490	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3491	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
3209	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	S	3492	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
3212	Res, 390 ohm, 5%, 1/10W, Metalized Gl			3495	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
	ass.	3198 021 53910		3496	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3213	Res, 560 ohm, 5%, 1/10W, Metalized Gl			3497	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	ass.	3198 021 55610		3500	Res, 1M5, 5%, 1/2W, Metalized Glass.	2322 242 13155
3215	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230		3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	3198 013 04710
3216	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	S	3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225
3217	Res, 1M5, 5%, 1/8W, Metalized Glass.	2322 730 61155		3503	PTC DC ZPB 120V S 10R PM30 B . . .	2120 661 00019
3218	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	S	3505	Surge Protector.	2422 549 43073
3219	Res, 560 ohm, 5%, 1/10W, Metalized Gl		S	3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
	ass.	3198 021 55610	S	3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333
3220	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	S	3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102
3225	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040		3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010		3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184
3243	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720		3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204
3246	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230	S	3515	2.5 ohm, 20%, 3.6W, Negative Temperat	
3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010			ure Coefficient.	2122 612 00023
3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340		3517	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3250	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	S	3518	Res, 0R22, 5%, 2 1/2W, Metal Film. .	3198 012 32270
3251	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040		3520	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3252	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220		3521	Res, 330 ohm, 5%, 1/10W, Metalized Gl	
3253	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220			ass.	3198 021 53310
3257	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	S	3525	Res, 47 ohm, 5%, 1/3W, Metal Film. .	2306 204 03479
3258	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010		3528	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3259	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010		3529	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3530	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	3198 013 01020		3532	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3534	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530

S = Safety Part Be sure to use exact replacement part.

HD2530C221 (continued)

3536	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3537	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
S 3542	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3570	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3571	Res, 150K, 1%, 3/5W, Metal Film. . .	2322 156 21504
3573	Res, 2K, 1%, 1/8W, Metalized Glass .	2322 734 62002
3574	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3577	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3578	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3579	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3592	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3594	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3595	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3596	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3597	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3598	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3599	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3607	RST NETW RGLE 10X 8K2 PM5 B . . .	2120 108 93916
3608	RST NETW RGLE 6X 2K2 PM5 B . . .	2120 108 93913
3609	RST NETW RGLE 7X 2K2 PM5 B . . .	2120 108 93915
3611	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3612	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3613	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3615	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3616	Jumper Wire/Staple	0322 179 00003
3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3619	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3629	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
3631	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
S 3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210
3634	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3635	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3636	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3637	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3653	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3654	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3655	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710
3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3662	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3663	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220
3664	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220
3665	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3666	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3667	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3672	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3673	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3674	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3675	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510
3676	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510
3677	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510
3680	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3681	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3682	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220
3683	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3684	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3821	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3822	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3823	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3824	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3825	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3826	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3827	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3828	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3829	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3830	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3831	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198 011 03310
3832	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3908	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710
3909	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3910	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3911	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230
3912	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
3913	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3914	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820
3915	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3916	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3917	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
3918	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3919	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3920	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3921	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230
3922	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820
3923	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3924	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3925	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3926	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3929	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3930	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710
3931	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810
3951	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3953	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3955	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3957	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4004	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4011	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4012	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4020	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4051	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4100	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4144	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4203	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4207	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4212	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4215	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4216	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4465	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4501	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4650	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4651	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4654	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4833	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4911	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4912	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4914	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4957	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4999	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 5u6.	3198 018 25680
5004	Coil, 820n	2422 535 97314
5201	Coil, 22u.	3198 018 22290
5202	Coil, 6u8.	3198 018 16880
5342	Coil, 22u.	3198 018 22290
S 5445	Transformer, L.O.T., models ending in C221 and C225.	3128 138 20941
5451	Coil, 27u.	2422 535 96614
5457	Coil, Linear Correction.	3128 138 53241
5461	TFM SIG SLOT UU-1522S WIRE B . . .	2422 531 02318
5461	Transformer.	3128 138 33811
5480	Coil, 33u.	2422 535 97335
S 5500	Filter, Mains, 5mH, 2A	2422 549 43432
5516	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5518	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5521	Coil, 2u2.	3198 018 12280
5540	Coil, 4u7.	3198 018 14780
S 5545	Transfomer,.	2422 531 02314
5551	Coil, 27u.	2422 535 95366
5552	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5572	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5573	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5576	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5577	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5600	Coil, 8u2.	3198 018 18280
5601	Coil, 8u2.	3198 018 18280
5620	Coil, 6u8.	3198 018 16880
5821	Coil, 100u	3198 018 21010
5822	Coil, 18u.	3198 018 21890
6008	Zener Diode, 33 volt	3198 010 23390
6113	Zener Diode, 6.8 volt.	9340 386 40115
6211	Diode, Signal, 1N4148.	3198 010 10010
6212	Diode, Signal, 1N4148.	3198 010 10010
6213	Diode, Signal, 1N4148.	3198 010 10010
6331	Diode, Signal, BAV21	3198 010 10070
6333	Diode, Signal, BAV21	3198 010 10070
6335	Diode, Signal, BAV21	3198 010 10070

S = Safety Part Be sure to use exact replacement part.

HD2530C221 (continued)

	6401	Diode, Rect, BYD33D	9337 234 00133		9202	Jumper Wire/Staple	0322 179 00003
	6402	Zener Diode, 33 volt	3198 010 23390		9203	Jumper Wire/Staple	0322 179 00003
	6403	Diode, Rect, BYD33D	9337 234 00133		9204	Jumper Wire/Staple	0322 179 00003
	6404	Zener Diode, 75 volt	9331 180 00133		9205	Jumper Wire/Staple	0322 179 00003
	6449	Diode, Signal, 1N4148.	3198 010 10010		9206	Jumper Wire/Staple	0322 179 00003
	6450	Diode, Signal, 1N4148.	3198 010 10010		9207	Jumper Wire/Staple	0322 179 00003
	6460	Diode, Rect, BY228/20	9336 215 80112		9208	Jumper Wire/Staple	0322 179 00003
	6463	Diode, Signal, 1N4148.	3198 010 10010		9209	Jumper Wire/Staple	0322 179 00003
	6464	Zener Diode, 6.2 volt.	9331 668 30133		9210	Jumper Wire/Staple	0322 179 00003
	6465	Diode, Rect, BYD33J	9337 234 20133		9211	Jumper Wire/Staple	0322 179 00003
	6466	Diode, Rect, BYD33J	9337 234 20133		9214	Jumper Wire/Staple	0322 179 00003
	6480	Zener Diode, 27 volt	3198 010 22790		9215	Jumper Wire/Staple	0322 179 00003
	6481	Diode, Signal, 1N4148.	3198 010 10010		9216	Jumper Wire/Staple	0322 179 00003
	6485	Diode, Rect, BYD33J	9337 234 20133		9217	Jumper Wire/Staple	0322 179 00003
	6486	Diode, Rect, EGP20DL-5300	9322 100 13682		9218	Jumper Wire/Staple	0322 179 00003
	6487	Diode, Rect, BYD33D	9337 234 00133		9220	Jumper Wire/Staple	0322 179 00003
	6488	Diode, Rect, BYV27-200.	9322 126 72673		9221	Jumper Wire/Staple	0322 179 00003
	6490	Diode, Rect, BYV27-200.	9322 126 72673		9222	Jumper Wire/Staple	0322 179 00003
	6505	Diode, Bridge Rect, GBU6JL-7002	9322 138 08667		9225	Jumper Wire/Staple	0322 179 00003
	6507	Diode, Rect, BYD33J	9337 234 20133		9226	Jumper Wire/Staple	0322 179 00003
	6508	Diode, Rect, BYD33J	9337 234 20133		9227	Jumper Wire/Staple	0322 179 00003
	6510	Zener Diode, 20 volt	9331 178 60133		9228	Jumper Wire/Staple	0322 179 00003
	6511	Diode, Rect, BYV95C	9335 001 80133		9229	Jumper Wire/Staple	0322 179 00003
	6512	Diode, Rect, 1N5062	3198 010 10120		9230	Jumper Wire/Staple	0322 179 00003
	6513	Diode, Rect, 1N5062	3198 010 10120		9231	Jumper Wire/Staple	0322 179 00003
	6514	Zener Diode, 18 volt	3198 010 21890		9232	Jumper Wire/Staple	0322 179 00003
	6540	Diode, Signal, BAV21	3198 010 10070		9233	Jumper Wire/Staple	0322 179 00003
	6550	Diode, Rect, BY229X-800	9340 380 30127		9234	Jumper Wire/Staple	0322 179 00003
	6560	Diode, Rect, EGP20DL-5300	9322 100 13682		9236	Jumper Wire/Staple	0322 179 00003
	6580	Diode, Rect, SB140.	9339 577 60673		9237	Jumper Wire/Staple	0322 179 00003
	6584	Diode, Signal, 1N4148.	3198 010 10010		9238	Jumper Wire/Staple	0322 179 00003
	6585	Diode, Signal, 1N4148.	3198 010 10010		9240	Jumper Wire/Staple	0322 179 00003
	6591	Diode, Signal, BAS16WS	9322 031 99685		9241	Jumper Wire/Staple	0322 179 00003
	6601	Zener Diode, 3.9 volt.	3198 010 23980		9242	Jumper Wire/Staple	0322 179 00003
	6603	Jumper Wire/Staple	0322 179 00003		9243	Jumper Wire/Staple	0322 179 00003
	6604	Jumper Wire/Staple	0322 179 00003		9245	Jumper Wire/Staple	0322 179 00003
	6605	Jumper Wire/Staple	0322 179 00003		9301	Jumper Wire/Staple	0322 179 00003
	6606	Zener Diode, 4.7 volt.	3198 010 24780		9401	Jumper Wire/Staple	0322 179 00003
	6607	Zener Diode, 6.8 volt.	3198 010 26880		9402	Jumper Wire/Staple	0322 179 00003
	6690	LED VS LTL-307P (LITO) B	9322 033 95682		9403	Jumper Wire/Staple	0322 179 00003
	6821	Zener Diode, 9.1 volt.	9331 177 80133		9404	Jumper Wire/Staple	0322 179 00003
	6822	Diode, Signal, 1N4148.	3198 010 10010		9407	Jumper Wire/Staple	0322 179 00003
	6951	Diode, Signal, BAS16WS	9322 031 99685		9408	Jumper Wire/Staple	0322 179 00003
	6961	Diode, Signal, BAS16WS	9322 031 99685		9411	Jumper Wire/Staple	0322 179 00003
	7250	IC,	9352 620 26112		9414	Jumper Wire/Staple	0322 179 00003
	7251	IC, LM317T	9337 220 80682		9417	Jumper Wire/Staple	0322 179 00003
	7254	Transistor, NPN, BC847B.	3198 010 42030		9419	Jumper Wire/Staple	0322 179 00003
	7256	Transistor, NPN, BC847B.	3198 010 42030		9420	Jumper Wire/Staple	0322 179 00003
	7258	Transistor, NPN, BC847B.	3198 010 42030		9421	Jumper Wire/Staple	0322 179 00003
	7263	Transistor, PNP, BC857B.	3198 010 42150		9422	Jumper Wire/Staple	0322 179 00003
	7266	Transistor, NPN, BC847B.	3198 010 42030		9424	Jumper Wire/Staple	0322 179 00003
	7330	IC, TDA6107Q/N2.	9352 576 50112		9425	Jumper Wire/Staple	0322 179 00003
	7401	IC,	9322 121 47687		9427	Jumper Wire/Staple	0322 179 00003
	7460	Transistor, NPN, BU1508DX.	9340 170 50127		9428	Jumper Wire/Staple	0322 179 00003
	7461	Transistor, NPN, BF819	9335 354 50127		9460	Jumper Wire/Staple	0322 179 00003
	7462	Transistor, NPN, BC547B.	3198 020 40030		9461	Jumper Wire/Staple	0322 179 00003
	7463	Transistor, PNP, BC557B.	3198 020 40110		9500	Jumper Wire/Staple	0322 179 00003
	7480	IC,	9322 028 93682		9501	Jumper Wire/Staple	0322 179 00003
	7481	Transistor, PNP, BC557B.	3198 020 40110		9502	Jumper Wire/Staple	0322 179 00003
	7482	Transistor, PNP, BC857B.	3198 010 42150		9503	Jumper Wire/Staple	0322 179 00003
	7518	STH10NC60FI SMPS FET.	9322 155 66687		9505	Jumper Wire/Staple	0322 179 00003
	7520	IC,	9322 108 36682		9509	Jumper Wire/Staple	0322 179 00003
	7570	IC,	9337 711 00676		9510	Jumper Wire/Staple	0322 179 00003
S	7581	Coupler, TCDT1101G	9338 431 30682		9511	Jumper Wire/Staple	0322 179 00003
	7590	Transistor, NPN, BC847B.	3198 010 42030		9512	Jumper Wire/Staple	0322 179 00003
	7591	Transistor, NPN, BC847B.	3198 010 42030		9513	Jumper Wire/Staple	0322 179 00003
	7592	Transistor, NPN, BC847B.	3198 010 42030		9515	Jumper Wire/Staple	0322 179 00003
	7600	IC,	9352 670 96112		9516	Jumper Wire/Staple	0322 179 00003
	7601	IC, ST24W04B6.	9322 097 23682		9517	Jumper Wire/Staple	0322 179 00003
	7603	Transistor, NPN, BC337	9331 796 00126		9518	Jumper Wire/Staple	0322 179 00003
	7604	Transistor, NPN, BC847B.	3198 010 42030		9526	Jumper Wire/Staple	0322 179 00003
	7605	Transistor, NPN, BC847B.	3198 010 42030		9601	Jumper Wire/Staple	0322 179 00003
	7608	Transistor, NPN, BC847B.	3198 010 42030		9602	Jumper Wire/Staple	0322 179 00003
	7609	Transistor, NPN, BC847B.	3198 010 42030		9603	Jumper Wire/Staple	0322 179 00003
	7680	IR RECEIVER.	9322 154 48667		9604	Jumper Wire/Staple	0322 179 00003
	7821	IC,	9352 374 70112		9605	Jumper Wire/Staple	0322 179 00003
	7822	IC, HEF4052BT.	9333 729 50653		9606	Jumper Wire/Staple	0322 179 00003
	7823	Transistor, NPN, BC337-25.	3198 020 43530		9608	Jumper Wire/Staple	0322 179 00003
	7904	Transistor, NPN, BC847B.	3198 010 42030		9609	Jumper Wire/Staple	0322 179 00003
	7908	Transistor, NPN, BC847B.	3198 010 42030		9610	Jumper Wire/Staple	0322 179 00003
	7951	IC,	9351 861 60112		9611	Jumper Wire/Staple	0322 179 00003
	7960	ISOPROPYL ALCOHOL.	1306 500 43201		9612	Jumper Wire/Staple	0322 179 00003
	9001	Jumper Wire/Staple	0322 179 00003		9613	Jumper Wire/Staple	0322 179 00003
	9003	Jumper Wire/Staple	0322 179 00003		9614	Jumper Wire/Staple	0322 179 00003
	9005	Jumper Wire/Staple	0322 179 00003		9615	Jumper Wire/Staple	0322 179 00003
	9011	Jumper Wire/Staple	0322 179 00003		9618	Jumper Wire/Staple	0322 179 00003
	9012	Jumper Wire/Staple	0322 179 00003		9621	Jumper Wire/Staple	0322 179 00003
	9105	Jumper Wire/Staple	0322 179 00003		9622	Jumper Wire/Staple	0322 179 00003
	9126	Jumper Wire/Staple	0322 179 00003		9624	Jumper Wire/Staple	0322 179 00003
	9132	Jumper Wire/Staple	0322 179 00003		9625	Jumper Wire/Staple	0322 179 00003
	9140	Jumper Wire/Staple	0322 179 00003		9626	Jumper Wire/Staple	0322 179 00003
	9200	Jumper Wire/Staple	0322 179 00003		9629	Jumper Wire/Staple	0322 179 00003

S = Safety Part Be sure to use exact replacement part.

HD2530C221 (continued)

9631	Jumper Wire/Staple	0322 179 00003
9632	Jumper Wire/Staple	0322 179 00003
9637	Jumper Wire/Staple	0322 179 00003
9640	Jumper Wire/Staple	0322 179 00003
9642	Jumper Wire/Staple	0322 179 00003
9643	Jumper Wire/Staple	0322 179 00003
9644	Jumper Wire/Staple	0322 179 00003
9660	Jumper Wire/Staple	0322 179 00003
9754	Jumper Wire/Staple	0322 179 00003
9788	Jumper Wire/Staple	0322 179 00003
9793	Jumper Wire/Staple	0322 179 00003
9800	Jumper Wire/Staple	0322 179 00003
9805	Jumper Wire/Staple	0322 179 00003
9806	Jumper Wire/Staple	0322 179 00003
9807	Jumper Wire/Staple	0322 179 00003
9810	Jumper Wire/Staple	0322 179 00003
9901	Jumper Wire/Staple	0322 179 00003
9904	Jumper Wire/Staple	0322 179 00003
9905	Jumper Wire/Staple	0322 179 00003
9906	Jumper Wire/Staple	0322 179 00003
9920	Jumper Wire/Staple	0322 179 00003
9933	Jumper Wire/Staple	0322 179 00003
9936	Jumper Wire/Staple	0322 179 00003
9940	Jumper Wire/Staple	0322 179 00003
9941	Jumper Wire/Staple	0322 179 00003
9942	Jumper Wire/Staple	0322 179 00003
9943	Jumper Wire/Staple	0322 179 00003
9944	Jumper Wire/Staple	0322 179 00003
9945	Jumper Wire/Staple	0322 179 00003
9946	Jumper Wire/Staple	0322 179 00003
9947	Jumper Wire/Staple	0322 179 00003
9948	Jumper Wire/Staple	0322 179 00003
9949	Jumper Wire/Staple	0322 179 00003
9950	Jumper Wire/Staple	0322 179 00003
9951	Jumper Wire/Staple	0322 179 00003
9952	Jumper Wire/Staple	0322 179 00003
9953	Jumper Wire/Staple	0322 179 00003
9955	Jumper Wire/Staple	0322 179 00003
9956	Jumper Wire/Staple	0322 179 00003
9957	Jumper Wire/Staple	0322 179 00003
9958	Jumper Wire/Staple	0322 179 00003
9959	Jumper Wire/Staple	0322 179 00003
9960	Jumper Wire/Staple	0322 179 00003
9962	Jumper Wire/Staple	0322 179 00003
9963	Jumper Wire/Staple	0322 179 00003
9964	Jumper Wire/Staple	0322 179 00003
9965	Jumper Wire/Staple	0322 179 00003
9966	Jumper Wire/Staple	0322 179 00003
9967	Jumper Wire/Staple	0322 179 00003
9968	Jumper Wire/Staple	0322 179 00003
9969	Jumper Wire/Staple	0322 179 00003
9970	Jumper Wire/Staple	0322 179 00003
9971	Jumper Wire/Staple	0322 179 00003
9972	Jumper Wire/Staple	0322 179 00003
9974	Jumper Wire/Staple	0322 179 00003
9975	Jumper Wire/Staple	0322 179 00003
9976	Jumper Wire/Staple	0322 179 00003
9977	Jumper Wire/Staple	0322 179 00003
9981	Jumper Wire/Staple	0322 179 00003
9982	Jumper Wire/Staple	0322 179 00003
9983	Jumper Wire/Staple	0322 179 00003
9984	Jumper Wire/Staple	0322 179 00003
9987	Jumper Wire/Staple	0322 179 00003
9989	Jumper Wire/Staple	0322 179 00003
9990	Jumper Wire/Staple	0322 179 00003
9991	Jumper Wire/Staple	0322 179 00003
9992	Jumper Wire/Staple	0322 179 00003
9993	Jumper Wire/Staple	0322 179 00003
CBA	313917887131 Main Chassis Board Asm.	3139 178 87131

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	AC Power Cord.	3135 010 04821
AC02	Clip, Anode Lead	3135 014 04471
AC03	Cabinet Back	3139 124 27731
AC04	Cabinet Front.	3139 137 55901
AC05	Chassis Guide.	3139 124 31381
AC06	Control Buttons.	3139 124 27461
S AC07	Convergence and Purity Assembly. . .	2422 549 43385
S AC08	CRT A63AFW36X (C121 Version)	9301 763 20443
S AC09	Coil, Degaussing	2422 549 44489
AC10	Holder, Degaussing (4 Used).	3135 013 01641
AC11	Light Guide.	3139 124 26461
AC13	Owner's Manual, English.	3135 015 10932
AC14	Power Button	3139 124 26444
REMOTE	Remote Transmitter	3139 148 54201
AC16	Speaker, 16R, 1W5 (2 Used)	2422 264 00343
S AC18	Yoke (C121 Version).	3321 203 00121
AC19	Yoke Wedge (3 used).	3135 013 00311
AC21	Batteries f/Remote Transmitter . . .	9299 000 13827
AC24	Spring	3139 121 26231

S = Safety Part Be sure to use exact replacement part.

HD2720C101 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts	
S 0127	3.15 Amp Fuse, ...	3122 358 72141
0152	Cable, DIP, 6 Pin, 400mm	3104 301 09421
0153	4 Pin Cable.	3104 301 09431
0212	Connector, 2 Pin	2422 025 15396
0220	4 Pin Board Connector.	2422 025 04852
0223	3 Pin Board Connector.	2422 026 04963
0224	1 Pin Board Connector.	2422 034 20021
0228	1 Pin Board Connector.	2422 034 20021
0234	Connector, 4 Pin	2422 025 15847
S 0243	Connector, 6 Pin	2422 025 04854
0244	4 Pin Board Connector.	2422 025 04852
S 0245	Connector, 6 Pin	2422 025 04854
S 0254	CRT Socket (9 Pin)	2422 500 80022
0267	Connector, 3 Pin	2412 020 00725
1000	Tuner.	2422 542 90057
1001	Filter	2422 549 42501
1003	45 MHz SAW, Filter,.	2422 549 42433
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807
1208	Crystal Resonator.	4835 242 77276
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10869
S 1571	1 Amp, Radial Fuse,.	4835 253 97162
S 1572	1 Amp, Radial Fuse,.	4835 253 97162
S 1580	Relay, 12V	2422 132 07317
1600	Switch, Tactile.	2422 128 02742
1601	Switch, Tactile.	2422 128 02742
1602	Switch, Tactile.	2422 128 02742
1603	Switch, Tactile.	2422 128 02742
1606	Switch, Tactile.	2422 128 02742
1660	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488
1821	Ceramic Resonator.	4835 122 97102
2001	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2002	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2003	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2004	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2011	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2102	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2103	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2104	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2201	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2202	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2203	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2204	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2205	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2208	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2209	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2211	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2212	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2213	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2214	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2215	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 16654
2220	Cap, 15p, 5%, 50V, Ceramic	3198 016 01590
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2222	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2226	Cap, 33u, 20%, 25V, Electrolytic . .	2020 021 90124
2227	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2247	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2248	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2249	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2330	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2340	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320
S 2343	Cap, 3n3, 10%, 2KV, Ceramic.	2020 558 90529
2345	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2401	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2402	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2404	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2405	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2407	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2409	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2420	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2426	Cap, 100n, 10%, 63V, Metalized Polyes ter.	2222 370 75104
2428	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2429	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2430	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2431	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2437	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2438	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2448	Cap, 220p, 10%, 500V, Ceramic. . . .	3198 019 42210
2450	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91139
2451	Cap, 15n, 10%, 50V, Polyester. . . .	2020 300 90575
2451	0.01uF., 10%, 50V, Polyester, only 27	3198 138 20941
2456	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176
2457	Cap, 390n, 5%, 250V, Metalized Polypr opylene.	2222 479 90021
2458	Cap, 2u2, 20%, 100V, Electrolytic. .	2020 021 91331
2459	Cap, 680p, 10%, 500V, Ceramic. . . .	3198 019 46810
2461	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2462	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176
2463	680pF., 10%, 2KV, Ceramic.	4835 122 47584
S 2465	Cap, 10n, 5%, 1600V, Polypropylene .	2222 375 90154
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050
2473	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2481	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2482	Cap, 68n, 10%, 250V, Polyester . . .	2222 347 90234
2484	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2485	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2486	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2487	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2488	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2489	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2490	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2491	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810
2500	0.47uF., 250V, Polyester	4835 121 47569
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
S 2507	Cap, 1n5, 10%, 1KV, Ceramic.	2020 558 90443
2508	Cap, 470u, 20%, 200V, Electrolytic .	2020 024 90647
S 2511	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
S 2518	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2530	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 021 91147
2531	Cap, 1n, 2%, 50V, Polypropylene. . .	2020 310 90049
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2540	Cap, 100u, 20%, 25V, Electrolytic. .	2020 021 90547
S 2545	1500pF., 250VAC, Ceramic	4835 122 47621
S 2550	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2551	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91358
2561	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
S 2562	Cap, 220p, 10%, 1KV, Ceramic	2020 558 90424
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2572	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2575	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2577	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2586	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2604	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2613	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2615	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2619	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2622	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2629	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2679	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2681	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2821	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280
2823	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2825	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2826	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090
2827	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2828	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2829	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2830	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280
2831	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2832	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280

S = Safety Part Be sure to use exact replacement part.

HD2720C101 (continued)

	2833	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280		3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
	2834	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780		3401	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
	2835	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3402	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
	2836	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3403	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
	2837	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740		3405	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002
	2838	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3406	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
	2839	Cap, 1u, 5%, 50V, Metalized Polyester	2020 308 90124		3407	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002
	2840	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
	2841	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3409	1.5 ohm, 5%, 1/3W, Metal Film. . . .	4835 116 57664
	2842	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
	2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
	2844	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3420	470k, 5%, 1/10W, Metal Film.	4835 111 37407
	2845	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
	2913	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280		3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
	2914	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330		3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840
	2915	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606
	2916	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648		3425	Res, 120K, 5%, 1/10W, Metalized Glass	2120 108 91716
	2917	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3426	39k, 5%, 1/10W, Metal Film	4835 111 27051
	2918	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330		3428	22k, 5%, 1/10W, Metal Film	4835 111 37441
	2919	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3429	27k, 5%, 1/10W, Metal Film	4835 111 37442
	2920	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648		3431	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
	2921	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3432	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
	2931	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280		3436	Res, 1K, 2%, 0,25W	4822 051 10102
	2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3437	10k, 5%, 1/10W, Metal Film	4835 111 37216
	2952	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3438	33k, 1/4W, Carbon Film	4835 110 57375
	2954	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
	2955	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3447	10k, 5%, 1/10W, Metal Film	4835 111 37216
	2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
	2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
	2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	S	3452	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63229
	2960	Cap, 220u, 20%, 50V, Electrolytic. .	3198 026 52210	S	3453	Res, 4R7, 5%, 5W, Wire Wound	2322 251 41478
	2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090	S	3454	Res, 33K, 5%, 1 1/3W, Metal Film . .	2322 194 63333
	2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090		3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
	2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090		3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
	3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3462	Res, 6K8, 5%, 5W, Metal Film	2322 257 41682
	3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
	3010	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610		3464	Res, 1K, 2%, 0,25W	4822 051 10102
	3013	Zero ohm,.	4835 111 27056	S	3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
	3014	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052		3466	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903
	3015	22k, 5%, 1/10W, Metal Film	4835 111 37441		3467	Res, 14K, 1%, 3/5W, Metal Film . . .	2322 156 21403
	3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810		3467	Res, 15K, 1%, 3/5W, Metal Film . . .	2322 156 21503
	3021	Res, 1K, 2%, 0,25W	4822 051 10102		3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
	3103	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3469	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
	3104	10k, 5%, 1/10W, Metal Film	4835 111 37216		3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
	3108	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703
	3109	10k, 5%, 1/10W, Metal Film	4835 111 37216		3481	Res, 35K7, 1%, 3/5W, Metal Film. . .	2322 156 23573
	3123	75 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37276		3482	Res, 56K, 1%, 3/5W, Metal Film . . .	2322 156 25603
	3200	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
	3201	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253		3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3203	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443	S	3485	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
	3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	S	3486	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3205	Res, 1K, 2%, 0,25W	4822 051 10102	S	3487	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3206	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	S	3488	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
	3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3490	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3209	22k, 5%, 1/10W, Metal Film	4835 111 37441	S	3491	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3212	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253	S	3492	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3213	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3495	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272
	3215	22k, 5%, 1/10W, Metal Film	4835 111 37441		3496	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3216	Zero ohm,.	4835 111 27056		3497	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3217	Res, 1M5, 5%, 1/8W, Metalized Glass.	2322 730 61155		3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
	3218	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225
	3219	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3503	10ohm, 120VAC, Positive Temperature C	
	3220	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432			oefficient	4835 116 47001
	3225	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S	3505	Surge Protector.	2422 549 43073
	3228	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
	3231	Zero ohm,.	4835 111 27056	S	3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333
	3232	Zero ohm,.	4835 111 27056	S	3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102
	3233	Zero ohm,.	4835 111 27056		3512	15k, 5%, 1/10W, Metal Film	4835 111 37458
	3243	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052		3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184
	3246	82k, 5%, 1/10W, Metal Film	4835 111 37277		3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204
	3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3515	2.5 ohm, 20%, 3.6W, Negative Temperat	
	3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010			ure Coefficient.	2122 612 00023
	3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340		3516	Res, 1K, 2%, 0,25W	4822 051 10102
	3250	Zero ohm,.	4835 111 27056		3517	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
	3251	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S	3518	Res, 0R22, 5%, 3W, Metal Film. . . .	2120 106 90548
	3252	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		3520	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
	3253	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		3521	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443
	3257	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3525	33 ohm, 5%, 1/3W, Metal Film	4835 116 57665
	3258	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3528	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3259	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3529	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3530	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
	3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3532	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3534	15k, 5%, 1/10W, Metal Film	4835 111 37458
	3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3536	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3537	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046	S	3542	4.7 Megohm, 5%, 1/2W, Metal Film . .	4835 116 57009
S	3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109		3570	15k, 5%, 1/10W, Metal Film	4835 111 37458
S	3341	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483		3571	Res, 150K, 1%, 3/5W, Metal Film. . .	2322 156 21504
S	3342	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483		3573	Res, 2K, 1%, 1/10W, Metalized Glass.	2120 108 92657
	3343	1.5k, 20%, 1/2W, Carbon Composition.	4835 110 47034		3574	33k, 5%, 1/10W, Metal Film	4835 111 37248
	3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290		3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
S	3345	VDR, DC, 1mA, 50V, MAX 115V	2322 593 13507		3577	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030

S = Safety Part Be sure to use exact replacement part.

HD2720C101 (continued)

3578	Res, 1K, 2%, 0,25W	4822 051 10102	
3579	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451	
3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3592	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3594	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3595	68k, 5%, 1/6W, Carbon Film	4835 111 37205	
3596	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3597	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3598	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3599	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3607	8.2k, 5%, 1/8W, Inline Package . . .	4835 111 97046	
3608	2.2k, 5%, 1/8W, Inline Package . . .	4835 111 97049	
3609	2.2k, 5%, Resistor Network	2120 108 93868	
3611	Res, 1K, 2%, 0,25W	4822 051 10102	
3612	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3613	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3615	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3617	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3619	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3629	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259	
3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3631	27k, 5%, 1/10W, Metal Film	4835 111 37442	
S 3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63479	
3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210	
3634	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3635	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3636	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3637	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3653	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3654	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3655	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3662	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3663	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3664	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3665	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3666	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376	
3667	27k, 5%, 1/10W, Metal Film	4835 111 37442	
3672	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3673	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3674	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231	
3675	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3676	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3677	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3680	680 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37271	
3681	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3682	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3683	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3684	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3821	15k, 5%, 1/10W, Metal Film	4835 111 37458	
3822	1.2k, 5%, 1/10W, Metal Film.	4835 111 27042	
3823	100k, 5%, 1/10W, Metal Film.	4835 111 37434	
3824	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3825	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3826	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3827	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3828	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3829	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272	
3830	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272	
3831	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198 011 03310	
3832	47 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37262	
3908	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3909	Res, 1K, 2%, 0,25W	4822 051 10102	
3910	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376	
3911	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230	
3912	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3913	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3914	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	
3915	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231	
3916	220 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37371	
3917	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3918	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3919	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376	
3920	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231	
3921	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230	
3922	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	
3923	220 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37371	
3924	39k, 5%, 1/10W, Metal Film	4835 111 27051	
3925	39k, 5%, 1/10W, Metal Film	4835 111 27051	
3926	39k, 5%, 1/10W, Metal Film	4835 111 27051	
3929	39k, 5%, 1/10W, Metal Film	4835 111 27051	
3930	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3931	Res, 1K, 2%, 0,25W	4822 051 10102	
3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810	
3951	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3953	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3955	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
3957	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
4001	Zero ohm,.	4835 111 27056	
4002	Zero ohm,.	4835 111 27056	
4004	Zero ohm,.	4835 111 27056	
4007	Zero ohm,.	4835 111 27056	
4009	Zero ohm,.	4835 111 27056	
4010	Zero ohm,.	4835 111 27056	
4011	Zero ohm,.	4835 111 27056	
4012	Zero ohm,.	4835 111 27056	
4013	Zero ohm,.	4835 111 27056	
4020	Zero ohm,.	4835 111 27056	
4051	Zero ohm,.	4835 111 27056	
4100	Zero ohm,.	4835 111 27056	
4101	Zero ohm,.	4835 111 27056	
4102	Zero ohm,.	4835 111 27056	
4103	Zero ohm,.	4835 111 27056	
4143	Zero ohm,.	4835 111 27056	
4144	Zero ohm,.	4835 111 27056	
4203	Zero ohm,.	4835 111 27056	
4207	Zero ohm,.	4835 111 27056	
4212	Zero ohm,.	4835 111 27056	
4214	Zero ohm,.	4835 111 27056	
4215	Zero ohm,.	4835 111 27056	
4216	Zero ohm,.	4835 111 27056	
4501	Zero ohm,.	4835 111 27056	
4602	Zero ohm,.	4835 111 27056	
4650	Zero ohm,.	4835 111 27056	
4651	Zero ohm,.	4835 111 27056	
4652	Zero ohm,.	4835 111 27056	
4654	Zero ohm,.	4835 111 27056	
4655	Zero ohm,.	4835 111 27056	
4684	Zero ohm,.	4835 111 27056	
4687	Zero ohm,.	4835 111 27056	
4831	Zero ohm,.	4835 111 27056	
4832	Zero ohm,.	4835 111 27056	
4833	Zero ohm,.	4835 111 27056	
4902	Zero ohm,.	4835 111 27056	
4903	Zero ohm,.	4835 111 27056	
4904	Zero ohm,.	4835 111 27056	
4905	Zero ohm,.	4835 111 27056	
4909	Zero ohm,.	4835 111 27056	
4911	Zero ohm,.	4835 111 27056	
4912	Zero ohm,.	4835 111 27056	
4914	Zero ohm,.	4835 111 27056	
4957	Zero ohm,.	4835 111 27056	
4999	Zero ohm,.	4835 111 27056	
5000	Coil, 5u6.	3198 018 25680	
5004	Coil, 820n	2422 535 97314	
5201	Coil, 22u.	3198 018 22290	
5202	Coil, 6u8.	3198 018 16880	
5342	22uH., 10%, Coil, Peaking.	4835 157 67069	
S 5445	Transformer, L.O.T., models ending in C101, C121, and C125	2422 531 02327	
S 5445	Transformer, L.O.T., models ending in C221 and C225.	3128 138 20941	
5451	Coil, 27u.	2422 535 96614	
5457	Coil, Linear Correction.	3128 138 53241	
5461	Transformer.	3128 138 33811	
5480	Coil, 27u.	2422 535 97334	
5480	Coil, 39u.	2422 535 97336	
5480	33uH., Peaking Coil, only in 25. . .	4835 157 58205	
S 5500	Filter, Mains, 5mH, 2A	2422 549 43432	
5516	100uH., Coil	4835 157 67078	
5518	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5521	Coil, 2u2.	3198 018 12280	
5540	Coil, 4u7.	3198 018 14780	
S 5545	Transfomer,.	2422 531 02314	
5551	27uH., 5%, Coil, Peaking	4835 157 67052	
5552	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5572	100uH., Coil	4835 157 67078	
5573	100uH., Coil	4835 157 67078	
5576	100uH., Coil	4835 157 67078	
5577	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5600	Coil, 8u2.	3198 018 18280	
5601	Coil, 8u2.	3198 018 18280	
5620	Coil, 6u8.	3198 018 16880	
5821	Coil, 100u	3198 018 21010	
5822	Coil, 18u.	3198 018 21890	
6008	Zener, 33 Volt BZX79-C33	4835 130 37904	
6113	Zener Diode, 6.8 volt.	9340 386 40115	
6211	Diode, 1N4148.	4835 130 37048	
6212	Diode, 1N4148.	4835 130 37048	
6213	Diode, 1N4148.	4835 130 37048	
6331	Diode.	4835 130 37294	
6333	Diode.	4835 130 37294	
6335	Diode.	4835 130 37294	
6401	Diode.	4835 130 37094	
6402	Zener, 33 Volt, BZX79-C33.	4835 130 37904	
6403	Diode.	4835 130 37094	

S = Safety Part Be sure to use exact replacement part.

HD2720C101 (continued)

6404	Diode.	4835 130 37094
6404	Zener Diode, 75 volt	9331 180 00133
6449	Diode, 1N4148.	4835 130 37048
6450	Diode, 1N4148.	4835 130 37048
6460	Diode, Rect, BY228/20	9336 215 80112
6463	Diode, 1N4148.	4835 130 37048
6464	Zener Diode, 6.2 volt.	9337 242 70133
6465	Diode, BYD33J.	4835 130 37094
6466	Diode, BYD33J.	4835 130 37094
6480	Diode, Zener	4835 130 37947
6481	Diode, 1N4148.	4835 130 37048
6485	Diode, BYD33J.	4835 130 37094
6486	Diode, EGP20DL-530	4835 130 37919
6487	Diode.	4835 130 37094
6488	Diode, Rect, BYV27-200.	9322 126 72673
6490	Diode, Rect, BYV27-200.	9322 126 72673
6505	Diode, Bridge Rect, GBU6JL-7002	9322 138 08667
6507	Diode, BYD33J.	4835 130 37094
6508	Diode, BYD33J.	4835 130 37094
6510	Zener Diode, 20 volt	9331 178 60133
6511	Diode, BYV95C.	4835 130 37052
6512	Diode, Rect, BY228/20	4822 130 41275
6513	Diode, Rect, BY228/20	4822 130 41275
6514	Zener, 18 Volt, BZX79-C18.	4835 130 37908
6540	Diode.	4835 130 37294
6550	Diode, Rect, BY229X-800	9340 380 30127
6560	Diode, EGP20DL-530	4835 130 37919
6580	Diode, Rect, SB140.	9339 577 60673
6584	Diode, 1N4148.	4835 130 37048
6585	Diode, 1N4148.	4835 130 37048
6591	Diode, BAS216.	4835 130 37905
6601	Diode, Zener	4835 130 37684
6606	Zener, 4.7 Volt, BZX79-C4V7.	4835 130 37005
6607	Zener, 6.8 Volt, BZX79-C6V8.	4835 130 37945
6690	LED, LTL-307P.	4835 130 97096
6821	Zener Diode, 9.1 volt.	9331 177 80133
6822	Fixed Coil	4835 130 37048
6951	Diode, BAS216.	4835 130 37905
6961	Diode, BAS216.	4835 130 37905
7250	IC,.	9352 620 26112
7251	IC, LM317T	9337 220 80682
7254	Transistor, NPN, BC847B.	4822 130 60511
7256	Transistor, NPN, BC847B.	4822 130 60511
7258	Transistor, NPN, BC847B.	4822 130 60511
7263	Transistor, PNP, BC857B.	5322 130 60508
7266	Transistor, NPN, BC847B.	4822 130 60511
7330	IC,.	9352 184 10112
7401	IC,.	9322 121 47687
7460	Transistor, NPN, BU1508DX.	9340 170 50127
7461	Transistor, NPN, BF819	9335 354 50127
7462	Transistor, BC547B	4835 130 47055
7463	Transistor, BC557B	4835 130 47409
7480	IC,.	9322 028 93682
7481	Transistor, BC557B	4835 130 47409
7482	Transistor, PNP, BC857B.	5322 130 60508
7518	STH8NA60FI SMPS FET	9322 068 92687
7518	STH10NC60FI SMPS FET.	9322 155 66687
7520	IC, MC44603A	4835 209 88537
7570	IC,.	9337 711 00676
S 7581	Coupler, TCDT1101G	9338 431 30682
7590	Transistor, NPN, BC847B.	4822 130 60511
7591	Transistor, NPN, BC847B.	4822 130 60511
7592	Transistor, NPN, BC847B.	4822 130 60511
7600	IC, SAA5543PS/M4/1046 L90US1-1.4	4835 310 57477
7601	IC, ST24W04B6.	9322 097 23682
7603	Transistor, NPN, BC337	9331 796 00126
7604	Transistor, NPN, BC847B.	4822 130 60511
7605	Transistor, NPN, BC847B.	4822 130 60511
7608	Transistor, NPN, BC847B.	4822 130 60511
7609	Transistor, NPN, BC847B.	4822 130 60511
7680	IR Receiver.	9322 127 53667
7821	IC,.	9352 374 70112
7822	IC, HEF4052BT.	9333 729 50653
7823	Transistor, NPN, BC337-25.	3198 020 43530
7904	Transistor, NPN, BC847B.	4822 130 60511
7908	Transistor, NPN, BC847B.	4822 130 60511
7951	IC,.	4822 209 13706
9423	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
CBA	00EMF831A102 Main Chassis Board Asm.	00EM F83 1A102

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	AC Power Cord.	3135 010 04821
S AC02	Anode Clip	4835 256 97264
AC03	Cabinet Back	3139 124 27871
AC04	Cabinet Front.	3139 137 53001
AC05	Chassis Guide.	3139 124 31381
AC06	Control Buttons.	3139 124 27351
S AC07	Convergence and Purity Assembly.	2422 549 43385
S AC08	CRT A68AJB82X.	4835 131 27167
S AC09	Coil, Degaussing	3121 218 62701
AC11	Light Guide.	3139 124 26461
AC13	Owner's Manual, English.	3135 015 10771
AC14	Power Button	3139 124 26444
REMOTE	Remote Transmitter, RC2528/04.	3139 228 82051
AC16	Speaker, 16R, 1W5 (2 Used)	2422 264 00343
S AC18	Yoke	3313 203 01242
AC19	Yoke Wedge (3 Used).	4835 535 27001
AC21	Battery, 1.5V AA, 2-Pack, (Not Shown	9299 000 10137
AC24	Spring	3139 121 26231

S = Safety Part Be sure to use exact replacement part.

LL9125C121 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts	
S 0127	3.15 Amp Fuse, ...	3122 358 72141
0152	Cable, DIP, 6 Pin, 400mm	3104 301 09421
0153	4 Pin Cable.	3104 301 09431
0212	Connector, 2 Pin	2422 025 15396
0215	Connector, 2 Pin,.	2422 025 16343
0220	4 Pin Board Connector.	2422 025 04852
0224	1 Pin Board Connector.	2422 034 20021
0228	1 Pin Board Connector.	2422 034 20021
0238	Connector, 5 Pin	2422 025 12481
S 0243	Connector, 6 Pin	2422 025 04854
0244	4 Pin Board Connector.	2422 025 04852
S 0245	Connector, 6 Pin	2422 025 04854
S 0254	CRT Socket (9 Pin)	2422 500 80022
0259	Connector, 3 Pin	2412 020 00725
0267	Connector, 3 Pin	2412 020 00725
1000	Tuner.	2422 542 90057
1001	Filter	2422 549 42501
1003	45 MHz SAW, Filter,.	2422 549 42433
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807
1208	Crystal Resonator.	4835 242 77276
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10869
S 1571	1 Amp, Radial Fuse,.	4835 253 97162
S 1572	1 Amp, Radial Fuse,.	4835 253 97162
S 1580	Relay, 12V	2422 132 07317
1600	Switch, Tactile.	2422 128 02742
1601	Switch, Tactile.	2422 128 02742
1602	Switch, Tactile.	2422 128 02742
1603	Switch, Tactile.	2422 128 02742
1606	Switch, Tactile.	2422 128 02742
1660	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488
2001	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2002	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2003	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2004	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2011	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2201	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2202	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2203	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2204	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2205	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2208	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2209	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2211	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2212	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2213	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2214	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2215	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 16654
2220	Cap, 18p, 5%, 50V, Ceramic	3198 016 01890
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2222	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2226	Cap, 33u, 20%, 25V, Electrolytic . .	2020 021 90124
2227	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2228	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780
2247	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2248	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2249	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2330	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2340	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320
S 2343	Cap, 3n3, 10%, 2KV, Ceramic.	2020 558 90529
2345	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2401	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2402	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2404	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2405	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2407	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2409	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2420	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2426	Cap, 100n, 10%, 63V, Metalized Polyes ter.	2222 370 75104
2428	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2429	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2430	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2431	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2437	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2438	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2448	Cap, 220p, 10%, 500V, Ceramic. . . .	3198 019 42210
2450	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91139
2451	Cap, 15n, 10%, 50V, Polyester. . . .	2020 300 90575
2451	0.01uF., 10%, 50V, Polyester, only 27	3198 138 20941
2456	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176
2457	Cap, 390n, 5%, 250V, Metalized Polypr opylene.	2222 479 90021
2458	Cap, 2u2, 20%, 100V, Electrolytic. .	2020 021 91331
2459	Cap, 680p, 10%, 500V, Ceramic. . . .	3198 019 46810
2461	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2462	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176
2463	470pF., 10%, 2KV, Ceramic.	4835 122 47638
S 2465	Cap, 10n, 5%, 1600V, Polypropylene .	2222 375 90154
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050
2481	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2482	Cap, 68n, 10%, 250V, Polyester . . .	2222 347 90234
2484	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2485	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2486	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2487	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2488	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2489	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2490	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2491	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810
2500	0.47uF., 250V, Polyester	4835 121 47569
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
S 2507	Cap, 1n5, 10%, 1KV, Ceramic.	2020 558 90443
2508	Cap, 470u, 20%, 200V, Electrolytic .	2020 024 90647
S 2511	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
S 2518	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2530	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 021 91147
2531	Cap, 1n, 2%, 50V, Polypropylene. . .	2020 310 90049
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2540	Cap, 100u, 20%, 25V, Electrolytic. .	2020 021 90547
S 2545	1500pF., 250VAC, Ceramic	4835 122 47621
S 2550	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2551	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91358
2561	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
S 2562	Cap, 220p, 10%, 1KV, Ceramic	2020 558 90424
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2575	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2577	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2586	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2604	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2613	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2615	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2619	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2622	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2629	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2679	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2681	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2913	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2914	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2915	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2916	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648
2917	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2960	Cap, 220u, 20%, 50V, Electrolytic. .	3198 026 52210
2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090
2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010

S = Safety Part Be sure to use exact replacement part.

LL9125C121 (continued)

	3010	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610		3469	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
	3013	Zero ohm,.	4835 111 27056		3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
	3014	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052		3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703
	3015	22k, 5%, 1/10W, Metal Film	4835 111 37441		3481	Res, 100K, 1%, 3/5W, Metal Film. . .	2322 156 21004
	3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810		3482	Res, 32K4, 1%, 3/5W, Metal Film. . .	2322 156 23243
	3021	Res, 1K, 2%, 0,25W	4822 051 10102		3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
	3200	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3201	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253	S	3485	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
	3203	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443	S	3486	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	S	3487	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3205	Res, 1K, 2%, 0,25W	4822 051 10102	S	3488	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
	3206	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	S	3490	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3491	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3209	22k, 5%, 1/10W, Metal Film	4835 111 37441	S	3492	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3212	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253		3495	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272
	3213	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3496	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3215	22k, 5%, 1/10W, Metal Film	4835 111 37441		3497	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3216	Zero ohm,.	4835 111 27056		3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
	3218	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225
	3219	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3503	9ohm, 220V, Positive Temperature Coef	
	3220	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432			ficient.	2120 661 00024
	3225	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S	3505	Surge Protector.	2422 549 43073
	3228	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
	3231	Zero ohm,.	4835 111 27056	S	3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333
	3232	Zero ohm,.	4835 111 27056	S	3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102
	3233	Zero ohm,.	4835 111 27056		3512	15k, 5%, 1/10W, Metal Film	4835 111 37458
	3243	1.2k, 5%, 1/10W, Metal Film.	4835 111 27042		3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184
	3246	82k, 5%, 1/10W, Metal Film	4835 111 37277		3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204
	3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3515	2.5 ohm, 20%, 3.6W, Negative Temperat	
	3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010			ure Coefficient.	2122 612 00023
	3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340		3516	Res, 1K, 2%, 0,25W	4822 051 10102
	3250	Zero ohm,.	4835 111 27056		3517	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
	3251	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S	3518	Res, 0R22, 5%, 3W, Metal Film. . . .	2120 106 90548
	3252	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		3520	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
	3253	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		3521	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443
	3257	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3525	33 ohm, 5%, 1/3W, Metal Film	4835 116 57665
	3258	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3528	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3259	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3529	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3530	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
	3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3532	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3534	15k, 5%, 1/10W, Metal Film	4835 111 37458
	3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3536	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3537	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046	S	3542	4.7 Megohm, 5%, 1/2W, Metal Film . .	4835 116 57009
S	3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109		3570	15k, 5%, 1/10W, Metal Film	4835 111 37458
S	3341	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483		3571	Res, 150K, 1%, 3/5W, Metal Film. . .	2322 156 21504
S	3342	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483		3573	Res, 2K, 1%, 1/10W, Metalized Glass.	2120 108 92657
	3343	1.5k, 20%, 1/2W, Carbon Composition.	4835 110 47034		3574	33k, 5%, 1/10W, Metal Film	4835 111 37248
	3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290		3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
S	3345	VDR, DC, 1mA, 50V, MAX 115V	2322 593 13507		3577	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290		3578	Res, 1K, 2%, 0,25W	4822 051 10102
	3401	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380		3579	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
	3402	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380		3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3403	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380		3592	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3405	Res, 1K8, 1%, 3/5W, Metal Film . . .	2322 156 21802		3594	22k, 5%, 1/10W, Metal Film	4835 111 37441
	3406	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020		3595	68k, 5%, 1/6W, Carbon Film	4835 111 37205
	3407	Res, 1K8, 1%, 3/5W, Metal Film . . .	2322 156 21802		3596	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020		3597	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
	3409	1.5 ohm, 5%, 1/3W, Metal Film. . . .	4835 116 57664		3598	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210		3599	22k, 5%, 1/10W, Metal Film	4835 111 37441
	3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210		3607	8.2k, 5%, 1/8W, Inline Package . . .	4835 111 97046
	3420	470k, 5%, 1/10W, Metal Film.	4835 111 37407		3608	2.2k, 5%, 1/8W, Inline Package . . .	4835 111 97049
	3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220		3609	2.2k, 5%, Resistor Network	2120 108 93868
	3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220		3611	Res, 1K, 2%, 0,25W	4822 051 10102
	3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840		3612	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606		3613	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3425	150k, 5%, 1/10W, Metal Film.	4835 111 27045		3615	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3426	39k, 5%, 1/10W, Metal Film	4835 111 27051		3617	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
	3428	22k, 5%, 1/10W, Metal Film	4835 111 37441		3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3429	27k, 5%, 1/10W, Metal Film	4835 111 37442		3619	820 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37466
	3431	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247		3629	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259
	3432	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
	3436	Res, 1K, 2%, 0,25W	4822 051 10102		3631	27k, 5%, 1/10W, Metal Film	4835 111 37442
	3437	10k, 5%, 1/10W, Metal Film	4835 111 37216	S	3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63479
	3438	33k, 1/4W, Carbon Film	4835 110 57375		3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210
	3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920		3634	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
	3447	10k, 5%, 1/10W, Metal Film	4835 111 37216		3635	22k, 5%, 1/10W, Metal Film	4835 111 37441
	3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3636	22k, 5%, 1/10W, Metal Film	4835 111 37441
	3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320		3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
S	3452	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63229		3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
S	3453	Res, 4R7, 5%, 5W, Wire Wound	2322 251 41478		3653	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
S	3454	Res, 33K, 5%, 1 1/3W, Metal Film . .	2322 194 63333		3654	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
	3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020		3655	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
	3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720		3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710
S	3462	Res, 6K8, 5%, 5W, Metal Film	2322 257 41682		3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790		3662	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
	3464	Res, 1K, 2%, 0,25W	4822 051 10102		3663	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
S	3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109		3664	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
	3466	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903		3665	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
	3467	Res, 14K, 1%, 3/5W, Metal Film . . .	2322 156 21403		3666	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376
	3467	Res, 15K, 1%, 3/5W, Metal Film . . .	2322 156 21503		3667	27k, 5%, 1/10W, Metal Film	4835 111 37442
	3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020		3672	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052

S = Safety Part Be sure to use exact replacement part.

LL9125C121 (continued)

3673	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3674	470 ohm, 5%, 1/10W, Metal Film	4835 111 37259	
3675	Res, 150 ohm, 5%, 1/10W, Metalized Glass	3198 021 51510	
3676	Res, 150 ohm, 5%, 1/10W, Metalized Glass	3198 021 51510	
3677	Res, 150 ohm, 5%, 1/10W, Metalized Glass	3198 021 51510	
3680	680 ohm, 5%, 1/10W, Metal Film	4835 111 37271	
3681	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3682	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3683	100 ohm, 5%, 1/10W, Metal Film	4835 111 37432	
3684	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3685	220 ohm, 5%, 1/10W, Metal Film	4835 111 37371	
3687	220 ohm, 5%, 1/10W, Metal Film	4835 111 37371	
3908	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3909	Res, 1K, 2%, 0,25W	4822 051 10102	
3910	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376	
3911	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230	
3912	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3913	Res, 6K8, 5%, 1/6W, Carbon Film.	3198 011 06820	
3914	Res, 1K8, 5%, 1/6W, Carbon Film.	3198 011 01820	
3915	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231	
3916	220 ohm, 5%, 1/10W, Metal Film	4835 111 37371	
3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810	
3951	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3953	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272	
3955	Res, 4K7, 5%, 1/6W, Carbon Film.	3198 011 04720	
4001	Zero ohm,	4835 111 27056	
4002	Zero ohm,	4835 111 27056	
4004	Zero ohm,	4835 111 27056	
4007	Zero ohm,	4835 111 27056	
4009	Zero ohm,	4835 111 27056	
4010	Zero ohm,	4835 111 27056	
4011	Zero ohm,	4835 111 27056	
4012	Zero ohm,	4835 111 27056	
4013	Zero ohm,	4835 111 27056	
4020	Zero ohm,	4835 111 27056	
4051	Zero ohm,	4835 111 27056	
4100	Zero ohm,	4835 111 27056	
4101	Zero ohm,	4835 111 27056	
4102	Zero ohm,	4835 111 27056	
4103	Zero ohm,	4835 111 27056	
4143	Zero ohm,	4835 111 27056	
4144	Zero ohm,	4835 111 27056	
4203	Zero ohm,	4835 111 27056	
4207	Zero ohm,	4835 111 27056	
4212	Zero ohm,	4835 111 27056	
4214	Zero ohm,	4835 111 27056	
4215	Zero ohm,	4835 111 27056	
4216	Zero ohm,	4835 111 27056	
4501	Zero ohm,	4835 111 27056	
4602	Zero ohm,	4835 111 27056	
4650	Zero ohm,	4835 111 27056	
4651	Zero ohm,	4835 111 27056	
4652	Zero ohm,	4835 111 27056	
4654	Zero ohm,	4835 111 27056	
4655	Zero ohm,	4835 111 27056	
4684	Zero ohm,	4835 111 27056	
4687	Zero ohm,	4835 111 27056	
4831	Zero ohm,	4835 111 27056	
4832	Zero ohm,	4835 111 27056	
4833	Zero ohm,	4835 111 27056	
4902	Zero ohm,	4835 111 27056	
4903	Zero ohm,	4835 111 27056	
4904	Zero ohm,	4835 111 27056	
4905	Zero ohm,	4835 111 27056	
4909	Zero ohm,	4835 111 27056	
4911	Zero ohm,	4835 111 27056	
4912	Zero ohm,	4835 111 27056	
4914	Zero ohm,	4835 111 27056	
4957	Zero ohm,	4835 111 27056	
4999	Zero ohm,	4835 111 27056	
5000	Coil, 5u6.	3198 018 25680	
5004	Coil, 820n	2422 535 97314	
5201	Coil, 22u.	3198 018 22290	
5202	Coil, 6u8.	3198 018 16880	
5342	22uH., 10%, Coil, Peaking.	4835 157 67069	
S 5445	Transformer, L.O.T., models ending in C101, C121, and C125	2422 531 02327	
S 5445	Transformer, L.O.T., models ending in C221 and C225.	3128 138 20941	
5451	Coil, 27u.	2422 535 96614	
5457	Coil, Linear Correction.	3128 138 53241	
5461	Transformer.	3128 138 33811	
5480	Coil, 27u.	2422 535 97334	
5480	Coil, 39u.	2422 535 97336	
5480	33uH., Peaking Coil, only in 25.	4835 157 58205	
S 5500	Filter, Mains, 5mH, 2A	2422 549 43432	
5516	100uH., Coil	4835 157 67078	
5518	Fixed, Inductor, 100MHz, 50R.	3198 018 90010	
5521	Coil, 2u2.	3198 018 12280	
5540	Coil, 4u7.	3198 018 14780	
S 5545	Transfomer,	2422 531 02314	
5551	27uH., 5%, Coil, Peaking	4835 157 67052	
5552	Fixed, Inductor, 100MHz, 50R.	3198 018 90010	
5572	100uH., Coil	4835 157 67078	
5573	100uH., Coil	4835 157 67078	
5576	100uH., Coil	4835 157 67078	
5577	Fixed, Inductor, 100MHz, 50R.	3198 018 90010	
5600	Coil, 8u2.	3198 018 18280	
5601	Coil, 8u2.	3198 018 18280	
5620	Coil, 6u8.	3198 018 16880	
5821	Coil, 100u	3198 018 21010	
6008	Zener, 33 Volt BZX79-C33	4835 130 37904	
6211	Diode, 1N4148.	4835 130 37048	
6212	Diode, 1N4148.	4835 130 37048	
6213	Diode, 1N4148.	4835 130 37048	
6331	Diode.	4835 130 37294	
6333	Diode.	4835 130 37294	
6335	Diode.	4835 130 37294	
6401	Diode.	4835 130 37094	
6402	Zener, 33 Volt, BZX79-C33.	4835 130 37904	
6403	Diode.	4835 130 37094	
6404	Diode.	4835 130 37094	
6449	Diode, 1N4148.	4835 130 37048	
6450	Diode, 1N4148.	4835 130 37048	
6460	Diode, Rect, BY228/20	9336 215 80112	
6463	Diode, 1N4148.	4835 130 37048	
6464	Zener, 6.2 Volt, BZX79-B6V2.	4835 130 37948	
6465	Diode, BYD33J.	4835 130 37094	
6466	Diode, BYD33J.	4835 130 37094	
6480	Diode, Zener	4835 130 37947	
6481	Diode, 1N4148.	4835 130 37048	
6485	Diode, BYD33J.	4835 130 37094	
6486	Diode, EGP20DL-530	4835 130 37919	
6487	Diode.	4835 130 37094	
6488	Diode, Rect, BYV27-200.	9322 126 72673	
6490	Diode, Rect, BYV27-200.	9322 126 72673	
6505	Diode, Bridge Rect, GBU6JL-7002	9322 138 08667	
6507	Diode, BYD33J.	4835 130 37094	
6508	Diode, BYD33J.	4835 130 37094	
6510	Zener Diode, 20 volt	9331 178 60133	
6511	Diode, BYV95C.	4835 130 37052	
6512	Diode, Rect, BY228/20	4822 130 41275	
6513	Diode, Rect, BY228/20	4822 130 41275	
6514	Zener, 18 Volt, BZX79-C18.	4835 130 37908	
6540	Diode.	4835 130 37294	
6550	Diode, Rect, BY229X-800	9340 380 30127	
6560	Diode, EGP20DL-530	4835 130 37919	
6580	Diode, Rect, BYV27-200.	9322 126 72673	
6584	Diode, 1N4148.	4835 130 37048	
6585	Diode, 1N4148.	4835 130 37048	
6591	Diode, BAS216.	4835 130 37905	
6601	Diode, Zener	4835 130 37684	
6602	Diode, 1N4148.	4835 130 37048	
6603	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610	
6604	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610	
6605	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610	
6606	Zener, 4.7 Volt, BZX79-C4V7.	4835 130 37005	
6607	Zener, 6.8 Volt, BZX79-C6V8.	4835 130 37945	
6690	LED, LTL-307P.	4835 130 97096	
6951	Diode, BAS216.	4835 130 37905	
6961	Diode, BAS216.	4835 130 37905	
7250	IC,	9352 620 26112	
7251	IC, LM317T	9337 220 80682	
7254	Transistor, NPN, BC847B.	4822 130 60511	
7256	Transistor, NPN, BC847B.	4822 130 60511	
7258	Transistor, NPN, BC847B.	4822 130 60511	
7263	Transistor, PNP, BC857B.	5322 130 60508	
7266	Transistor, NPN, BC847B.	4822 130 60511	
7330	IC,	9352 184 10112	
7401	IC,	9322 121 47687	
7460	Transistor, NPN, BU1508DX.	9340 170 50127	
7461	Transistor, NPN, BF819	9335 354 50127	
7462	Transistor, BC547B	4835 130 47055	
7463	Transistor, BC557B	4835 130 47409	
7480	IC,	9322 028 93682	
7481	Transistor, BC557B	4835 130 47409	
7482	Transistor, PNP, BC857B.	5322 130 60508	
7518	STH8NA60FI SMPS FET	9322 068 92687	
7518	STH10NC60FI SMPS FET.	9322 155 66687	
7520	IC, MC44603A	4835 209 88537	
7570	IC,	9337 711 00676	
S 7581	Coupler, TCDT1101G	9338 431 30682	
7590	Transistor, NPN, BC847B.	4822 130 60511	
7591	Transistor, NPN, BC847B.	4822 130 60511	
7592	Transistor, NPN, BC847B.	4822 130 60511	
7600	IC, SAA5543-PS/M4/0167 L9 v3.2 (Commercial Models - NON Pro Plus)	9352 670 84112	
7600	IC, SAA5565-PS/M3/0195 L9 v3.2 (Commercial Models - Pro Plus Models).	9352 673 97112	
7601	IC, ST24W16B6, commercial models only	9322 095 35682	

S = Safety Part Be sure to use exact replacement part.

LL9125C121 (continued)

7603	Transistor, NPN, BC337	9331 796 00126
7604	Transistor, NPN, BC847B.	4822 130 60511
7605	Transistor, NPN, BC847B.	4822 130 60511
7608	Transistor, NPN, BC847B.	4822 130 60511
7609	Transistor, NPN, BC847B.	4822 130 60511
7680	IR Receiver.	9322 127 53667
7904	Transistor, NPN, BC847B.	4822 130 60511
7954	IC,.	4835 209 88542
9423	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
CBA	00EMF899A002 Main Chassis Board Asm.	00EM F89 9A002

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Mains Cord	3135 010 07161
S AC02	Anode Clip	4835 256 97264
AC03	Cabinet Back	3135 014 07961
AC04	Cabinet Front.	3135 017 04101
AC05	Chassis Guide.	3139 124 31381
AC06	Control Buttons.	3139 124 27351
S AC07	Convergence and Purity Assembly. . .	2422 549 43385
S AC08	CRT A63AFW86X.	4835 131 27131
S AC09	Coil, Degaussing	3121 218 62971
AC11	Light Guide.	3139 124 26461
AC12	Nameplate.	4835 459 17546
AC13	Owner's Manual	3135 015 16021
AC14	Power Button	3139 124 26444
AC16	Speaker, 16R, 1W5 (2 Used)	2422 264 00343
S AC18	Yoke (C121 Version).	3321 203 00121
AC19	Yoke Wedge (3 Used).	4835 535 27006
S AC20	AC Adapt, UL - IEC (26LL59 1121) . .	3135 010 03071
AC24	Spring	3139 121 26231
AC29	Vent Cover	3135 013 03371

S = Safety Part Be sure to use exact replacement part.

LL9125C221 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts	
S 0127	3.15 Amp Fuse, ...	3122 358 72141
0152	Cable, DIP, 6 Pin, 400mm	3104 301 09421
0153	4 Pin Cable.	3104 301 09431
0212	Connector, 2 Pin	2422 025 15396
0215	Connector, 2 Pin,.	2422 025 16343
0220	4 Pin Board Connector.	2422 025 04852
0224	1 Pin Board Connector.	2422 034 20021
0228	1 Pin Board Connector.	2422 034 20021
0238	Connector, 5 Pin	2422 025 12481
S 0243	Connector, 6 Pin	2422 025 04854
0244	4 Pin Board Connector.	2422 025 04852
S 0245	Connector, 6 Pin	2422 025 04854
S 0254	CRT Socket (9 Pin)	2422 500 80022
0259	Connector, 3 Pin	2412 020 00725
0267	Connector, 3 Pin	2412 020 00725
1000	Tuner.	2422 542 90057
1001	Filter	2422 549 42501
1003	45 MHz SAW, Filter,.	2422 549 42433
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807
1208	Crystal Resonator.	4835 242 77276
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10869
S 1571	1 Amp, Radial Fuse,.	4835 253 97162
S 1572	1 Amp, Radial Fuse,.	4835 253 97162
S 1580	Relay, 12V	2422 132 07317
1600	Switch, Tactile.	2422 128 02742
1601	Switch, Tactile.	2422 128 02742
1602	Switch, Tactile.	2422 128 02742
1603	Switch, Tactile.	2422 128 02742
1606	Switch, Tactile.	2422 128 02742
1660	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488
2001	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2002	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2003	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2004	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2011	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2201	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2202	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2203	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2204	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2205	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2208	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2209	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2211	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2212	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2213	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2214	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2215	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 16654
2220	Cap, 18p, 5%, 50V, Ceramic	3198 016 01890
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2222	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2226	Cap, 33u, 20%, 25V, Electrolytic . .	2020 021 90124
2227	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2228	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780
2247	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2248	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2249	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2330	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2340	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320
S 2343	Cap, 3n3, 10%, 2KV, Ceramic.	2020 558 90529
2345	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2401	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2402	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2404	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2405	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2407	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2409	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2420	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2426	Cap, 100n, 10%, 63V, Metalized Polyes ter.	2222 370 75104
2428	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2429	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2430	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2431	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2437	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2438	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2448	Cap, 220p, 10%, 500V, Ceramic. . . .	3198 019 42210
2450	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91139
2451	Cap, 15n, 10%, 50V, Polyester. . . .	2020 300 90575
2451	0.01uF., 10%, 50V, Polyester, only 27	3198 138 20941
2456	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176
2457	Cap, 390n, 5%, 250V, Metalized Polypr opylene.	2222 479 90021
2458	Cap, 2u2, 20%, 100V, Electrolytic. .	2020 021 91331
2459	Cap, 680p, 10%, 500V, Ceramic. . . .	3198 019 46810
2461	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2462	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176
2463	470pF., 10%, 2KV, Ceramic.	4835 122 47638
S 2465	Cap, 10n, 5%, 1600V, Polypropylene .	2222 375 90154
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050
2481	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2482	Cap, 68n, 10%, 250V, Polyester . . .	2222 347 90234
2484	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2485	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2486	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2487	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2488	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2489	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2490	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2491	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810
2500	0.47uF., 250V, Polyester	4835 121 47569
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
S 2507	Cap, 1n5, 10%, 1KV, Ceramic.	2020 558 90443
2508	Cap, 470u, 20%, 200V, Electrolytic .	2020 024 90647
S 2511	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
S 2518	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2530	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 021 91147
2531	Cap, 1n, 2%, 50V, Polypropylene. . .	2020 310 90049
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2540	Cap, 100u, 20%, 25V, Electrolytic. .	2020 021 90547
S 2545	1500pF., 250VAC, Ceramic	4835 122 47621
S 2550	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2551	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91358
2561	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
S 2562	Cap, 220p, 10%, 1KV, Ceramic	2020 558 90424
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2575	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2577	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2586	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2604	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2613	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2615	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2619	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2622	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2629	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2679	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2681	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2913	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2914	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2915	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2916	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648
2917	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2960	Cap, 220u, 20%, 50V, Electrolytic. .	3198 026 52210
2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090
2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010

S = Safety Part Be sure to use exact replacement part.

LL9125C221 (continued)

	3010	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610		3469	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
	3013	Zero ohm,.	4835 111 27056		3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
	3014	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052		3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703
	3015	22k, 5%, 1/10W, Metal Film	4835 111 37441		3481	Res, 100K, 1%, 3/5W, Metal Film. . .	2322 156 21004
	3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810		3482	Res, 32K4, 1%, 3/5W, Metal Film. . .	2322 156 23243
	3021	Res, 1K, 2%, 0,25W	4822 051 10102		3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
	3200	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3201	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253	S	3485	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
	3203	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443	S	3486	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	S	3487	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3205	Res, 1K, 2%, 0,25W	4822 051 10102	S	3488	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
	3206	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	S	3490	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3491	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3209	22k, 5%, 1/10W, Metal Film	4835 111 37441	S	3492	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3212	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253		3495	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272
	3213	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3496	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3215	22k, 5%, 1/10W, Metal Film	4835 111 37441		3497	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3216	Zero ohm,.	4835 111 27056		3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
	3218	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225
	3219	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3503	9ohm, 220V, Positive Temperature Coef	
	3220	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432			ficient.	2120 661 00024
	3225	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S	3505	Surge Protector.	2422 549 43073
	3228	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
	3231	Zero ohm,.	4835 111 27056	S	3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333
	3232	Zero ohm,.	4835 111 27056	S	3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102
	3233	Zero ohm,.	4835 111 27056		3512	15k, 5%, 1/10W, Metal Film	4835 111 37458
	3243	1.2k, 5%, 1/10W, Metal Film.	4835 111 27042		3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184
	3246	82k, 5%, 1/10W, Metal Film	4835 111 37277		3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204
	3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3515	2.5 ohm, 20%, 3.6W, Negative Temperat	
	3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010			ure Coefficient.	2122 612 00023
	3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340		3516	Res, 1K, 2%, 0,25W	4822 051 10102
	3250	Zero ohm,.	4835 111 27056		3517	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
	3251	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S	3518	Res, 0R22, 5%, 3W, Metal Film. . . .	2120 106 90548
	3252	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		3520	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
	3253	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		3521	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443
	3257	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3525	33 ohm, 5%, 1/3W, Metal Film	4835 116 57665
	3258	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3528	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3259	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3529	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3530	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
	3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3532	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3534	15k, 5%, 1/10W, Metal Film	4835 111 37458
	3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3536	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3537	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046	S	3542	4.7 Megohm, 5%, 1/2W, Metal Film . .	4835 116 57009
S	3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109		3570	15k, 5%, 1/10W, Metal Film	4835 111 37458
S	3341	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483		3571	Res, 150K, 1%, 3/5W, Metal Film. . .	2322 156 21504
S	3342	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483		3573	Res, 2K, 1%, 1/10W, Metalized Glass.	2120 108 92657
	3343	1.5k, 20%, 1/2W, Carbon Composition.	4835 110 47034		3574	33k, 5%, 1/10W, Metal Film	4835 111 37248
	3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290		3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
S	3345	VDR, DC, 1mA, 50V, MAX 115V	2322 593 13507		3577	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290		3578	Res, 1K, 2%, 0,25W	4822 051 10102
	3401	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380		3579	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
	3402	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380		3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3403	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380		3592	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3405	Res, 1K8, 1%, 3/5W, Metal Film . . .	2322 156 21802		3594	22k, 5%, 1/10W, Metal Film	4835 111 37441
	3406	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020		3595	68k, 5%, 1/6W, Carbon Film	4835 111 37205
	3407	Res, 1K8, 1%, 3/5W, Metal Film . . .	2322 156 21802		3596	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020		3597	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
	3409	1.5 ohm, 5%, 1/3W, Metal Film. . . .	4835 116 57664		3598	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210		3599	22k, 5%, 1/10W, Metal Film	4835 111 37441
	3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210		3607	8.2k, 5%, 1/8W, Inline Package . . .	4835 111 97046
	3420	470k, 5%, 1/10W, Metal Film.	4835 111 37407		3608	2.2k, 5%, 1/8W, Inline Package . . .	4835 111 97049
	3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220		3609	2.2k, 5%, Resistor Network	2120 108 93868
	3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220		3611	Res, 1K, 2%, 0,25W	4822 051 10102
	3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840		3612	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606		3613	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3425	150k, 5%, 1/10W, Metal Film.	4835 111 27045		3615	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3426	39k, 5%, 1/10W, Metal Film	4835 111 27051		3617	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
	3428	22k, 5%, 1/10W, Metal Film	4835 111 37441		3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3429	27k, 5%, 1/10W, Metal Film	4835 111 37442		3619	820 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37466
	3431	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247		3629	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259
	3432	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
	3436	Res, 1K, 2%, 0,25W	4822 051 10102		3631	27k, 5%, 1/10W, Metal Film	4835 111 37442
	3437	10k, 5%, 1/10W, Metal Film	4835 111 37216	S	3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63479
	3438	33k, 1/4W, Carbon Film	4835 110 57375		3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210
	3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920		3634	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
	3447	10k, 5%, 1/10W, Metal Film	4835 111 37216		3635	22k, 5%, 1/10W, Metal Film	4835 111 37441
	3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3636	22k, 5%, 1/10W, Metal Film	4835 111 37441
	3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320		3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
S	3452	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63229		3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
S	3453	Res, 4R7, 5%, 5W, Wire Wound	2322 251 41478		3653	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
S	3454	Res, 33K, 5%, 1 1/3W, Metal Film . .	2322 194 63333		3654	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
	3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020		3655	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
	3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720		3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710
S	3462	Res, 6K8, 5%, 5W, Metal Film	2322 257 41682		3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790		3662	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
	3464	Res, 1K, 2%, 0,25W	4822 051 10102		3663	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
S	3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109		3664	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
	3466	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903		3665	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
	3467	Res, 14K, 1%, 3/5W, Metal Film . . .	2322 156 21403		3666	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376
	3467	Res, 15K, 1%, 3/5W, Metal Film . . .	2322 156 21503		3667	27k, 5%, 1/10W, Metal Film	4835 111 37442
	3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020		3672	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052

S = Safety Part Be sure to use exact replacement part.

LL9125C221 (continued)

3673	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3674	470 ohm, 5%, 1/10W, Metal Film	4835 111 37259	
3675	Res, 150 ohm, 5%, 1/10W, Metalized Glass	3198 021 51510	
3676	Res, 150 ohm, 5%, 1/10W, Metalized Glass	3198 021 51510	
3677	Res, 150 ohm, 5%, 1/10W, Metalized Glass	3198 021 51510	
3680	680 ohm, 5%, 1/10W, Metal Film	4835 111 37271	
3681	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3682	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3683	100 ohm, 5%, 1/10W, Metal Film	4835 111 37432	
3684	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3685	220 ohm, 5%, 1/10W, Metal Film	4835 111 37371	
3687	220 ohm, 5%, 1/10W, Metal Film	4835 111 37371	
3908	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3909	Res, 1K, 2%, 0,25W	4822 051 10102	
3910	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376	
3911	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230	
3912	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3913	Res, 6K8, 5%, 1/6W, Carbon Film.	3198 011 06820	
3914	Res, 1K8, 5%, 1/6W, Carbon Film.	3198 011 01820	
3915	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231	
3916	220 ohm, 5%, 1/10W, Metal Film	4835 111 37371	
3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810	
3951	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3953	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272	
3955	Res, 4K7, 5%, 1/6W, Carbon Film.	3198 011 04720	
4001	Zero ohm,	4835 111 27056	
4002	Zero ohm,	4835 111 27056	
4004	Zero ohm,	4835 111 27056	
4007	Zero ohm,	4835 111 27056	
4009	Zero ohm,	4835 111 27056	
4010	Zero ohm,	4835 111 27056	
4011	Zero ohm,	4835 111 27056	
4012	Zero ohm,	4835 111 27056	
4013	Zero ohm,	4835 111 27056	
4020	Zero ohm,	4835 111 27056	
4051	Zero ohm,	4835 111 27056	
4100	Zero ohm,	4835 111 27056	
4101	Zero ohm,	4835 111 27056	
4102	Zero ohm,	4835 111 27056	
4103	Zero ohm,	4835 111 27056	
4143	Zero ohm,	4835 111 27056	
4144	Zero ohm,	4835 111 27056	
4203	Zero ohm,	4835 111 27056	
4207	Zero ohm,	4835 111 27056	
4212	Zero ohm,	4835 111 27056	
4214	Zero ohm,	4835 111 27056	
4215	Zero ohm,	4835 111 27056	
4216	Zero ohm,	4835 111 27056	
4501	Zero ohm,	4835 111 27056	
4602	Zero ohm,	4835 111 27056	
4650	Zero ohm,	4835 111 27056	
4651	Zero ohm,	4835 111 27056	
4652	Zero ohm,	4835 111 27056	
4654	Zero ohm,	4835 111 27056	
4655	Zero ohm,	4835 111 27056	
4684	Zero ohm,	4835 111 27056	
4687	Zero ohm,	4835 111 27056	
4831	Zero ohm,	4835 111 27056	
4832	Zero ohm,	4835 111 27056	
4833	Zero ohm,	4835 111 27056	
4902	Zero ohm,	4835 111 27056	
4903	Zero ohm,	4835 111 27056	
4904	Zero ohm,	4835 111 27056	
4905	Zero ohm,	4835 111 27056	
4909	Zero ohm,	4835 111 27056	
4911	Zero ohm,	4835 111 27056	
4912	Zero ohm,	4835 111 27056	
4914	Zero ohm,	4835 111 27056	
4957	Zero ohm,	4835 111 27056	
4999	Zero ohm,	4835 111 27056	
5000	Coil, 5u6.	3198 018 25680	
5004	Coil, 820n	2422 535 97314	
5201	Coil, 22u.	3198 018 22290	
5202	Coil, 6u8.	3198 018 16880	
5342	22uH., 10%, Coil, Peaking.	4835 157 67069	
S 5445	Transformer, L.O.T., models ending in C101, C121, and C125	2422 531 02327	
S 5445	Transformer, L.O.T., models ending in C221 and C225.	3128 138 20941	
5451	Coil, 27u.	2422 535 96614	
5457	Coil, Linear Correction.	3128 138 53241	
5461	Transformer.	3128 138 33811	
5480	Coil, 27u.	2422 535 97334	
5480	Coil, 39u.	2422 535 97336	
5480	33uH., Peaking Coil, only in 25.	4835 157 58205	
S 5500	Filter, Mains, 5mH, 2A	2422 549 43432	
5516	100uH., Coil	4835 157 67078	
5518	Fixed, Inductor, 100MHz, 50R.	3198 018 90010	
5521	Coil, 2u2.	3198 018 12280	
5540	Coil, 4u7.	3198 018 14780	
S 5545	Transfomer,	2422 531 02314	
5551	27uH., 5%, Coil, Peaking	4835 157 67052	
5552	Fixed, Inductor, 100MHz, 50R.	3198 018 90010	
5572	100uH., Coil	4835 157 67078	
5573	100uH., Coil	4835 157 67078	
5576	100uH., Coil	4835 157 67078	
5577	Fixed, Inductor, 100MHz, 50R.	3198 018 90010	
5600	Coil, 8u2.	3198 018 18280	
5601	Coil, 8u2.	3198 018 18280	
5620	Coil, 6u8.	3198 018 16880	
5821	Coil, 100u	3198 018 21010	
6008	Zener, 33 Volt BZX79-C33	4835 130 37904	
6211	Diode, 1N4148.	4835 130 37048	
6212	Diode, 1N4148.	4835 130 37048	
6213	Diode, 1N4148.	4835 130 37048	
6331	Diode.	4835 130 37294	
6333	Diode.	4835 130 37294	
6335	Diode.	4835 130 37294	
6401	Diode.	4835 130 37094	
6402	Zener, 33 Volt, BZX79-C33.	4835 130 37904	
6403	Diode.	4835 130 37094	
6404	Diode.	4835 130 37094	
6449	Diode, 1N4148.	4835 130 37048	
6450	Diode, 1N4148.	4835 130 37048	
6460	Diode, Rect, BY228/20	9336 215 80112	
6463	Diode, 1N4148.	4835 130 37048	
6464	Zener, 6.2 Volt, BZX79-B6V2.	4835 130 37948	
6465	Diode, BYD33J.	4835 130 37094	
6466	Diode, BYD33J.	4835 130 37094	
6480	Diode, Zener	4835 130 37947	
6481	Diode, 1N4148.	4835 130 37048	
6485	Diode, BYD33J.	4835 130 37094	
6486	Diode, EGP20DL-530	4835 130 37919	
6487	Diode.	4835 130 37094	
6488	Diode, Rect, BYV27-200.	9322 126 72673	
6490	Diode, Rect, BYV27-200.	9322 126 72673	
6505	Diode, Bridge Rect, GBU6JL-7002	9322 138 08667	
6507	Diode, BYD33J.	4835 130 37094	
6508	Diode, BYD33J.	4835 130 37094	
6510	Zener Diode, 20 volt	9331 178 60133	
6511	Diode, BYV95C.	4835 130 37052	
6512	Diode, Rect, BY228/20	4822 130 41275	
6513	Diode, Rect, BY228/20	4822 130 41275	
6514	Zener, 18 Volt, BZX79-C18.	4835 130 37908	
6540	Diode.	4835 130 37294	
6550	Diode, Rect, BY229X-800	9340 380 30127	
6560	Diode, EGP20DL-530	4835 130 37919	
6580	Diode, Rect, BYV27-200.	9322 126 72673	
6584	Diode, 1N4148.	4835 130 37048	
6585	Diode, 1N4148.	4835 130 37048	
6591	Diode, BAS216.	4835 130 37905	
6601	Diode, Zener	4835 130 37684	
6602	Diode, 1N4148.	4835 130 37048	
6603	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610	
6604	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610	
6605	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610	
6606	Zener, 4.7 Volt, BZX79-C4V7.	4835 130 37005	
6607	Zener, 6.8 Volt, BZX79-C6V8.	4835 130 37945	
6690	LED, LTL-307P.	4835 130 97096	
6951	Diode, BAS216.	4835 130 37905	
6961	Diode, BAS216.	4835 130 37905	
7250	IC,	9352 620 26112	
7251	IC, LM317T	9337 220 80682	
7254	Transistor, NPN, BC847B.	4822 130 60511	
7256	Transistor, NPN, BC847B.	4822 130 60511	
7258	Transistor, NPN, BC847B.	4822 130 60511	
7263	Transistor, PNP, BC857B.	5322 130 60508	
7266	Transistor, NPN, BC847B.	4822 130 60511	
7330	IC,	9352 184 10112	
7401	IC,	9322 121 47687	
7460	Transistor, NPN, BU1508DX.	9340 170 50127	
7461	Transistor, NPN, BF819	9335 354 50127	
7462	Transistor, BC547B	4835 130 47055	
7463	Transistor, BC557B	4835 130 47409	
7480	IC,	9322 028 93682	
7481	Transistor, BC557B	4835 130 47409	
7482	Transistor, PNP, BC857B.	5322 130 60508	
7518	STH8NA60FI SMPS FET	9322 068 92687	
7518	STH10NC60FI SMPS FET.	9322 155 66687	
7520	IC, MC44603A	4835 209 88537	
7570	IC,	9337 711 00676	
S 7581	Coupler, TCDT1101G	9338 431 30682	
7590	Transistor, NPN, BC847B.	4822 130 60511	
7591	Transistor, NPN, BC847B.	4822 130 60511	
7592	Transistor, NPN, BC847B.	4822 130 60511	
7600	IC, SAA5543-PS/M4/0167 L9 v3.2 (Commercial Models - NON Pro Plus)	9352 670 84112	
7600	IC, SAA5565-PS/M3/0195 L9 v3.2 (Commercial Models - Pro Plus Models).	9352 673 97112	
7601	IC, ST24W16B6, commercial models only	9322 095 35682	

S = Safety Part Be sure to use exact replacement part.

LL9125C221 (continued)

7603	Transistor, NPN, BC337	9331 796 00126
7604	Transistor, NPN, BC847B.	4822 130 60511
7605	Transistor, NPN, BC847B.	4822 130 60511
7608	Transistor, NPN, BC847B.	4822 130 60511
7609	Transistor, NPN, BC847B.	4822 130 60511
7680	IR Receiver.	9322 127 53667
7904	Transistor, NPN, BC847B.	4822 130 60511
7954	IC,.	4835 209 88542
9423	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
CBA	00EMF899A002 Main Chassis Board Asm.	00EM F89 9A002

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Mains Cord	3135 010 07161
S AC02	Anode Clip	4835 256 97264
AC03	Cabinet Back	3135 014 07961
AC04	Cabinet Front.	3135 017 04101
AC05	Chassis Guide.	3139 124 31381
AC06	Control Buttons.	3139 124 27351
S AC07	Convergence and Purity Assembly. . .	2422 549 43385
S AC08	CRT A63AFW86X.	4835 131 27131
S AC09	Coil, Degaussing	3121 218 62971
AC11	Light Guide.	3139 124 26461
AC12	Nameplate.	4835 459 17546
AC13	Owner's Manual	3135 015 16021
AC14	Power Button	3139 124 26444
AC16	Speaker, 16R, 1W5 (2 Used)	2422 264 00343
S AC18	Yoke (C121 Version).	3321 203 00121
AC19	Yoke Wedge (3 Used).	4835 535 27006
S AC20	AC Adapt, UL - IEC (26LL59 1121) . .	3135 010 03071
AC24	Spring	3139 121 26231
AC29	Vent Cover	3135 013 03371

MS2530C221 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts	
0113	L9 SOPS HEATSINK	3139 121 62041
0119	DIODE HEATSINK L9.	3139 121 26691
0121	LINE HEATSINK (CINCH).	3139 121 61942
S 0127	Holder, Fuse, 2 Pin.	3122 358 71251
0211	Connector, 2 Pin	2422 025 11196
0212	Connector, 2 Pin	2422 025 15396
0220	4 Pin Board Connector.	2422 025 04852
0221	Connector, 4 Pin	2422 025 15503
0222	Connector, 2 Pin	2422 025 10646
0225	1 Pin Board Connector.	2422 034 20021
0226	1 Pin Board Connector.	2422 034 20021
0234	Connector, 4 Pin	2422 025 15847
S 0243	Connector, 6 Pin	2422 025 04854
0244	4 Pin Board Connector.	2422 025 04852
S 0245	Connector, 6 Pin	2422 025 04854
S 0254	CRT Socket (9 Pin)	2422 500 80022
0267	Connector, 3 Pin	2412 020 00725
1000	TUNER.	3139 147 16412
1001	Filter	2422 549 42501
1003	45 MHz SAW, Filter,	2422 549 42433
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807
1208	Crystal Resonator, 3.58MHz	2422 543 00832
S 1500	Fue, 4 A, 250V	2422 086 10905
S 1571	FUSE 1A 250V	2422 086 10779
S 1572	FUSE 1A 250V	2422 086 10779
S 1580	Relay, 12V, 5A G5PA-1.	2422 132 07444
1600	Switch, Tactile.	2422 128 02742
1601	Switch, Tactile.	2422 128 02742
1602	Switch, Tactile.	2422 128 02742
1603	Switch, Tactile.	2422 128 02742
1606	Switch, Tactile.	2422 128 02742
1660	Crystal, Resonator, 12MHz, 20 Pin.	2422 543 00488
1821	Ceramic Resonator, 514KHz5, CSB503F58	2422 540 98344
2001	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2002	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2003	Cap, 470u, 20%, 16V, Electrolytic.	3198 025 24710
2004	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2011	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
2013	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2201	Cap, 220n, 10%, 50V, Polyester	3198 014 02240
2202	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2203	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
2204	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2205	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2206	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2207	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2208	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2209	Cap, 470n, +80/-20%, 16V, Ceramic.	3198 017 24740
2211	Cap, 470n, +80/-20%, 16V, Ceramic.	3198 017 24740
2212	Cap, 470n, +80/-20%, 16V, Ceramic.	3198 017 24740
2213	Cap, 470n, +80/-20%, 16V, Ceramic.	3198 017 24740
2214	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2215	Cap, 2u2, 20%, 50V, Electrolytic	3198 025 52280
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 15654
2220	Cap, 18p, 5%, 50V, Ceramic	3198 016 01890
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2222	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2226	Cap, 33u, 20%, 25V, Electrolytic	2020 021 90124
2227	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2247	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2248	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2249	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2330	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2340	Cap, 10u, 20%, 250V, Electrolytic.	2020 012 93495
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320
S 2343	Cap, 3n3, 10%, 2KV, Ceramic.	2020 558 90529
2345	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2401	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2402	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2404	Cap, 220n, 10%, 50V, Polyester	3198 014 02240
2405	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2407	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2409	Cap, 220n, 10%, 50V, Polyester	3198 014 02240
2420	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2426	Cap, 100n, 10%, 63V, Metalized Polyester	2222 370 75104
2428	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2429	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2430	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
2431	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2437	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2438	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2448	Cap, 33p, 5%, 500V, Ceramic.	2020 557 90192
2450	Cap, 47u, 20%, 160v, Electrolytic.	2020 021 91139
2451	Cap, 15n, 10%, 50V, Polyester.	2020 300 90575
2456	Cap, 47n, 10%, 250V, Metalized Polyester.	2222 368 90176
2457	Cap, 390n, 5%, 250V, Metalized Polypropylene.	2222 479 90021
2458	Cap, 2u2, 20%, 100V, Electrolytic.	2020 021 91331
2459	Cap, 680p, 10%, 500V, Ceramic.	3198 019 46810
2461	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2462	Cap, 47n, 10%, 250V, Metalized Polyester.	2222 368 90176
S 2463	Cap, 470p, 10%, 2KV, Ceramic	2020 558 90483
S 2465	Cap, 10n, 5%, 1600V, Polypropylene	2222 375 90154
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050
2473	Cap, 47u, 20%, 50V, Electrolytic	3198 025 54790
2481	Cap, 470n, 10%, 50V, Polyester	3198 014 04740
2482	Cap, 68n, 10%, 250V, Polyester	2222 347 90234
2484	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2485	Cap, 4u7, 20%, 250V, Electrolytic.	2020 012 93293
2486	Cap, 470u, 20%, 16V, Electrolytic.	3198 025 24710
2487	Cap, 100u, 20%, 50V, Electrolytic.	3198 025 51010
2488	Cap, 470u, 20%, 16V, Electrolytic.	3198 025 24710
2489	Cap, 470u, 20%, 16V, Electrolytic.	3198 025 24710
2490	Cap, 470p, 10%, 500V, Ceramic.	3198 019 44710
2491	Cap, 470p, 10%, 500V, Ceramic.	3198 019 44710
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810
2499	Cap, 220n, 10%, 100V, Metalized Polyester	2222 365 25224
2500	Cap, 470n, 20%, 275V, Polypropylene.	2222 336 29148
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2507	Cap, 1n5, 10%, 1KV, Ceramic.	3198 019 61520
2508	Cap, 470u, 20%, 200V, Electrolytic	2020 024 90647
2511	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
2518	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2529	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2530	Cap, 1u, 20%, 50V, Electrolytic.	2020 021 91147
2531	Cap, 1n, 2%, 50V, Polypropylene.	2020 310 90049
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2540	Cap, 100u, 20%, 25V, Electrolytic.	2020 021 90547
S 2545	Cap, 1n5, 20%, v, Ceramic.	2020 554 90128
2550	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2551	Cap, 47u, 20%, 160v, Electrolytic.	2020 021 91358
2561	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020
2562	Cap, 220p, 10%, 1KV, Ceramic	3198 019 62210
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2575	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2577	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020
2586	Cap, 220u, 20%, 25V, Electrolytic.	3198 025 32210
2604	Cap, 22u, 20%, 50V, Electrolytic	3198 025 52290
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2613	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2615	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2619	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2622	Cap, 220u, 20%, 25V, Electrolytic.	3198 025 32210
2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2629	Cap, 22n, +80/-20%, 50V, Ceramic	3198 019 22230
2630	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2631	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2679	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2681	Cap, 220u, 20%, 25V, Electrolytic.	3198 025 32210
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2821	Cap, 2u2, 20%, 50V, Electrolytic	3198 028 52280
2823	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2825	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2826	Cap, 10u, 20%, 16V, Electrolytic	3198 028 21090
2827	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2828	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2829	Cap, 220n, +80/-20%, 25V, Ceramic.	3198 023 22240
2830	Cap, 2u2, 20%, 50V, Electrolytic	3198 028 52280
2831	Cap, 220n, +80/-20%, 25V, Ceramic.	3198 023 22240
2832	Cap, 2u2, 20%, 50V, Electrolytic	3198 028 52280

S = Safety Part Be sure to use exact replacement part.

MS2530C221 (continued)

2833	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280
2834	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780
2835	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2836	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2837	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2844	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2845	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2913	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2914	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2915	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2916	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648
2917	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2918	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2919	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2920	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648
2921	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2931	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2952	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2954	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2955	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2960	Cap, 220u, 20%, 50V, Electrolytic. .	3198 026 52210
2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090
2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3010	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
3013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810
3021	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3201	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3203	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820
3205	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3206	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3209	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3212	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3213	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3215	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3216	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3217	Res, 1M5, 5%, 1/8W, Metalized Glass.	2322 730 61155
3218	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3219	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3220	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3225	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3243	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3246	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340
3250	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3252	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3253	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3257	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3258	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3259	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	3198 013 01020
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	3198 013 01020
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	3198 013 01020
S 3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
3343	Res, 1K5, 20%, 1/2W, Carbon Film . .	3198 013 01520
3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
3345	VDR DC 1MA/50V S MAX 110V A . . .	2122 550 00152
3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
3401	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
3402	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
3403	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
3405	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002
3406	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3407	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002
3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3409	Res, 1R5, 5%, 1/3W, Metal Film . . .	2306 204 03158
3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
3420	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840
3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606
3425	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3426	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3428	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3429	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3431	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3432	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3433	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3436	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3437	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3438	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
3447	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
S 3452	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	3198 012 32290
S 3454	Res, 33K, 5%, 1 1/3W, Metal Film . .	2322 194 63333
3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
S 3462	Res, 6K8, 5%, 5W, Metal Film	2322 257 41682
3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3464	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
S 3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
3466	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903
3467	Res, 14K, 1%, 3/5W, Metal Film . . .	2322 156 21403
3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3469	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703
3481	Res, 100K, 1%, 3/5W, Metal Film. . .	2322 156 21004
3482	Res, 32K4, 1%, 3/5W, Metal Film. . .	2322 156 23243
3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
S 3486	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
S 3487	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
S 3488	Res, 4R7, 5%, 1/2W, Metal Film . . .	2306 207 03478
S 3490	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
S 3491	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
S 3492	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
3495	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3496	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3497	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
S 3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225
3503	PTC DC ZPB 120V S 10R PM30 B . . .	2120 661 00019
S 3505	Surge Protector.	2422 549 43073
S 3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
S 3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333
S 3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102
3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184
3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204
S 3515	2.5 ohm, 20%, 3.6W, Negative Temperat ure Coefficient.	2122 612 00023
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3517	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
S 3518	Res, 0R22, 5%, 2 1/2W, Metal Film. .	3198 012 32270
3520	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3521	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
S 3525	Res, 47 ohm, 5%, 1/3W, Metal Film. .	2306 204 03479
3528	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3529	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3530	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
3532	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3534	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3536	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3537	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
S 3542	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3570	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3571	Res, 150K, 1%, 3/5W, Metal Film. . .	2322 156 21504
3573	Res, 2K, 1%, 1/8W, Metalized Glass .	2322 734 62002
3574	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3577	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3578	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3579	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3592	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3594	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3595	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3596	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3597	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3598	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3599	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230

S = Safety Part Be sure to use exact replacement part.

MS2530C221 (continued)

3607	RST NETW RGLE 10X 8K2 PM5 B . . .	2120 108 93916
3608	RST NETW RGLE 6X 2K2 PM5 B . . .	2120 108 93913
3609	RST NETW RGLE 7X 2K2 PM5 B . . .	2120 108 93915
3611	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3612	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3613	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3615	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3616	Jumper Wire/Staple	0322 179 00003
3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3619	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3629	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
3631	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
S 3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210
3634	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3635	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3636	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3637	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3653	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3654	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3655	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710
3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3662	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3663	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220
3664	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220
3665	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3666	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3667	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3672	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3673	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3674	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3675	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510
3676	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510
3677	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510
3680	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3681	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3682	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220
3683	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3684	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3821	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3822	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3823	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3824	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3825	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3826	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3827	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3828	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3829	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3830	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3831	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198 011 03310
3832	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3908	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710
3909	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3910	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3911	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230
3913	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3914	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820
3915	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3916	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3917	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
3918	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3919	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3920	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3921	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230
3922	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820
3923	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3924	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3925	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3926	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3929	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3930	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710
3931	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810
3951	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3953	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3955	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3957	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4004	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4011	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4012	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4020	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4051	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4100	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4203	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4212	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4215	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4216	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4465	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4501	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4650	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4651	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4654	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4832	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4911	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4914	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4957	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4999	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 5u6.	3198 018 25680
5004	Coil, 820n	2422 535 97314
5201	Coil, 22u.	3198 018 22290
5202	Coil, 6u8.	3198 018 16880
5342	Coil, 22u.	3198 018 22290
S 5445	Transformer, L.O.T., models ending in C221 and C225.	3128 138 20941
5451	Coil, 27u.	2422 535 96614
5457	Coil, Linear Correction.	3128 138 53241
5461	TFM SIG SLOT UU-1522S WIRE B . . .	2422 531 02318
5461	Transformer.	3128 138 33811
5480	Coil, 33u.	2422 535 97335
S 5500	Filter, Mains, 5mH, 2A	2422 549 43432
5516	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5518	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5521	Coil, 2u2.	3198 018 12280
5540	Coil, 4u7.	3198 018 14780
S 5545	Transfomer,.	2422 531 02314
5551	Coil, 27u.	2422 535 95366
5552	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5572	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5573	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5576	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5577	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5600	Coil, 8u2.	3198 018 18280
5601	Coil, 8u2.	3198 018 18280
5620	Coil, 6u8.	3198 018 16880
5821	Coil, 100u	3198 018 21010
5822	Coil, 18u.	3198 018 21890
6008	Zener Diode, 33 volt	3198 010 23390
6211	Diode, Signal, 1N4148.	3198 010 10010
6212	Diode, Signal, 1N4148.	3198 010 10010
6213	Diode, Signal, 1N4148.	3198 010 10010
6331	Diode, Signal, BAV21	3198 010 10070
6333	Diode, Signal, BAV21	3198 010 10070
6335	Diode, Signal, BAV21	3198 010 10070
6401	Diode, Rect, BYD33D	9337 234 00133
6402	Zener Diode, 33 volt	3198 010 23390
6403	Diode, Rect, BYD33D	9337 234 00133
6404	Zener Diode, 75 volt	9331 180 00133
6449	Diode, Signal, 1N4148.	3198 010 10010
6450	Diode, Signal, 1N4148.	3198 010 10010
6460	Diode, Rect, BY228/20	9336 215 80112
6463	Diode, Signal, 1N4148.	3198 010 10010
6464	Zener Diode, 6.2 volt.	9331 668 30133
6465	Diode, Rect, BYD33J	9337 234 20133
6466	Diode, Rect, BYD33J	9337 234 20133
6480	Zener Diode, 27 volt	3198 010 22790
6481	Diode, Signal, 1N4148.	3198 010 10010
6485	Diode, Rect, BYD33J	9337 234 20133
6486	Diode, Rect, EGP20DL-5300	9322 100 13682
6487	Diode, Rect, BYD33D	9337 234 00133
6488	Diode, Rect, BYV27-200.	9322 126 72673
6490	Diode, Rect, BYV27-200.	9322 126 72673
6505	Diode, Bridge Rect, GBU6JL-7002 . .	9322 138 08667
6507	Diode, Rect, BYD33J	9337 234 20133
6508	Diode, Rect, BYD33J	9337 234 20133
6510	Zener Diode, 20 volt	9331 178 60133
6511	Diode, Rect, BYV95C	9335 001 80133
6512	Diode, Rect, 1N5062	3198 010 10120

S = Safety Part Be sure to use exact replacement part.

MS2530C221 (continued)

6513	Diode, Rect, 1N5062	3198 010 10120	9234	Jumper Wire/Staple	0322 179 00003
6514	Zener Diode, 18 volt	3198 010 21890	9236	Jumper Wire/Staple	0322 179 00003
6540	Diode, Signal, BAV21	3198 010 10070	9237	Jumper Wire/Staple	0322 179 00003
6550	Diode, Rect, BY229X-800	9340 380 30127	9238	Jumper Wire/Staple	0322 179 00003
6560	Diode, Rect, EGP20DL-5300	9322 100 13682	9240	Jumper Wire/Staple	0322 179 00003
6580	Diode, Rect, SB140.	9339 577 60673	9241	Jumper Wire/Staple	0322 179 00003
6584	Diode, Signal, 1N4148.	3198 010 10010	9242	Jumper Wire/Staple	0322 179 00003
6585	Diode, Signal, 1N4148.	3198 010 10010	9243	Jumper Wire/Staple	0322 179 00003
6591	Diode, Signal, BAS16WS	9322 031 99685	9245	Jumper Wire/Staple	0322 179 00003
6601	Zener Diode, 3.9 volt.	3198 010 23980	9301	Jumper Wire/Staple	0322 179 00003
6603	Jumper Wire/Staple	0322 179 00003	9401	Jumper Wire/Staple	0322 179 00003
6604	Jumper Wire/Staple	0322 179 00003	9402	Jumper Wire/Staple	0322 179 00003
6605	Jumper Wire/Staple	0322 179 00003	9403	Jumper Wire/Staple	0322 179 00003
6606	Zener Diode, 4.7 volt.	3198 010 24780	9404	Jumper Wire/Staple	0322 179 00003
6607	Zener Diode, 6.8 volt.	3198 010 26880	9407	Jumper Wire/Staple	0322 179 00003
6690	LED VS LTL-307P (LITO) B	9322 033 95682	9408	Jumper Wire/Staple	0322 179 00003
6821	Zener Diode, 9.1 volt.	9331 177 80133	9411	Jumper Wire/Staple	0322 179 00003
6822	Diode, Signal, 1N4148.	3198 010 10010	9414	Jumper Wire/Staple	0322 179 00003
6951	Diode, Signal, BAS16WS	9322 031 99685	9417	Jumper Wire/Staple	0322 179 00003
6961	Diode, Signal, BAS16WS	9322 031 99685	9419	Jumper Wire/Staple	0322 179 00003
7250	IC,	9352 620 26112	9420	Jumper Wire/Staple	0322 179 00003
7251	IC, LM317T	9337 220 80682	9421	Jumper Wire/Staple	0322 179 00003
7254	Transistor, NPN, BC847B.	3198 010 42030	9422	Jumper Wire/Staple	0322 179 00003
7256	Transistor, NPN, BC847B.	3198 010 42030	9424	Jumper Wire/Staple	0322 179 00003
7258	Transistor, NPN, BC847B.	3198 010 42030	9425	Jumper Wire/Staple	0322 179 00003
7263	Transistor, PNP, BC857B.	3198 010 42150	9427	Jumper Wire/Staple	0322 179 00003
7266	Transistor, NPN, BC847B.	3198 010 42030	9428	Jumper Wire/Staple	0322 179 00003
7330	IC, TDA6107Q/N2.	9352 576 50112	9460	Jumper Wire/Staple	0322 179 00003
7401	IC,	9322 121 47687	9461	Jumper Wire/Staple	0322 179 00003
7460	Transistor, NPN, BU1508DX.	9340 170 50127	9500	Jumper Wire/Staple	0322 179 00003
7461	Transistor, NPN, BF819	9335 354 50127	9501	Jumper Wire/Staple	0322 179 00003
7462	Transistor, NPN, BC547B.	3198 020 40030	9502	Jumper Wire/Staple	0322 179 00003
7463	Transistor, PNP, BC557B.	3198 020 40110	9503	Jumper Wire/Staple	0322 179 00003
7480	IC,	9322 028 93682	9505	Jumper Wire/Staple	0322 179 00003
7481	Transistor, PNP, BC557B.	3198 020 40110	9509	Jumper Wire/Staple	0322 179 00003
7482	Transistor, PNP, BC857B.	3198 010 42150	9510	Jumper Wire/Staple	0322 179 00003
7518	STH10NC60FI SMPS FET.	9322 155 66687	9511	Jumper Wire/Staple	0322 179 00003
7520	IC,	9322 108 36682	9512	Jumper Wire/Staple	0322 179 00003
7570	IC,	9337 711 00676	9513	Jumper Wire/Staple	0322 179 00003
S 7581	Coupler, TCDT1101G	9338 431 30682	9515	Jumper Wire/Staple	0322 179 00003
7590	Transistor, NPN, BC847B.	3198 010 42030	9516	Jumper Wire/Staple	0322 179 00003
7591	Transistor, NPN, BC847B.	3198 010 42030	9517	Jumper Wire/Staple	0322 179 00003
7592	Transistor, NPN, BC847B.	3198 010 42030	9518	Jumper Wire/Staple	0322 179 00003
7600	IC,	9352 670 96112	9521	Jumper Wire/Staple	0322 179 00003
7601	IC, ST24W04B6.	9322 097 23682	9526	Jumper Wire/Staple	0322 179 00003
7603	Transistor, NPN, BC337	9331 796 00126	9601	Jumper Wire/Staple	0322 179 00003
7604	Transistor, NPN, BC847B.	3198 010 42030	9602	Jumper Wire/Staple	0322 179 00003
7605	Transistor, NPN, BC847B.	3198 010 42030	9603	Jumper Wire/Staple	0322 179 00003
7608	Transistor, NPN, BC847B.	3198 010 42030	9604	Jumper Wire/Staple	0322 179 00003
7609	Transistor, NPN, BC847B.	3198 010 42030	9605	Jumper Wire/Staple	0322 179 00003
7680	IR RECEIVER.	9322 154 48667	9606	Jumper Wire/Staple	0322 179 00003
7821	IC,	9352 374 70112	9608	Jumper Wire/Staple	0322 179 00003
7823	Transistor, NPN, BC337-25.	3198 020 43530	9609	Jumper Wire/Staple	0322 179 00003
7904	Transistor, NPN, BC847B.	3198 010 42030	9610	Jumper Wire/Staple	0322 179 00003
7908	Transistor, NPN, BC847B.	3198 010 42030	9611	Jumper Wire/Staple	0322 179 00003
7951	IC,	9351 861 60112	9612	Jumper Wire/Staple	0322 179 00003
7960	ISOPROPYL ALCOHOL.	1306 500 43201	9613	Jumper Wire/Staple	0322 179 00003
9001	Jumper Wire/Staple	0322 179 00003	9614	Jumper Wire/Staple	0322 179 00003
9003	Jumper Wire/Staple	0322 179 00003	9615	Jumper Wire/Staple	0322 179 00003
9005	Jumper Wire/Staple	0322 179 00003	9618	Jumper Wire/Staple	0322 179 00003
9011	Jumper Wire/Staple	0322 179 00003	9621	Jumper Wire/Staple	0322 179 00003
9012	Jumper Wire/Staple	0322 179 00003	9622	Jumper Wire/Staple	0322 179 00003
9105	Jumper Wire/Staple	0322 179 00003	9624	Jumper Wire/Staple	0322 179 00003
9126	Jumper Wire/Staple	0322 179 00003	9625	Jumper Wire/Staple	0322 179 00003
9200	Jumper Wire/Staple	0322 179 00003	9626	Jumper Wire/Staple	0322 179 00003
9202	Jumper Wire/Staple	0322 179 00003	9629	Jumper Wire/Staple	0322 179 00003
9203	Jumper Wire/Staple	0322 179 00003	9631	Jumper Wire/Staple	0322 179 00003
9204	Jumper Wire/Staple	0322 179 00003	9632	Jumper Wire/Staple	0322 179 00003
9205	Jumper Wire/Staple	0322 179 00003	9637	Jumper Wire/Staple	0322 179 00003
9206	Jumper Wire/Staple	0322 179 00003	9640	Jumper Wire/Staple	0322 179 00003
9207	Jumper Wire/Staple	0322 179 00003	9642	Jumper Wire/Staple	0322 179 00003
9208	Jumper Wire/Staple	0322 179 00003	9643	Jumper Wire/Staple	0322 179 00003
9209	Jumper Wire/Staple	0322 179 00003	9644	Jumper Wire/Staple	0322 179 00003
9210	Jumper Wire/Staple	0322 179 00003	9660	Jumper Wire/Staple	0322 179 00003
9211	Jumper Wire/Staple	0322 179 00003	9754	Jumper Wire/Staple	0322 179 00003
9214	Jumper Wire/Staple	0322 179 00003	9788	Jumper Wire/Staple	0322 179 00003
9215	Jumper Wire/Staple	0322 179 00003	9793	Jumper Wire/Staple	0322 179 00003
9216	Jumper Wire/Staple	0322 179 00003	9800	Jumper Wire/Staple	0322 179 00003
9217	Jumper Wire/Staple	0322 179 00003	9805	Jumper Wire/Staple	0322 179 00003
9218	Jumper Wire/Staple	0322 179 00003	9806	Jumper Wire/Staple	0322 179 00003
9220	Jumper Wire/Staple	0322 179 00003	9807	Jumper Wire/Staple	0322 179 00003
9221	Jumper Wire/Staple	0322 179 00003	9810	Jumper Wire/Staple	0322 179 00003
9222	Jumper Wire/Staple	0322 179 00003	9821	Jumper Wire/Staple	0322 179 00003
9225	Jumper Wire/Staple	0322 179 00003	9901	Jumper Wire/Staple	0322 179 00003
9226	Jumper Wire/Staple	0322 179 00003	9904	Jumper Wire/Staple	0322 179 00003
9227	Jumper Wire/Staple	0322 179 00003	9905	Jumper Wire/Staple	0322 179 00003
9228	Jumper Wire/Staple	0322 179 00003	9906	Jumper Wire/Staple	0322 179 00003
9229	Jumper Wire/Staple	0322 179 00003	9933	Jumper Wire/Staple	0322 179 00003
9230	Jumper Wire/Staple	0322 179 00003	9936	Jumper Wire/Staple	0322 179 00003
9231	Jumper Wire/Staple	0322 179 00003	9940	Jumper Wire/Staple	0322 179 00003
9232	Jumper Wire/Staple	0322 179 00003	9941	Jumper Wire/Staple	0322 179 00003
9233	Jumper Wire/Staple	0322 179 00003	9942	Jumper Wire/Staple	0322 179 00003

S = Safety Part Be sure to use exact replacement part.

MS2530C221 (continued)

9943	Jumper Wire/Staple	0322 179 00003
9944	Jumper Wire/Staple	0322 179 00003
9945	Jumper Wire/Staple	0322 179 00003
9946	Jumper Wire/Staple	0322 179 00003
9947	Jumper Wire/Staple	0322 179 00003
9948	Jumper Wire/Staple	0322 179 00003
9949	Jumper Wire/Staple	0322 179 00003
9950	Jumper Wire/Staple	0322 179 00003
9951	Jumper Wire/Staple	0322 179 00003
9952	Jumper Wire/Staple	0322 179 00003
9953	Jumper Wire/Staple	0322 179 00003
9955	Jumper Wire/Staple	0322 179 00003
9956	Jumper Wire/Staple	0322 179 00003
9957	Jumper Wire/Staple	0322 179 00003
9958	Jumper Wire/Staple	0322 179 00003
9959	Jumper Wire/Staple	0322 179 00003
9960	Jumper Wire/Staple	0322 179 00003
9962	Jumper Wire/Staple	0322 179 00003
9963	Jumper Wire/Staple	0322 179 00003
9964	Jumper Wire/Staple	0322 179 00003
9965	Jumper Wire/Staple	0322 179 00003
9966	Jumper Wire/Staple	0322 179 00003
9967	Jumper Wire/Staple	0322 179 00003
9968	Jumper Wire/Staple	0322 179 00003
9969	Jumper Wire/Staple	0322 179 00003
9970	Jumper Wire/Staple	0322 179 00003
9971	Jumper Wire/Staple	0322 179 00003
9972	Jumper Wire/Staple	0322 179 00003
9974	Jumper Wire/Staple	0322 179 00003
9975	Jumper Wire/Staple	0322 179 00003
9976	Jumper Wire/Staple	0322 179 00003
9977	Jumper Wire/Staple	0322 179 00003
9981	Jumper Wire/Staple	0322 179 00003
9982	Jumper Wire/Staple	0322 179 00003
9983	Jumper Wire/Staple	0322 179 00003
9984	Jumper Wire/Staple	0322 179 00003
9987	Jumper Wire/Staple	0322 179 00003
9989	Jumper Wire/Staple	0322 179 00003
9990	Jumper Wire/Staple	0322 179 00003
9991	Jumper Wire/Staple	0322 179 00003
9992	Jumper Wire/Staple	0322 179 00003
9993	Jumper Wire/Staple	0322 179 00003
CBA	313917808991 Main Chassis Boarrd Asm.	3139 178 08991

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Mainscord, 125V, 10A	3135 010 03831
AC02	Clip, Anode Lead	3135 014 04471
AC03	Cabinet Back	3139 124 27731
AC04	Cabinet, Front	3139 137 96421
AC05	Chassis Guide.	3139 124 31381
AC06	Customer Control Button.	3139 124 27471
S AC07	Convergence and Purity Assembly. . .	2422 549 43385
S AC08	CRT A63AFW36X (C121 Version)	9301 763 20443
S AC08	CRT A63QDB891X01	9322 151 39682
S AC09	Coil, Degaussing	2422 549 44489
AC10	Holder, Degaussing (4 Used).	3135 013 01641
AC11	Light Guide.	3139 124 26461
AC13	Owner's Manual	3121 235 20091
AC14	Power Button	3139 124 30891
REMOTE	Remote Transmitter	3139 228 88101
AC16	Speaker, 16R, 1W5 (2 Used)	2422 264 00343
S AC18	Yoke (C121 Version).	3321 203 00121
S AC18	Yoke, Vendor # DSE2603CL(M), (C125 Ve rsion)	4835 310 57502
AC19	Yoke Wedge (3 used).	3135 013 00311
AC21	Battery, 1.5V AA, 2-Pack, (Not Shown	9299 000 10137
AC24	Spring	3139 121 26231

MS2530C225 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts	
0113	L9 SOPS HEATSINK	3139 121 62041
0119	DIODE HEATSINK L9.	3139 121 26691
0121	LINE HEATSINK (CINCH).	3139 121 61942
S 0127	Holder, Fuse, 2 Pin.	3122 358 71251
0211	Connector, 2 Pin	2422 025 11196
0212	Connector, 2 Pin	2422 025 15396
0220	4 Pin Board Connector.	2422 025 04852
0221	Connector, 4 Pin	2422 025 15503
0222	Connector, 2 Pin	2422 025 10646
0225	1 Pin Board Connector.	2422 034 20021
0226	1 Pin Board Connector.	2422 034 20021
0234	Connector, 4 Pin	2422 025 15847
S 0243	Connector, 6 Pin	2422 025 04854
0244	4 Pin Board Connector.	2422 025 04852
S 0245	Connector, 6 Pin	2422 025 04854
S 0254	CRT Socket (9 Pin)	2422 500 80022
0267	Connector, 3 Pin	2412 020 00725
1000	TUNER.	3139 147 16412
1001	Filter	2422 549 42501
1003	45 MHz SAW, Filter,.	2422 549 42433
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807
1208	Crystal Resonator, 3.58MHz	2422 543 00832
S 1500	Fue, 4 A, 250V	2422 086 10905
S 1571	FUSE 1A 250V	2422 086 10779
S 1572	FUSE 1A 250V	2422 086 10779
S 1580	Relay, 12V, 5A G5PA-1.	2422 132 07444
1600	Switch, Tactile.	2422 128 02742
1601	Switch, Tactile.	2422 128 02742
1602	Switch, Tactile.	2422 128 02742
1603	Switch, Tactile.	2422 128 02742
1606	Switch, Tactile.	2422 128 02742
1660	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488
1821	Ceramic Resonator, 514KHz5, CSB503F58	2422 540 98344
2001	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2002	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2003	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2004	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2011	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2201	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2202	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2203	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2204	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2205	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2208	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2209	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2211	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2212	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2213	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2214	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2215	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 15654
2220	Cap, 18p, 5%, 50V, Ceramic	3198 016 01890
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2222	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2226	Cap, 33u, 20%, 25V, Electrolytic . .	2020 021 90124
2227	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2247	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2248	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2249	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2330	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2340	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320
S 2343	Cap, 3n3, 10%, 2KV, Ceramic.	2020 558 90529
2345	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2401	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2402	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2404	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2405	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2407	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2409	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2420	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2426	Cap, 100n, 10%, 63V, Metalized Polyes ter.	2222 370 75104
2428	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2429	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2430	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2431	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2437	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2438	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2448	Cap, 33p, 5%, 500V, Ceramic.	2020 557 90192
2450	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91139
2451	Cap, 15n, 10%, 50V, Polyester. . . .	2020 300 90575
2456	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176
2457	Cap, 390n, 5%, 250V, Metalized Polypr opylene.	2222 479 90021
2458	Cap, 2u2, 20%, 100V, Electrolytic. .	2020 021 91331
2459	Cap, 680p, 10%, 500V, Ceramic. . . .	3198 019 46810
2461	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2462	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176
S 2463	Cap, 470p, 10%, 2KV, Ceramic	2020 558 90483
S 2465	Cap, 10n, 5%, 1600V, Polypropylene .	2222 375 90154
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050
2473	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2481	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2482	Cap, 68n, 10%, 250V, Polyester . . .	2222 347 90234
2484	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2485	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2486	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2487	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2488	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2489	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2490	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2491	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810
2499	Cap, 220n, 10%, 100V, Metalized Polye ster	2222 365 25224
2500	Cap, 470n, 20%, 275V, Polypropylene.	2222 336 29148
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2507	Cap, 1n5, 10%, 1KV, Ceramic.	3198 019 61520
2508	Cap, 470u, 20%, 200V, Electrolytic .	2020 024 90647
2511	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
2518	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2530	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 021 91147
2531	Cap, 1n, 2%, 50V, Polypropylene. . .	2020 310 90049
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2540	Cap, 100u, 20%, 25V, Electrolytic. .	2020 021 90547
S 2545	Cap, 1n5, 20%, v, Ceramic.	2020 554 90128
2550	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2551	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91358
2561	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2562	Cap, 220p, 10%, 1KV, Ceramic	3198 019 62210
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2575	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2577	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2586	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2604	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2613	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2615	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2619	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2622	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2629	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2679	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2681	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2821	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280
2823	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2825	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2826	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090
2827	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2828	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2829	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2830	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280
2831	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2832	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280

S = Safety Part Be sure to use exact replacement part.

MS2530C225 (continued)

2833	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280
2834	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780
2835	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2836	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2837	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2844	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2845	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2913	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2914	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2915	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2916	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648
2917	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2918	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2919	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2920	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648
2921	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2931	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2952	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2954	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2955	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2960	Cap, 220u, 20%, 50V, Electrolytic. .	3198 026 52210
2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090
2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3010	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
3013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810
3021	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3201	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3203	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820
3205	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3206	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3209	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3212	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3213	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3215	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3216	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3217	Res, 1M5, 5%, 1/8W, Metalized Glass.	2322 730 61155
3218	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3219	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3220	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3225	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3243	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3246	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340
3250	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3252	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3253	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3257	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3258	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3259	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	3198 013 01020
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	3198 013 01020
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	3198 013 01020
S 3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
3343	Res, 1K5, 20%, 1/2W, Carbon Film . .	3198 013 01520
3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
3345	VDR DC 1MA/50V S MAX 110V A . . .	2122 550 00152
3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
3401	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
3402	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
3403	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
3405	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002
3406	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3407	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002
3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3409	Res, 1R5, 5%, 1/3W, Metal Film . . .	2306 204 03158
3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
3420	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840
3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606
3425	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3426	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3428	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3429	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3431	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3432	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3433	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3436	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3437	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3438	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
3447	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
S 3452	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	3198 012 32290
S 3454	Res, 33K, 5%, 1 1/3W, Metal Film . .	2322 194 63333
3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
S 3462	Res, 6K8, 5%, 5W, Metal Film	2322 257 41682
3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3464	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
S 3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
3466	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903
3467	Res, 14K, 1%, 3/5W, Metal Film . . .	2322 156 21403
3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3469	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703
3481	Res, 100K, 1%, 3/5W, Metal Film. . .	2322 156 21004
3482	Res, 32K4, 1%, 3/5W, Metal Film. . .	2322 156 23243
3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
S 3486	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
S 3487	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
S 3488	Res, 4R7, 5%, 1/2W, Metal Film . . .	2306 207 03478
S 3490	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
S 3491	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
S 3492	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
3495	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3496	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3497	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
S 3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225
3503	PTC DC ZPB 120V S 10R PM30 B . . .	2120 661 00019
S 3505	Surge Protector.	2422 549 43073
S 3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
S 3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333
S 3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102
3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184
3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204
S 3515	2.5 ohm, 20%, 3.6W, Negative Temperat ure Coefficient.	2122 612 00023
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3517	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
S 3518	Res, 0R22, 5%, 2 1/2W, Metal Film. .	3198 012 32270
3520	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3521	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
S 3525	Res, 47 ohm, 5%, 1/3W, Metal Film. .	2306 204 03479
3528	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3529	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3530	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
3532	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3534	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3536	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3537	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
S 3542	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3570	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3571	Res, 150K, 1%, 3/5W, Metal Film. . .	2322 156 21504
3573	Res, 2K, 1%, 1/8W, Metalized Glass .	2322 734 62002
3574	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3577	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3578	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3579	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3592	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3594	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3595	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3596	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3597	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3598	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3599	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230

S = Safety Part Be sure to use exact replacement part.

MS2530C225 (continued)

3607	RST NETW RGLE 10X 8K2 PM5 B . . .	2120 108 93916
3608	RST NETW RGLE 6X 2K2 PM5 B . . .	2120 108 93913
3609	RST NETW RGLE 7X 2K2 PM5 B . . .	2120 108 93915
3611	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3612	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3613	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3615	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3616	Jumper Wire/Staple	0322 179 00003
3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3619	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3629	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
3631	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
S 3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210
3634	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3635	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3636	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3637	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3653	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3654	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3655	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710
3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3662	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3663	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220
3664	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220
3665	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3666	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3667	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3672	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3673	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3674	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3675	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3676	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3677	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3680	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3681	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3682	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220
3683	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3684	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3821	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3822	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3823	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3824	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3825	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3826	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3827	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3828	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3829	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3830	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3831	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198 011 03310
3832	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3908	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710
3909	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3910	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3911	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230
3913	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3914	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820
3915	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3916	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3917	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
3918	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3919	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3920	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3921	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230
3922	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820
3923	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3924	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3925	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3926	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3929	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3930	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710
3931	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810
3951	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3953	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3955	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3957	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4004	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4011	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4012	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4020	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4051	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4100	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4203	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4212	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4215	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4216	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4465	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4501	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4650	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4651	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4654	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4832	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4911	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4914	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4957	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4999	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 5u6.	3198 018 25680
5004	Coil, 820n	2422 535 97314
5201	Coil, 22u.	3198 018 22290
5202	Coil, 6u8.	3198 018 16880
5342	Coil, 22u.	3198 018 22290
S 5445	Transformer, L.O.T., models ending in C221 and C225.	3128 138 20941
5451	Coil, 27u.	2422 535 96614
5457	Coil, Linear Correction.	3128 138 53241
5461	TFM SIG SLOT UU-1522S WIRE B . . .	2422 531 02318
5461	Transformer.	3128 138 33811
5480	Coil, 33u.	2422 535 97335
S 5500	Filter, Mains, 5mH, 2A	2422 549 43432
5516	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5518	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5521	Coil, 2u2.	3198 018 12280
5540	Coil, 4u7.	3198 018 14780
S 5545	Transfomer,.	2422 531 02314
5551	Coil, 27u.	2422 535 95366
5552	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5572	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5573	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5576	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5577	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5600	Coil, 8u2.	3198 018 18280
5601	Coil, 8u2.	3198 018 18280
5620	Coil, 6u8.	3198 018 16880
5821	Coil, 100u	3198 018 21010
5822	Coil, 18u.	3198 018 21890
6008	Zener Diode, 33 volt	3198 010 23390
6211	Diode, Signal, 1N4148.	3198 010 10010
6212	Diode, Signal, 1N4148.	3198 010 10010
6213	Diode, Signal, 1N4148.	3198 010 10010
6331	Diode, Signal, BAV21	3198 010 10070
6333	Diode, Signal, BAV21	3198 010 10070
6335	Diode, Signal, BAV21	3198 010 10070
6401	Diode, Rect, BYD33D	9337 234 00133
6402	Zener Diode, 33 volt	3198 010 23390
6403	Diode, Rect, BYD33D	9337 234 00133
6404	Zener Diode, 75 volt	9331 180 00133
6449	Diode, Signal, 1N4148.	3198 010 10010
6450	Diode, Signal, 1N4148.	3198 010 10010
6460	Diode, Rect, BY228/20	9336 215 80112
6463	Diode, Signal, 1N4148.	3198 010 10010
6464	Zener Diode, 6.2 volt.	9331 668 30133
6465	Diode, Rect, BYD33J	9337 234 20133
6466	Diode, Rect, BYD33J	9337 234 20133
6480	Zener Diode, 27 volt	3198 010 22790
6481	Diode, Signal, 1N4148.	3198 010 10010
6485	Diode, Rect, BYD33J	9337 234 20133
6486	Diode, Rect, EGP20DL-5300	9322 100 13682
6487	Diode, Rect, BYD33D	9337 234 00133
6488	Diode, Rect, BYV27-200.	9322 126 72673
6490	Diode, Rect, BYV27-200.	9322 126 72673
6505	Diode, Bridge Rect, GBU6JL-7002 . .	9322 138 08667
6507	Diode, Rect, BYD33J	9337 234 20133
6508	Diode, Rect, BYD33J	9337 234 20133
6510	Zener Diode, 20 volt	9331 178 60133
6511	Diode, Rect, BYV95C	9335 001 80133
6512	Diode, Rect, 1N5062	3198 010 10120

S = Safety Part Be sure to use exact replacement part.

MS2530C225 (continued)

6513	Diode, Rect, 1N5062	3198 010 10120	9234	Jumper Wire/Staple	0322 179 00003
6514	Zener Diode, 18 volt	3198 010 21890	9236	Jumper Wire/Staple	0322 179 00003
6540	Diode, Signal, BAV21	3198 010 10070	9237	Jumper Wire/Staple	0322 179 00003
6550	Diode, Rect, BY229X-800	9340 380 30127	9238	Jumper Wire/Staple	0322 179 00003
6560	Diode, Rect, EGP20DL-5300	9322 100 13682	9240	Jumper Wire/Staple	0322 179 00003
6580	Diode, Rect, SB140.	9339 577 60673	9241	Jumper Wire/Staple	0322 179 00003
6584	Diode, Signal, 1N4148.	3198 010 10010	9242	Jumper Wire/Staple	0322 179 00003
6585	Diode, Signal, 1N4148.	3198 010 10010	9243	Jumper Wire/Staple	0322 179 00003
6591	Diode, Signal, BAS16WS	9322 031 99685	9245	Jumper Wire/Staple	0322 179 00003
6601	Zener Diode, 3.9 volt.	3198 010 23980	9301	Jumper Wire/Staple	0322 179 00003
6603	Jumper Wire/Staple	0322 179 00003	9401	Jumper Wire/Staple	0322 179 00003
6604	Jumper Wire/Staple	0322 179 00003	9402	Jumper Wire/Staple	0322 179 00003
6605	Jumper Wire/Staple	0322 179 00003	9403	Jumper Wire/Staple	0322 179 00003
6606	Zener Diode, 4.7 volt.	3198 010 24780	9404	Jumper Wire/Staple	0322 179 00003
6607	Zener Diode, 6.8 volt.	3198 010 26880	9407	Jumper Wire/Staple	0322 179 00003
6690	LED VS LTL-307P (LITO) B	9322 033 95682	9408	Jumper Wire/Staple	0322 179 00003
6821	Zener Diode, 9.1 volt.	9331 177 80133	9411	Jumper Wire/Staple	0322 179 00003
6822	Diode, Signal, 1N4148.	3198 010 10010	9414	Jumper Wire/Staple	0322 179 00003
6951	Diode, Signal, BAS16WS	9322 031 99685	9417	Jumper Wire/Staple	0322 179 00003
6961	Diode, Signal, BAS16WS	9322 031 99685	9419	Jumper Wire/Staple	0322 179 00003
7250	IC,	9352 620 26112	9420	Jumper Wire/Staple	0322 179 00003
7251	IC, LM317T	9337 220 80682	9421	Jumper Wire/Staple	0322 179 00003
7254	Transistor, NPN, BC847B.	3198 010 42030	9422	Jumper Wire/Staple	0322 179 00003
7256	Transistor, NPN, BC847B.	3198 010 42030	9424	Jumper Wire/Staple	0322 179 00003
7258	Transistor, NPN, BC847B.	3198 010 42030	9425	Jumper Wire/Staple	0322 179 00003
7263	Transistor, PNP, BC857B.	3198 010 42150	9427	Jumper Wire/Staple	0322 179 00003
7266	Transistor, NPN, BC847B.	3198 010 42030	9428	Jumper Wire/Staple	0322 179 00003
7330	IC, TDA6107Q/N2.	9352 576 50112	9460	Jumper Wire/Staple	0322 179 00003
7401	IC,	9322 121 47687	9461	Jumper Wire/Staple	0322 179 00003
7460	Transistor, NPN, BU1508DX.	9340 170 50127	9500	Jumper Wire/Staple	0322 179 00003
7461	Transistor, NPN, BF819	9335 354 50127	9501	Jumper Wire/Staple	0322 179 00003
7462	Transistor, NPN, BC547B.	3198 020 40030	9502	Jumper Wire/Staple	0322 179 00003
7463	Transistor, PNP, BC557B.	3198 020 40110	9503	Jumper Wire/Staple	0322 179 00003
7480	IC,	9322 028 93682	9505	Jumper Wire/Staple	0322 179 00003
7481	Transistor, PNP, BC557B.	3198 020 40110	9509	Jumper Wire/Staple	0322 179 00003
7482	Transistor, PNP, BC857B.	3198 010 42150	9510	Jumper Wire/Staple	0322 179 00003
7518	STH10NC60FI SMPS FET.	9322 155 66687	9511	Jumper Wire/Staple	0322 179 00003
7520	IC,	9322 108 36682	9512	Jumper Wire/Staple	0322 179 00003
7570	IC,	9337 711 00676	9513	Jumper Wire/Staple	0322 179 00003
S 7581	Coupler, TCDT1101G	9338 431 30682	9515	Jumper Wire/Staple	0322 179 00003
7590	Transistor, NPN, BC847B.	3198 010 42030	9516	Jumper Wire/Staple	0322 179 00003
7591	Transistor, NPN, BC847B.	3198 010 42030	9517	Jumper Wire/Staple	0322 179 00003
7592	Transistor, NPN, BC847B.	3198 010 42030	9518	Jumper Wire/Staple	0322 179 00003
7600	IC,	9352 670 96112	9521	Jumper Wire/Staple	0322 179 00003
7601	IC, ST24W04B6.	9322 097 23682	9526	Jumper Wire/Staple	0322 179 00003
7603	Transistor, NPN, BC337	9331 796 00126	9601	Jumper Wire/Staple	0322 179 00003
7604	Transistor, NPN, BC847B.	3198 010 42030	9602	Jumper Wire/Staple	0322 179 00003
7605	Transistor, NPN, BC847B.	3198 010 42030	9603	Jumper Wire/Staple	0322 179 00003
7608	Transistor, NPN, BC847B.	3198 010 42030	9604	Jumper Wire/Staple	0322 179 00003
7609	Transistor, NPN, BC847B.	3198 010 42030	9605	Jumper Wire/Staple	0322 179 00003
7680	IR RECEIVER.	9322 154 48667	9606	Jumper Wire/Staple	0322 179 00003
7821	IC,	9352 374 70112	9608	Jumper Wire/Staple	0322 179 00003
7823	Transistor, NPN, BC337-25.	3198 020 43530	9609	Jumper Wire/Staple	0322 179 00003
7904	Transistor, NPN, BC847B.	3198 010 42030	9610	Jumper Wire/Staple	0322 179 00003
7908	Transistor, NPN, BC847B.	3198 010 42030	9611	Jumper Wire/Staple	0322 179 00003
7951	IC,	9351 861 60112	9612	Jumper Wire/Staple	0322 179 00003
7960	ISOPROPYL ALCOHOL.	1306 500 43201	9613	Jumper Wire/Staple	0322 179 00003
9001	Jumper Wire/Staple	0322 179 00003	9614	Jumper Wire/Staple	0322 179 00003
9003	Jumper Wire/Staple	0322 179 00003	9615	Jumper Wire/Staple	0322 179 00003
9005	Jumper Wire/Staple	0322 179 00003	9618	Jumper Wire/Staple	0322 179 00003
9011	Jumper Wire/Staple	0322 179 00003	9621	Jumper Wire/Staple	0322 179 00003
9012	Jumper Wire/Staple	0322 179 00003	9622	Jumper Wire/Staple	0322 179 00003
9105	Jumper Wire/Staple	0322 179 00003	9624	Jumper Wire/Staple	0322 179 00003
9126	Jumper Wire/Staple	0322 179 00003	9625	Jumper Wire/Staple	0322 179 00003
9200	Jumper Wire/Staple	0322 179 00003	9626	Jumper Wire/Staple	0322 179 00003
9202	Jumper Wire/Staple	0322 179 00003	9629	Jumper Wire/Staple	0322 179 00003
9203	Jumper Wire/Staple	0322 179 00003	9631	Jumper Wire/Staple	0322 179 00003
9204	Jumper Wire/Staple	0322 179 00003	9632	Jumper Wire/Staple	0322 179 00003
9205	Jumper Wire/Staple	0322 179 00003	9637	Jumper Wire/Staple	0322 179 00003
9206	Jumper Wire/Staple	0322 179 00003	9640	Jumper Wire/Staple	0322 179 00003
9207	Jumper Wire/Staple	0322 179 00003	9642	Jumper Wire/Staple	0322 179 00003
9208	Jumper Wire/Staple	0322 179 00003	9643	Jumper Wire/Staple	0322 179 00003
9209	Jumper Wire/Staple	0322 179 00003	9644	Jumper Wire/Staple	0322 179 00003
9210	Jumper Wire/Staple	0322 179 00003	9660	Jumper Wire/Staple	0322 179 00003
9211	Jumper Wire/Staple	0322 179 00003	9754	Jumper Wire/Staple	0322 179 00003
9214	Jumper Wire/Staple	0322 179 00003	9788	Jumper Wire/Staple	0322 179 00003
9215	Jumper Wire/Staple	0322 179 00003	9793	Jumper Wire/Staple	0322 179 00003
9216	Jumper Wire/Staple	0322 179 00003	9800	Jumper Wire/Staple	0322 179 00003
9217	Jumper Wire/Staple	0322 179 00003	9805	Jumper Wire/Staple	0322 179 00003
9218	Jumper Wire/Staple	0322 179 00003	9806	Jumper Wire/Staple	0322 179 00003
9220	Jumper Wire/Staple	0322 179 00003	9807	Jumper Wire/Staple	0322 179 00003
9221	Jumper Wire/Staple	0322 179 00003	9810	Jumper Wire/Staple	0322 179 00003
9222	Jumper Wire/Staple	0322 179 00003	9821	Jumper Wire/Staple	0322 179 00003
9225	Jumper Wire/Staple	0322 179 00003	9901	Jumper Wire/Staple	0322 179 00003
9226	Jumper Wire/Staple	0322 179 00003	9904	Jumper Wire/Staple	0322 179 00003
9227	Jumper Wire/Staple	0322 179 00003	9905	Jumper Wire/Staple	0322 179 00003
9228	Jumper Wire/Staple	0322 179 00003	9906	Jumper Wire/Staple	0322 179 00003
9229	Jumper Wire/Staple	0322 179 00003	9933	Jumper Wire/Staple	0322 179 00003
9230	Jumper Wire/Staple	0322 179 00003	9936	Jumper Wire/Staple	0322 179 00003
9231	Jumper Wire/Staple	0322 179 00003	9940	Jumper Wire/Staple	0322 179 00003
9232	Jumper Wire/Staple	0322 179 00003	9941	Jumper Wire/Staple	0322 179 00003
9233	Jumper Wire/Staple	0322 179 00003	9942	Jumper Wire/Staple	0322 179 00003

S = Safety Part Be sure to use exact replacement part.

MS2530C225 (continued)

9943	Jumper Wire/Staple	0322 179 00003
9944	Jumper Wire/Staple	0322 179 00003
9945	Jumper Wire/Staple	0322 179 00003
9946	Jumper Wire/Staple	0322 179 00003
9947	Jumper Wire/Staple	0322 179 00003
9948	Jumper Wire/Staple	0322 179 00003
9949	Jumper Wire/Staple	0322 179 00003
9950	Jumper Wire/Staple	0322 179 00003
9951	Jumper Wire/Staple	0322 179 00003
9952	Jumper Wire/Staple	0322 179 00003
9953	Jumper Wire/Staple	0322 179 00003
9955	Jumper Wire/Staple	0322 179 00003
9956	Jumper Wire/Staple	0322 179 00003
9957	Jumper Wire/Staple	0322 179 00003
9958	Jumper Wire/Staple	0322 179 00003
9959	Jumper Wire/Staple	0322 179 00003
9960	Jumper Wire/Staple	0322 179 00003
9962	Jumper Wire/Staple	0322 179 00003
9963	Jumper Wire/Staple	0322 179 00003
9964	Jumper Wire/Staple	0322 179 00003
9965	Jumper Wire/Staple	0322 179 00003
9966	Jumper Wire/Staple	0322 179 00003
9967	Jumper Wire/Staple	0322 179 00003
9968	Jumper Wire/Staple	0322 179 00003
9969	Jumper Wire/Staple	0322 179 00003
9970	Jumper Wire/Staple	0322 179 00003
9971	Jumper Wire/Staple	0322 179 00003
9972	Jumper Wire/Staple	0322 179 00003
9974	Jumper Wire/Staple	0322 179 00003
9975	Jumper Wire/Staple	0322 179 00003
9976	Jumper Wire/Staple	0322 179 00003
9977	Jumper Wire/Staple	0322 179 00003
9981	Jumper Wire/Staple	0322 179 00003
9982	Jumper Wire/Staple	0322 179 00003
9983	Jumper Wire/Staple	0322 179 00003
9984	Jumper Wire/Staple	0322 179 00003
9987	Jumper Wire/Staple	0322 179 00003
9989	Jumper Wire/Staple	0322 179 00003
9990	Jumper Wire/Staple	0322 179 00003
9991	Jumper Wire/Staple	0322 179 00003
9992	Jumper Wire/Staple	0322 179 00003
9993	Jumper Wire/Staple	0322 179 00003
CBA	313917808991 Main Chassis Boarrd Asm.	3139 178 08991

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Mainscord, 125V, 10A	3135 010 03831
AC02	Clip, Anode Lead	3135 014 04471
AC03	Cabinet Back	3139 124 27731
AC04	Cabinet, Front	3139 137 96421
AC05	Chassis Guide.	3139 124 31381
AC06	Customer Control Button.	3139 124 27471
S AC07	Convergence and Purity Assembly. . .	2422 549 43385
S AC08	CRT A63AFW36X (C121 Version)	9301 763 20443
S AC08	CRT A63QDB891X01	9322 151 39682
S AC09	Coil, Degaussing	2422 549 44489
AC10	Holder, Degaussing (4 Used).	3135 013 01641
AC11	Light Guide.	3139 124 26461
AC13	Owner's Manual	3121 235 20091
AC14	Power Button	3139 124 30891
REMOTE	Remote Transmitter	3139 228 88101
AC16	Speaker, 16R, 1W5 (2 Used)	2422 264 00343
S AC18	Yoke (C121 Version).	3321 203 00121
S AC18	Yoke, Vendor # DSE2603CL(M), (C125 Ve rsion)	4835 310 57502
AC19	Yoke Wedge (3 used).	3135 013 00311
AC21	Battery, 1.5V AA, 2-Pack, (Not Shown	9299 000 10137
AC24	Spring	3139 121 26231

S = Safety Part Be sure to use exact replacement part.

MS2730C221 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts	
0113	L9 SOPS HEATSINK	3139 121 62041
0119	DIODE HEATSINK L9.	3139 121 26691
0121	LINE HEATSINK (CINCH).	3139 121 61942
S 0127	Holder, Fuse, 2 Pin.	3122 358 71251
0211	Connector, 2 Pin	2422 025 11196
0212	Connector, 2 Pin	2422 025 15396
0220	4 Pin Board Connector.	2422 025 04852
0221	Connector, 4 Pin	2422 025 15503
0222	Connector, 2 Pin	2422 025 10646
0223	3 Pin Board Connector.	2422 026 04963
0225	1 Pin Board Connector.	2422 034 20021
0226	1 Pin Board Connector.	2422 034 20021
0234	Connector, 4 Pin	2422 025 15847
S 0243	Connector, 6 Pin	2422 025 04854
0244	4 Pin Board Connector.	2422 025 04852
S 0245	Connector, 6 Pin	2422 025 04854
S 0254	CRT Socket (9 Pin)	2422 500 80022
0267	Connector, 3 Pin	2412 020 00725
0350	ISOPROPYL ALCOHOL.	1306 500 43201
1000	TUNER.	3139 147 16412
1001	Filter	2422 549 42501
1003	45 MHz SAW, Filter,.	2422 549 42433
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807
1208	Crystal Resonator, 3.58MHz	2422 543 00832
S 1500	Fue, 4 A, 250V	2422 086 10905
S 1571	FUSE 1A 250V	2422 086 10779
S 1572	FUSE 1A 250V	2422 086 10779
S 1580	Relay, 12V, 5A G5PA-1.	2422 132 07444
1600	Switch, Tactile.	2422 128 02742
1601	Switch, Tactile.	2422 128 02742
1602	Switch, Tactile.	2422 128 02742
1603	Switch, Tactile.	2422 128 02742
1606	Switch, Tactile.	2422 128 02742
1660	Crystal, Resonator, 12MHz, 20 Pin.	2422 543 00488
1821	Ceramic Resonator, 514KHz5, CSB503F58	2422 540 98344
2001	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2002	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2003	Cap, 470u, 20%, 16V, Electrolytic.	3198 025 24710
2004	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2011	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
2013	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2102	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2103	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2104	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2201	Cap, 220n, 10%, 50V, Polyester	3198 014 02240
2202	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2203	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
2204	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2205	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2206	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2207	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2208	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2209	Cap, 470n, +80/-20%, 16V, Ceramic.	3198 017 24740
2211	Cap, 470n, +80/-20%, 16V, Ceramic.	3198 017 24740
2212	Cap, 470n, +80/-20%, 16V, Ceramic.	3198 017 24740
2213	Cap, 470n, +80/-20%, 16V, Ceramic.	3198 017 24740
2214	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2215	Cap, 2u2, 20%, 50V, Electrolytic	3198 025 52280
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 15654
2220	Cap, 18p, 5%, 50V, Ceramic	3198 016 01890
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2222	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2226	Cap, 33u, 20%, 25V, Electrolytic	2020 021 90124
2227	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2247	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2248	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2249	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2330	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2340	Cap, 10u, 20%, 250V, Electrolytic.	2020 012 93495
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320
S 2343	Cap, 3n3, 10%, 2KV, Ceramic.	2020 558 90529
2345	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2401	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2402	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2404	Cap, 220n, 10%, 50V, Polyester	3198 014 02240
2405	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2407	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2409	Cap, 220n, 10%, 50V, Polyester	3198 014 02240
2420	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2426	Cap, 100n, 10%, 63V, Metalized Polyester.	2222 370 75104
2428	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2429	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2430	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
2431	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2437	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2438	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2448	Cap, 33p, 5%, 500V, Ceramic.	2020 557 90192
2450	Cap, 47u, 20%, 160v, Electrolytic.	2020 021 91139
2451	Cap, 10n, 10%, 50V, Polyester.	3198 014 01030
2456	Cap, 47n, 10%, 250V, Metalized Polyester.	2222 368 90176
2457	Cap, 390n, 5%, 250V, Metalized Polypropylene.	2222 479 90021
2458	Cap, 2u2, 20%, 100V, Electrolytic.	2020 021 91331
2459	Cap, 680p, 10%, 500V, Ceramic.	3198 019 46810
2461	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2462	Cap, 47n, 10%, 250V, Metalized Polyester.	2222 368 90176
S 2463	Cap, 680p, 10%, 2KV, Ceramic	2020 558 90485
S 2465	Cap, 10n, 5%, 1600V, Polypropylene	2222 375 90154
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050
2473	Cap, 47u, 20%, 50V, Electrolytic	3198 025 54790
2481	Cap, 470n, 10%, 50V, Polyester	3198 014 04740
2482	Cap, 68n, 10%, 250V, Polyester	2222 347 90234
2484	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2485	Cap, 4u7, 20%, 250V, Electrolytic.	2020 012 93293
2486	Cap, 470u, 20%, 16V, Electrolytic.	3198 025 24710
2487	Cap, 100u, 20%, 50V, Electrolytic.	3198 025 51010
2488	Cap, 470u, 20%, 16V, Electrolytic.	3198 025 24710
2489	Cap, 470u, 20%, 16V, Electrolytic.	3198 025 24710
2490	Cap, 470p, 10%, 500V, Ceramic.	3198 019 44710
2491	Cap, 470p, 10%, 500V, Ceramic.	3198 019 44710
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810
2499	Cap, 220n, 10%, 100V, Metalized Polyester	2222 365 25224
2500	Cap, 470n, 20%, 275V, Polypropylene.	2222 336 29148
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2507	Cap, 1n5, 10%, 1KV, Ceramic.	3198 019 61520
2508	Cap, 470u, 20%, 200V, Electrolytic	2020 024 90647
2511	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
2518	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2529	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2530	Cap, 1u, 20%, 50V, Electrolytic.	2020 021 91147
2531	Cap, 1n, 2%, 50V, Polypropylene.	2020 310 90049
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2540	Cap, 100u, 20%, 25V, Electrolytic.	2020 021 90547
S 2545	Cap, 1n5, 20%, v, Ceramic.	2020 554 90128
2550	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2551	Cap, 47u, 20%, 160v, Electrolytic.	2020 021 91358
2561	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020
2562	Cap, 220p, 10%, 1KV, Ceramic	3198 019 62210
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2572	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2575	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2577	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020
2586	Cap, 220u, 20%, 25V, Electrolytic.	3198 025 32210
2604	Cap, 22u, 20%, 50V, Electrolytic	3198 025 52290
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2613	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2615	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2619	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2622	Cap, 220u, 20%, 25V, Electrolytic.	3198 025 32210
2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2629	Cap, 22n, +80/-20%, 50V, Ceramic	3198 019 22230
2630	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2631	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2679	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2681	Cap, 220u, 20%, 25V, Electrolytic.	3198 025 32210
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2821	Cap, 2u2, 20%, 50V, Electrolytic	3198 028 52280
2823	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2825	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2826	Cap, 10u, 20%, 16V, Electrolytic	3198 028 21090

S = Safety Part Be sure to use exact replacement part.

MS2730C221 (continued)

2827	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
2828	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	3198 013 01020
2829	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
2830	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280		3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	3198 013 01020
2831	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	S	3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
2832	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280	S	3341	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
2833	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280	S	3342	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
2834	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780		3343	Res, 1K5, 20%, 1/2W, Carbon Film . .	3198 013 01520
2835	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
2836	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3345	VDR DC 1MA/50V S MAX 110V A . . .	2122 550 00152
2837	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740		3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
2838	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3401	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2839	Cap, 1u, 10%, 50V, Polyester	3198 014 01050		3402	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2840	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3403	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2841	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3405	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002
2842	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3406	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3407	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002
2844	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2845	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3409	Res, 1R5, 5%, 1/3W, Metal Film . . .	2306 204 03158
2913	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280		3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2914	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330		3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2915	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3420	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
2916	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648		3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2917	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2918	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330		3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840
2919	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606
2920	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648		3425	Res, 120K, 5%, 1/10W, Metalized Glass	2120 108 91716
2921	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3426	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
2931	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280		3428	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3429	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
2952	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3431	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
2954	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3432	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
2955	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3433	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3436	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3437	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3438	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
2960	Cap, 220u, 20%, 50V, Electrolytic. .	3198 026 52210		3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090		3447	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090		3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090		3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3452	Res, 33 ohm, 5%, 2 1/2W, Metal Film.	3198 012 33390
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3453	Res, 4R7, 5%, 5W, Wire Wound	2322 251 41478
3010	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610	S	3454	Res, 33K, 5%, 1 1/3W, Metal Film . .	2322 194 63333
3013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020		3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720		3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3015	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	S	3462	Res, 6K8, 5%, 5W, Metal Film	2322 257 41682
3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810		3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3021	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020		3464	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3103	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220	S	3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
3104	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030		3466	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903
3108	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3467	Res, 14K, 1%, 3/5W, Metal Film . . .	2322 156 21403
3109	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030		3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3123	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590		3469	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
				3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010		3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703
3201	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910		3481	Res, 35K7, 1%, 3/5W, Metal Film. . .	2322 156 23573
				3482	Res, 56K, 1%, 3/5W, Metal Film . . .	2322 156 25603
3203	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310		3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
				3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	S	3486	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
3205	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	S	3487	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
3206	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610	S	3488	Res, 4R7, 5%, 1/2W, Metal Film . . .	2306 207 03478
			S	3490	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3491	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
3209	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	S	3492	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
3212	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910		3495	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
				3496	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3213	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610		3497	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
				3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3215	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	S	3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225
3216	Res, Zero ohm, 'Chip' Jumper	3198 021 90020		3503	PTC DC ZPB 120V S 10R PM30 B . . .	2120 661 00019
3217	Res, 1M5, 5%, 1/8W, Metalized Glass.	2322 730 61155	S	3505	Surge Protector.	2422 549 43073
3218	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	S	3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3219	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610	S	3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333
			S	3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102
3220	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010		3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3225	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040		3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010		3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204
3243	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	S	3515	2.5 ohm, 20%, 3.6W, Negative Temperat ure Coefficient.	2122 612 00023
3246	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230				
3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3517	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340	S	3518	Res, 0R22, 5%, 2 1/2W, Metal Film. .	3198 012 32270
3250	Res, Zero ohm, 'Chip' Jumper	3198 021 90020		3520	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3251	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040		3521	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3252	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220				
3253	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	S	3525	Res, 47 ohm, 5%, 1/3W, Metal Film. .	2306 204 03479
3257	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010		3528	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3258	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010		3529	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3259	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010		3530	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3532	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	3198 013 01020		3534	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530

S = Safety Part Be sure to use exact replacement part.

MS2730C221 (continued)

3536	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830	
3537	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
S 3542	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475	
3570	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530	
3571	Res, 150K, 1%, 3/5W, Metal Film. . .	2322 156 21504	
3573	Res, 2K, 1%, 1/8W, Metalized Glass .	2322 734 62002	
3574	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330	
3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3577	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3578	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3579	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002	
3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3592	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3594	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	
3595	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830	
3596	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3597	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3598	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3599	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	
3607	RST NETW RGLE 10X 8K2 PM5 B . . .	2120 108 93916	
3608	RST NETW RGLE 6X 2K2 PM5 B . . .	2120 108 93913	
3609	RST NETW RGLE 7X 2K2 PM5 B . . .	2120 108 93915	
3611	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3612	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3613	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3615	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3616	Jumper Wire/Staple	0322 179 00003	
3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3619	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3629	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710	
3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3631	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730	
S 3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790	
3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210	
3634	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	
3635	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	
3636	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	
3637	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3653	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3654	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3655	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3662	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3663	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220	
3664	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220	
3665	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3666	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620	
3667	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730	
3672	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3673	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3674	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820	
3675	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3676	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3677	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3680	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810	
3681	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3682	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220	
3683	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3684	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	
3821	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530	
3822	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220	
3823	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040	
3824	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	
3825	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3826	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3827	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3828	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3829	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820	
3830	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820	
3831	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198 011 03310	
3832	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790	
3908	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3909	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3910	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620	
3911	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230	
3912	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3913	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3914	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	
3915	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820	
3916	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210	
3917	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3918	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3919	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620	
3920	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820	
3921	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230	
3922	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	
3923	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210	
3924	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930	
3925	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930	
3926	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930	
3929	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930	
3930	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3931	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810	
3951	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	
3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3953	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3955	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
3957	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4004	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4011	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4012	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4020	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4051	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4100	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4144	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4203	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4207	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4212	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4215	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4216	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4465	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4501	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4650	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4651	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4654	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4833	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4911	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4912	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4914	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4957	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4999	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
5000	Coil, 5u6.	3198 018 25680	
5004	Coil, 820n	2422 535 97314	
5201	Coil, 22u.	3198 018 22290	
5202	Coil, 6u8.	3198 018 16880	
5342	Coil, 22u.	3198 018 22290	
S 5445	Transformer, L.O.T., models ending in C221 and C225.	3128 138 20941	
5451	Coil, 27u.	2422 535 96614	
5457	Coil, Linear Correction.	3128 138 53241	
5461	TFM SIG SLOT UU-1522S WIRE B . . .	2422 531 02318	
5461	Transformer.	3128 138 33811	
5480	Coil, 39u.	2422 535 97336	
S 5500	Filter, Mains, 5mH, 2A	2422 549 43432	
5516	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5518	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5521	Coil, 2u2.	3198 018 12280	
5540	Coil, 4u7.	3198 018 14780	
S 5545	Transfomer,.	2422 531 02314	
5551	Coil, 27u.	2422 535 95366	
5552	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5572	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5573	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5576	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5577	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5600	Coil, 8u2.	3198 018 18280	
5601	Coil, 8u2.	3198 018 18280	
5620	Coil, 6u8.	3198 018 16880	
5821	Coil, 100u	3198 018 21010	
5822	Coil, 18u.	3198 018 21890	
6008	Zener Diode, 33 volt	3198 010 23390	
6113	Zener Diode, 6.8 volt.	9340 386 40115	
6211	Diode, Signal, 1N4148.	3198 010 10010	
6212	Diode, Signal, 1N4148.	3198 010 10010	
6213	Diode, Signal, 1N4148.	3198 010 10010	
6331	Diode, Signal, BAV21	3198 010 10070	
6333	Diode, Signal, BAV21	3198 010 10070	
6335	Diode, Signal, BAV21	3198 010 10070	

S = Safety Part Be sure to use exact replacement part.

MS2730C221 (continued)

	6401	Diode, Rect, BYD33D	9337 234 00133		9203	Jumper Wire/Staple	0322 179 00003
	6402	Zener Diode, 33 volt	3198 010 23390		9204	Jumper Wire/Staple	0322 179 00003
	6403	Diode, Rect, BYD33D	9337 234 00133		9205	Jumper Wire/Staple	0322 179 00003
	6404	Zener Diode, 75 volt	9331 180 00133		9206	Jumper Wire/Staple	0322 179 00003
	6449	Diode, Signal, 1N4148.	3198 010 10010		9207	Jumper Wire/Staple	0322 179 00003
	6450	Diode, Signal, 1N4148.	3198 010 10010		9208	Jumper Wire/Staple	0322 179 00003
	6460	Diode, Rect, BY228/20	9336 215 80112		9209	Jumper Wire/Staple	0322 179 00003
	6463	Diode, Signal, 1N4148.	3198 010 10010		9210	Jumper Wire/Staple	0322 179 00003
	6464	Zener Diode, 6.2 volt.	9331 668 30133		9211	Jumper Wire/Staple	0322 179 00003
	6465	Diode, Rect, BYD33J	9337 234 20133		9214	Jumper Wire/Staple	0322 179 00003
	6466	Diode, Rect, BYD33J	9337 234 20133		9215	Jumper Wire/Staple	0322 179 00003
	6480	Zener Diode, 27 volt	3198 010 22790		9216	Jumper Wire/Staple	0322 179 00003
	6481	Diode, Signal, 1N4148.	3198 010 10010		9217	Jumper Wire/Staple	0322 179 00003
	6485	Diode, Rect, BYD33J	9337 234 20133		9218	Jumper Wire/Staple	0322 179 00003
	6486	Diode, Rect, EGP20DL-5300	9322 100 13682		9220	Jumper Wire/Staple	0322 179 00003
	6487	Diode, Rect, BYD33D	9337 234 00133		9221	Jumper Wire/Staple	0322 179 00003
	6488	Diode, Rect, BYV27-200.	9322 126 72673		9222	Jumper Wire/Staple	0322 179 00003
	6490	Diode, Rect, BYV27-200.	9322 126 72673		9225	Jumper Wire/Staple	0322 179 00003
	6505	Diode, Bridge Rect, GBU6JL-7002	9322 138 08667		9226	Jumper Wire/Staple	0322 179 00003
	6507	Diode, Rect, BYD33J	9337 234 20133		9227	Jumper Wire/Staple	0322 179 00003
	6508	Diode, Rect, BYD33J	9337 234 20133		9228	Jumper Wire/Staple	0322 179 00003
	6510	Zener Diode, 20 volt	9331 178 60133		9229	Jumper Wire/Staple	0322 179 00003
	6511	Diode, Rect, BYV95C	9335 001 80133		9230	Jumper Wire/Staple	0322 179 00003
	6512	Diode, Rect, 1N5062	3198 010 10120		9231	Jumper Wire/Staple	0322 179 00003
	6513	Diode, Rect, 1N5062	3198 010 10120		9232	Jumper Wire/Staple	0322 179 00003
	6514	Zener Diode, 18 volt	3198 010 21890		9233	Jumper Wire/Staple	0322 179 00003
	6540	Diode, Signal, BAV21	3198 010 10070		9234	Jumper Wire/Staple	0322 179 00003
	6550	Diode, Rect, BY229X-800	9340 380 30127		9236	Jumper Wire/Staple	0322 179 00003
	6560	Diode, Rect, EGP20DL-5300	9322 100 13682		9237	Jumper Wire/Staple	0322 179 00003
	6580	Diode, Rect, SB140.	9339 577 60673		9238	Jumper Wire/Staple	0322 179 00003
	6584	Diode, Signal, 1N4148.	3198 010 10010		9240	Jumper Wire/Staple	0322 179 00003
	6585	Diode, Signal, 1N4148.	3198 010 10010		9241	Jumper Wire/Staple	0322 179 00003
	6591	Diode, Signal, BAS16WS	9322 031 99685		9242	Jumper Wire/Staple	0322 179 00003
	6601	Zener Diode, 3.9 volt.	3198 010 23980		9243	Jumper Wire/Staple	0322 179 00003
	6603	Jumper Wire/Staple	0322 179 00003		9245	Jumper Wire/Staple	0322 179 00003
	6604	Jumper Wire/Staple	0322 179 00003		9301	Jumper Wire/Staple	0322 179 00003
	6605	Jumper Wire/Staple	0322 179 00003		9401	Jumper Wire/Staple	0322 179 00003
	6606	Zener Diode, 4.7 volt.	3198 010 24780		9402	Jumper Wire/Staple	0322 179 00003
	6607	Zener Diode, 6.8 volt.	3198 010 26880		9403	Jumper Wire/Staple	0322 179 00003
	6690	LED VS LTL-307P (LITO) B	9322 033 95682		9404	Jumper Wire/Staple	0322 179 00003
	6821	Zener Diode, 9.1 volt.	9331 177 80133		9407	Jumper Wire/Staple	0322 179 00003
	6822	Diode, Signal, 1N4148.	3198 010 10010		9408	Jumper Wire/Staple	0322 179 00003
	6951	Diode, Signal, BAS16WS	9322 031 99685		9411	Jumper Wire/Staple	0322 179 00003
	6961	Diode, Signal, BAS16WS	9322 031 99685		9414	Jumper Wire/Staple	0322 179 00003
	7250	IC,	9352 620 26112		9417	Jumper Wire/Staple	0322 179 00003
	7251	IC, LM317T	9337 220 80682		9419	Jumper Wire/Staple	0322 179 00003
	7254	Transistor, NPN, BC847B.	3198 010 42030		9420	Jumper Wire/Staple	0322 179 00003
	7256	Transistor, NPN, BC847B.	3198 010 42030		9421	Jumper Wire/Staple	0322 179 00003
	7258	Transistor, NPN, BC847B.	3198 010 42030		9422	Jumper Wire/Staple	0322 179 00003
	7263	Transistor, PNP, BC857B.	3198 010 42150		9424	Jumper Wire/Staple	0322 179 00003
	7266	Transistor, NPN, BC847B.	3198 010 42030		9425	Jumper Wire/Staple	0322 179 00003
	7330	IC, TDA6107Q/N2.	9352 576 50112		9427	Jumper Wire/Staple	0322 179 00003
	7401	IC,	9322 121 47687		9428	Jumper Wire/Staple	0322 179 00003
	7460	Transistor, NPN, BU1508DX.	9340 170 50127		9460	Jumper Wire/Staple	0322 179 00003
	7461	Transistor, NPN, BF819	9335 354 50127		9461	Jumper Wire/Staple	0322 179 00003
	7462	Transistor, NPN, BC547B.	3198 020 40030		9500	Jumper Wire/Staple	0322 179 00003
	7463	Transistor, PNP, BC557B.	3198 020 40110		9501	Jumper Wire/Staple	0322 179 00003
	7480	IC,	9322 028 93682		9502	Jumper Wire/Staple	0322 179 00003
	7481	Transistor, PNP, BC557B.	3198 020 40110		9503	Jumper Wire/Staple	0322 179 00003
	7482	Transistor, PNP, BC857B.	3198 010 42150		9505	Jumper Wire/Staple	0322 179 00003
	7518	STH10NC60FI SMPS FET.	9322 155 66687		9509	Jumper Wire/Staple	0322 179 00003
	7520	IC,	9322 108 36682		9510	Jumper Wire/Staple	0322 179 00003
	7570	IC,	9337 711 00676		9511	Jumper Wire/Staple	0322 179 00003
S	7581	Coupler, TCDT1101G	9338 431 30682		9512	Jumper Wire/Staple	0322 179 00003
	7590	Transistor, NPN, BC847B.	3198 010 42030		9513	Jumper Wire/Staple	0322 179 00003
	7591	Transistor, NPN, BC847B.	3198 010 42030		9515	Jumper Wire/Staple	0322 179 00003
	7592	Transistor, NPN, BC847B.	3198 010 42030		9516	Jumper Wire/Staple	0322 179 00003
	7600	IC,	9352 670 96112		9517	Jumper Wire/Staple	0322 179 00003
	7601	IC, ST24W04B6.	9322 097 23682		9518	Jumper Wire/Staple	0322 179 00003
	7603	Transistor, NPN, BC337	9331 796 00126		9521	Jumper Wire/Staple	0322 179 00003
	7604	Transistor, NPN, BC847B.	3198 010 42030		9526	Jumper Wire/Staple	0322 179 00003
	7605	Transistor, NPN, BC847B.	3198 010 42030		9601	Jumper Wire/Staple	0322 179 00003
	7608	Transistor, NPN, BC847B.	3198 010 42030		9602	Jumper Wire/Staple	0322 179 00003
	7609	Transistor, NPN, BC847B.	3198 010 42030		9603	Jumper Wire/Staple	0322 179 00003
	7680	IR RECEIVER.	9322 154 48667		9604	Jumper Wire/Staple	0322 179 00003
	7821	IC,	9352 374 70112		9605	Jumper Wire/Staple	0322 179 00003
	7822	IC, HEF4052BT.	9333 729 50653		9606	Jumper Wire/Staple	0322 179 00003
	7823	Transistor, NPN, BC337-25.	3198 020 43530		9608	Jumper Wire/Staple	0322 179 00003
	7904	Transistor, NPN, BC847B.	3198 010 42030		9609	Jumper Wire/Staple	0322 179 00003
	7908	Transistor, NPN, BC847B.	3198 010 42030		9610	Jumper Wire/Staple	0322 179 00003
	7951	IC,	9351 861 60112		9611	Jumper Wire/Staple	0322 179 00003
	9001	Jumper Wire/Staple	0322 179 00003		9612	Jumper Wire/Staple	0322 179 00003
	9003	Jumper Wire/Staple	0322 179 00003		9613	Jumper Wire/Staple	0322 179 00003
	9005	Jumper Wire/Staple	0322 179 00003		9614	Jumper Wire/Staple	0322 179 00003
	9011	Jumper Wire/Staple	0322 179 00003		9615	Jumper Wire/Staple	0322 179 00003
	9012	Jumper Wire/Staple	0322 179 00003		9618	Jumper Wire/Staple	0322 179 00003
	9105	Jumper Wire/Staple	0322 179 00003		9621	Jumper Wire/Staple	0322 179 00003
	9126	Jumper Wire/Staple	0322 179 00003		9622	Jumper Wire/Staple	0322 179 00003
	9132	Jumper Wire/Staple	0322 179 00003		9624	Jumper Wire/Staple	0322 179 00003
	9140	Jumper Wire/Staple	0322 179 00003		9625	Jumper Wire/Staple	0322 179 00003
	9200	Jumper Wire/Staple	0322 179 00003		9626	Jumper Wire/Staple	0322 179 00003
	9202	Jumper Wire/Staple	0322 179 00003		9629	Jumper Wire/Staple	0322 179 00003

S = Safety Part Be sure to use exact replacement part.

MS2730C221 (continued)

9631	Jumper Wire/Staple	0322 179 00003
9632	Jumper Wire/Staple	0322 179 00003
9637	Jumper Wire/Staple	0322 179 00003
9640	Jumper Wire/Staple	0322 179 00003
9642	Jumper Wire/Staple	0322 179 00003
9643	Jumper Wire/Staple	0322 179 00003
9644	Jumper Wire/Staple	0322 179 00003
9660	Jumper Wire/Staple	0322 179 00003
9754	Jumper Wire/Staple	0322 179 00003
9788	Jumper Wire/Staple	0322 179 00003
9793	Jumper Wire/Staple	0322 179 00003
9800	Jumper Wire/Staple	0322 179 00003
9805	Jumper Wire/Staple	0322 179 00003
9806	Jumper Wire/Staple	0322 179 00003
9807	Jumper Wire/Staple	0322 179 00003
9810	Jumper Wire/Staple	0322 179 00003
9901	Jumper Wire/Staple	0322 179 00003
9904	Jumper Wire/Staple	0322 179 00003
9905	Jumper Wire/Staple	0322 179 00003
9906	Jumper Wire/Staple	0322 179 00003
9920	Jumper Wire/Staple	0322 179 00003
9933	Jumper Wire/Staple	0322 179 00003
9936	Jumper Wire/Staple	0322 179 00003
9940	Jumper Wire/Staple	0322 179 00003
9941	Jumper Wire/Staple	0322 179 00003
9942	Jumper Wire/Staple	0322 179 00003
9943	Jumper Wire/Staple	0322 179 00003
9944	Jumper Wire/Staple	0322 179 00003
9945	Jumper Wire/Staple	0322 179 00003
9946	Jumper Wire/Staple	0322 179 00003
9947	Jumper Wire/Staple	0322 179 00003
9948	Jumper Wire/Staple	0322 179 00003
9949	Jumper Wire/Staple	0322 179 00003
9950	Jumper Wire/Staple	0322 179 00003
9951	Jumper Wire/Staple	0322 179 00003
9952	Jumper Wire/Staple	0322 179 00003
9953	Jumper Wire/Staple	0322 179 00003
9955	Jumper Wire/Staple	0322 179 00003
9956	Jumper Wire/Staple	0322 179 00003
9957	Jumper Wire/Staple	0322 179 00003
9958	Jumper Wire/Staple	0322 179 00003
9959	Jumper Wire/Staple	0322 179 00003
9960	Jumper Wire/Staple	0322 179 00003
9962	Jumper Wire/Staple	0322 179 00003
9963	Jumper Wire/Staple	0322 179 00003
9964	Jumper Wire/Staple	0322 179 00003
9965	Jumper Wire/Staple	0322 179 00003
9966	Jumper Wire/Staple	0322 179 00003
9967	Jumper Wire/Staple	0322 179 00003
9968	Jumper Wire/Staple	0322 179 00003
9969	Jumper Wire/Staple	0322 179 00003
9970	Jumper Wire/Staple	0322 179 00003
9971	Jumper Wire/Staple	0322 179 00003
9972	Jumper Wire/Staple	0322 179 00003
9974	Jumper Wire/Staple	0322 179 00003
9975	Jumper Wire/Staple	0322 179 00003
9976	Jumper Wire/Staple	0322 179 00003
9977	Jumper Wire/Staple	0322 179 00003
9981	Jumper Wire/Staple	0322 179 00003
9982	Jumper Wire/Staple	0322 179 00003
9983	Jumper Wire/Staple	0322 179 00003
9984	Jumper Wire/Staple	0322 179 00003
9987	Jumper Wire/Staple	0322 179 00003
9989	Jumper Wire/Staple	0322 179 00003
9990	Jumper Wire/Staple	0322 179 00003
9991	Jumper Wire/Staple	0322 179 00003
9992	Jumper Wire/Staple	0322 179 00003
9993	Jumper Wire/Staple	0322 179 00003
CBA	313917868471 Main Chassis Board Asm.	3139 178 68471

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Mainscord, 125V, 10A	3135 010 03831
AC02	Clip, Anode Lead	3135 014 04471
AC03	Cabinet Back	3139 124 27871
AC04	Cabinet Front.	3139 137 53001
AC04	Cabinet Front.	3139 137 96431
AC05	Chassis Guide.	3139 124 31381
AC06	Control Buttons.	3139 124 27351
S AC07	Convergence and Purity Assembly. . .	2422 549 43385
S AC08	CRT A68AJB82X.	9301 787 60472
S AC09	Coil, Degaussing	2422 549 43967
AC10	Holder, Degaussing (4 Used).	3135 013 01641
AC11	Light Guide.	3139 124 26461
AC13	Owner's Manual	3121 235 20091
AC13	Owner's Manual, English.	3135 015 10761
AC14	Power Button	3139 124 26444
REMOTE	Remote Transmitter	3139 148 54201
REMOTE	Remote Transmitter	3139 228 88101
AC16	Speaker, 16R, 1W5 (2 Used)	2422 264 00343
S AC18	Yoke	3313 203 01242
AC19	Yoke Wedge (3 used).	3135 013 00311
AC21	Battery, 1.5V AA, 2-Pack, (Not Shown	9299 000 10137
AC21	Batteries f/Remote Transmitter . . .	9299 000 13827
AC24	Spring	3139 121 26231

S = Safety Part Be sure to use exact replacement part.

PA9027C101 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts		
S 0127	3.15 Amp Fuse, ...	3122 358 72141	
0152	Cable, DIP, 6 Pin, 400mm	3104 301 09421	
0153	4 Pin Cable.	3104 301 09431	
0212	Connector, 2 Pin	2422 025 15396	
0213	Connector, 3 Pin	2412 020 00725	
0214	Connector, 3 Pin	2422 025 16382	
0215	Connector, 2 Pin	2412 020 00724	
0216	4 Pin Board Connector.	2422 025 16384	
0219	5 Pin Board Connector.	2422 025 16387	
0220	4 Pin Board Connector.	2422 025 04852	
0224	1 Pin Board Connector.	2422 034 20021	
0228	1 Pin Board Connector.	2422 034 20021	
0234	Connector, 4 Pin	2422 025 12479	
0236	Connector, 4 Pin	2422 025 12479	
0237	Connector, 4 Pin	2422 025 12479	
0238	Connector, 5 Pin	2422 025 12481	
S 0243	Connector, 6 Pin	2422 025 04854	
0244	4 Pin Board Connector.	2422 025 04852	
S 0245	Connector, 6 Pin	2422 025 04854	
S 0254	CRT Socket (9 Pin)	2422 500 80022	
0259	Connector, 3 Pin	2422 025 16383	
0262	Connector, 4 Pin	2422 025 16385	
0267	Connector, 3 Pin	2412 020 00725	
1000	Tuner.	2422 542 90051	
1003	45 MHz SAW, Filter,.	2422 549 42433	
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807	
1208	Crystal Resonator, 3.58MHz	2422 543 00832	
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10869	
S 1572	1 Amp, Radial Fuse,.	4835 253 97162	
S 1573	2.5 Amp Fuse, Radial,.	2422 086 10422	
S 1580	Relay, 12V	2422 132 07317	
1600	Switch, Tactile.	2422 128 02742	
1601	Switch, Tactile.	2422 128 02742	
1602	Switch, Tactile.	2422 128 02742	
1603	Switch, Tactile.	2422 128 02742	
1606	Switch, Tactile.	2422 128 02742	
1660	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488	
1822	Crystal Resonator, 18MHz432, 12 Pin, HC49/U A	2422 543 00842	
2001	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2002	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2003	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2004	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2011	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2101	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2102	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2103	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2104	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2111	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2112	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2115	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2201	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2205	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2207	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2208	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2209	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2211	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2212	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2213	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2214	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2215	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280	
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 16654	
2220	Cap, 18p, 5%, 50V, Ceramic	3198 016 01890	
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2222	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2226	Cap, 33u, 20%, 25V, Electrolytic . .	2020 021 90124	
2227	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2247	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2248	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2249	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2330	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177	
2340	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495	
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320	
S 2343	Cap, 3n3, 10%, 2KV, Ceramic.	2020 558 90529	
2345	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020	
2401	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2402	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2404	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2405	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2407	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2409	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2420	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2426	Cap, 100n, 10%, 63V, Metalized Polyester.	2222 370 75104	
2428	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220	
2429	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2430	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2431	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2437	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	
2438	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2448	Cap, 220p, 10%, 500V, Ceramic. . . .	3198 019 42210	
2450	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91139	
2451	Cap, 15n, 10%, 50V, Polyester. . . .	2020 300 90575	
2451	0.01uF., 10%, 50V, Polyester, only 27	3198 138 20941	
2456	Cap, 47n, 10%, 250V, Metalized Polyester.	2222 368 90176	
2457	Cap, 390n, 5%, 250V, Metalized Polypropylene.	2222 479 90021	
2458	Cap, 10u, 20%, 100V, Electrolytic. .	2020 021 90813	
2459	Cap, 680p, 10%, 500V, Ceramic. . . .	3198 019 46810	
2461	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020	
2462	Cap, 47n, 10%, 250V, Metalized Polyester.	2222 368 90176	
2463	1000pF., 10%, 2KV, Ceramic	4835 122 47629	
S 2465	Cap, 9n1, 5%, 1600V, Polypropylene .	2022 333 00118	
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050	
2473	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790	
2481	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740	
2482	Cap, 68n, 10%, 250V, Polyester . . .	2222 347 90234	
2484	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2485	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93282	
2486	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2487	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2488	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2489	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2490	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710	
2491	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710	
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810	
2500	0.47uF., 250V, Polyester	4835 121 47569	
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
S 2507	Cap, 1n5, 10%, 1KV, Ceramic.	2020 558 90443	
2508	Cap, 470u, 20%, 200V, Electrolytic .	2020 024 90626	
S 2511	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020	
S 2518	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290	
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320	
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320	
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2530	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 021 91147	
2531	Cap, 1n, 2%, 50V, Polypropylene. . .	2020 310 90049	
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220	
2540	Cap, 100u, 20%, 25V, Electrolytic. .	2020 021 90547	
S 2545	1500pF., 250VAC, Ceramic	4835 122 47622	
S 2550	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2551	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91358	
2561	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020	
S 2562	Cap, 220p, 10%, 1KV, Ceramic	2020 558 90424	
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020	
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020	
2571	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91353	
2572	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330	
2575	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820	
2586	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2604	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290	
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2613	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2615	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2619	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2622	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890	
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2629	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230	
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2631	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2679	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2681	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2850	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810	
2851	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	

S = Safety Part Be sure to use exact replacement part.

PA9027C101 (continued)

2852	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046
2853	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
2854	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046
2855	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380	S	3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
2856	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380	S	3341	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483
2858	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790	S	3342	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483
2859	Cap, 15p, 5%, 50V, Ceramic	3198 016 01590		3343	1.5k, 20%, 1/2W, Carbon Composition.	4835 110 47034
2860	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090		3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
2861	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	S	3345	VDR, DC, 1mA, 50V, MAX 115V	2322 593 13507
2862	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
2863	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090		3401	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2864	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3402	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2865	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3403	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2866	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3405	Res, 1K8, 1%, 3/5W, Metal Film . . .	2322 156 21802
2867	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3406	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2868	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780		3407	Res, 1K8, 1%, 3/5W, Metal Film . . .	2322 156 21802
2869	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2870	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3409	1.5 ohm, 5%, 1/3W, Metal Film. . . .	4835 116 57664
2871	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090		3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2874	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790		3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2875	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790		3420	470k, 5%, 1/10W, Metal Film.	4835 111 37407
2877	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2882	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2883	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090		3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840
2884	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606
2887	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810		3425	Res, 120K, 5%, 1/10W, Metalized Glass	2120 108 91716
2888	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3426	39k, 5%, 1/10W, Metal Film	4835 111 27051
2889	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3428	22k, 5%, 1/10W, Metal Film	4835 111 37441
2891	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390		3429	27k, 5%, 1/10W, Metal Film	4835 111 37442
2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3431	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
2952	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3432	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
2954	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3436	Res, 1K, 2%, 0,25W	4822 051 10102
2955	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3437	10k, 5%, 1/10W, Metal Film	4835 111 37216
2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3438	33k, 1/4W, Carbon Film	4835 110 57375
2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3447	10k, 5%, 1/10W, Metal Film	4835 111 37216
2960	Cap, 2u2, 20%, 25V, Electrolytic . .	3198 026 32220		3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090		3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090	S	3452	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63229
2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090	S	3453	Res, 4R7, 5%, 5W, Wire Wound	2322 251 41478
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3454	Res, 33K, 5%, 1 1/3W, Metal Film . .	2322 194 63333
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3013	Zero ohm,.	4835 111 27056		3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3014	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	S	3462	Res, 6K8, 5%, 5W, Metal Film	2322 257 41682
3015	22k, 5%, 1/10W, Metal Film	4835 111 37441		3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810		3464	Res, 1K, 2%, 0,25W	4822 051 10102
3100	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510	S	3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
3101	220k, 5%, 1/10W, Metal Film.	4835 111 37235		3466	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903
3103	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3467	Res, 14K, 1%, 3/5W, Metal Film . . .	2322 156 21403
3104	10k, 5%, 1/10W, Metal Film	4835 111 37216		3467	Res, 15K, 1%, 3/5W, Metal Film . . .	2322 156 21503
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510		3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3108	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3469	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
3109	10k, 5%, 1/10W, Metal Film	4835 111 37216		3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3122	220k, 5%, 1/10W, Metal Film.	4835 111 37235		3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703
3123	75 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37276		3481	Res, 35K7, 1%, 3/5W, Metal Film. . .	2322 156 23573
3125	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890		3482	Res, 56K, 1%, 3/5W, Metal Film . . .	2322 156 25603
3134	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790		3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3155	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259		3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3201	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253	S	3485	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
3203	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443	S	3486	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	S	3487	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3205	Res, 1K, 2%, 0,25W	4822 051 10102	S	3488	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
3206	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	S	3490	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3491	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3209	22k, 5%, 1/10W, Metal Film	4835 111 37441	S	3492	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3212	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253		3495	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272
3213	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3496	10k, 5%, 1/10W, Metal Film	4835 111 37216
3215	22k, 5%, 1/10W, Metal Film	4835 111 37441		3497	10k, 5%, 1/10W, Metal Film	4835 111 37216
3216	Zero ohm,.	4835 111 27056		3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3218	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225
3219	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3503	10ohm, 120VAC, Positive Temperature C	
3220	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432			oefficient	4835 116 47001
3225	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S	3505	Surge Protector.	2422 549 43073
3228	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3231	Zero ohm,.	4835 111 27056	S	3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333
3232	Zero ohm,.	4835 111 27056	S	3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102
3233	Zero ohm,.	4835 111 27056		3512	15k, 5%, 1/10W, Metal Film	4835 111 37458
3243	1.2k, 5%, 1/10W, Metal Film.	4835 111 27042		3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184
3246	82k, 5%, 1/10W, Metal Film	4835 111 37277		3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204
3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3515	2.5 ohm, 20%, 3.6W, Negative Temperat	
3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010			ure Coefficient.	2122 612 00023
3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340		3516	Res, 1K, 2%, 0,25W	4822 051 10102
3250	Zero ohm,.	4835 111 27056		3517	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3251	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S	3518	Res, 0R22, 5%, 3W, Metal Film. . . .	2120 106 90548
3252	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		3520	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3253	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		3521	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443
3257	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3525	33 ohm, 5%, 1/3W, Metal Film	4835 116 57665
3258	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3528	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3259	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3529	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3530	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3532	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3534	15k, 5%, 1/10W, Metal Film	4835 111 37458

S = Safety Part Be sure to use exact replacement part.

PA9027C101 (continued)

3536	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3537	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
S 3542	4.7 Megohm, 5%, 1/2W, Metal Film . .	4835 116 57009
3570	15k, 5%, 1/10W, Metal Film	4835 111 37458
3571	Res, 150K, 1%, 3/5W, Metal Film. . .	2322 156 21504
3573	Res, 2K, 1%, 1/10W, Metalized Glass.	2120 108 92657
3574	33k, 5%, 1/10W, Metal Film	4835 111 37248
3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3577	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3578	Res, 1K, 2%, 0,25W	4822 051 10102
3579	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3592	10k, 5%, 1/10W, Metal Film	4835 111 37216
3594	22k, 5%, 1/10W, Metal Film	4835 111 37441
3595	68k, 5%, 1/6W, Carbon Film	4835 111 37205
3596	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3597	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
3598	10k, 5%, 1/10W, Metal Film	4835 111 37216
3599	22k, 5%, 1/10W, Metal Film	4835 111 37441
3607	8.2k, 5%, 1/8W, Inline Package . . .	4835 111 97046
3608	2.2k, 5%, 1/8W, Inline Package . . .	4835 111 97049
3609	8.2k, 5%, Resistor Network	2120 108 92589
3611	Res, 1K, 2%, 0,25W	4822 051 10102
3612	10k, 5%, 1/10W, Metal Film	4835 111 37216
3613	10k, 5%, 1/10W, Metal Film	4835 111 37216
3615	10k, 5%, 1/10W, Metal Film	4835 111 37216
3617	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3619	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
3629	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259
3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
3631	27k, 5%, 1/10W, Metal Film	4835 111 37442
S 3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63479
3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210
3634	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
3635	22k, 5%, 1/10W, Metal Film	4835 111 37441
3636	22k, 5%, 1/10W, Metal Film	4835 111 37441
3637	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
3649	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
3650	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3653	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3654	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
3655	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710
3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3662	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
3663	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
3664	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
3665	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
3666	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376
3667	27k, 5%, 1/10W, Metal Film	4835 111 37442
3672	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
3673	10k, 5%, 1/10W, Metal Film	4835 111 37216
3674	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259
3675	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3676	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3677	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3680	680 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37271
3681	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
3682	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
3683	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
3684	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
3685	220 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37371
3841	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3842	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3843	47k, 5%, 1/10W, Metal Film	4835 111 37445
3844	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259
3845	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259
3850	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810
3951	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3953	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272
3954	1.5k, 5%, 1/10W, Metal Film.	4835 111 37437
3955	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3956	1.5k, 5%, 1/10W, Metal Film.	4835 111 37437
3957	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
4001	Zero ohm,.	4835 111 27056
4002	Zero ohm,.	4835 111 27056
4004	Zero ohm,.	4835 111 27056
4007	Zero ohm,.	4835 111 27056
4009	Zero ohm,.	4835 111 27056
4010	Zero ohm,.	4835 111 27056
4011	Zero ohm,.	4835 111 27056
4012	Zero ohm,.	4835 111 27056
4013	Zero ohm,.	4835 111 27056
4020	Zero ohm,.	4835 111 27056
4051	Zero ohm,.	4835 111 27056
4100	Zero ohm,.	4835 111 27056
4101	Zero ohm,.	4835 111 27056
4102	Zero ohm,.	4835 111 27056
4103	Zero ohm,.	4835 111 27056
4143	Zero ohm,.	4835 111 27056
4144	Zero ohm,.	4835 111 27056
4203	Zero ohm,.	4835 111 27056
4207	Zero ohm,.	4835 111 27056
4212	Zero ohm,.	4835 111 27056
4214	Zero ohm,.	4835 111 27056
4215	Zero ohm,.	4835 111 27056
4216	Zero ohm,.	4835 111 27056
4501	Zero ohm,.	4835 111 27056
4602	Zero ohm,.	4835 111 27056
4650	Zero ohm,.	4835 111 27056
4651	Zero ohm,.	4835 111 27056
4652	Zero ohm,.	4835 111 27056
4654	Zero ohm,.	4835 111 27056
4655	Zero ohm,.	4835 111 27056
4684	Zero ohm,.	4835 111 27056
4687	Zero ohm,.	4835 111 27056
4831	Zero ohm,.	4835 111 27056
4832	Zero ohm,.	4835 111 27056
4833	Zero ohm,.	4835 111 27056
4902	Zero ohm,.	4835 111 27056
4903	Zero ohm,.	4835 111 27056
4904	Zero ohm,.	4835 111 27056
4905	Zero ohm,.	4835 111 27056
4909	Zero ohm,.	4835 111 27056
4911	Zero ohm,.	4835 111 27056
4912	Zero ohm,.	4835 111 27056
4914	Zero ohm,.	4835 111 27056
4957	Zero ohm,.	4835 111 27056
4999	Zero ohm,.	4835 111 27056
5000	Coil, 5u6.	3198 018 25680
5004	Coil, 820n	2422 535 97314
5101	Coil, 5u6.	3198 018 15680
5201	Coil, 22u.	3198 018 22290
5202	Coil, 6u8.	3198 018 16880
5342	22uH., 10%, Coil, Peaking.	4835 157 67069
S 5445	Transformer, L.O.T., models ending in C101, C121, and C125	2422 531 02327
S 5445	Transformer, L.O.T., models ending in C221 and C225.	3128 138 20941
5451	Coil, 27u.	2422 535 96614
5457	Coil, Linear Correction.	3128 138 53241
5461	Transformer.	3128 138 33811
5480	Coil, 27u.	2422 535 97334
5480	Coil, 39u.	2422 535 97336
5480	33uH., Peaking Coil, only in 25. . .	4835 157 58205
S 5500	Filter, Mains, 5mH, 2A	2422 549 43432
5516	100uH., Coil	4835 157 67078
5518	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5521	Coil, 2u2.	3198 018 12280
5540	Coil, 4u7.	3198 018 14780
S 5545	Transfomer,.	2422 531 02314
5551	27uH., 5%, Coil, Peaking	4835 157 67052
5552	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5572	100uH., Coil	4835 157 67078
5573	100uH., Coil	4835 157 67078
5575	100uH., Coil	4835 157 67078
5576	100uH., Coil	4835 157 67078
5577	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5600	Coil, 8u2.	3198 018 18280
5601	Coil, 8u2.	3198 018 18280
5620	Coil, 6u8.	3198 018 16880
5821	Coil, 100u	3198 018 21010
5831	Coil, 12u.	3198 018 21290
5832	Coil, 12u.	3198 018 21290
5833	Coil, 12u.	3198 018 11290
6008	Zener, 33 Volt BZX79-C33	4835 130 37904
6113	Zener Diode, 6.8 volt.	9340 386 40115
6125	Zener Diode, 6.8 volt.	9340 386 40115
6211	Diode, 1N4148.	4835 130 37048
6212	Diode, 1N4148.	4835 130 37048
6213	Diode, 1N4148.	4835 130 37048
6331	Diode.	4835 130 37294
6333	Diode.	4835 130 37294
6335	Diode.	4835 130 37294
6401	Diode.	4835 130 37094
6402	Zener, 33 Volt, BZX79-C33.	4835 130 37904
6403	Diode.	4835 130 37094
6404	Diode.	4835 130 37094
6449	Diode, 1N4148.	4835 130 37048
6450	Diode, 1N4148.	4835 130 37048
6460	Diode, Rect, BY228/20	9336 215 80112
6463	Diode, 1N4148.	4835 130 37048
6464	Zener Diode, 6.2 volt.	9337 242 70133
6465	Diode, BYD33J.	4835 130 37094
6466	Diode, BYD33J.	4835 130 37094
6480	Diode, Zener	4835 130 37947

S = Safety Part Be sure to use exact replacement part.

6481	Diode, 1N4148.	4835 130 37048
6485	Diode, BYD33J.	4835 130 37094
6486	Diode, EGP20DL-530	4835 130 37919
6487	Diode.	4835 130 37094
6488	Diode, Rect, BYV27-200.	9322 126 72673
6490	Diode, Rect, BYV27-200.	9322 126 72673
6505	Diode, Bridge Rect, GBU6JL-7002 . .	9322 138 08667
6507	Diode, BYD33J.	4835 130 37094
6508	Diode, BYD33J.	4835 130 37094
6510	Zener Diode, 20 volt	9331 178 60133
6511	Diode, BYV95C.	4835 130 37052
6512	Diode, Rect, BY228/20	4822 130 41275
6513	Diode, Rect, BY228/20	4822 130 41275
6514	Zener, 18 Volt, BZX79-C18.	4835 130 37908
6540	Diode.	4835 130 37294
6550	Diode, Rect, BY229X-800	9340 380 30127
6560	Diode, EGP20DL-530	4835 130 37919
6570	Diode, EGP20DL-530	4835 130 37919
6582	Diode, EGP20DL-530	4835 130 37919
6584	Diode, 1N4148.	4835 130 37048
6585	Diode, 1N4148.	4835 130 37048
6590	Diode, EGP20DL-530	4835 130 37919
6591	Diode, BAS216.	4835 130 37905
6601	Diode, Zener	4835 130 37684
6602	Diode, 1N4148.	4835 130 37048
6603	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
6604	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
6605	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
6606	Zener, 4.7 Volt, BZX79-C4V7.	4835 130 37005
6607	Zener, 6.8 Volt, BZX79-C6V8.	4835 130 37945
6690	LED, LTL-307P.	4835 130 97096
6831	Diode, BAS216.	4835 130 37905
6951	Diode, BAS216.	4835 130 37905
6961	Diode, BAS216.	4835 130 37905
7134	Transistor, BC547B	4835 130 47055
7250	IC,.	9352 620 26112
7251	IC, LM317T	9337 220 80682
7254	Transistor, NPN, BC847B.	4822 130 60511
7256	Transistor, NPN, BC847B.	4822 130 60511
7258	Transistor, NPN, BC847B.	4822 130 60511
7263	Transistor, PNP, BC857B.	5322 130 60508
7266	Transistor, NPN, BC847B.	4822 130 60511
7330	IC,.	9352 184 10112
7401	IC,.	9322 121 47687
7460	Transistor, NPN, BU1508DX.	9340 170 50127
7461	Transistor, NPN, BF819	9335 354 50127
7462	Transistor, BC547B	4835 130 47055
7463	Transistor, BC557B	4835 130 47409
7480	IC,.	9322 028 93682
7481	Transistor, BC557B	4835 130 47409
7482	Transistor, PNP, BC857B.	5322 130 60508
7518	STH8NA60FI SMPS FET	9322 068 92687
7518	STH10NC60FI SMPS FET.	9322 155 66687
7520	IC, MC44603A	4835 209 88537
7570	IC,.	9337 711 00676
S 7581	Coupler, TCDT1101G	9338 431 30682
7590	Transistor, NPN, BC847B.	4822 130 60511
7591	Transistor, NPN, BC847B.	4822 130 60511
7592	Transistor, NPN, BC847B.	4822 130 60511
7600	IC, SAA5565-PS/M3/0195 L9 v3.2 (Comme rcial Models - Pro Plus Models). . .	9352 673 97112
7601	IC, ST24W16B6, commercial models only	9322 095 35682
7603	Transistor, NPN, BC337	9331 796 00126
7604	Transistor, NPN, BC847B.	4822 130 60511
7605	Transistor, NPN, BC847B.	4822 130 60511
7608	Transistor, NPN, BC847B.	4822 130 60511
7609	Transistor, NPN, BC847B.	4822 130 60511
7680	IR Receiver.	9322 127 53667
7833	IC,.	9322 136 54682
7950	IC,.	4835 209 88543
CBA	00EMF894A102 Main Chassis Board Asm.	00EM F89 4A102

A10757 L9 Audio Jack Panel Parts

	A10757 L9 Audio Jack Panel Parts	
CBA	00A10757A001 L9 Audio Jack Panel Asm.	00A1 075 7A001
C1	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280
C2	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280
J0214	Connector, 3 Pin	2422 025 16601
J0234	4 Pin Board Connector.	2422 025 15851
J100	Socket, Click, 4 Pin	2422 015 18711
J1214	Connector, 3 Pin	2422 025 16601
J1234	4 Pin Board Connector.	2422 025 12489
JP11	Socket, Cinch, 1 Pin	2422 026 04912
JP12	Socket, Cinch, 1 Pin	2422 026 04374
SW1	Switch	4835 277 27061

A10758 Provideo Card Parts

	A10758 Provideo Card Parts	
CBA	00A10758A001 Provideo Card Asm . . .	00A1 075 8A001
C1	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
C11	Cap, 10n, +80/-20%, 50V, Ceramic . .	3198 019 21030
C12	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
C13	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
C2	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
C3	Cap, 470n, 20%, 50V, Electrolytic. .	3198 025 54770
C4	Cap, 470n, 20%, 50V, Electrolytic. .	3198 025 54770
C5	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
C6	Cap, 470n, 20%, 50V, Electrolytic. .	3198 025 54770
C7	Cap, 470n, 20%, 50V, Electrolytic. .	3198 025 54770
IC1	IC,.	4835 209 88606
JC1	10 Pin Board Connector	2422 025 16203
JC2	Connector, 32 Pin.	3135 010 03541
JC3	6 Pin Board Connector.	2422 025 15797
JU1	Jumper	2422 025 16391
Q1	Transistor, BC547B	4835 130 47055
Q2	Transistor, BC557B	4835 130 47409
Q3	Transistor, BC547B	4835 130 47055
Q4	Transistor, BC547B	4835 130 47055
R10	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
R11	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
R12	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
R13	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
R14	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
R15	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730
R17	Res, 75 ohm, 5%, 1/6W, Carbon Film .	3198 011 07590
R4	2.2k, 5%, 1/3W, Metal Film	4835 116 57784
R6	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
R7	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
R8	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
R9	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
S SJ1	Mini Connector	4835 265 97421
Z1	Zener Diode, 8.2V, BZX79-C8V2. . . .	4835 130 37503
Z2	Zener Diode, 8.2V, BZX79-C8V2. . . .	4835 130 37503
Z3	Zener Diode, 8.2V, BZX79-C8V2. . . .	4835 130 37503
Z4	Zener Diode, 5.6V, BZX79-C5V6. . . .	4835 130 37007

A10759 Provideo Jack Panel Parts

	A10759 Provideo Jack Panel Parts	
CBA	00A10759A001 Provideo Jack Panel Asm.	00A1 075 9A001
C1	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
C2	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
C3	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
JP1	10 Pin Board Connector	2422 025 16204
JP10	Connector, Video Monitor Out	4835 265 97413
JP2	Connector, RCA Jack, White	2422 026 04983
JP3	Connector, RCA Jack, Red	2422 026 04982
JP4	Connector, RCA Jack, Red	2422 026 04982
JP5	Connector, RCA Jack, White	2422 026 04983
JP6	Connector, CVBS In	4835 265 97413
JP7	Connector, CVBS Out.	4835 265 97413
JP8	Connector, Y/C In.	4835 265 97411
JP9	Connector, Y/C Out	4835 265 97412
R1	Res, 75 ohm, 5%, 1/6W, Carbon Film .	3198 011 07590
R2	Res, 75 ohm, 5%, 1/6W, Carbon Film .	3198 011 07590
R3	Res, 75 ohm, 5%, 1/6W, Carbon Film .	3198 011 07590

A10778 L9 ITV Front A/V Panel

	A10778 L9 ITV Front A/V Panel	
CBA	00A10778A001 L9 ITV Front A/V Panel.	00A1 077 8A001
C1	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
C2	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
D1	Zener, 6.8 Volt, BZX79-C6V8.	4835 130 37945
D2	Zener, 6.8 Volt, BZX79-C6V8.	4835 130 37945
D3	Zener, 6.8 Volt, BZX79-C6V8.	4835 130 37945
D4	Zener, 6.8 Volt, BZX79-C6V8.	4835 130 37945
D5	Zener, 6.8 Volt, BZX79-C6V8.	4835 130 37945
J100	Connector.	2422 026 04731
J22	Connector, 3 Pin	2422 025 09191
J23	Connector, 6 Pin	2422 025 10738
R1	Res, 75 ohm, 5%, 1/6W, Carbon Film .	3198 011 07590
R2	Zero ohm,.	4835 111 27056
R3	47k, 5%, 1/10W, Metal Film	4835 111 37445
R4	Res, 1K, 2%, 0,25W	4822 051 10102
R5	Res, 1K, 2%, 0,25W	4822 051 10102
R6	47k, 5%, 1/10W, Metal Film	4835 111 37445

A10791 Comb Filter Panel Parts

	A10791 Comb Filter Panel Parts	
CBA	00A10791A001 Comb Filter Panel Asm..	00A1 079 1A001
1000	8 Pin board Connector.	2422 025 12483
1001	Connector, 4 Pin	2422 025 12479
1102	Crystal, Resonator, 32KHz768	2422 543 00056
1254	9 Pin Board Connector.	2422 025 16265
2000	Cap, 100u, 20%, 10V, Electrolytic. .	3198 025 11010
2001	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2002	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2003	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2011	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2012	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2013	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2014	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2020	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2021	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040

S = Safety Part Be sure to use exact replacement part.

PA9027C101 (continued)

2023	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2025	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2111	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2113	Battery, 3 Volts	2422 526 01206
3012	220 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37371
3013	220 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37371
3020	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
3026	2.2 Megohm, 5%, 1/10W, Metal Film. .	4835 111 27047
3027	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
3028	Zero ohm,.	4835 111 27056
3110	10k, 5%, 1/10W, Metal Film	4835 111 37216
3111	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3116	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
3117	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
3118	10k, 5%, 1/10W, Metal Film	4835 111 37216
3119	10k, 5%, 1/10W, Metal Film	4835 111 37216
5000	Coil, 10u.	3198 018 21090
5012	Coil, 15u.	2422 535 94296
5104	Coil, 6u8.	3198 018 26880
6110	Diode, BAS216.	4835 130 37905
7000	IC, SAA4961/V3/S1.	9352 609 51112
7012	Transistor, NPN, BC847B.	4822 130 60511
7110	IC,.	4835 209 17438
7111	IC,.	5322 209 61482
9001	Jumper Wire.	0322 179 00148

A10808 Pro Plus Interface Parts

	A10808 Pro Plus Interface Parts	
CBA	00A10808A001 Pro Plus Interface Asm.	00A1 080 8A001
BR711	Zero ohm,.	4835 111 27056
BR712	Zero ohm,.	4835 111 27056
BR713	Zero ohm,.	4835 111 27056
BR714	Zero ohm,.	4835 111 27056
BRS15	Zero ohm,.	4835 111 27056
BRS16	Zero ohm,.	4835 111 27056
C702	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
C703	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
J0237	Connector, 4 Pin	2422 025 12479
J0238	Connector, 5 Pin	2422 025 06353
J1215	Connector, 2 Pin,.	2422 025 16343
J1227	Connector, 4 Pin	2422 025 16385
J1237	Connector, 4 Pin	2422 025 12479
J1259	Connector, 3 Pin	2422 025 16383
J214	Connector, 3 Pin	2422 025 16382
J216	Connector, 4 Pin	2422 025 15847
J219	Connector, 5 Pin	2422 025 15848
J228	Connector, 3 Pin	2422 025 16407
J236	4 Pin Board Connector.	2422 025 12489
J775	Contact Pin.	2422 024 00626
J800	Connector, 32 Pin.	3135 010 03531
Q700	Transistor, NPN, BC847B.	4822 130 60511
Q701	Transistor, NPN, BC847B.	4822 130 60511
Q704	Transistor, PNP, BC857B.	5322 130 60508
Q705	Transistor, PNP, BC857B.	5322 130 60508
Q706	Transistor, NPN, BC847B.	4822 130 60511
Q707	Transistor, NPN, BC847B.	4822 130 60511
R700	10k, 5%, 1/10W, Metal Film	4835 111 37216
R701	47k, 5%, 1/10W, Metal Film	4835 111 37445
R702	75 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37276
R703	75 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37276
R711	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
R712	10k, 5%, 1/10W, Metal Film	4835 111 37216
R713	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
R714	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
R715	10k, 5%, 1/10W, Metal Film	4835 111 37216
R716	47k, 5%, 1/10W, Metal Film	4835 111 37445
R717	10k, 5%, 1/10W, Metal Film	4835 111 37216
R718	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
R719	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443
R720	Res, 1K, 2%, 0,25W	4822 051 10102
R721	75 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37276
R722	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231
Z700	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z701	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z702	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z703	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z704	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z705	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z706	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z707	Zener Diode, 8.2V, BZX284-C8	4835 130 37922

Cabinet & Accessory Parts

		Cabinet & Accessory Parts	
S	AC01	AC Power Cord.	3135 010 04321
S	AC02	Anode Clip	4835 256 97264
	AC03	Cabinet Back	3135 014 06521
	AC04	Cabinet Front.	3135 017 03891
	AC05	Chassis Guide.	3139 124 30211
	AC06	Control Buttons.	3139 124 26740
S	AC07	Convergence and Purity Assembly. . .	2422 549 43385
S	AC08	CRT A68AHB82X.	4835 131 27155
S	AC09	Coil, Degaussing	3121 218 62701
	AC11	Light Guide.	3139 124 26461
	AC12	Nameplate.	4835 459 17546
	AC13	Owner's Manual	3135 015 14291
	AC14	Power Button	3139 124 26750
	REMOTE	Remote Transmitter, T214AG-GA03. . .	4835 219 17627
	AC16	Speaker, 8W (2 Used)	2422 264 00279
S	AC17	AC Cord Relief (Not Shown)	3135 010 02841
S	AC18	Yoke	2422 549 43726
	AC19	Yoke Wedge (3 Used).	4835 535 27006
	AC21	Batteries f/Remote Transmitter . . .	9299 000 13827
	AC24	Spring	3139 121 26231
	AC26	Jack Panel, Plastic.	3135 014 09251

S = Safety Part Be sure to use exact replacement part.

PA9027C121 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts	
0113	L9 SOPS HEATSINK	3139 121 62041
0119	DIODE HEATSINK L9.	3139 121 26691
0121	LINE HEATSINK (CINCH).	3139 121 61942
S 0127	Holder, Fuse, 2 Pin.	3122 358 71251
0211	Connector, 2 Pin	2422 025 11196
0212	Connector, 2 Pin	2422 025 15396
0213	Connector, 2 Pin	2422 025 15395
0214	Connector, 3 Pin	2422 025 16382
0215	Connector, 2 Pin,	2422 025 16343
0216	Connector, 4 Pin	2422 025 15847
0219	Connector, 5 Pin	2422 025 15848
0220	4 Pin Board Connector.	2422 025 04852
0221	Connector, 4 Pin	2422 025 15503
0222	Connector, 2 Pin	2422 025 10646
0224	1 Pin Board Connector.	2422 034 20021
0227	Connector, 4 Pin	2422 025 16385
0228	1 Pin Board Connector.	2422 034 20021
0229	Connector, 3 Pin	2412 020 00725
0229	Cable Header, 3P/280/3P, HR WH UL.	3104 311 01641
0234	Connector, 4 Pin	2422 025 12479
0236	4 Pin Board Connector.	2422 025 16384
0237	Connector, 4 Pin	2422 025 12479
0238	5 Pin Board Connector.	2422 025 16387
S 0243	Connector, 6 Pin	2422 025 04854
0244	4 Pin Board Connector.	2422 025 04852
S 0245	Connector, 6 Pin	2422 025 04854
S 0254	CRT Socket (9 Pin)	2422 500 80022
0259	Connector, 3 Pin	2422 025 16383
0262	Connector, 6 Pin	2422 025 12482
1000	Tuner, V+U PLL PH MN B.	2422 542 90069
1003	45 MHz SAW, Filter,	2422 549 42433
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807
1208	Crystal Resonator, 3.58MHz	2422 543 00832
S 1500	Fue, 4 A, 250V	2422 086 10905
S 1572	FUSE 1A 250V	2422 086 10779
S 1573	2.5 Amp Fuse, Radial,	2422 086 10422
S 1580	Relay, 12V, 5A G5PA-1.	2422 132 07444
1600	Switch, Tactile.	2422 128 02742
1601	Switch, Tactile.	2422 128 02742
1602	Switch, Tactile.	2422 128 02742
1603	Switch, Tactile.	2422 128 02742
1606	Switch, Tactile.	2422 128 02742
1660	Crystal, Resonator, 12MHz, 20 Pin.	2422 543 00488
1822	Crystal Resonator, 18MHz432, 12 Pin, HC49/U A	2422 543 00842
2001	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2002	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2003	Cap, 100u, 20%, 50V, Electrolytic.	3198 025 51010
2004	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2011	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
2013	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2101	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2102	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2103	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2104	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2111	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
2112	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
2115	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2201	Cap, 220n, 10%, 50V, Polyester	3198 014 02240
2205	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2206	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2207	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2208	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2209	Cap, 470n, +80/-20%, 16V, Ceramic.	3198 017 24740
2211	Cap, 470n, +80/-20%, 16V, Ceramic.	3198 017 24740
2212	Cap, 470n, +80/-20%, 16V, Ceramic.	3198 017 24740
2213	Cap, 470n, +80/-20%, 16V, Ceramic.	3198 017 24740
2214	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2215	Cap, 2u2, 20%, 50V, Electrolytic	3198 025 52280
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 16654
2220	Cap, 18p, 5%, 50V, Ceramic	3198 016 01890
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2222	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2226	Cap, 33u, 20%, 25V, Electrolytic	2020 021 90124
2227	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2247	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2248	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2249	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2330	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2340	Cap, 10u, 20%, 250V, Electrolytic.	2020 012 93495
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320
S 2343	Cap, 3n3, 10%, 2KV, Ceramic.	2020 558 90529
2345	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2401	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2402	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2404	Cap, 220n, 10%, 50V, Polyester	3198 014 02240
2405	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2407	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2409	Cap, 220n, 10%, 50V, Polyester	3198 014 02240
2420	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2426	Cap, 100n, 10%, 63V, Metalized Polyester.	2222 370 75104
2428	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2429	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2430	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
2431	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2437	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2438	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2448	Cap, 33p, 5%, 500V, Ceramic.	2020 557 90192
2450	Cap, 47u, 20%, 160v, Electrolytic.	2020 021 91139
2451	Cap, 15n, 10%, 50V, Polyester.	2020 300 90575
2456	Cap, 47n, 10%, 250V, Metalized Polyester.	2222 368 90176
2457	Cap, 390n, 5%, 250V, Metalized Polypropylene.	2222 479 90021
2458	Cap, 10u, 20%, 100V, Electrolytic.	2020 021 90813
2459	Cap, 680p, 10%, 500V, Ceramic.	3198 019 46810
2461	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2462	Cap, 47n, 10%, 250V, Metalized Polyester.	2222 368 90176
S 2463	Cap, 680p, 10%, 2KV, Ceramic	2020 558 90485
S 2465	Cap, 10n, 5%, 1600V, Polypropylene	2222 375 90154
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050
2473	Cap, 47u, 20%, 50V, Electrolytic	3198 025 54790
2481	Cap, 470n, 10%, 50V, Polyester	3198 014 04740
2482	Cap, 68n, 10%, 250V, Polyester	2222 347 90234
2484	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2485	Cap, 4u7, 20%, 250V, Electrolytic.	2020 012 93282
2486	Cap, 470u, 20%, 16V, Electrolytic.	3198 025 24710
2487	Cap, 100u, 20%, 50V, Electrolytic.	3198 025 51010
2488	Cap, 470u, 20%, 16V, Electrolytic.	3198 025 24710
2489	Cap, 470u, 20%, 16V, Electrolytic.	3198 025 24710
2490	Cap, 470p, 10%, 500V, Ceramic.	3198 019 44710
2491	Cap, 470p, 10%, 500V, Ceramic.	3198 019 44710
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810
2499	Cap, 220n, 10%, 100V, Metalized Polyester	2222 365 25224
2500	Cap, 470n, 20%, 275V, Polypropylene.	2222 336 29148
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2507	Cap, 1n5, 10%, 1KV, Ceramic.	3198 019 61520
2508	Cap, 470u, 20%, 200V, Electrolytic	2020 024 90626
2511	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
2518	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2529	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2530	Cap, 1u, 20%, 50V, Electrolytic.	2020 021 91147
2531	Cap, 1n, 2%, 50V, Polypropylene.	2020 310 90049
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2540	Cap, 100u, 20%, 25V, Electrolytic.	2020 021 90547
S 2545	Cap, 1n5, 20%, v, Ceramic.	2020 554 90157
2550	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2551	Cap, 47u, 20%, 160v, Electrolytic.	2020 021 91358
2561	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020
2562	Cap, 220p, 10%, 1KV, Ceramic	3198 019 62210
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2571	Cap, 2u2, 20%, 25V, Electrolytic	2020 021 91353
2572	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2575	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2586	Cap, 220u, 20%, 25V, Electrolytic.	3198 025 32210
2604	Cap, 22u, 20%, 50V, Electrolytic	3198 025 52290
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2613	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2615	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2619	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2622	Cap, 220u, 20%, 25V, Electrolytic.	3198 025 32210
2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2629	Cap, 22n, +80/-20%, 50V, Ceramic	3198 019 22230
2630	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2631	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050

S = Safety Part Be sure to use exact replacement part.

PA9027C121 (continued)

2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
2679	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
2681	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210		3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3250	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3251	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
2850	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810		3252	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
2851	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3253	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
2852	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3257	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
2853	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3258	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
2854	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3259	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
2855	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380		3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
2856	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380		3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	3198 013 01020
2858	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790		3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
2859	Cap, 15p, 5%, 50V, Ceramic	3198 016 01590		3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	3198 013 01020
2860	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090		3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
2861	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	3198 013 01020
2862	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	S	3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
2863	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	S	3341	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
2864	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	S	3342	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
2865	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3343	Res, 1K5, 20%, 1/2W, Carbon Film . .	3198 013 01520
2866	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
2867	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3345	VDR DC 1MA/50V S MAX 110V A . . .	2122 550 00152
2868	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780		3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
2869	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3401	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2870	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3402	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2871	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090		3403	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2874	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790		3405	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002
2875	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790		3406	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2877	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3407	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002
2882	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2883	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090		3409	Res, 1R5, 5%, 1/3W, Metal Film . . .	2306 204 03158
2884	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2887	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810		3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2888	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3420	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
2889	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2891	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390		3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840
2952	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606
2954	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3425	Res, 120K, 5%, 1/10W, Metalized Glass	2120 108 91716
2955	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3426	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3428	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3429	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3431	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
2960	Cap, 2u2, 20%, 25V, Electrolytic . .	3198 026 32220		3432	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090		3433	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090		3436	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090		3437	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3438	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
3013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020		3447	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720		3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3015	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230		3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810	S	3452	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	3198 012 32290
3100	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510	S	3453	Res, 4R7, 5%, 5W, Wire Wound	2322 251 41478
3101	Res, 220K, 5%, 1/10W, Metalized Glass	3198 021 52240	S	3454	Res, 33K, 5%, 1 1/3W, Metal Film . .	2322 194 63333
3103	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3104	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030		3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510	S	3462	Res, 6K8, 5%, 5W, Metal Film	2322 257 41682
3108	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3109	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030		3464	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3122	Res, 220K, 5%, 1/10W, Metalized Glass	3198 021 52240	S	3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
3125	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890		3466	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903
3134	Jumper Wire/Staple	0322 179 00003		3467	Res, 15K, 1%, 3/5W, Metal Film . . .	2322 156 21503
3155	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710		3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
				3469	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3201	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910		3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
				3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703
3203	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310		3481	Res, 35K7, 1%, 3/5W, Metal Film. . .	2322 156 23573
				3482	Res, 56K, 1%, 3/5W, Metal Film . . .	2322 156 25603
3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820		3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3205	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020		3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3206	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610	S	3486	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
			S	3487	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3488	Res, 4R7, 5%, 1/2W, Metal Film . . .	2306 207 03478
3209	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	S	3490	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
3212	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910	S	3491	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
			S	3492	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
3213	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610		3495	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
				3496	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3215	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230		3497	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3216	Res, Zero ohm, 'Chip' Jumper	3198 021 90020		3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	3198 013 04710
3218	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	S	3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225
3219	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610	S	3503	PTC, DC, 120V,P3020 B.	2120 661 00025
			S	3505	Surge Protector.	2422 549 43073
3220	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	S	3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3225	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040	S	3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	S	3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102
3231	Res, Zero ohm, 'Chip' Jumper	3198 021 90020		3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3232	Res, Zero ohm, 'Chip' Jumper	3198 021 90020		3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184
3233	Res, Zero ohm, 'Chip' Jumper	3198 021 90020		3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204
3243	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220	S	3515	2.5 ohm, 20%, 3.6W, Negative Temperat ure Coefficient.	2122 612 00023
3246	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230				

S = Safety Part Be sure to use exact replacement part.

PA9027C121 (continued)

	3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
	3517	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
S	3518	Res, 0R22, 5%, 2 1/2W, Metal Film. .	3198 012 32270
	3520	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
	3521	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
S	3525	Res, 47 ohm, 5%, 1/3W, Metal Film. .	2306 204 03479
	3528	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3529	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
	3530	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
	3532	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
	3534	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
	3536	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
	3537	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
S	3542	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3570	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
	3571	Res, 150K, 1%, 3/5W, Metal Film. . .	2322 156 21504
	3573	Res, 2K, 1%, 1/8W, Metalized Glass .	2322 734 62002
	3574	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
	3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3577	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3578	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
	3579	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
	3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3592	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	3594	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
	3595	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
	3596	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3597	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
	3598	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	3599	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
	3607	RST NETW RGLE 10X 8K2 PM5 B . . .	2120 108 93916
	3608	RST NETW RGLE 6X 2K2 PM5 B . . .	2120 108 93913
	3609	2.2k, 5%, Resistor Network	2120 108 93868
	3611	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
	3612	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	3613	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	3615	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	3616	Jumper Wire/Staple	0322 179 00003
	3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3619	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
	3629	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
	3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
	3631	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
S	3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
	3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210
	3634	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
	3635	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
	3636	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
	3637	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
	3649	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
	3650	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
	3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3654	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
	3655	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
	3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710
	3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3662	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
	3663	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220
	3664	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220
	3665	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
	3666	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
	3667	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
	3672	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
	3673	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	3674	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
	3675	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
	3676	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
	3677	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
	3680	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
	3681	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
	3682	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220
	3683	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
	3684	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
	3687	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
	3841	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3842	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3843	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
	3844	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
	3845	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
	3850	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
	3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810
	3951	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
	3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3953	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
	3954	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
	3955	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
	3956	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
	3957	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
	4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4004	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4011	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4012	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4020	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4051	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4100	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4102	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4104	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4144	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4203	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4207	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4212	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4214	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4465	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4501	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4650	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4651	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4654	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4655	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4831	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4833	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4911	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4914	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4957	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4999	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	5000	Coil, 5u6.	3198 018 25680
	5004	Coil, 820n	2422 535 97314
	5101	Coil, 5u6.	3198 018 15680
	5201	Coil, 22u.	3198 018 22290
	5202	Coil, 6u8.	3198 018 16880
	5342	Coil, 22u.	3198 018 22290
S	5445	Transformer, L.O.T., models ending in C101, C121, and C125	2422 531 02327
	5451	Coil, 27u.	2422 535 96614
	5457	Coil, Linear Correction.	3128 138 53241
	5461	Transformer.	3128 138 33811
	5470	CBLE HR BK 9P/270/9X F.HOOK UL . . .	3104 311 02361
	5480	Coil, 27u.	2422 535 97334
S	5500	Filter, Mains, 5mH, 2A	2422 549 43432
	5516	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
	5518	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
	5521	Coil, 2u2.	3198 018 12280
	5540	Coil, 4u7.	3198 018 14780
S	5545	Transfomer,.	2422 531 02314
	5551	Coil, 27u.	2422 535 95366
	5552	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
	5572	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
	5573	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
	5575	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
	5576	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
	5577	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
	5600	Coil, 8u2.	3198 018 18280
	5601	Coil, 8u2.	3198 018 18280
	5620	Coil, 6u8.	3198 018 16880
	5821	Coil, 100u	3198 018 21010
	5831	Coil, 12u.	3198 018 21290
	5832	Coil, 12u.	3198 018 21290
	5833	Coil, 12u.	3198 018 11290
	6008	Zener Diode, 33 volt	3198 010 23390
	6113	Zener Diode, 6.8 volt.	9340 386 40115
	6125	Zener Diode, 6.8 volt.	9340 386 40115
	6211	Diode, Signal, 1N4148.	3198 010 10010
	6212	Diode, Signal, 1N4148.	3198 010 10010
	6213	Diode, Signal, 1N4148.	3198 010 10010
	6331	Diode, Signal, BAV21	3198 010 10070
	6333	Diode, Signal, BAV21	3198 010 10070
	6335	Diode, Signal, BAV21	3198 010 10070
	6401	Diode, Rect, BYD33D	9337 234 00133
	6402	Zener Diode, 33 volt	3198 010 23390
	6403	Diode, Rect, BYD33D	9337 234 00133
	6404	Zener Diode, 75 volt	9331 180 00133
	6449	Diode, Signal, 1N4148.	3198 010 10010

S = Safety Part Be sure to use exact replacement part.

PA9027C121 (continued)

6450	Diode, Signal, 1N4148.	3198 010 10010	9207	Jumper Wire/Staple	0322 179 00003
6460	Diode, Rect, BY228/20	9336 215 80112	9208	Jumper Wire/Staple	0322 179 00003
6463	Diode, Signal, 1N4148.	3198 010 10010	9209	Jumper Wire/Staple	0322 179 00003
6464	Zener Diode, 6.2 volt.	9331 668 30133	9210	Jumper Wire/Staple	0322 179 00003
6465	Diode, Rect, BYD33J	9337 234 20133	9211	Jumper Wire/Staple	0322 179 00003
6466	Diode, Rect, BYD33J	9337 234 20133	9214	Jumper Wire/Staple	0322 179 00003
6480	Zener Diode, 27 volt	3198 010 22790	9215	Jumper Wire/Staple	0322 179 00003
6481	Diode, Signal, 1N4148.	3198 010 10010	9216	Jumper Wire/Staple	0322 179 00003
6485	Diode, Rect, BYD33J	9337 234 20133	9217	Jumper Wire/Staple	0322 179 00003
6486	Diode, Rect, EGP20DL-5300	9322 100 13682	9218	Jumper Wire/Staple	0322 179 00003
6487	Diode, Rect, BYD33D	9337 234 00133	9220	Jumper Wire/Staple	0322 179 00003
6488	Diode, Rect, BYV27-200.	9322 126 72673	9221	Jumper Wire/Staple	0322 179 00003
6490	Diode, Rect, BYV27-200.	9322 126 72673	9222	Jumper Wire/Staple	0322 179 00003
6505	Diode, Bridge Rect, GBU6JL-7002 . .	9322 138 08667	9225	Jumper Wire/Staple	0322 179 00003
6507	Diode, Rect, BYD33J	9337 234 20133	9226	Jumper Wire/Staple	0322 179 00003
6508	Diode, Rect, BYD33J	9337 234 20133	9227	Jumper Wire/Staple	0322 179 00003
6510	Zener Diode, 20 volt	9331 178 60133	9228	Jumper Wire/Staple	0322 179 00003
6511	Diode, Rect, BYV95C	9335 001 80133	9229	Jumper Wire/Staple	0322 179 00003
6512	Diode, Rect, 1N5062	3198 010 10120	9230	Jumper Wire/Staple	0322 179 00003
6513	Diode, Rect, 1N5062	3198 010 10120	9231	Jumper Wire/Staple	0322 179 00003
6514	Zener Diode, 18 volt	3198 010 21890	9232	Jumper Wire/Staple	0322 179 00003
6540	Diode, Signal, BAV21	3198 010 10070	9233	Jumper Wire/Staple	0322 179 00003
6550	Diode, Rect, BY229X-800	9340 380 30127	9234	Jumper Wire/Staple	0322 179 00003
6560	Diode, Rect, EGP20DL-5300	9322 100 13682	9236	Jumper Wire/Staple	0322 179 00003
6570	Diode, Rect, EGP20DL-5300	9322 100 13682	9237	Jumper Wire/Staple	0322 179 00003
6582	Diode, Rect, EGP20DL-5300	9322 100 13682	9238	Jumper Wire/Staple	0322 179 00003
6584	Diode, Signal, 1N4148.	3198 010 10010	9240	Jumper Wire/Staple	0322 179 00003
6585	Diode, Signal, 1N4148.	3198 010 10010	9241	Jumper Wire/Staple	0322 179 00003
6590	Diode, Rect, EGP20DL-5300	9322 100 13682	9242	Jumper Wire/Staple	0322 179 00003
6591	Diode, Signal, BAS16WS	9322 031 99685	9245	Jumper Wire/Staple	0322 179 00003
6601	Zener Diode, 3.9 volt.	3198 010 23980	9301	Jumper Wire/Staple	0322 179 00003
6602	Diode, Signal, 1N4148.	3198 010 10010	9401	Jumper Wire/Staple	0322 179 00003
6603	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610	9402	Jumper Wire/Staple	0322 179 00003
6604	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610	9403	Jumper Wire/Staple	0322 179 00003
6605	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610	9404	Jumper Wire/Staple	0322 179 00003
6606	Zener Diode, 4.7 volt.	3198 010 24780	9407	Jumper Wire/Staple	0322 179 00003
6607	Zener Diode, 6.8 volt.	3198 010 26880	9408	Jumper Wire/Staple	0322 179 00003
6690	LED VS LTL-307P (LITO) B . . .	9322 033 95682	9411	Jumper Wire/Staple	0322 179 00003
6831	Diode, Signal, BAS16WS	9322 031 99685	9414	Jumper Wire/Staple	0322 179 00003
6951	Diode, Signal, BAS16WS	9322 031 99685	9417	Jumper Wire/Staple	0322 179 00003
6961	Diode, Signal, BAS16WS	9322 031 99685	9419	Jumper Wire/Staple	0322 179 00003
7134	Transistor, NPN, BC547B.	3198 020 40030	9420	Jumper Wire/Staple	0322 179 00003
7250	IC,.	9352 620 26112	9421	Jumper Wire/Staple	0322 179 00003
7251	IC, LM317T	9337 220 80682	9422	Jumper Wire/Staple	0322 179 00003
7254	Transistor, NPN, BC847B.	3198 010 42030	9424	Jumper Wire/Staple	0322 179 00003
7256	Transistor, NPN, BC847B.	3198 010 42030	9425	Jumper Wire/Staple	0322 179 00003
7258	Transistor, NPN, BC847B.	3198 010 42030	9427	Jumper Wire/Staple	0322 179 00003
7263	Transistor, PNP, BC857B.	3198 010 42150	9428	Jumper Wire/Staple	0322 179 00003
7266	Transistor, NPN, BC847B.	3198 010 42030	9460	Jumper Wire/Staple	0322 179 00003
7330	IC,.	9352 184 10112	9461	Jumper Wire/Staple	0322 179 00003
7401	IC,.	9322 121 47687	9500	Jumper Wire/Staple	0322 179 00003
7460	Transistor, NPN, BU1508DX.	9340 170 50127	9501	Jumper Wire/Staple	0322 179 00003
7461	Transistor, NPN, BF819	9335 354 50127	9502	Jumper Wire/Staple	0322 179 00003
7462	Transistor, NPN, BC547B.	3198 020 40030	9503	Jumper Wire/Staple	0322 179 00003
7463	Transistor, PNP, BC557B.	3198 020 40110	9505	Jumper Wire/Staple	0322 179 00003
7480	IC,.	9322 028 93682	9510	Jumper Wire/Staple	0322 179 00003
7481	Transistor, PNP, BC557B.	3198 020 40110	9511	Jumper Wire/Staple	0322 179 00003
7482	Transistor, PNP, BC857B.	3198 010 42150	9512	Jumper Wire/Staple	0322 179 00003
7518	STH10NC60FI SMPS FET.	9322 155 66687	9513	Jumper Wire/Staple	0322 179 00003
7520	IC,.	9322 108 36682	9515	Jumper Wire/Staple	0322 179 00003
7570	IC,.	9337 711 00676	9516	Jumper Wire/Staple	0322 179 00003
S 7581	Coupler, TCDT1101G	9338 431 30682	9517	Jumper Wire/Staple	0322 179 00003
7590	Transistor, NPN, BC847B.	3198 010 42030	9518	Jumper Wire/Staple	0322 179 00003
7591	Transistor, NPN, BC847B.	3198 010 42030	9521	Jumper Wire/Staple	0322 179 00003
7592	Transistor, NPN, BC847B.	3198 010 42030	9526	Jumper Wire/Staple	0322 179 00003
7600	IC, SAA5565-PS/M3/0195 L9 v3.2 (Comme rcial Models - Pro Plus Models). . .	9352 673 97112	9601	Jumper Wire/Staple	0322 179 00003
			9602	Jumper Wire/Staple	0322 179 00003
7601	IC, ST24W16B6, commercial models only	9322 095 35682	9603	Jumper Wire/Staple	0322 179 00003
7603	Transistor, NPN, BC337	9331 796 00126	9604	Jumper Wire/Staple	0322 179 00003
7604	Transistor, NPN, BC847B.	3198 010 42030	9605	Jumper Wire/Staple	0322 179 00003
7605	Transistor, NPN, BC847B.	3198 010 42030	9606	Jumper Wire/Staple	0322 179 00003
7608	Transistor, NPN, BC847B.	3198 010 42030	9608	Jumper Wire/Staple	0322 179 00003
7609	Transistor, NPN, BC847B.	3198 010 42030	9609	Jumper Wire/Staple	0322 179 00003
7680	IR Receiver.	9322 127 53667	9610	Jumper Wire/Staple	0322 179 00003
7833	IC,.	9322 136 54682	9611	Jumper Wire/Staple	0322 179 00003
7950	IC,.	9351 861 80112	9612	Jumper Wire/Staple	0322 179 00003
7980	ISOPROPYL ALCOHOL.	1306 500 43201	9613	Jumper Wire/Staple	0322 179 00003
7990	Connector, 3 Pin	2412 020 00725	9614	Jumper Wire/Staple	0322 179 00003
9001	Jumper Wire/Staple	0322 179 00003	9615	Jumper Wire/Staple	0322 179 00003
9003	Jumper Wire/Staple	0322 179 00003	9618	Jumper Wire/Staple	0322 179 00003
9005	Jumper Wire/Staple	0322 179 00003	9621	Jumper Wire/Staple	0322 179 00003
9011	Jumper Wire/Staple	0322 179 00003	9622	Jumper Wire/Staple	0322 179 00003
9012	Jumper Wire/Staple	0322 179 00003	9624	Jumper Wire/Staple	0322 179 00003
9105	Jumper Wire/Staple	0322 179 00003	9625	Jumper Wire/Staple	0322 179 00003
9126	Jumper Wire/Staple	0322 179 00003	9626	Jumper Wire/Staple	0322 179 00003
9132	Jumper Wire/Staple	0322 179 00003	9629	Jumper Wire/Staple	0322 179 00003
9140	Jumper Wire/Staple	0322 179 00003	9631	Jumper Wire/Staple	0322 179 00003
9141	Jumper Wire/Staple	0322 179 00003	9632	Jumper Wire/Staple	0322 179 00003
9200	Jumper Wire/Staple	0322 179 00003	9637	Jumper Wire/Staple	0322 179 00003
9202	Jumper Wire/Staple	0322 179 00003	9640	Jumper Wire/Staple	0322 179 00003
9205	Jumper Wire/Staple	0322 179 00003	9642	Jumper Wire/Staple	0322 179 00003
9206	Jumper Wire/Staple	0322 179 00003	9643	Jumper Wire/Staple	0322 179 00003

S = Safety Part Be sure to use exact replacement part.

PA9027C121 (continued)

9644	Jumper Wire/Staple	0322 179 00003
9754	Jumper Wire/Staple	0322 179 00003
9788	Jumper Wire/Staple	0322 179 00003
9793	Jumper Wire/Staple	0322 179 00003
9800	Jumper Wire/Staple	0322 179 00003
9805	Jumper Wire/Staple	0322 179 00003
9806	Jumper Wire/Staple	0322 179 00003
9807	Jumper Wire/Staple	0322 179 00003
9810	Jumper Wire/Staple	0322 179 00003
9901	Jumper Wire/Staple	0322 179 00003
9903	Jumper Wire/Staple	0322 179 00003
9904	Jumper Wire/Staple	0322 179 00003
9905	Jumper Wire/Staple	0322 179 00003
9906	Jumper Wire/Staple	0322 179 00003
9920	Jumper Wire/Staple	0322 179 00003
9933	Jumper Wire/Staple	0322 179 00003
9936	Jumper Wire/Staple	0322 179 00003
9939	Jumper Wire/Staple	0322 179 00003
9940	Jumper Wire/Staple	0322 179 00003
9941	Jumper Wire/Staple	0322 179 00003
9942	Jumper Wire/Staple	0322 179 00003
9943	Jumper Wire/Staple	0322 179 00003
9944	Jumper Wire/Staple	0322 179 00003
9945	Jumper Wire/Staple	0322 179 00003
9946	Jumper Wire/Staple	0322 179 00003
9947	Jumper Wire/Staple	0322 179 00003
9948	Jumper Wire/Staple	0322 179 00003
9949	Jumper Wire/Staple	0322 179 00003
9950	Jumper Wire/Staple	0322 179 00003
9951	Jumper Wire/Staple	0322 179 00003
9952	Jumper Wire/Staple	0322 179 00003
9953	Jumper Wire/Staple	0322 179 00003
9955	Jumper Wire/Staple	0322 179 00003
9956	Jumper Wire/Staple	0322 179 00003
9957	Jumper Wire/Staple	0322 179 00003
9958	Jumper Wire/Staple	0322 179 00003
9959	Jumper Wire/Staple	0322 179 00003
9960	Jumper Wire/Staple	0322 179 00003
9962	Jumper Wire/Staple	0322 179 00003
9963	Jumper Wire/Staple	0322 179 00003
9964	Jumper Wire/Staple	0322 179 00003
9965	Jumper Wire/Staple	0322 179 00003
9966	Jumper Wire/Staple	0322 179 00003
9967	Jumper Wire/Staple	0322 179 00003
9968	Jumper Wire/Staple	0322 179 00003
9969	Jumper Wire/Staple	0322 179 00003
9970	Jumper Wire/Staple	0322 179 00003
9971	Jumper Wire/Staple	0322 179 00003
9972	Jumper Wire/Staple	0322 179 00003
9974	Jumper Wire/Staple	0322 179 00003
9975	Jumper Wire/Staple	0322 179 00003
9976	Jumper Wire/Staple	0322 179 00003
9977	Jumper Wire/Staple	0322 179 00003
9981	Jumper Wire/Staple	0322 179 00003
9982	Jumper Wire/Staple	0322 179 00003
9983	Jumper Wire/Staple	0322 179 00003
9984	Jumper Wire/Staple	0322 179 00003
9987	Jumper Wire/Staple	0322 179 00003
9989	Jumper Wire/Staple	0322 179 00003
9990	Jumper Wire/Staple	0322 179 00003
9991	Jumper Wire/Staple	0322 179 00003
9992	Jumper Wire/Staple	0322 179 00003
9993	Jumper Wire/Staple	0322 179 00003
CBA	00EMF894A102 Main Chassis Board Asm.	00EM F89 4A102

A10757 L9 Audio Jack Panel Parts

	A10757 L9 Audio Jack Panel Parts	
CBA	00A10757A001 L9 Audio Jack Panel Asm.	00A1 075 7A001
C1	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280
C2	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280
J0214	Connector, 3 Pin	2422 025 16601
J0234	4 Pin Board Connector.	2422 025 15851
J100	Socket, Click, 4 Pin	2422 015 18711
J1214	Connector, 3 Pin	2422 025 16601
J1234	4 Pin Board Connector.	2422 025 12489
JP11	Socket, Cinch, 1 Pin	2422 026 04912
JP12	Socket, Cinch, 1 Pin	2422 026 04374
SW1	Switch	4835 277 27061

A10778 L9 ITV Front A/V Panel

	A10778 L9 ITV Front A/V Panel	
CBA	00A10778A001 L9 ITV Front A/V Panel.	00A1 077 8A001
C1	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
C2	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
D1	Zener, 6.8 Volt, BZX79-C6V8.	4835 130 37945
D2	Zener, 6.8 Volt, BZX79-C6V8.	4835 130 37945
D3	Zener, 6.8 Volt, BZX79-C6V8.	4835 130 37945
D4	Zener, 6.8 Volt, BZX79-C6V8.	4835 130 37945
D5	Zener, 6.8 Volt, BZX79-C6V8.	4835 130 37945
J100	Connector.	2422 026 04731
J22	Connector, 3 Pin	2422 025 09191
J23	Connector, 6 Pin	2422 025 10738

S = Safety Part Be sure to use exact replacement part.

R1	Res, 75 ohm, 5%, 1/6W, Carbon Film .	3198 011 07590
R2	Zero ohm,.	4835 111 27056
R3	47k, 5%, 1/10W, Metal Film	4835 111 37445
R4	Res, 1K, 2%, 0,25W	4822 051 10102
R5	Res, 1K, 2%, 0,25W	4822 051 10102
R6	47k, 5%, 1/10W, Metal Film	4835 111 37445

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	AC Power Cord.	3135 010 04321
AC02	Clip, Anode Lead	3135 014 04471
AC03	Cabinet Back	3135 014 06521
AC04	Cabinet Front.	3135 017 03891
AC06	Customer Control Buttons	3139 124 30901
S AC07	Convergence and Purity Assembly. . .	2422 549 43385
S AC08	CRT A68AJB82X.	9301 787 60472
S AC09	Coil, Degaussing	3121 218 62701
AC10	Holder, Degaussing (4 Used).	3135 013 01641
AC11	Light Guide.	3139 124 26461
AC12	Nameplate.	3135 015 03571
AC13	Owner's Manual	3135 015 14291
AC13	Owner's Manual	3135 015 20911
AC14	Power Button	3139 124 26753
REMOTE	Transmitter, Remote, RC2524 /01. . .	3139 228 84651
AC16	Speaker, 5W, 16 ohm (2 Used)	2422 264 00333
S AC18	Yoke	3313 203 01242
AC19	Yoke Wedge (3 used).	3135 013 00311
AC21	Battery, 1.5V AA, 2-Pack, (Not Shown	9299 000 10137
AC24	Spring	3139 121 26231

PA9032C101 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts		
S 0127	3.15 Amp Fuse, ...	3122 358 72141	
0152	Cable, DIP, 6 Pin, 400mm	3104 301 09421	
0153	4 Pin Cable.	3104 301 09431	
0212	Connector, 2 Pin	2422 025 15396	
0213	Connector, 3 Pin	2412 020 00725	
0214	Connector, 3 Pin	2422 025 16382	
0215	Connector, 2 Pin,.	2422 025 16343	
0216	Connector, 4 Pin	2422 025 15847	
0219	Connector, 5 Pin	2422 025 15848	
0219	5 Pin Board Connector.	2422 025 16387	
0220	4 Pin Board Connector.	2422 025 04852	
0224	1 Pin Board Connector.	2422 034 20021	
0228	1 Pin Board Connector.	2422 034 20021	
0234	Connector, 4 Pin	2422 025 12479	
0236	4 Pin Board Connector.	2422 025 16384	
0237	Connector, 4 Pin	2422 025 12479	
0238	Connector, 5 Pin	2422 025 12481	
0238	Connector, 5 Pin	2422 025 15848	
S 0243	Connector, 6 Pin	2422 025 04854	
0244	4 Pin Board Connector.	2422 025 04852	
S 0245	Connector, 6 Pin	2422 025 04854	
S 0254	CRT Socket (9 Pin)	2422 500 80022	
0259	Connector, 3 Pin	2422 025 16383	
0262	Connector, 4 Pin	2422 025 16385	
0267	Connector, 3 Pin	2412 020 00725	
1000	Tuner.	2422 542 90051	
1003	45 MHz SAW, Filter,.	2422 549 42433	
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807	
1208	Crystal Resonator.	4835 242 77276	
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10869	
S 1572	1 Amp, Radial Fuse,.	4835 253 97162	
S 1573	2.5 Amp Fuse, Radial,.	2422 086 10422	
S 1580	Relay, 12V	2422 132 07317	
1600	Switch, Tactile.	2422 128 02742	
1601	Switch, Tactile.	2422 128 02742	
1602	Switch, Tactile.	2422 128 02742	
1603	Switch, Tactile.	2422 128 02742	
1606	Switch, Tactile.	2422 128 02742	
1660	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488	
1822	Crystal Resonator, 18MHz432, 12 Pin, HC49/U A	2422 543 00842	
2001	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2003	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2004	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2011	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2101	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2102	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2103	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2104	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2111	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2112	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2115	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2201	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2205	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2207	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2208	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2209	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2211	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2212	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2213	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2214	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2215	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280	
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 16654	
2220	Cap, 18p, 5%, 50V, Ceramic	3198 016 01890	
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2222	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2226	Cap, 33u, 20%, 25V, Electrolytic . .	2020 021 90124	
2227	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2247	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2248	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2249	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2330	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177	
2340	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495	
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320	
S 2343	Cap, 3n3, 10%, 2KV, Ceramic.	2020 558 90529	
2345	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020	
2401	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2402	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2403	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2405	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2407	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2409	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2420	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2426	Cap, 100n, 10%, 63V, Metalized Polyes ter.	2222 370 75104	
2428	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220	
2429	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2430	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2431	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2437	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2438	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2448	Cap, 220p, 10%, 500V, Ceramic. . . .	3198 019 42210	
2450	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91139	
2451	Cap, 15n, 10%, 50V, Polyester. . . .	2020 300 90575	
2451	0.012uF., 5%, 50V, Polyester	3198 014 01230	
2451	0.01uF., 10%, 50V, Polyester, only 27	3198 138 20941	
2456	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176	
2457	Cap, 360n, 5%, 250V, Metalized Polypr opylene.	2222 479 90019	
2458	Cap, 2u2, 20%, 100V, Electrolytic. .	2020 021 91331	
2459	Cap, 680p, 10%, 500V, Ceramic. . . .	3198 019 46810	
2461	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020	
2462	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176	
S 2463	Cap, 1n2, 10%, 2KV, Ceramic.	2020 558 90488	
2464	Cap, 2u2, 5%, 160V, Polypropylene. .	2222 479 90042	
S 2465	Cap, 12n, 5%, 1600V, Polypropylene .	2222 375 90156	
2467	Cap, 8n2, 10%, 400V, Polyester . . .	2222 347 51822	
2468	Cap, 18n, 10%, 400V, Polyester . . .	2222 347 90222	
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050	
2470	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710	
2472	Cap, 2u2, 20%, 50V, Electrolytic . .	2020 021 90552	
2473	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790	
2481	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740	
2482	Cap, 68n, 10%, 250V, Polyester . . .	2222 347 90234	
2484	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2485	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293	
2486	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2487	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2488	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2489	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2490	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710	
2491	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710	
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810	
2500	0.47uF., 250V, Polyester	4835 121 47569	
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
S 2507	Cap, 1n5, 10%, 1KV, Ceramic.	2020 558 90443	
2508	Cap, 470u, 20%, 200V, Electrolytic .	2020 024 90647	
S 2511	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020	
S 2518	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290	
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320	
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320	
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2530	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 021 91147	
2531	Cap, 1n, 2%, 50V, Polypropylene. . .	2020 310 90049	
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220	
2540	Cap, 100u, 20%, 25V, Electrolytic. .	2020 021 90547	
S 2545	1500pF., 250VAC, Ceramic	4835 122 47621	
S 2550	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2551	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91358	
2561	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020	
S 2562	Cap, 220p, 10%, 1KV, Ceramic	2020 558 90424	
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020	
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020	
2571	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91353	
2572	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330	
2575	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820	
2586	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2604	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290	
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2613	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2615	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2619	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2622	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890	
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2629	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230	
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2631	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	

S = Safety Part Be sure to use exact replacement part.

PA9032C101 (continued)

2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3252	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
2679	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3253	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
2681	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210		3257	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3258	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3259	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
2850	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810		3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
2851	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046
2852	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
2853	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046
2854	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
2855	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380		3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046
2856	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380	S	3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
2858	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790	S	3341	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483
2859	Cap, 15p, 5%, 50V, Ceramic	3198 016 01590	S	3342	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483
2860	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090		3343	1.5k, 20%, 1/2W, Carbon Composition.	4835 110 47034
2861	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
2862	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	S	3345	VDR, DC, 1mA, 50V, MAX 115V	2322 593 13507
2863	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090		3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
2864	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3401	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2865	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3402	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2866	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3403	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2867	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3405	2.2k, 1%, 0.6W, Metal Film	4835 116 57676
2868	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780		3406	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2869	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3407	2.2k, 1%, 0.6W, Metal Film	4835 116 57676
2870	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2871	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090		3409	1.5 ohm, 5%, 1/3W, Metal Film. . . .	4835 116 57664
2874	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790		3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2875	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790		3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2877	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3420	470k, 5%, 1/10W, Metal Film.	4835 111 37407
2882	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2883	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090		3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2884	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840
2887	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810		3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606
2888	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3425	68k, 5%, 1/10W, Metal Film	4835 111 37273
2889	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3426	39k, 5%, 1/10W, Metal Film	4835 111 27051
2891	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390		3428	22k, 5%, 1/10W, Metal Film	4835 111 37441
2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3429	27k, 5%, 1/10W, Metal Film	4835 111 37442
2952	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3431	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
2954	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3432	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
2955	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3436	Res, 1K, 2%, 0,25W	4822 051 10102
2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3437	10k, 5%, 1/10W, Metal Film	4835 111 37216
2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3438	33k, 1/4W, Carbon Film	4835 110 57375
2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
2960	Cap, 2u2, 20%, 25V, Electrolytic . .	3198 026 32220		3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090		3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090	S	3452	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63229
2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090	S	3454	Res, 33K, 5%, 1 1/3W, Metal Film . .	2322 194 63333
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3013	Zero ohm,.	4835 111 27056	S	3462	Res, 6K8, 5%, 5W, Metal Film	2322 257 41682
3014	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052		3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3015	22k, 5%, 1/10W, Metal Film	4835 111 37441	S	3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810		3467	Res, 14K, 1%, 3/5W, Metal Film . . .	2322 156 21403
3100	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510		3467	Res, 15K, 1%, 3/5W, Metal Film . . .	2322 156 21503
3101	220k, 5%, 1/10W, Metal Film.	4835 111 37235		3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3103	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3470	Res, 220K, 5%, 1/4W, Carbon Film . .	2120 101 74224
3104	10k, 5%, 1/10W, Metal Film	4835 111 37216		3472	Res, 56K, 5%, 1/6W, Carbon Film. . .	3198 011 05630
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510		3473	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3108	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3474	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3109	10k, 5%, 1/10W, Metal Film	4835 111 37216		3475	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3122	220k, 5%, 1/10W, Metal Film.	4835 111 37235		3477	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3123	75 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37276		3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3125	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890		3479	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198 011 03310
3145	Res, 1K, 2%, 0,25W	4822 051 10102		3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703
3155	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259		3481	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903
3201	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253		3482	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903
3203	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443		3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820		3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3205	Res, 1K, 2%, 0,25W	4822 051 10102	S	3485	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
3206	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	S	3486	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3487	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3209	22k, 5%, 1/10W, Metal Film	4835 111 37441	S	3488	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
3212	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253	S	3490	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3213	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	S	3491	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3215	22k, 5%, 1/10W, Metal Film	4835 111 37441	S	3492	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3216	Zero ohm,.	4835 111 27056		3495	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
3217	Res, 1M5, 5%, 1/8W, Metalized Glass.	2322 730 61155		3496	10k, 5%, 1/10W, Metal Film	4835 111 37216
3218	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3497	10k, 5%, 1/10W, Metal Film	4835 111 37216
3219	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3220	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225
3225	100k, 5%, 1/10W, Metal Film.	4835 111 37434		3503	10ohm, 120VAC, Positive Temperature C	
3228	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432			oefficient	4835 116 47001
3231	Zero ohm,.	4835 111 27056	S	3505	Surge Protector.	2422 549 43073
3232	Zero ohm,.	4835 111 27056	S	3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3233	Zero ohm,.	4835 111 27056	S	3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333
3243	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	S	3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102
3246	82k, 5%, 1/10W, Metal Film	4835 111 37277		3512	15k, 5%, 1/10W, Metal Film	4835 111 37458
3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184
3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204
3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340	S	3515	2.5 ohm, 20%, 3.6W, Negative Temperat	
3250	Zero ohm,.	4835 111 27056			ure Coefficient.	2122 612 00023
3251	270k, 5%, 1/10W, Metal Film.	3198 021 52740		3516	Res, 1K, 2%, 0,25W	4822 051 10102

S = Safety Part Be sure to use exact replacement part.

PA9032C101 (continued)

	3517	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
S	3518	Res, 0R22, 5%, 3W, Metal Film. . . .	2120 106 90548
	3520	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
	3521	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443
S	3525	33 ohm, 5%, 1/3W, Metal Film	4835 116 57665
	3528	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3529	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
	3530	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
	3532	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
	3534	15k, 5%, 1/10W, Metal Film	4835 111 37458
	3536	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
	3537	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
S	3542	4.7 Megohm, 5%, 1/2W, Metal Film . .	4835 116 57009
	3570	15k, 5%, 1/10W, Metal Film	4835 111 37458
	3571	Res, 150K, 1%, 3/5W, Metal Film. . .	2322 156 21504
	3573	Res, 2K, 1%, 1/10W, Metalized Glass.	2120 108 92657
	3574	33k, 5%, 1/10W, Metal Film	4835 111 37248
	3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3577	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3578	Res, 1K, 2%, 0,25W	4822 051 10102
	3579	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
	3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3592	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3594	22k, 5%, 1/10W, Metal Film	4835 111 37441
	3595	68k, 5%, 1/6W, Carbon Film	4835 111 37205
	3596	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3597	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
	3598	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3599	22k, 5%, 1/10W, Metal Film	4835 111 37441
	3607	8.2k, 5%, 1/8W, Inline Package . . .	4835 111 97046
	3608	2.2k, 5%, 1/8W, Inline Package . . .	4835 111 97049
	3609	2.2k, 5%, Resistor Network	2120 108 93868
	3611	Res, 1K, 2%, 0,25W	4822 051 10102
	3612	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3613	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3615	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3617	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
	3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3619	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
	3629	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259
	3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
	3631	27k, 5%, 1/10W, Metal Film	4835 111 37442
S	3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63479
	3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210
	3634	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
	3635	22k, 5%, 1/10W, Metal Film	4835 111 37441
	3636	22k, 5%, 1/10W, Metal Film	4835 111 37441
	3637	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
	3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3653	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3654	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
	3655	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
	3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710
	3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3662	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
	3663	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
	3664	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
	3665	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
	3666	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376
	3667	27k, 5%, 1/10W, Metal Film	4835 111 37442
	3672	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
	3673	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3674	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231
	3675	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
	3676	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
	3677	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
	3680	680 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37271
	3681	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
	3682	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
	3683	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
	3684	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
	3687	220 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37371
	3841	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3842	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3843	47k, 5%, 1/10W, Metal Film	4835 111 37445
	3844	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259
	3845	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259
	3850	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
	3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810
	3951	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
	3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3953	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272
	3954	1.5k, 5%, 1/10W, Metal Film.	4835 111 37437
	3955	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
	3956	1.5k, 5%, 1/10W, Metal Film.	4835 111 37437
	3957	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
	4001	Zero ohm,.	4835 111 27056
	4002	Zero ohm,.	4835 111 27056
	4004	Zero ohm,.	4835 111 27056
	4007	Zero ohm,.	4835 111 27056
	4009	Zero ohm,.	4835 111 27056
	4010	Zero ohm,.	4835 111 27056
	4011	Zero ohm,.	4835 111 27056
	4012	Zero ohm,.	4835 111 27056
	4013	Zero ohm,.	4835 111 27056
	4020	Zero ohm,.	4835 111 27056
	4051	Zero ohm,.	4835 111 27056
	4100	Zero ohm,.	4835 111 27056
	4101	Zero ohm,.	4835 111 27056
	4102	Zero ohm,.	4835 111 27056
	4103	Zero ohm,.	4835 111 27056
	4143	Zero ohm,.	4835 111 27056
	4144	Zero ohm,.	4835 111 27056
	4203	Zero ohm,.	4835 111 27056
	4207	Zero ohm,.	4835 111 27056
	4212	Zero ohm,.	4835 111 27056
	4214	Zero ohm,.	4835 111 27056
	4215	Zero ohm,.	4835 111 27056
	4216	Zero ohm,.	4835 111 27056
	4410	Res, 1K, 2%, 0,25W	4822 051 10102
	4501	Zero ohm,.	4835 111 27056
	4602	Zero ohm,.	4835 111 27056
	4650	Zero ohm,.	4835 111 27056
	4651	Zero ohm,.	4835 111 27056
	4652	Zero ohm,.	4835 111 27056
	4654	Zero ohm,.	4835 111 27056
	4655	Zero ohm,.	4835 111 27056
	4684	Zero ohm,.	4835 111 27056
	4687	Zero ohm,.	4835 111 27056
	4831	Zero ohm,.	4835 111 27056
	4832	Zero ohm,.	4835 111 27056
	4833	Zero ohm,.	4835 111 27056
	4902	Zero ohm,.	4835 111 27056
	4903	Zero ohm,.	4835 111 27056
	4904	Zero ohm,.	4835 111 27056
	4905	Zero ohm,.	4835 111 27056
	4909	Zero ohm,.	4835 111 27056
	4911	Zero ohm,.	4835 111 27056
	4912	Zero ohm,.	4835 111 27056
	4914	Zero ohm,.	4835 111 27056
	4957	Zero ohm,.	4835 111 27056
	4999	Zero ohm,.	4835 111 27056
	5000	Coil, 5u6.	3198 018 25680
	5004	Coil, 820n	2422 535 97314
	5101	Coil, 5u6.	3198 018 15680
	5201	Coil, 22u.	3198 018 22290
	5202	Coil, 6u8.	3198 018 16880
	5342	22uH., 10%, Coil, Peaking.	4835 157 67069
S	5445	Transformer, L.O.T., models ending in C101, C121, and C125	2422 531 02327
S	5445	Transformer, L.O.T., models ending in C221 and C225.	3128 138 20941
	5451	Coil, 27u.	2422 535 96614
	5457	Coil	3128 138 53181
	5461	Transformer.	3128 138 33811
	5463	Coil, Choke.	3128 138 37021
	5471	Coil, 1m	2422 535 94652
	5480	Coil, 27u.	2422 535 97334
	5480	Coil, 39u.	2422 535 97336
	5480	Coil, 47u.	2422 535 97337
	5480	33uH., Peaking Coil, only in 25. . .	4835 157 58205
S	5500	Filter, Mains, 5mH, 2A	2422 549 43432
	5516	100uH., Coil	4835 157 67078
	5518	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
	5521	Coil, 2u2.	3198 018 12280
	5540	Coil, 4u7.	3198 018 14780
S	5545	Transfomer,.	2422 531 02314
	5551	27uH., 5%, Coil, Peaking	4835 157 67052
	5552	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
	5572	100uH., Coil	4835 157 67078
	5573	100uH., Coil	4835 157 67078
	5575	100uH., Coil	4835 157 67078
	5576	100uH., Coil	4835 157 67078
	5577	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
	5600	Coil, 8u2.	3198 018 18280
	5601	Coil, 8u2.	3198 018 18280
	5620	Coil, 6u8.	3198 018 16880
	5821	Coil, 100u	3198 018 21010
	5831	Coil, 12u.	3198 018 21290
	5832	Coil, 12u.	3198 018 21290
	5833	Coil, 12u.	3198 018 11290
	6008	Zener, 33 Volt BZX79-C33	4835 130 37904
	6113	Zener Diode, 6.8 volt.	9340 386 40115
	6125	Zener Diode, 6.8 volt.	9340 386 40115
	6211	Diode, 1N4148.	4835 130 37048
	6212	Diode, 1N4148.	4835 130 37048
	6213	Diode, 1N4148.	4835 130 37048
	6331	Diode.	4835 130 37294
	6333	Diode.	4835 130 37294
	6335	Diode.	4835 130 37294

S = Safety Part Be sure to use exact replacement part.

PA9032C101 (continued)

6401	Diode.	4835 130 37094
6402	Zener, 18 Volt, BZX79-C18.	4835 130 37908
6449	Diode, 1N4148.	4835 130 37048
6450	Diode, 1N4148.	4835 130 37048
6460	Diode, Rect, BY228/20	9336 215 80112
6461	Diode, Rect, BYW95C-20.	9336 215 90112
6463	Diode, 1N4148.	4835 130 37048
6465	Diode, BYD33J.	4835 130 37094
6466	Diode, BYD33J.	4835 130 37094
6470	Zener Diode, 9.1 volt.	9331 177 80133
6472	Diode, 1N4148.	4835 130 37048
6480	Diode, Zener	4835 130 37947
6481	Diode, 1N4148.	4835 130 37048
6485	Diode, BYD33J.	4835 130 37094
6486	Diode, EGP20DL-530	4835 130 37919
6487	Diode.	4835 130 37094
6488	Diode, Rect, BYV27-200.	9322 126 72673
6490	Diode, Rect, BYV27-200.	9322 126 72673
6505	Diode, Bridge Rect, GBU6JL-7002	9322 138 08667
6507	Diode, BYD33J.	4835 130 37094
6508	Diode, BYD33J.	4835 130 37094
6510	Zener Diode, 20 volt	9331 178 60133
6511	Diode, BYV95C.	4835 130 37052
6512	Diode, Rect, BY228/20	4822 130 41275
6513	Diode, Rect, BY228/20	4822 130 41275
6514	Zener, 18 Volt, BZX79-C18.	4835 130 37908
6540	Diode.	4835 130 37294
6550	Diode, Rect, BY229X-800	9340 380 30127
6560	Diode, EGP20DL-530	4835 130 37919
6570	Diode, EGP20DL-530	4835 130 37919
6582	Diode, EGP20DL-530	4835 130 37919
6584	Diode, 1N4148.	4835 130 37048
6585	Diode, 1N4148.	4835 130 37048
6590	Diode, EGP20DL-530	4835 130 37919
6591	Diode, BAS216.	4835 130 37905
6601	Diode, Zener	4835 130 37684
6602	Diode, 1N4148.	4835 130 37048
6603	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
6604	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
6605	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
6606	Zener, 4.7 Volt, BZX79-C4V7.	4835 130 37005
6607	Zener, 6.8 Volt, BZX79-C6V8.	4835 130 37945
6690	LED, LTL-307P.	4835 130 97096
6831	Diode, BAS216.	4835 130 37905
6951	Diode, BAS216.	4835 130 37905
6961	Diode, BAS216.	4835 130 37905
7134	Transistor, BC547B	4835 130 47055
7250	IC,.	9352 620 27112
7251	IC, LM317T	9337 220 80682
7254	Transistor, NPN, BC847B.	4822 130 60511
7256	Transistor, NPN, BC847B.	4822 130 60511
7258	Transistor, NPN, BC847B.	4822 130 60511
7263	Transistor, PNP, BC857B.	5322 130 60508
7266	Transistor, NPN, BC847B.	4822 130 60511
7330	IC,.	9352 184 10112
7401	IC,.	4835 209 88531
7460	Transistor, NPN, BU1508DX.	9340 170 50127
7461	Transistor, NPN, BF819	9335 354 50127
7470	F.E.T., Power, STP16NE06FP	9322 123 96687
7480	IC,.	9322 028 93682
7481	Transistor, BC557B	4835 130 47409
7482	Transistor, PNP, BC857B.	5322 130 60508
7518	STH8NA60FI SMPS FET	9322 068 92687
7518	STH10NC60FI SMPS FET.	9322 155 66687
7520	IC, MC44603A	4835 209 88537
7570	IC,.	9337 711 00676
S 7581	Coupler, TCDT1101G	9338 431 30682
7590	Transistor, NPN, BC847B.	4822 130 60511
7591	Transistor, NPN, BC847B.	4822 130 60511
7592	Transistor, NPN, BC847B.	4822 130 60511
7600	IC, SAA5565-PS/M3/0195 L9 v3.2 (Commercial Models - Pro Plus Models).	9352 673 97112
7601	IC, ST24W16B6, commercial models only	9322 095 35682
7603	Transistor, NPN, BC337	9331 796 00126
7604	Transistor, NPN, BC847B.	4822 130 60511
7605	Transistor, NPN, BC847B.	4822 130 60511
7608	Transistor, NPN, BC847B.	4822 130 60511
7609	Transistor, NPN, BC847B.	4822 130 60511
7680	IR Receiver.	9322 127 53667
7833	IC,.	9322 136 54682
7950	IC,.	4835 209 88543
CBA	00EMF895A102 Main Chassis Board Asm.	00EM F89 5A102

A10757 L9 Audio Jack Panel Parts

	A10757 L9 Audio Jack Panel Parts	
CBA	00A10757A001 L9 Audio Jack Panel Asm.	00A1 075 7A001
C1	Cap, 2u2, 20%, 50V, Electrolytic	3198 028 52280
C2	Cap, 2u2, 20%, 50V, Electrolytic	3198 028 52280
J0214	Connector, 3 Pin	2422 025 16601
J0234	4 Pin Board Connector.	2422 025 15851
J100	Socket, Click, 4 Pin	2422 015 18711
J1214	Connector, 3 Pin	2422 025 16601
J1234	4 Pin Board Connector.	2422 025 12489
JP11	Socket, Cinch, 1 Pin	2422 026 04912
JP12	Socket, Cinch, 1 Pin	2422 026 04374
SW1	Switch	4835 277 27061

A10758 Provideo Card Parts

	A10758 Provideo Card Parts	
CBA	00A10758A001 Provideo Card Asm	00A1 075 8A001
C1	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
C11	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030
C12	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
C13	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
C2	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
C3	Cap, 470n, 20%, 50V, Electrolytic.	3198 025 54770
C4	Cap, 470n, 20%, 50V, Electrolytic.	3198 025 54770
C5	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
C6	Cap, 470n, 20%, 50V, Electrolytic.	3198 025 54770
C7	Cap, 470n, 20%, 50V, Electrolytic.	3198 025 54770
IC1	IC,.	4835 209 88606
JC1	10 Pin Board Connector	2422 025 16203
JC2	Connector, 32 Pin.	3135 010 03541
JC3	6 Pin Board Connector.	2422 025 15797
JU1	Jumper	2422 025 16391
Q1	Transistor, BC547B	4835 130 47055
Q2	Transistor, BC557B	4835 130 47409
Q3	Transistor, BC547B	4835 130 47055
Q4	Transistor, BC547B	4835 130 47055
R10	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
R11	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
R12	Res, 1 ohm, 5%, 1/3W, Metal Film	2322 205 33108
R13	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
R14	Res, 47K, 5%, 1/6W, Carbon Film.	3198 011 04730
R15	Res, 47K, 5%, 1/6W, Carbon Film.	3198 011 04730
R17	Res, 75 ohm, 5%, 1/6W, Carbon Film	3198 011 07590
R4	2.2k, 5%, 1/3W, Metal Film	4835 116 57784
R6	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
R7	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
R8	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
R9	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
S SJ1	Mini Connector	4835 265 97421
Z1	Zener Diode, 8.2V, BZX79-C8V2.	4835 130 37503
Z2	Zener Diode, 8.2V, BZX79-C8V2.	4835 130 37503
Z3	Zener Diode, 8.2V, BZX79-C8V2.	4835 130 37503
Z4	Zener Diode, 5.6V, BZX79-C5V6.	4835 130 37007

A10759 Provideo Jack Panel Parts

	A10759 Provideo Jack Panel Parts	
CBA	00A10759A001 Provideo Jack Panel Asm.	00A1 075 9A001
C1	Cap, 220n, 10%, 50V, Polyester	3198 014 02240
C2	Cap, 220n, 10%, 50V, Polyester	3198 014 02240
C3	Cap, 220n, 10%, 50V, Polyester	3198 014 02240
JP1	10 Pin Board Connector	2422 025 16204
JP10	Connector, Video Monitor Out	4835 265 97413
JP2	Connector, RCA Jack, White	2422 026 04983
JP3	Connector, RCA Jack, Red	2422 026 04982
JP4	Connector, RCA Jack, Red	2422 026 04982
JP5	Connector, RCA Jack, White	2422 026 04983
JP6	Connector, CVBS In	4835 265 97413
JP7	Connector, CVBS Out.	4835 265 97413
JP8	Connector, Y/C In.	4835 265 97411
JP9	Connector, Y/C Out	4835 265 97412
R1	Res, 75 ohm, 5%, 1/6W, Carbon Film	3198 011 07590
R2	Res, 75 ohm, 5%, 1/6W, Carbon Film	3198 011 07590
R3	Res, 75 ohm, 5%, 1/6W, Carbon Film	3198 011 07590

A10791 Comb Filter Panel Parts

	A10791 Comb Filter Panel Parts	
CBA	00A10791A001 Comb Filter Panel Asm.	00A1 079 1A001
1000	8 Pin board Connector.	2422 025 12483
1001	Connector, 4 Pin	2422 025 12479
1102	Crystal, Resonator, 32KHz768	2422 543 00056
1254	9 Pin Board Connector.	2422 025 16265
2000	Cap, 100u, 20%, 10V, Electrolytic.	3198 025 11010
2001	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2002	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2003	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2004	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2011	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2012	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2013	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2014	Cap, 220n, +80/-20%, 25V, Ceramic.	3198 023 22240
2020	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2021	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2023	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2025	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2111	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
2113	Battery, 3 Volts	2422 526 01206
3012	220 ohm, 5%, 1/10W, Metal Film	4835 111 37371
3013	220 ohm, 5%, 1/10W, Metal Film	4835 111 37371
3020	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
3026	2.2 Megohm, 5%, 1/10W, Metal Film.	4835 111 27047
3027	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052

S = Safety Part Be sure to use exact replacement part.

PA9032C101 (continued)

3028	Zero ohm,.	4835 111 27056
3110	10k, 5%, 1/10W, Metal Film	4835 111 37216
3111	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3116	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
3117	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
3118	10k, 5%, 1/10W, Metal Film	4835 111 37216
3119	10k, 5%, 1/10W, Metal Film	4835 111 37216
5000	Coil, 10u.	3198 018 21090
5012	Coil, 15u.	2422 535 94296
5104	Coil, 6u8.	3198 018 26880
6110	Diode, BAS216.	4835 130 37905
7000	IC, SAA4961/V3/S1.	9352 609 51112
7012	Transistor, NPN, BC847B.	4822 130 60511
7110	IC,.	4835 209 17438
7111	IC,.	5322 209 61482
9001	Jumper Wire.	0322 179 00148

A10808 Pro Plus Interface Parts

	A10808 Pro Plus Interface Parts	
CBA	00A10808A001 Pro Plus Interface Asm.	00A1 080 8A001
BR711	Zero ohm,.	4835 111 27056
BR712	Zero ohm,.	4835 111 27056
BR713	Zero ohm,.	4835 111 27056
BR714	Zero ohm,.	4835 111 27056
BRS15	Zero ohm,.	4835 111 27056
BRS16	Zero ohm,.	4835 111 27056
C702	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
C703	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
J0237	Connector, 4 Pin	2422 025 12479
J0238	Connector, 5 Pin	2422 025 06353
J1215	Connector, 2 Pin,.	2422 025 16343
J1227	Connector, 4 Pin	2422 025 16385
J1237	Connector, 4 Pin	2422 025 12479
J1259	Connector, 3 Pin	2422 025 16383
J214	Connector, 3 Pin	2422 025 16382
J216	Connector, 4 Pin	2422 025 15847
J219	Connector, 5 Pin	2422 025 15848
J228	Connector, 3 Pin	2422 025 16407
J236	4 Pin Board Connector.	2422 025 12489
J775	Contact Pin.	2422 024 00626
J800	Connector, 32 Pin.	3135 010 03531
Q700	Transistor, NPN, BC847B.	4822 130 60511
Q701	Transistor, NPN, BC847B.	4822 130 60511
Q704	Transistor, PNP, BC857B.	5322 130 60508
Q705	Transistor, PNP, BC857B.	5322 130 60508
Q706	Transistor, NPN, BC847B.	4822 130 60511
Q707	Transistor, NPN, BC847B.	4822 130 60511
R700	10k, 5%, 1/10W, Metal Film	4835 111 37216
R701	47k, 5%, 1/10W, Metal Film	4835 111 37445
R702	75 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37276
R703	75 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37276
R711	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
R712	10k, 5%, 1/10W, Metal Film	4835 111 37216
R713	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
R714	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
R715	10k, 5%, 1/10W, Metal Film	4835 111 37216
R716	47k, 5%, 1/10W, Metal Film	4835 111 37445
R717	10k, 5%, 1/10W, Metal Film	4835 111 37216
R718	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
R719	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443
R720	Res, 1K, 2%, 0,25W	4822 051 10102
R721	75 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37276
R722	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231
Z700	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z701	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z702	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z703	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z704	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z705	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z706	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z707	Zener Diode, 8.2V, BZX284-C8	4835 130 37922

A10797 ITV Scan 3 Card Parts

	A10797 ITV Scan 3 Card Parts	
CBA	A10797 ITV Scan 3 Card Panel Asm.. .	00A1 079 7A001
1001	Crystal, Resonator, 20M140	2422 543 01196
1002	Socket, 2 Pin, SVHS.	2422 033 00365
1004	Socket, Cinch, 6 Pin	2422 026 04827
1005	Crystal Resonator, 14M31818, 20P . .	2422 543 00904
1010	Connector, 32 Pin.	3135 010 03541
1011	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488
1012	Connector, 5 Pin	2422 025 12708
1013	Connector, 14 Pin.	2422 025 12486
2000	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2001	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2002	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2003	Cap, 15p, 5%, 50V, Ceramic	3198 016 01590
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2006	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2007	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2008	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2009	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2010	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2011	Cap, 270p, 5%, 50V, Ceramic.	3198 016 02710
2012	Cap, 15p, 5%, 50V, Ceramic	3198 016 01590
2013	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2014	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2015	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2016	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2017	Cap, 10u, 20%, 25V, Electrolytic . .	2020 004 90288
2018	Cap, 270p, 5%, 50V, Ceramic.	3198 016 02710
2019	Cap, 15p, 5%, 50V, Ceramic	3198 016 01590
2020	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2021	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2022	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2023	Cap, 270p, 5%, 50V, Ceramic.	3198 016 02710
2024	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2025	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2026	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2059	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2060	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2061	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2062	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2063	Cap, 4u7, +80/-20%, 10V, Ceramic . .	2020 552 96305
2064	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2065	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2066	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2067	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2071	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2072	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2073	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2074	Cap, 4u7, 20%, 35V, Electrolytic . .	3198 030 74780
2075	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2076	Cap, 4u7, 20%, 35V, Electrolytic . .	3198 030 74780
2077	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2078	Cap, 4u7, 20%, 35V, Electrolytic . .	3198 030 74780
2079	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2080	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2081	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2082	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2083	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2084	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2085	Cap, 4u7, 20%, 35V, Electrolytic . .	3198 030 74780
2086	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2087	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2088	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2089	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2090	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2091	Cap, 4u7, 20%, 35V, Electrolytic . .	3198 030 74780
2092	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2093	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2094	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2095	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2096	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2097	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2098	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2099	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2100	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2101	Cap, 1u, 20%, 35V, Electrolytic. . .	2020 004 90282
2102	Cap, 1u, 20%, 35V, Electrolytic. . .	2020 004 90282
2103	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2104	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2105	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2106	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2107	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2108	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2109	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2110	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2111	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2112	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2113	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2114	Cap, 470u, 20%, 25V, Electrolytic. .	2020 012 93457
2115	Cap, 10u, 20%, 10V, Electrolytic . .	3198 032 34130
2116	Cap, 10u, 20%, 10V, Electrolytic . .	3198 032 34130
2118	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2119	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2120	Cap, 680p, 10%, 50V, Ceramic	3198 017 06810
2121	Cap, 680p, 10%, 50V, Ceramic	3198 017 06810
2122	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2123	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2124	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2125	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2126	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2127	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2129	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2130	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2131	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2132	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2134	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2135	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2136	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010

S = Safety Part Be sure to use exact replacement part.

PA9032C101 (continued)

2137	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2139	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2140	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2141	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810
2142	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810
3001	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3002	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3003	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3004	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3005	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3006	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3007	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3008	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3009	Res, 13K, 5%, 1/8W, Metalized Glass.	2322 730 61133
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3012	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3015	Res, 13K, 5%, 1/8W, Metalized Glass.	2322 730 61133
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3017	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3018	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3019	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3020	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3021	Res, 13K, 5%, 1/8W, Metalized Glass.	2322 730 61133
3022	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3023	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3024	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3025	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3026	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3027	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3028	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3029	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3030	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3031	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3033	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3052	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3056	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3057	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3058	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3060	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3061	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3062	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3063	Res, 820 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 58210
3064	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3065	RST NETW SM ARV24 4X 33R PM5 R . . .	2350 035 10339
3066	RST NETW SM ARV24 4X 33R PM5 R . . .	2350 035 10339
3073	RST NETW SM ARV24 4X 33R PM5 R . . .	2350 035 10339
3074	RST NETW SM ARV24 4X 33R PM5 R . . .	2350 035 10339
3082	RST NETW SM ARV24 4X 33R PM5 R . . .	2350 035 10339
3085	RST NETW SM ARV24 4X 33R PM5 R . . .	2350 035 10339
3089	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3090	RST NETW SM ARV24 4X 33R PM5 R . . .	2350 035 10339
3091	RST NETW SM ARV24 4X 33R PM5 R . . .	2350 035 10339
3097	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3099	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3100	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3101	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3102	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3103	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3104	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3105	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3106	Res, 270 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52710
3107	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3108	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3109	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3110	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3111	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3112	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3113	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3114	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3116	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3117	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3118	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3119	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3120	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3121	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3122	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3124	Res, 910 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 69101
3129	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3130	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3131	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3132	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3133	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3135	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3136	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3137	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3138	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3139	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3140	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3141	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3142	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3143	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
5001	Coil, 820n	3198 018 38270
5002	Coil, 1u2.	3198 018 31280
5003	Coil, 1u2.	3198 018 31280
5004	Coil, 1u2.	3198 018 31280
5010	Coil, 820n	3198 018 38270
5012	Coil, 820n	3198 018 38270
5014	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
5015	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5016	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5017	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5018	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5019	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5020	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5021	Coil, 82u.	2422 535 95408
5023	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5024	Coil, 1u8.	3198 018 31880
6001	Diode, Signal, BAV99	3198 010 10620
6002	Diode, Signal, BAV99	3198 010 10620
6003	Diode, Signal, BAV99	3198 010 10620
6004	Diode, Signal, BAV99	3198 010 10620
6005	Diode, Signal, BAV99	3198 010 10620
6006	Diode, Signal, BAV99	3198 010 10620
6009	Diode, Signal, BAV99	3198 010 10620
6010	Diode, Signal, BAV99	3198 010 10620
6011	Diode, Signal, BAS16WS	9322 031 99685
6012	Diode, Signal, BAS16WS	9322 031 99685
6013	Diode, Signal, BAS16WS	9322 031 99685
6014	Diode, Signal, BAS16WS	9322 031 99685
6015	Diode, Signal, BAS16WS	9322 031 99685
6016	Diode, Signal, BAS16WS	9322 031 99685
6017	Diode, Rect, MBRS140.	9322 070 26668
6018	Zener Diode, 6.8 volt.	9340 386 40115
7000	Transistor, FET Signal, BSN20. . . .	9340 125 00235
7001	IC, LM393D	9339 575 30668
7002	IC, LM393D	9339 575 30668
7003	Transistor, NPN, BC847B.	3198 010 42030
7004	Transistor, NPN, BC847B.	3198 010 42030
7005	Transistor, NPN, BC847B.	3198 010 42030
7006	Transistor, PNP, BC857B.	3198 010 42150
7007	Transistor, FET Signal, BSN20. . . .	9340 125 00235
7010	Transistor, FET Signal, BSN20. . . .	9340 125 00235
7011	IC, FS401AC.	9322 107 99671
7012	IC, HY57V161610DTC-10.	9322 161 58668
7013	Transistor, FET Signal, BSN20. . . .	9340 125 00235
7014	IC,.	3135 019 02151
7016	IC, 74HC4066D.	9337 144 20653
7018	IC, M24C04-WMN6.	9322 122 33668
7019	IC, TDA8440/C3	9338 180 70112
7020	Transistor, PNP, BC857B.	3198 010 42150
7021	Transistor, NPN, BC847B.	3198 010 42030
7022	IC, MC33269D-3.3	9322 106 88668
7023	IC, MC33269D-3.3	9322 106 88668
7024	IC, LM2596S-ADJ.	9322 130 86685
7028	Transistor, FET Signal, BSH103 . . .	9340 547 13215
7036	Transistor, FET Signal, BSH103 . . .	9340 547 13215
7037	Transistor, NPN, BC847B.	3198 010 42030

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	AC Power Cord.	3135 010 04321
AC02	Clip, Anode Lead	3135 014 04471
AC03	Cabinet, Back (ITV).	3135 014 06531
AC04	Cabinet Front.	3135 017 03901
AC05	Chassis Guide.	3139 124 31322
AC06	Control Buttons.	3139 124 26472
S AC08	CRT A80ECK272X56	9301 795 00428
S AC09	Coil, Degaussing	3121 218 62641
AC10	Holder, Degaussing (4 Used).	3135 013 01661

S = Safety Part Be sure to use exact replacement part.

PA9032C101 (continued)

AC11	Light Guide.	3139 124 26461
AC12	Nameplate.	3135 015 03571
AC13	Owner's Manual	3135 015 14291
AC13	Owner's Manual	3135 015 20911
AC14	Power Button	3139 124 26444
REMOTE	Transmitter, Remote, RC2524 /01. . .	3139 228 84651
AC16	Speaker, 8W, 8 ohm (2 Used).	2422 264 00322
AC21	Battery, 1.5V AA, 2-Pack, (Not Shown	9299 000 10137
AC24	Spring	3139 121 26231

S = Safety Part Be sure to use exact replacement part.

S = Safety Part Be sure to use exact replacement part.

PA9032C121 - Manual no. 7583

Main Chassis Parts
Main Chassis Parts

Cabinet & Accessory Parts
Cabinet & Accessory Parts

PA9036C121 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts	
0113	L9 SOPS HEATSINK	3139 121 62041
0119	DIODE HEATSINK L9.	3139 121 26691
0121	LINE HEATSINK (CINCH).	3139 121 61942
S 0127	Holder, Fuse, 2 Pin.	3122 358 71251
0153	DIPMATE CABLE 4-560.	3139 131 00961
0200	CBLE HR BK 9P/270/9X F.HOOK UL . . .	3104 311 02361
0211	Connector, 2 Pin	2422 025 11196
0212	Connector, 2 Pin	2422 025 15396
0213	Connector, 2 Pin	2422 025 15395
0214	Connector, 3 Pin	2422 025 16382
0215	Connector, 2 Pin,.	2422 025 16343
0216	Connector, 4 Pin	2422 025 15847
0219	Connector, 5 Pin	2422 025 15848
0220	4 Pin Board Connector.	2422 025 04852
0221	Connector, 4 Pin	2422 025 15503
0222	Connector, 2 Pin	2422 025 10646
0224	1 Pin Board Connector.	2422 034 20021
0225	1 Pin Board Connector.	2422 034 20021
0226	1 Pin Board Connector.	2422 034 20021
0227	Connector, 4 Pin	2422 025 16385
0228	1 Pin Board Connector.	2422 034 20021
0229	Connector, 3 Pin	2412 020 00725
0229	Cable Header, 3P/280/3P, HR WH UL. .	3104 311 01641
0234	Connector, 4 Pin	2422 025 12479
0236	4 Pin Board Connector.	2422 025 16384
0237	Connector, 4 Pin	2422 025 12479
0238	5 Pin Board Connector.	2422 025 16387
S 0243	Connector, 6 Pin	2422 025 04854
0244	4 Pin Board Connector.	2422 025 04852
S 0245	Connector, 6 Pin	2422 025 04854
S 0254	CRT Socket (9 Pin)	2422 500 80022
0259	Connector, 3 Pin	2422 025 16383
0350	ISOPROPYL ALCOHOL.	1306 500 43201
1000	Tuner, V+U PLL PH MN B.	2422 542 90069
1003	45 MHz SAW, Filter,.	2422 549 42433
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807
1208	Crystal Resonator, 3.58MHz	2422 543 00832
S 1500	Fue, 4 A, 250V	2422 086 10905
S 1572	FUSE 1A 250V	2422 086 10779
S 1573	2.5 Amp Fuse, Radial,.	2422 086 10422
S 1580	Relay, 12V, 5A G5PA-1.	2422 132 07444
1600	Switch, Tactile.	2422 128 02742
1601	Switch, Tactile.	2422 128 02742
1602	Switch, Tactile.	2422 128 02742
1603	Switch, Tactile.	2422 128 02742
1606	Switch, Tactile.	2422 128 02742
1660	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488
1822	Crystal Resonator, 18MHz432, 12 Pin, HC49/U A	2422 543 00842
2001	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2002	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2003	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2004	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2011	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2101	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2102	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2103	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2104	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2107	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2109	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2111	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2112	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2115	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2201	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2205	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2208	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2209	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2211	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2212	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2213	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2214	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2215	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 16654
2220	Cap, 18p, 5%, 50V, Ceramic	3198 016 01890
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2222	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2226	Cap, 33u, 20%, 25V, Electrolytic . .	2020 021 90124
2227	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2247	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2248	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2249	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2330	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2340	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320
2342	Cap, 680p, 5%, 50V, Ceramic.	3198 016 06810
S 2343	Cap, 3n3, 10%, 2KV, Ceramic.	2020 558 90529
2345	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2401	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2402	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2403	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2405	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2407	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2409	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2420	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2426	Cap, 100n, 10%, 63V, Metalized Polyes ter.	2222 370 75104
2428	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2429	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2430	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2431	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2437	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2438	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2448	Cap, 33p, 5%, 500V, Ceramic.	2020 557 90192
2450	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91139
2451	0.012uF., 5%, 50V, Polyester	3198 014 01230
2456	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176
2457	Cap, 470n, 5%, 250V, Polypropylene .	2222 479 90023
2458	Cap, 2u2, 20%, 100V, Electrolytic. .	2020 021 91331
2459	Cap, 680p, 10%, 500V, Ceramic. . . .	3198 019 46810
2461	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2462	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176
S 2463	Cap, 330p, 10%, 2KV, Ceramic	2020 558 90481
2464	Cap, 2u2, 5%, 160V, Polypropylene. .	2222 479 90042
S 2465	Cap, 15n, 5%, 1600V, Polypropylene .	2222 375 90158
2467	Cap, 18n, 10%, 400V, Polyester . . .	2222 347 90222
2468	Cap, 22n, 10%, 400V, Polyester . . .	2222 347 90223
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050
2470	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2472	Cap, 2u2, 20%, 50V, Electrolytic . .	2020 021 90552
2473	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2480	Cap, 150n, 10%, 250V, Polyester. . .	2222 347 90216
2481	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2484	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2485	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2486	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2487	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2488	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2489	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2490	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2491	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810
2500	Cap, 470n, 20%, 275V, Polypropylene.	2222 336 29148
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2507	Cap, 1n5, 10%, 1KV, Ceramic.	3198 019 61520
2508	Cap, 470u, 20%, 200V, Electrolytic .	2020 024 90647
2511	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
2518	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2530	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 021 91147
2531	Cap, 1n, 2%, 50V, Polypropylene. . .	2020 310 90049
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2540	Cap, 100u, 20%, 25V, Electrolytic. .	2020 021 90547
S 2545	Cap, 1n5, 20%, v, Ceramic.	2020 554 90128
2550	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2551	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91358
2561	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2562	Cap, 220p, 10%, 1KV, Ceramic	3198 019 62210
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2571	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91353
2572	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2575	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2586	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2604	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2613	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2615	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2619	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2622	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210

S = Safety Part Be sure to use exact replacement part.

PA9036C121 (continued)

2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2629	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2679	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2681	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2850	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810
2851	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2852	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2853	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2854	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2855	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2856	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2858	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2859	Cap, 15p, 5%, 50V, Ceramic	3198 016 01590
2860	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2861	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2862	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2863	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2864	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2865	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2866	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2867	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2868	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780
2869	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2870	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2871	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2872	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2874	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2875	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2877	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2882	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2883	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2884	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2887	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810
2888	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2889	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2891	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2952	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2954	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2955	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2960	Cap, 2u2, 20%, 25V, Electrolytic . .	3198 026 32220
2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090
2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810
3100	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3101	Res, 220K, 5%, 1/10W, Metalized Glass	3198 021 52240
3103	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3104	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3108	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3109	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3122	Res, 220K, 5%, 1/10W, Metalized Glass	3198 021 52240
3123	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3125	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3131	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3132	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3134	Jumper Wire/Staple	0322 179 00003
3136	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3137	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3141	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3145	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3155	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3201	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3203	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820
3205	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3206	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3209	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3212	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3213	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3215	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3216	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3218	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3219	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3220	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3225	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3231	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3232	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3233	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3243	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3246	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340
3250	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3251	270k, 5%, 1/10W, Metal Film.	3198 021 52740
3252	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3253	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3257	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3258	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3259	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	3198 013 01020
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	3198 013 01020
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	3198 013 01020
S 3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
3343	Res, 1K5, 20%, 1/2W, Carbon Film . .	3198 013 01520
3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
3345	VDR DC 1MA/50V S MAX 110V A . . .	2122 550 00152
3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
3401	Res, 2R2, 5%, 1/6W, Carbon Film. . .	3198 011 02280
3402	Res, 2R2, 5%, 1/6W, Carbon Film. . .	3198 011 02280
3403	Res, 2R2, 5%, 1/6W, Carbon Film. . .	3198 011 02280
3405	Res, 1K5, 1%, 3/5W, Metal Film . . .	2322 156 21502
3406	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3407	Res, 1K5, 1%, 3/5W, Metal Film . . .	2322 156 21502
3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3409	Res, 1R5, 5%, 1/3W, Metal Film . . .	2306 204 03158
3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
3420	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840
3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606
3425	Res, 220K, 5%, 1/10W, Metalized Glass	3198 021 52240
3426	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3428	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3429	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3431	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3432	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3433	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3436	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3437	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3438	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
3447	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
S 3452	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	3198 012 32290
S 3454	Res, 33K, 5%, 1 1/3W, Metal Film . .	2322 194 63333
3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
S 3462	Res, 5K6, 5%, 5W, Metal Film	2322 257 41562
3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3464	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
S 3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
3466	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903
3467	Res, 13K, 1%, 3/5W, Metal Film . . .	2322 156 21303
3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3469	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3470	Res, 220K, 5%, 1/4W, Carbon Film . .	2120 101 74224
3472	Res, 56K, 5%, 1/6W, Carbon Film. . .	3198 011 05630
3473	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3474	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3475	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3477	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3479	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198 011 03310
3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703
3481	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903

S = Safety Part Be sure to use exact replacement part.

PA9036C121 (continued)

	3482	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903
	3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
	3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
S	3486	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
S	3487	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
S	3488	Res, 4R7, 5%, 1/2W, Metal Film . . .	2306 207 03478
S	3490	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
S	3491	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
S	3492	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
	3495	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220
	3496	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	3497	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	3500	Res, 1M5, 5%, 1/2W, Metalized Glass.	2322 242 13155
	3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
S	3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225
	3503	PTC DC ZPB 120V S 10R PM30 B . . .	2120 661 00019
S	3505	Surge Protector.	2422 549 43073
S	3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
S	3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333
S	3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102
	3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
	3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184
	3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204
S	3515	2.5 ohm, 20%, 3.6W, Negative Temperature Coefficient.	2122 612 00023
	3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
	3517	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
S	3518	Res, 0R22, 5%, 2 1/2W, Metal Film. .	3198 012 32270
	3520	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
	3521	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310
S	3525	Res, 47 ohm, 5%, 1/3W, Metal Film. .	2306 204 03479
	3528	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3529	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
	3530	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
	3532	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
	3534	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
	3536	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
	3537	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
S	3542	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3570	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
	3571	Res, 150K, 1%, 3/5W, Metal Film. . .	2322 156 21504
	3573	Res, 2K, 1%, 1/8W, Metalized Glass .	2322 734 62002
	3574	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
	3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3577	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3578	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
	3579	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
	3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3592	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	3594	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
	3595	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
	3596	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3597	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
	3598	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	3599	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
	3607	RST NETW RGLE 10X 8K2 PM5 B . . .	2120 108 93916
	3608	RST NETW RGLE 6X 2K2 PM5 B . . .	2120 108 93913
	3609	RST NETW RGLE 7X 2K2 PM5 B . . .	2120 108 93915
	3611	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
	3612	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	3613	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	3615	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	3616	Jumper Wire/Staple	0322 179 00003
	3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3619	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
	3629	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
	3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
	3631	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
S	3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
	3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210
	3634	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
	3635	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
	3636	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
	3637	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
	3649	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
	3650	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
	3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3654	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
	3655	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
	3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710
	3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3662	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
	3663	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220
	3664	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220
	3665	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
	3666	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
	3667	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
	3672	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
	3673	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	3674	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
	3675	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510
	3676	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510
	3677	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510
	3680	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
	3681	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
	3682	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220
	3683	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
	3684	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
	3686	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220
	3687	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
	3841	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3842	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3843	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
	3844	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
	3845	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
	3850	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
	3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810
	3951	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
	3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3953	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
	3954	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
	3955	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
	3956	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
	3957	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
	4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4004	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4011	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4012	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4020	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4051	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4100	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4102	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4104	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4144	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4145	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4203	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4207	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4212	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4214	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4410	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
	4465	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4501	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4650	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4651	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4654	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4655	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4831	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4833	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4911	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4914	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4957	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4999	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	5000	Coil, 5u6.	3198 018 25680
	5004	Coil, 820n	2422 535 97314
	5101	Coil, 5u6.	3198 018 15680
	5201	Coil, 22u.	3198 018 22290
	5202	Coil, 6u8.	3198 018 16880
	5342	Coil, 22u.	3198 018 22290
S	5445	Transformer, L.O.T..	3128 138 20733
	5451	Coil, 27u.	2422 535 96614
	5457	Coil, Linear, DC12	3128 138 55881
	5461	Transformer.	3128 138 33811
	5463	350uH., Bridge Coil.	3128 138 34851
	5471	Coil, 1m	3198 018 71020
	5480	Coil, 4u7.	2422 535 97324
S	5500	Filter, Mains, 5mH, 2A	2422 549 43432
	5516	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
	5518	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
	5521	Coil, 2u2.	3198 018 12280
	5540	Coil, 4u7.	3198 018 14780
S	5545	Transfomer,.	2422 531 02314

S = Safety Part Be sure to use exact replacement part.

PA9036C121 (continued)

5551	Coil, 27u.	2422 535 95366
5552	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
5572	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5573	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5575	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5576	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
5577	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
5600	Coil, 8u2.	3198 018 18280
5601	Coil, 8u2.	3198 018 18280
5620	Coil, 6u8.	3198 018 16880
5821	Coil, 100u	3198 018 21010
5831	Coil, 12u.	3198 018 21290
5832	Coil, 12u.	3198 018 21290
5833	Coil, 12u.	3198 018 11290
6008	Zener Diode, 33 volt	3198 010 23390
6113	Zener Diode, 6.8 volt.	9340 386 40115
6122	Zener Diode, 6.8 volt.	9340 386 40115
6124	Zener Diode, 6.8 volt.	9340 386 40115
6125	Zener Diode, 6.8 volt.	9340 386 40115
6211	Diode, Signal, 1N4148.	3198 010 10010
6212	Diode, Signal, 1N4148.	3198 010 10010
6213	Diode, Signal, 1N4148.	3198 010 10010
6331	Diode, Signal, BAV21	3198 010 10070
6333	Diode, Signal, BAV21	3198 010 10070
6335	Diode, Signal, BAV21	3198 010 10070
6401	Diode, Rect, BYD33D	9337 234 00133
6402	Zener Diode, 18 volt	3198 010 21890
6404	Zener Diode, 56 volt	3198 010 25690
6449	Diode, Signal, 1N4148.	3198 010 10010
6450	Diode, Signal, 1N4148.	3198 010 10010
6460	Diode, Rect, DG3-7005L.	9336 436 10682
6461	Diode, Rect, BYW95C-20.	9336 215 90112
6463	Diode, Signal, 1N4148.	3198 010 10010
6464	Zener Diode, 6.2 volt.	9331 668 30133
6465	Diode, Rect, BYD33J	9337 234 20133
6466	Diode, Rect, BYD33J	9337 234 20133
6470	Zener Diode, 9.1 volt.	9331 177 80133
6472	Diode, Signal, 1N4148.	3198 010 10010
6480	Zener Diode, 27 volt	3198 010 22790
6481	Diode, Signal, 1N4148.	3198 010 10010
6485	Diode, Rect, BYD33J	9337 234 20133
6486	Diode, Rect, EGP20DL-5300	9322 100 13682
6487	Diode, Rect, BYD33D	9337 234 00133
6488	Diode, Rect, BYV27-200.	9322 126 72673
6490	Diode, Rect, BYV27-200.	9322 126 72673
6505	Diode, Bridge Rect, GBU6JL-7002	9322 138 08667
6507	Diode, Rect, BYD33J	9337 234 20133
6508	Diode, Rect, BYD33J	9337 234 20133
6510	Zener Diode, 20 volt	9331 178 60133
6511	Diode, Rect, BYV95C	9335 001 80133
6512	Diode, Rect, 1N5062	3198 010 10120
6513	Diode, Rect, 1N5062	3198 010 10120
6514	Zener Diode, 18 volt	3198 010 21890
6540	Diode, Signal, BAV21	3198 010 10070
6550	Diode, Rect, BY229X-800	9340 380 30127
6560	Diode, Rect, EGP20DL-5300	9322 100 13682
6570	Diode, Rect, EGP20DL-5300	9322 100 13682
6582	Diode, Rect, EGP20DL-5300	9322 100 13682
6584	Diode, Signal, 1N4148.	3198 010 10010
6585	Diode, Signal, 1N4148.	3198 010 10010
6590	Diode, Rect, EGP20DL-5300	9322 100 13682
6591	Diode, Signal, BAS16WS	9322 031 99685
6601	Zener Diode, 3.9 volt.	3198 010 23980
6602	Diode, Signal, 1N4148.	3198 010 10010
6603	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
6604	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
6605	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
6606	Zener Diode, 4.7 volt.	3198 010 24780
6607	Zener Diode, 6.8 volt.	3198 010 26880
6690	LED VS LTL-307P (LITO) B	9322 033 95682
6831	Diode, Signal, BAS16WS	9322 031 99685
6951	Diode, Signal, BAS16WS	9322 031 99685
6961	Diode, Signal, BAS16WS	9322 031 99685
7134	Transistor, NPN, BC547B.	3198 020 40030
7250	IC,	9352 620 27112
7251	IC, LM317T	9337 220 80682
7254	Transistor, NPN, BC847B.	3198 010 42030
7256	Transistor, NPN, BC847B.	3198 010 42030
7258	Transistor, NPN, BC847B.	3198 010 42030
7263	Transistor, PNP, BC857B.	3198 010 42150
7266	Transistor, NPN, BC847B.	3198 010 42030
7330	IC,	9352 561 40112
7401	IC, TDA8172.	9339 229 40682
7460	Transistor, NPN, BU1508DX.	9340 170 50127
7461	Transistor, NPN, BF819	9335 354 50127
7462	Transistor, NPN, BC547B.	3198 020 40030
7463	Transistor, PNP, BC557B.	3198 020 40110
7470	F.E.T., Power, STP16NE06FP	9322 123 96687
7480	IC,	9322 028 93682
7481	Transistor, PNP, BC557B.	3198 020 40110
7482	Transistor, PNP, BC857B.	3198 010 42150
7518	STH10NC60FI SMPS FET.	9322 155 66687
7520	IC,	9322 108 36682
7570	IC,	9337 711 00676
S 7581	Coupler, TCDT1101G	9338 431 30682
7590	Transistor, NPN, BC847B.	3198 010 42030
7591	Transistor, NPN, BC847B.	3198 010 42030
7592	Transistor, NPN, BC847B.	3198 010 42030
7601	IC, ST24W16B6, commercial models only	9322 095 35682
7603	Transistor, NPN, BC337	9331 796 00126
7604	Transistor, NPN, BC847B.	3198 010 42030
7605	Transistor, NPN, BC847B.	3198 010 42030
7608	Transistor, NPN, BC847B.	3198 010 42030
7609	Transistor, NPN, BC847B.	3198 010 42030
7680	IR Receiver.	9322 127 53667
7833	IC,	9322 136 54682
7950	IC,	9351 861 80112
9001	Jumper Wire/Staple	0322 179 00003
9003	Jumper Wire/Staple	0322 179 00003
9005	Jumper Wire/Staple	0322 179 00003
9011	Jumper Wire/Staple	0322 179 00003
9012	Jumper Wire/Staple	0322 179 00003
9105	Jumper Wire/Staple	0322 179 00003
9126	Jumper Wire/Staple	0322 179 00003
9130	Jumper Wire/Staple	0322 179 00003
9132	Jumper Wire/Staple	0322 179 00003
9137	Jumper Wire/Staple	0322 179 00003
9138	Jumper Wire/Staple	0322 179 00003
9139	Jumper Wire/Staple	0322 179 00003
9140	Jumper Wire/Staple	0322 179 00003
9141	Jumper Wire/Staple	0322 179 00003
9200	Jumper Wire/Staple	0322 179 00003
9202	Jumper Wire/Staple	0322 179 00003
9205	Jumper Wire/Staple	0322 179 00003
9206	Jumper Wire/Staple	0322 179 00003
9207	Jumper Wire/Staple	0322 179 00003
9208	Jumper Wire/Staple	0322 179 00003
9209	Jumper Wire/Staple	0322 179 00003
9210	Jumper Wire/Staple	0322 179 00003
9211	Jumper Wire/Staple	0322 179 00003
9214	Jumper Wire/Staple	0322 179 00003
9215	Jumper Wire/Staple	0322 179 00003
9216	Jumper Wire/Staple	0322 179 00003
9217	Jumper Wire/Staple	0322 179 00003
9218	Jumper Wire/Staple	0322 179 00003
9220	Jumper Wire/Staple	0322 179 00003
9221	Jumper Wire/Staple	0322 179 00003
9222	Jumper Wire/Staple	0322 179 00003
9225	Jumper Wire/Staple	0322 179 00003
9226	Jumper Wire/Staple	0322 179 00003
9227	Jumper Wire/Staple	0322 179 00003
9228	Jumper Wire/Staple	0322 179 00003
9229	Jumper Wire/Staple	0322 179 00003
9230	Jumper Wire/Staple	0322 179 00003
9231	Jumper Wire/Staple	0322 179 00003
9232	Jumper Wire/Staple	0322 179 00003
9233	Jumper Wire/Staple	0322 179 00003
9234	Jumper Wire/Staple	0322 179 00003
9236	Jumper Wire/Staple	0322 179 00003
9237	Jumper Wire/Staple	0322 179 00003
9238	Jumper Wire/Staple	0322 179 00003
9240	Jumper Wire/Staple	0322 179 00003
9241	Jumper Wire/Staple	0322 179 00003
9242	Jumper Wire/Staple	0322 179 00003
9245	Jumper Wire/Staple	0322 179 00003
9301	Jumper Wire/Staple	0322 179 00003
9402	Jumper Wire/Staple	0322 179 00003
9403	Jumper Wire/Staple	0322 179 00003
9404	Jumper Wire/Staple	0322 179 00003
9407	Jumper Wire/Staple	0322 179 00003
9408	Jumper Wire/Staple	0322 179 00003
9411	Jumper Wire/Staple	0322 179 00003
9414	Jumper Wire/Staple	0322 179 00003
9417	Jumper Wire/Staple	0322 179 00003
9419	Jumper Wire/Staple	0322 179 00003
9420	Jumper Wire/Staple	0322 179 00003
9421	Jumper Wire/Staple	0322 179 00003
9422	Jumper Wire/Staple	0322 179 00003
9424	Jumper Wire/Staple	0322 179 00003
9425	Jumper Wire/Staple	0322 179 00003
9427	Jumper Wire/Staple	0322 179 00003
9428	Jumper Wire/Staple	0322 179 00003
9453	Jumper Wire/Staple	0322 179 00003
9460	Jumper Wire/Staple	0322 179 00003
9463	Jumper Wire/Staple	0322 179 00003
9500	Jumper Wire/Staple	0322 179 00003
9501	Jumper Wire/Staple	0322 179 00003
9502	Jumper Wire/Staple	0322 179 00003
9503	Jumper Wire/Staple	0322 179 00003
9505	Jumper Wire/Staple	0322 179 00003
9510	Jumper Wire/Staple	0322 179 00003
9511	Jumper Wire/Staple	0322 179 00003
9512	Jumper Wire/Staple	0322 179 00003
9513	Jumper Wire/Staple	0322 179 00003

S = Safety Part Be sure to use exact replacement part.

PA9036C121 (continued)

9515	Jumper Wire/Staple	0322 179 00003
9516	Jumper Wire/Staple	0322 179 00003
9517	Jumper Wire/Staple	0322 179 00003
9518	Jumper Wire/Staple	0322 179 00003
9521	Jumper Wire/Staple	0322 179 00003
9526	Jumper Wire/Staple	0322 179 00003
9601	Jumper Wire/Staple	0322 179 00003
9602	Jumper Wire/Staple	0322 179 00003
9603	Jumper Wire/Staple	0322 179 00003
9604	Jumper Wire/Staple	0322 179 00003
9605	Jumper Wire/Staple	0322 179 00003
9606	Jumper Wire/Staple	0322 179 00003
9608	Jumper Wire/Staple	0322 179 00003
9609	Jumper Wire/Staple	0322 179 00003
9610	Jumper Wire/Staple	0322 179 00003
9611	Jumper Wire/Staple	0322 179 00003
9612	Jumper Wire/Staple	0322 179 00003
9613	Jumper Wire/Staple	0322 179 00003
9614	Jumper Wire/Staple	0322 179 00003
9615	Jumper Wire/Staple	0322 179 00003
9618	Jumper Wire/Staple	0322 179 00003
9621	Jumper Wire/Staple	0322 179 00003
9622	Jumper Wire/Staple	0322 179 00003
9624	Jumper Wire/Staple	0322 179 00003
9625	Jumper Wire/Staple	0322 179 00003
9626	Jumper Wire/Staple	0322 179 00003
9629	Jumper Wire/Staple	0322 179 00003
9631	Jumper Wire/Staple	0322 179 00003
9632	Jumper Wire/Staple	0322 179 00003
9637	Jumper Wire/Staple	0322 179 00003
9640	Jumper Wire/Staple	0322 179 00003
9642	Jumper Wire/Staple	0322 179 00003
9643	Jumper Wire/Staple	0322 179 00003
9644	Jumper Wire/Staple	0322 179 00003
9754	Jumper Wire/Staple	0322 179 00003
9788	Jumper Wire/Staple	0322 179 00003
9793	Jumper Wire/Staple	0322 179 00003
9800	Jumper Wire/Staple	0322 179 00003
9805	Jumper Wire/Staple	0322 179 00003
9806	Jumper Wire/Staple	0322 179 00003
9807	Jumper Wire/Staple	0322 179 00003
9810	Jumper Wire/Staple	0322 179 00003
9901	Jumper Wire/Staple	0322 179 00003
9903	Jumper Wire/Staple	0322 179 00003
9905	Jumper Wire/Staple	0322 179 00003
9906	Jumper Wire/Staple	0322 179 00003
9920	Jumper Wire/Staple	0322 179 00003
9933	Jumper Wire/Staple	0322 179 00003
9936	Jumper Wire/Staple	0322 179 00003
9939	Jumper Wire/Staple	0322 179 00003
9940	Jumper Wire/Staple	0322 179 00003
9941	Jumper Wire/Staple	0322 179 00003
9942	Jumper Wire/Staple	0322 179 00003
9943	Jumper Wire/Staple	0322 179 00003
9944	Jumper Wire/Staple	0322 179 00003
9945	Jumper Wire/Staple	0322 179 00003
9946	Jumper Wire/Staple	0322 179 00003
9947	Jumper Wire/Staple	0322 179 00003
9948	Jumper Wire/Staple	0322 179 00003
9949	Jumper Wire/Staple	0322 179 00003
9950	Jumper Wire/Staple	0322 179 00003
9951	Jumper Wire/Staple	0322 179 00003
9953	Jumper Wire/Staple	0322 179 00003
9955	Jumper Wire/Staple	0322 179 00003
9956	Jumper Wire/Staple	0322 179 00003
9957	Jumper Wire/Staple	0322 179 00003
9958	Jumper Wire/Staple	0322 179 00003
9959	Jumper Wire/Staple	0322 179 00003
9960	Jumper Wire/Staple	0322 179 00003
9962	Jumper Wire/Staple	0322 179 00003
9963	Jumper Wire/Staple	0322 179 00003
9965	Jumper Wire/Staple	0322 179 00003
9966	Jumper Wire/Staple	0322 179 00003
9967	Jumper Wire/Staple	0322 179 00003
9968	Jumper Wire/Staple	0322 179 00003
9969	Jumper Wire/Staple	0322 179 00003
9970	Jumper Wire/Staple	0322 179 00003
9971	Jumper Wire/Staple	0322 179 00003
9972	Jumper Wire/Staple	0322 179 00003
9973	Jumper Wire/Staple	0322 179 00003
9974	Jumper Wire/Staple	0322 179 00003
9975	Jumper Wire/Staple	0322 179 00003
9976	Jumper Wire/Staple	0322 179 00003
9977	Jumper Wire/Staple	0322 179 00003
9981	Jumper Wire/Staple	0322 179 00003
9982	Jumper Wire/Staple	0322 179 00003
9983	Jumper Wire/Staple	0322 179 00003
9984	Jumper Wire/Staple	0322 179 00003
9987	Jumper Wire/Staple	0322 179 00003
9989	Jumper Wire/Staple	0322 179 00003
9990	Jumper Wire/Staple	0322 179 00003
9991	Jumper Wire/Staple	0322 179 00003
9992	Jumper Wire/Staple	0322 179 00003
9993	Jumper Wire/Staple	0322 179 00003
CBA	00EMF896A001 Main Chassis Board Assembly.	00EM F89 6A001

A10757 L9 Audio Jack Panel Parts

	A10757 L9 Audio Jack Panel Parts	
CBA	00A10757A001 L9 Audio Jack Panel Asm.	00A1 075 7A001
C1	Cap, 2u2, 20%, 50V, Electrolytic	3198 028 52280
C2	Cap, 2u2, 20%, 50V, Electrolytic	3198 028 52280
J0214	Connector, 3 Pin	2422 025 16601
J0234	4 Pin Board Connector.	2422 025 15851
J100	Socket, Click, 4 Pin	2422 015 18711
J1214	Connector, 3 Pin	2422 025 16601
J1234	4 Pin Board Connector.	2422 025 12489
JP11	Socket, Cinch, 1 Pin	2422 026 04912
JP12	Socket, Cinch, 1 Pin	2422 026 04374
SW1	Switch	4835 277 27061

Cabinet & Accessory Parts

		Cabinet & Accessory Parts	
S	AC01	AC Power Cord.	3135 010 04321
	AC02	Clip, Anode Lead	3135 014 04471
	AC03	Cabinet, Back (ITV).	3135 014 06541
	AC04	Cabinet Front.	3135 017 03911
	AC05	L9L CHASSIS TRAY-32V	3139 124 31323
	AC06	Control Buttons.	3139 124 26472
S	AC08	CRT A90LPY30X02.	9322 139 25682
S	AC09	Coil, Degaussing	3121 218 62661
	AC10	Holder Degaussing Coil (4 Used).	3135 013 01651
	AC11	Light Guide.	3139 124 26461
	AC12	Nameplate.	3135 015 03571
	AC13	Owner's Manual	3135 015 20911
	AC14	Power Button	3139 124 26444
	REMOTE	Transmitter, Remote, RC2524 /01.	3139 228 84651
	AC16	Speaker, 5W, 16 ohm (2 Used)	2422 264 00333
	AC21	Battery, 1.5V AA, 2-Pack, (Not Shown	9299 000 10137
	AC24	Spring	3139 121 26231

S = Safety Part Be sure to use exact replacement part.

PC9225C121 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts		
S 0127	3.15 Amp Fuse, ...	3122 358 72141	
0129	4 Pin Cable.	3104 301 09431	
0152	Cable, DIP, 6 Pin, 400mm	3104 301 09421	
0153	4 Pin Cable.	3104 301 09431	
0212	Connector, 2 Pin	2422 025 15396	
0214	Connector, 3 Pin	2422 025 16382	
0215	Connector, 2 Pin,.	2422 025 16343	
0216	Connector, 4 Pin	2422 025 15847	
0219	Connector, 5 Pin	2422 025 15848	
0220	4 Pin Board Connector.	2422 025 04852	
0224	1 Pin Board Connector.	2422 034 20021	
0227	Connector, 4 Pin	2422 025 16385	
0228	1 Pin Board Connector.	2422 034 20021	
0234	Connector, 4 Pin	2422 025 15847	
0236	4 Pin Board Connector.	2422 025 16384	
0237	Connector, 4 Pin	2422 025 12479	
0238	5 Pin Board Connector.	2422 025 16387	
S 0243	Connector, 6 Pin	2422 025 04854	
0244	4 Pin Board Connector.	2422 025 04852	
S 0245	Connector, 6 Pin	2422 025 04854	
S 0254	CRT Socket (9 Pin)	2422 500 80022	
0259	Connector, 3 Pin	2422 025 16383	
0262	Connector, 4 Pin	2422 025 16385	
0267	Connector, 3 Pin	2412 020 00725	
1000	Tuner.	2422 542 90051	
1001	Filter	2422 549 42501	
1003	45 MHz SAW, Filter,.	2422 549 42433	
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807	
1208	Crystal Resonator, 3.58MHz	2422 543 00832	
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10869	
S 1571	1 Amp, Radial Fuse,.	4835 253 97162	
S 1572	1 Amp, Radial Fuse,.	4835 253 97162	
S 1580	Relay, 12V	2422 132 07317	
1600	Switch, Tactile.	2422 128 02742	
1601	Switch, Tactile.	2422 128 02742	
1602	Switch, Tactile.	2422 128 02742	
1603	Switch, Tactile.	2422 128 02742	
1606	Switch, Tactile.	2422 128 02742	
1660	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488	
1821	Ceramic Resonator.	4835 122 97102	
2001	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2003	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2004	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2006	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290	
2011	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2102	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2103	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2104	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2201	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2202	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2203	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2204	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2205	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2207	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2208	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2209	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2211	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2212	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2213	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2214	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2215	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280	
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 16654	
2220	Cap, 18p, 5%, 50V, Ceramic	3198 016 01890	
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2222	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2226	Cap, 33u, 20%, 25V, Electrolytic . .	2020 021 90124	
2227	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2247	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2248	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2249	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2330	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177	
2340	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495	
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320	
S 2343	Cap, 3n3, 10%, 2KV, Ceramic.	2020 558 90529	
2345	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020	
2401	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2402	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2404	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2405	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2407	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2409	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2420	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2426	Cap, 100n, 10%, 63V, Metalized Polyes ter.	2222 370 75104	
2428	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220	
2429	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2430	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2431	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2437	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	
2438	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2448	Cap, 220p, 10%, 500V, Ceramic. . . .	3198 019 42210	
2450	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91139	
2451	Cap, 15n, 10%, 50V, Polyester. . . .	2020 300 90575	
2451	0.01uF., 10%, 50V, Polyester, only 27	3198 138 20941	
2456	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176	
2457	Cap, 390n, 5%, 250V, Metalized Polypr opylene.	2222 479 90021	
2458	Cap, 10u, 20%, 100V, Electrolytic. .	2020 021 90813	
2459	Cap, 680p, 10%, 500V, Ceramic. . . .	3198 019 46810	
2461	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020	
2462	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176	
2463	470pF., 10%, 2KV, Ceramic.	4835 122 47638	
S 2465	Cap, 10n, 5%, 1600V, Polypropylene .	2222 375 90154	
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050	
2481	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740	
2482	Cap, 68n, 10%, 250V, Polyester . . .	2222 347 90234	
2484	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2485	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93282	
2486	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2487	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2488	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2489	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2490	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710	
2491	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710	
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810	
2500	0.47uF., 250V, Polyester	4835 121 47569	
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
S 2507	Cap, 1n5, 10%, 1KV, Ceramic.	2020 558 90443	
2508	Cap, 470u, 20%, 200V, Electrolytic .	2020 024 90626	
S 2511	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020	
S 2518	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290	
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320	
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320	
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2530	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 021 91147	
2531	Cap, 1n, 2%, 50V, Polypropylene. . .	2020 310 90049	
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220	
2540	Cap, 100u, 20%, 25V, Electrolytic. .	2020 021 90547	
S 2545	1500pF., 250VAC, Ceramic	4835 122 47622	
S 2550	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2551	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91358	
2561	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020	
S 2562	Cap, 220p, 10%, 1KV, Ceramic	2020 558 90424	
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020	
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020	
2572	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330	
2575	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820	
2577	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020	
2586	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2604	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290	
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2613	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2615	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2619	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2622	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890	
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2629	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230	
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2631	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2679	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2681	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2821	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280	
2823	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	

S = Safety Part Be sure to use exact replacement part.

PC9225C121 (continued)

2825	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080		3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046
2826	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090	S	3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
2827	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	S	3341	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483
2828	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	S	3342	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483
2829	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3343	1.5k, 20%, 1/2W, Carbon Composition.	4835 110 47034
2830	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280		3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
2831	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	S	3345	VDR, DC, 1mA, 50V, MAX 115V	2322 593 13507
2832	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280		3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
2833	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280		3401	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2834	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780		3402	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2835	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3403	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2836	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3405	Res, 1K8, 1%, 3/5W, Metal Film . . .	2322 156 21802
2837	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740		3406	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2838	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3407	Res, 1K8, 1%, 3/5W, Metal Film . . .	2322 156 21802
2839	Cap, 1u, 5%, 50V, Metalized Polyester	2020 308 90124		3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2840	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3409	1.5 ohm, 5%, 1/3W, Metal Film. . . .	4835 116 57664
2841	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2842	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3420	470k, 5%, 1/10W, Metal Film.	4835 111 37407
2844	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2845	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2913	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280		3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840
2914	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330		3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606
2915	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3425	150k, 5%, 1/10W, Metal Film.	4835 111 27045
2916	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648		3426	39k, 5%, 1/10W, Metal Film	4835 111 27051
2917	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3428	22k, 5%, 1/10W, Metal Film	4835 111 37441
2918	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330		3429	27k, 5%, 1/10W, Metal Film	4835 111 37442
2919	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3431	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
2920	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648		3432	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
2921	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3436	Res, 1K, 2%, 0,25W	4822 051 10102
2931	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280		3437	10k, 5%, 1/10W, Metal Film	4835 111 37216
2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3438	33k, 1/4W, Carbon Film	4835 110 57375
2952	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
2954	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3447	10k, 5%, 1/10W, Metal Film	4835 111 37216
2955	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	S	3452	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63229
2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	S	3453	Res, 4R7, 5%, 5W, Wire Wound	2322 251 41478
2960	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	S	3454	Res, 33K, 5%, 1 1/3W, Metal Film . .	2322 194 63333
2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090		3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090		3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090	S	3462	Res, 6K8, 5%, 5W, Metal Film	2322 257 41682
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3464	Res, 1K, 2%, 0,25W	4822 051 10102
3010	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610	S	3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
3013	Zero ohm,.	4835 111 27056		3466	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903
3014	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052		3467	Res, 14K, 1%, 3/5W, Metal Film . . .	2322 156 21403
3015	22k, 5%, 1/10W, Metal Film	4835 111 37441		3467	Res, 15K, 1%, 3/5W, Metal Film . . .	2322 156 21503
3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810		3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3021	Res, 1K, 2%, 0,25W	4822 051 10102		3469	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
3103	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3104	10k, 5%, 1/10W, Metal Film	4835 111 37216		3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703
3108	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3481	Res, 100K, 1%, 3/5W, Metal Film. . .	2322 156 21004
3109	10k, 5%, 1/10W, Metal Film	4835 111 37216		3482	Res, 32K4, 1%, 3/5W, Metal Film. . .	2322 156 23243
3123	75 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37276		3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3200	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3201	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253	S	3485	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
3203	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443	S	3486	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	S	3487	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3205	Res, 1K, 2%, 0,25W	4822 051 10102	S	3488	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
3206	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	S	3490	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3491	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3209	22k, 5%, 1/10W, Metal Film	4835 111 37441	S	3492	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3212	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253		3495	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272
3213	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3496	10k, 5%, 1/10W, Metal Film	4835 111 37216
3215	22k, 5%, 1/10W, Metal Film	4835 111 37441		3497	10k, 5%, 1/10W, Metal Film	4835 111 37216
3216	Zero ohm,.	4835 111 27056		3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3218	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225
3219	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3503	10ohm, 120VAC, Positive Temperature C	
3220	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432			oefficient	4835 116 47001
3225	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S	3505	Surge Protector.	2422 549 43073
3228	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3231	Zero ohm,.	4835 111 27056	S	3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333
3232	Zero ohm,.	4835 111 27056	S	3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102
3233	Zero ohm,.	4835 111 27056		3512	15k, 5%, 1/10W, Metal Film	4835 111 37458
3243	1.2k, 5%, 1/10W, Metal Film.	4835 111 27042		3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184
3246	82k, 5%, 1/10W, Metal Film	4835 111 37277		3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204
3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3515	2.5 ohm, 20%, 3.6W, Negative Temperat	
3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010			ure Coefficient.	2122 612 00023
3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340		3516	Res, 1K, 2%, 0,25W	4822 051 10102
3250	Zero ohm,.	4835 111 27056		3517	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3251	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S	3518	Res, 0R22, 5%, 3W, Metal Film. . . .	2120 106 90548
3252	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		3520	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3253	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		3521	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443
3257	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3525	33 ohm, 5%, 1/3W, Metal Film	4835 116 57665
3258	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3528	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3259	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3529	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3530	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3532	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3534	15k, 5%, 1/10W, Metal Film	4835 111 37458
3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3536	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3537	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030

S = Safety Part Be sure to use exact replacement part.

PC9225C121 (continued)

S 3542	4.7 Megohm, 5%, 1/2W, Metal Film . .	4835 116 57009
3570	15k, 5%, 1/10W, Metal Film	4835 111 37458
3571	Res, 150K, 1%, 3/5W, Metal Film. . .	2322 156 21504
3573	Res, 2K, 1%, 1/10W, Metalized Glass.	2120 108 92657
3574	33k, 5%, 1/10W, Metal Film	4835 111 37248
3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3577	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3578	Res, 1K, 2%, 0,25W	4822 051 10102
3579	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3592	10k, 5%, 1/10W, Metal Film	4835 111 37216
3594	22k, 5%, 1/10W, Metal Film	4835 111 37441
3595	68k, 5%, 1/6W, Carbon Film	4835 111 37205
3596	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3597	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
3598	10k, 5%, 1/10W, Metal Film	4835 111 37216
3599	22k, 5%, 1/10W, Metal Film	4835 111 37441
3607	8.2k, 5%, 1/8W, Inline Package . . .	4835 111 97046
3608	2.2k, 5%, 1/8W, Inline Package . . .	4835 111 97049
3609	2.2k, 5%, Resistor Network	2120 108 93868
3611	Res, 1K, 2%, 0,25W	4822 051 10102
3612	10k, 5%, 1/10W, Metal Film	4835 111 37216
3613	10k, 5%, 1/10W, Metal Film	4835 111 37216
3615	10k, 5%, 1/10W, Metal Film	4835 111 37216
3617	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3619	820 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37466
3629	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259
3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
3631	27k, 5%, 1/10W, Metal Film	4835 111 37442
S 3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63479
3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210
3634	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
3635	22k, 5%, 1/10W, Metal Film	4835 111 37441
3636	22k, 5%, 1/10W, Metal Film	4835 111 37441
3637	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
3649	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
3650	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3653	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3654	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
3655	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710
3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3662	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
3663	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
3664	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
3665	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
3666	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376
3667	27k, 5%, 1/10W, Metal Film	4835 111 37442
3672	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
3673	10k, 5%, 1/10W, Metal Film	4835 111 37216
3674	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259
3675	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3676	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3677	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3680	680 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37271
3681	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
3682	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
3683	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
3684	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
3685	220 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37371
3821	15k, 5%, 1/10W, Metal Film	4835 111 37458
3822	1.2k, 5%, 1/10W, Metal Film.	4835 111 27042
3823	100k, 5%, 1/10W, Metal Film.	4835 111 37434
3824	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
3825	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3826	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3827	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3828	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3829	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272
3830	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272
3831	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198 011 03310
3832	47 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37262
3908	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710
3909	Res, 1K, 2%, 0,25W	4822 051 10102
3910	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376
3911	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230
3912	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
3913	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3914	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820
3915	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231
3916	220 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37371
3917	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
3918	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3919	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376
3920	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231
3921	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230
3922	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820
3923	220 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37371
3924	39k, 5%, 1/10W, Metal Film	4835 111 27051
3925	39k, 5%, 1/10W, Metal Film	4835 111 27051
3926	39k, 5%, 1/10W, Metal Film	4835 111 27051
3929	39k, 5%, 1/10W, Metal Film	4835 111 27051
3930	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710
3931	Res, 1K, 2%, 0,25W	4822 051 10102
3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810
3951	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3953	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272
3955	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3957	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
4001	Zero ohm,.	4835 111 27056
4002	Zero ohm,.	4835 111 27056
4004	Zero ohm,.	4835 111 27056
4007	Zero ohm,.	4835 111 27056
4009	Zero ohm,.	4835 111 27056
4010	Zero ohm,.	4835 111 27056
4011	Zero ohm,.	4835 111 27056
4012	Zero ohm,.	4835 111 27056
4013	Zero ohm,.	4835 111 27056
4020	Zero ohm,.	4835 111 27056
4051	Zero ohm,.	4835 111 27056
4100	Zero ohm,.	4835 111 27056
4101	Zero ohm,.	4835 111 27056
4102	Zero ohm,.	4835 111 27056
4103	Zero ohm,.	4835 111 27056
4143	Zero ohm,.	4835 111 27056
4144	Zero ohm,.	4835 111 27056
4203	Zero ohm,.	4835 111 27056
4207	Zero ohm,.	4835 111 27056
4212	Zero ohm,.	4835 111 27056
4214	Zero ohm,.	4835 111 27056
4215	Zero ohm,.	4835 111 27056
4216	Zero ohm,.	4835 111 27056
4501	Zero ohm,.	4835 111 27056
4602	Zero ohm,.	4835 111 27056
4650	Zero ohm,.	4835 111 27056
4651	Zero ohm,.	4835 111 27056
4652	Zero ohm,.	4835 111 27056
4654	Zero ohm,.	4835 111 27056
4655	Zero ohm,.	4835 111 27056
4684	Zero ohm,.	4835 111 27056
4687	Zero ohm,.	4835 111 27056
4831	Zero ohm,.	4835 111 27056
4832	Zero ohm,.	4835 111 27056
4833	Zero ohm,.	4835 111 27056
4902	Zero ohm,.	4835 111 27056
4903	Zero ohm,.	4835 111 27056
4904	Zero ohm,.	4835 111 27056
4905	Zero ohm,.	4835 111 27056
4909	Zero ohm,.	4835 111 27056
4911	Zero ohm,.	4835 111 27056
4912	Zero ohm,.	4835 111 27056
4914	Zero ohm,.	4835 111 27056
4957	Zero ohm,.	4835 111 27056
4999	Zero ohm,.	4835 111 27056
5000	Coil, 5u6.	3198 018 25680
5004	Coil, 820n	2422 535 97314
5201	Coil, 22u.	3198 018 22290
5202	Coil, 6u8.	3198 018 16880
5342	Coil, 22u.	3198 018 22290
S 5445	Transformer, L.O.T., models ending in C101, C121, and C125	2422 531 02327
S 5445	Transformer, L.O.T., models ending in C221 and C225.	3128 138 20941
5451	Coil, 27u.	2422 535 96614
5457	Coil, Linear Correction.	3128 138 53241
5461	Transformer.	3128 138 33811
5480	Coil, 27u.	2422 535 97334
5480	Coil, 39u.	2422 535 97336
5480	Coil, 27u.	3198 018 22790
5480	33uH., Peaking Coil, only in 25. . .	4835 157 58205
S 5500	Filter, Mains, 5mH, 2A	2422 549 43432
5516	100uH., Coil	4835 157 67078
5518	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5521	Coil, 2u2.	3198 018 12280
5540	Coil, 4u7.	3198 018 14780
S 5545	Transfomer,.	2422 531 02314
5551	27uH., 5%, Coil, Peaking	4835 157 67052
5552	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5572	100uH., Coil	4835 157 67078
5573	100uH., Coil	4835 157 67078
5576	100uH., Coil	4835 157 67078
5577	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5600	Coil, 8u2.	3198 018 18280
5601	Coil, 8u2.	3198 018 18280
5620	Coil, 6u8.	3198 018 16880
5821	Coil, 100u	3198 018 21010
5822	Coil, 18u.	3198 018 21890

S = Safety Part Be sure to use exact replacement part.

PC9225C121 (continued)

6008	Zener, 33 Volt BZX79-C33	4835 130 37904
6113	Zener Diode, 6.8 volt.	9340 386 40115
6211	Diode, 1N4148.	4835 130 37048
6212	Diode, 1N4148.	4835 130 37048
6213	Diode, 1N4148.	4835 130 37048
6331	Diode.	4835 130 37294
6333	Diode.	4835 130 37294
6335	Diode.	4835 130 37294
6401	Diode.	4835 130 37094
6402	Zener, 33 Volt, BZX79-C33.	4835 130 37904
6403	Diode.	4835 130 37094
6404	Diode.	4835 130 37094
6449	Diode, 1N4148.	4835 130 37048
6450	Diode, 1N4148.	4835 130 37048
6460	Diode, Rect, BY228/20	9336 215 80112
6463	Diode, 1N4148.	4835 130 37048
6464	Zener Diode, 6.2 volt.	9337 242 70133
6465	Diode, BYD33J.	4835 130 37094
6466	Diode, BYD33J.	4835 130 37094
6480	Diode, Zener	4835 130 37947
6481	Diode, 1N4148.	4835 130 37048
6485	Diode, BYD33J.	4835 130 37094
6486	Diode, EGP20DL-530	4835 130 37919
6487	Diode.	4835 130 37094
6488	Diode, Rect, BYV27-200.	9322 126 72673
6490	Diode, Rect, BYV27-200.	9322 126 72673
6505	Diode, Bridge Rect, GBU6JL-7002	9322 138 08667
6507	Diode, BYD33J.	4835 130 37094
6508	Diode, BYD33J.	4835 130 37094
6510	Zener Diode, 20 volt	9331 178 60133
6511	Diode, BYV95C.	4835 130 37052
6512	Diode, Rect, BY228/20	4822 130 41275
6513	Diode, Rect, BY228/20	4822 130 41275
6514	Zener, 18 Volt, BZX79-C18.	4835 130 37908
6540	Diode.	4835 130 37294
6550	Diode, Rect, BY229X-800	9340 380 30127
6560	Diode, EGP20DL-530	4835 130 37919
6580	Diode, Rect, SB140.	9339 577 60673
6584	Diode, 1N4148.	4835 130 37048
6585	Diode, 1N4148.	4835 130 37048
6591	Diode, BAS216.	4835 130 37905
6601	Diode, Zener	4835 130 37684
6602	Diode, 1N4148.	4835 130 37048
6603	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
6604	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
6605	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
6606	Zener, 4.7 Volt, BZX79-C4V7.	4835 130 37005
6607	Zener, 6.8 Volt, BZX79-C6V8.	4835 130 37945
6690	LED, LTL-307P.	4835 130 97096
6821	Zener Diode, 9.1 volt.	9331 177 80133
6822	Fixed Coil	4835 130 37048
6951	Diode, BAS216.	4835 130 37905
6961	Diode, BAS216.	4835 130 37905
7250	IC,.	9352 620 26112
7251	IC, LM317T	9337 220 80682
7254	Transistor, NPN, BC847B.	4822 130 60511
7256	Transistor, NPN, BC847B.	4822 130 60511
7258	Transistor, NPN, BC847B.	4822 130 60511
7263	Transistor, PNP, BC857B.	5322 130 60508
7266	Transistor, NPN, BC847B.	4822 130 60511
7330	IC,.	9352 184 10112
7401	IC,.	9322 121 47687
7460	Transistor, NPN, BU1508DX.	9340 170 50127
7461	Transistor, NPN, BF819	9335 354 50127
7462	Transistor, BC547B	4835 130 47055
7463	Transistor, BC557B	4835 130 47409
7480	IC,.	9322 028 93682
7481	Transistor, BC557B	4835 130 47409
7482	Transistor, PNP, BC857B.	5322 130 60508
7518	STH8NA60FI SMPS FET	9322 068 92687
7518	STH10NC60FI SMPS FET.	9322 155 66687
7520	IC, MC44603A	4835 209 88537
7570	IC,.	9337 711 00676
S 7581	Coupler, TCDT1101G	9338 431 30682
7590	Transistor, NPN, BC847B.	4822 130 60511
7591	Transistor, NPN, BC847B.	4822 130 60511
7592	Transistor, NPN, BC847B.	4822 130 60511
7600	IC, SAA5543-PS/M4/0167 L9 v3.2 (Commercial Models - NON Pro Plus)	9352 670 84112
7601	IC, ST24W16B6, commercial models only	9322 095 35682
7603	Transistor, NPN, BC337	9331 796 00126
7604	Transistor, NPN, BC847B.	4822 130 60511
7605	Transistor, NPN, BC847B.	4822 130 60511
7608	Transistor, NPN, BC847B.	4822 130 60511
7609	Transistor, NPN, BC847B.	4822 130 60511
7680	IR Receiver.	9322 127 53667
7821	IC,.	9352 374 70112
7822	IC, HEF4052BT.	9333 729 50653
7823	Transistor, NPN, BC337-25.	3198 020 43530
7904	Transistor, NPN, BC847B.	4822 130 60511
7905	Transistor, NPN, BC847B.	4822 130 60511
7906	Transistor, NPN, BC847B.	4822 130 60511
7908	Transistor, NPN, BC847B.	4822 130 60511
7909	Transistor, NPN, BC847B.	4822 130 60511
7910	Transistor, NPN, BC847B.	4822 130 60511
7951	IC,.	4822 209 13706
7953	IC,.	4835 209 88474
CBA	00EMF891A102 Main Chassis Board Asm.	00EM F89 1A102

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Mains Cord	3135 010 07161
S AC02	Anode Clip	4835 256 97264
AC03	Cabinet Back	3135 014 07981
AC04	Cabinet Front.	3135 017 04111
AC05	Chassis Guide.	3139 124 31381
AC06	Customer Control Button.	3139 124 27471
S AC07	Convergence and Purity Assembly.	2422 549 43385
S AC08	CRT A63AFW36X (C121 Version)	9301 763 20443
S AC09	Coil, Degaussing	3121 218 62961
AC11	Light Guide.	3139 124 26461
AC12	Nameplate.	4835 459 17546
AC14	Power Button	3139 124 30891
AC16	Speaker, 16R, 1W5 (2 Used)	2422 264 00343
S AC18	Yoke (C121 Version).	3321 203 00121
AC19	Yoke Wedge (3 Used).	4835 535 27001
AC22	Card Do Cover.	4835 432 17929
AC23	Card Housing	3135 014 08741
AC24	Spring	3139 121 26231
AC25	Owner's Manual	3135 015 16031
AC28	RF Cable	3135 010 07461
AC29	Vent Cover	3135 013 03371

S = Safety Part Be sure to use exact replacement part.

PC9225C221 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts		
S 0127	3.15 Amp Fuse,	3122 358 72141	
0129	4 Pin Cable.	3104 301 09431	
0152	Cable, DIP, 6 Pin, 400mm	3104 301 09421	
0153	4 Pin Cable.	3104 301 09431	
0212	Connector, 2 Pin	2422 025 15396	
0214	Connector, 3 Pin	2422 025 16382	
0215	Connector, 2 Pin,	2422 025 16343	
0216	Connector, 4 Pin	2422 025 15847	
0219	Connector, 5 Pin	2422 025 15848	
0220	4 Pin Board Connector.	2422 025 04852	
0224	1 Pin Board Connector.	2422 034 20021	
0227	Connector, 4 Pin	2422 025 16385	
0228	1 Pin Board Connector.	2422 034 20021	
0234	Connector, 4 Pin	2422 025 15847	
0236	4 Pin Board Connector.	2422 025 16384	
0237	Connector, 4 Pin	2422 025 12479	
0238	5 Pin Board Connector.	2422 025 16387	
S 0243	Connector, 6 Pin	2422 025 04854	
0244	4 Pin Board Connector.	2422 025 04852	
S 0245	Connector, 6 Pin	2422 025 04854	
S 0254	CRT Socket (9 Pin)	2422 500 80022	
0259	Connector, 3 Pin	2422 025 16383	
0262	Connector, 4 Pin	2422 025 16385	
0267	Connector, 3 Pin	2412 020 00725	
1000	Tuner.	2422 542 90051	
1001	Filter	2422 549 42501	
1003	45 MHz SAW, Filter,	2422 549 42433	
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807	
1208	Crystal Resonator, 3.58MHz	2422 543 00832	
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10869	
S 1571	1 Amp, Radial Fuse,	4835 253 97162	
S 1572	1 Amp, Radial Fuse,	4835 253 97162	
S 1580	Relay, 12V	2422 132 07317	
1600	Switch, Tactile.	2422 128 02742	
1601	Switch, Tactile.	2422 128 02742	
1602	Switch, Tactile.	2422 128 02742	
1603	Switch, Tactile.	2422 128 02742	
1606	Switch, Tactile.	2422 128 02742	
1660	Crystal, Resonator, 12MHz, 20 Pin.	2422 543 00488	
1821	Ceramic Resonator.	4835 122 97102	
2001	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2003	Cap, 100u, 20%, 50V, Electrolytic.	3198 025 51010	
2004	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2006	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290	
2011	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090	
2013	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040	
2102	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2103	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2104	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2201	Cap, 220n, 10%, 50V, Polyester	3198 014 02240	
2202	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2203	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090	
2204	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2205	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040	
2206	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040	
2207	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010	
2208	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010	
2209	Cap, 470n, +80/-20%, 16V, Ceramic.	3198 017 24740	
2211	Cap, 470n, +80/-20%, 16V, Ceramic.	3198 017 24740	
2212	Cap, 470n, +80/-20%, 16V, Ceramic.	3198 017 24740	
2213	Cap, 470n, +80/-20%, 16V, Ceramic.	3198 017 24740	
2214	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2215	Cap, 2u2, 20%, 50V, Electrolytic	3198 025 52280	
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 16654	
2220	Cap, 18p, 5%, 50V, Ceramic	3198 016 01890	
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2222	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040	
2226	Cap, 33u, 20%, 25V, Electrolytic	2020 021 90124	
2227	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080	
2247	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2248	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2249	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2330	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177	
2340	Cap, 10u, 20%, 250V, Electrolytic.	2020 012 93495	
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320	
S 2343	Cap, 3n3, 10%, 2KV, Ceramic.	2020 558 90529	
2345	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020	
2401	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2402	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2404	Cap, 220n, 10%, 50V, Polyester	3198 014 02240	
2405	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2407	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2409	Cap, 220n, 10%, 50V, Polyester	3198 014 02240	
2420	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2426	Cap, 100n, 10%, 63V, Metalized Polyester	2222 370 75104	
2428	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220	
2429	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080	
2430	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090	
2431	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040	
2437	Cap, 220n, +80/-20%, 25V, Ceramic.	3198 023 22240	
2438	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050	
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2448	Cap, 220p, 10%, 500V, Ceramic.	3198 019 42210	
2450	Cap, 47u, 20%, 160v, Electrolytic.	2020 021 91139	
2451	Cap, 15n, 10%, 50V, Polyester.	2020 300 90575	
2451	0.01uF., 10%, 50V, Polyester, only 27	3198 138 20941	
2456	Cap, 47n, 10%, 250V, Metalized Polyester.	2222 368 90176	
2457	Cap, 390n, 5%, 250V, Metalized Polypropylene.	2222 479 90021	
2458	Cap, 10u, 20%, 100V, Electrolytic.	2020 021 90813	
2459	Cap, 680p, 10%, 500V, Ceramic.	3198 019 46810	
2461	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020	
2462	Cap, 47n, 10%, 250V, Metalized Polyester.	2222 368 90176	
2463	470pF., 10%, 2KV, Ceramic.	4835 122 47638	
S 2465	Cap, 10n, 5%, 1600V, Polypropylene	2222 375 90154	
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050	
2481	Cap, 470n, 10%, 50V, Polyester	3198 014 04740	
2482	Cap, 68n, 10%, 250V, Polyester	2222 347 90234	
2484	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2485	Cap, 4u7, 20%, 250V, Electrolytic.	2020 012 93282	
2486	Cap, 470u, 20%, 16V, Electrolytic.	3198 025 24710	
2487	Cap, 100u, 20%, 50V, Electrolytic.	3198 025 51010	
2488	Cap, 470u, 20%, 16V, Electrolytic.	3198 025 24710	
2489	Cap, 470u, 20%, 16V, Electrolytic.	3198 025 24710	
2490	Cap, 470p, 10%, 500V, Ceramic.	3198 019 44710	
2491	Cap, 470p, 10%, 500V, Ceramic.	3198 019 44710	
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810	
2500	0.47uF., 250V, Polyester	4835 121 47569	
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
S 2507	Cap, 1n5, 10%, 1KV, Ceramic.	2020 558 90443	
2508	Cap, 470u, 20%, 200V, Electrolytic	2020 024 90626	
S 2511	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020	
S 2518	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290	
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320	
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320	
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2529	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040	
2530	Cap, 1u, 20%, 50V, Electrolytic.	2020 021 91147	
2531	Cap, 1n, 2%, 50V, Polypropylene.	2020 310 90049	
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220	
2540	Cap, 100u, 20%, 25V, Electrolytic.	2020 021 90547	
S 2545	1500pF., 250VAC, Ceramic	4835 122 47622	
S 2550	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2551	Cap, 47u, 20%, 160v, Electrolytic.	2020 021 91358	
2561	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020	
S 2562	Cap, 220p, 10%, 1KV, Ceramic	2020 558 90424	
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020	
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020	
2572	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330	
2575	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040	
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820	
2577	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020	
2586	Cap, 220u, 20%, 25V, Electrolytic.	3198 025 32210	
2604	Cap, 22u, 20%, 50V, Electrolytic	3198 025 52290	
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2613	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2615	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040	
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2619	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080	
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2622	Cap, 220u, 20%, 25V, Electrolytic.	3198 025 32210	
2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890	
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2629	Cap, 22n, +80/-20%, 50V, Ceramic	3198 019 22230	
2630	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040	
2631	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050	
2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2679	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040	
2681	Cap, 220u, 20%, 25V, Electrolytic.	3198 025 32210	
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2821	Cap, 2u2, 20%, 50V, Electrolytic	3198 028 52280	
2823	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	

S = Safety Part Be sure to use exact replacement part.

PC9225C221 (continued)

2825	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080		3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046
2826	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090	S	3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
2827	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	S	3341	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483
2828	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	S	3342	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483
2829	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3343	1.5k, 20%, 1/2W, Carbon Composition.	4835 110 47034
2830	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280		3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
2831	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	S	3345	VDR, DC, 1mA, 50V, MAX 115V	2322 593 13507
2832	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280		3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
2833	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280		3401	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2834	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780		3402	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2835	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3403	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2836	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3405	Res, 1K8, 1%, 3/5W, Metal Film . . .	2322 156 21802
2837	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740		3406	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2838	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3407	Res, 1K8, 1%, 3/5W, Metal Film . . .	2322 156 21802
2839	Cap, 1u, 5%, 50V, Metalized Polyester	2020 308 90124		3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2840	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3409	1.5 ohm, 5%, 1/3W, Metal Film. . . .	4835 116 57664
2841	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2842	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3420	470k, 5%, 1/10W, Metal Film.	4835 111 37407
2844	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2845	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2913	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280		3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840
2914	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330		3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606
2915	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3425	150k, 5%, 1/10W, Metal Film.	4835 111 27045
2916	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648		3426	39k, 5%, 1/10W, Metal Film	4835 111 27051
2917	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3428	22k, 5%, 1/10W, Metal Film	4835 111 37441
2918	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330		3429	27k, 5%, 1/10W, Metal Film	4835 111 37442
2919	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3431	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
2920	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648		3432	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
2921	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3436	Res, 1K, 2%, 0,25W	4822 051 10102
2931	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280		3437	10k, 5%, 1/10W, Metal Film	4835 111 37216
2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3438	33k, 1/4W, Carbon Film	4835 110 57375
2952	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
2954	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3447	10k, 5%, 1/10W, Metal Film	4835 111 37216
2955	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	S	3452	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63229
2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	S	3453	Res, 4R7, 5%, 5W, Wire Wound	2322 251 41478
2960	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	S	3454	Res, 33K, 5%, 1 1/3W, Metal Film . .	2322 194 63333
2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090		3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090		3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090	S	3462	Res, 6K8, 5%, 5W, Metal Film	2322 257 41682
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3464	Res, 1K, 2%, 0,25W	4822 051 10102
3010	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610	S	3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
3013	Zero ohm,.	4835 111 27056		3466	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903
3014	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052		3467	Res, 14K, 1%, 3/5W, Metal Film . . .	2322 156 21403
3015	22k, 5%, 1/10W, Metal Film	4835 111 37441		3467	Res, 15K, 1%, 3/5W, Metal Film . . .	2322 156 21503
3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810		3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3021	Res, 1K, 2%, 0,25W	4822 051 10102		3469	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
3103	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3104	10k, 5%, 1/10W, Metal Film	4835 111 37216		3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703
3108	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3481	Res, 100K, 1%, 3/5W, Metal Film. . .	2322 156 21004
3109	10k, 5%, 1/10W, Metal Film	4835 111 37216		3482	Res, 32K4, 1%, 3/5W, Metal Film. . .	2322 156 23243
3123	75 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37276		3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3200	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3201	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253	S	3485	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
3203	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443	S	3486	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	S	3487	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3205	Res, 1K, 2%, 0,25W	4822 051 10102	S	3488	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
3206	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	S	3490	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3491	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3209	22k, 5%, 1/10W, Metal Film	4835 111 37441	S	3492	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3212	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253		3495	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272
3213	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3496	10k, 5%, 1/10W, Metal Film	4835 111 37216
3215	22k, 5%, 1/10W, Metal Film	4835 111 37441		3497	10k, 5%, 1/10W, Metal Film	4835 111 37216
3216	Zero ohm,.	4835 111 27056		3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3218	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225
3219	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3503	10ohm, 120VAC, Positive Temperature C	
3220	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432			oefficient	4835 116 47001
3225	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S	3505	Surge Protector.	2422 549 43073
3228	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3231	Zero ohm,.	4835 111 27056	S	3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333
3232	Zero ohm,.	4835 111 27056	S	3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102
3233	Zero ohm,.	4835 111 27056		3512	15k, 5%, 1/10W, Metal Film	4835 111 37458
3243	1.2k, 5%, 1/10W, Metal Film.	4835 111 27042		3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184
3246	82k, 5%, 1/10W, Metal Film	4835 111 37277		3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204
3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3515	2.5 ohm, 20%, 3.6W, Negative Temperat	
3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010			ure Coefficient.	2122 612 00023
3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340		3516	Res, 1K, 2%, 0,25W	4822 051 10102
3250	Zero ohm,.	4835 111 27056		3517	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3251	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S	3518	Res, 0R22, 5%, 3W, Metal Film. . . .	2120 106 90548
3252	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		3520	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3253	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		3521	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443
3257	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3525	33 ohm, 5%, 1/3W, Metal Film	4835 116 57665
3258	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3528	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3259	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3529	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3530	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3532	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3534	15k, 5%, 1/10W, Metal Film	4835 111 37458
3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3536	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3537	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030

S = Safety Part Be sure to use exact replacement part.

PC9225C221 (continued)

S 3542	4.7 Megohm, 5%, 1/2W, Metal Film . .	4835 116 57009
3570	15k, 5%, 1/10W, Metal Film	4835 111 37458
3571	Res, 150K, 1%, 3/5W, Metal Film. . .	2322 156 21504
3573	Res, 2K, 1%, 1/10W, Metalized Glass.	2120 108 92657
3574	33k, 5%, 1/10W, Metal Film	4835 111 37248
3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3577	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3578	Res, 1K, 2%, 0,25W	4822 051 10102
3579	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3592	10k, 5%, 1/10W, Metal Film	4835 111 37216
3594	22k, 5%, 1/10W, Metal Film	4835 111 37441
3595	68k, 5%, 1/6W, Carbon Film	4835 111 37205
3596	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3597	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
3598	10k, 5%, 1/10W, Metal Film	4835 111 37216
3599	22k, 5%, 1/10W, Metal Film	4835 111 37441
3607	8.2k, 5%, 1/8W, Inline Package . . .	4835 111 97046
3608	2.2k, 5%, 1/8W, Inline Package . . .	4835 111 97049
3609	2.2k, 5%, Resistor Network	2120 108 93868
3611	Res, 1K, 2%, 0,25W	4822 051 10102
3612	10k, 5%, 1/10W, Metal Film	4835 111 37216
3613	10k, 5%, 1/10W, Metal Film	4835 111 37216
3615	10k, 5%, 1/10W, Metal Film	4835 111 37216
3617	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3619	820 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37466
3629	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259
3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
3631	27k, 5%, 1/10W, Metal Film	4835 111 37442
S 3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63479
3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210
3634	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
3635	22k, 5%, 1/10W, Metal Film	4835 111 37441
3636	22k, 5%, 1/10W, Metal Film	4835 111 37441
3637	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
3649	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
3650	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3653	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3654	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
3655	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710
3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3662	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
3663	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
3664	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
3665	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
3666	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376
3667	27k, 5%, 1/10W, Metal Film	4835 111 37442
3672	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
3673	10k, 5%, 1/10W, Metal Film	4835 111 37216
3674	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259
3675	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3676	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3677	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3680	680 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37271
3681	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
3682	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
3683	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
3684	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
3685	220 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37371
3821	15k, 5%, 1/10W, Metal Film	4835 111 37458
3822	1.2k, 5%, 1/10W, Metal Film.	4835 111 27042
3823	100k, 5%, 1/10W, Metal Film.	4835 111 37434
3824	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
3825	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3826	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3827	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3828	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3829	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272
3830	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272
3831	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198 011 03310
3832	47 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37262
3908	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710
3909	Res, 1K, 2%, 0,25W	4822 051 10102
3910	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376
3911	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230
3912	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
3913	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3914	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820
3915	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231
3916	220 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37371
3917	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
3918	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3919	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376
3920	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231
3921	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230
3922	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820
3923	220 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37371
3924	39k, 5%, 1/10W, Metal Film	4835 111 27051
3925	39k, 5%, 1/10W, Metal Film	4835 111 27051
3926	39k, 5%, 1/10W, Metal Film	4835 111 27051
3929	39k, 5%, 1/10W, Metal Film	4835 111 27051
3930	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710
3931	Res, 1K, 2%, 0,25W	4822 051 10102
3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810
3951	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3953	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272
3955	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3957	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
4001	Zero ohm,.	4835 111 27056
4002	Zero ohm,.	4835 111 27056
4004	Zero ohm,.	4835 111 27056
4007	Zero ohm,.	4835 111 27056
4009	Zero ohm,.	4835 111 27056
4010	Zero ohm,.	4835 111 27056
4011	Zero ohm,.	4835 111 27056
4012	Zero ohm,.	4835 111 27056
4013	Zero ohm,.	4835 111 27056
4020	Zero ohm,.	4835 111 27056
4051	Zero ohm,.	4835 111 27056
4100	Zero ohm,.	4835 111 27056
4101	Zero ohm,.	4835 111 27056
4102	Zero ohm,.	4835 111 27056
4103	Zero ohm,.	4835 111 27056
4143	Zero ohm,.	4835 111 27056
4144	Zero ohm,.	4835 111 27056
4203	Zero ohm,.	4835 111 27056
4207	Zero ohm,.	4835 111 27056
4212	Zero ohm,.	4835 111 27056
4214	Zero ohm,.	4835 111 27056
4215	Zero ohm,.	4835 111 27056
4216	Zero ohm,.	4835 111 27056
4501	Zero ohm,.	4835 111 27056
4602	Zero ohm,.	4835 111 27056
4650	Zero ohm,.	4835 111 27056
4651	Zero ohm,.	4835 111 27056
4652	Zero ohm,.	4835 111 27056
4654	Zero ohm,.	4835 111 27056
4655	Zero ohm,.	4835 111 27056
4684	Zero ohm,.	4835 111 27056
4687	Zero ohm,.	4835 111 27056
4831	Zero ohm,.	4835 111 27056
4832	Zero ohm,.	4835 111 27056
4833	Zero ohm,.	4835 111 27056
4902	Zero ohm,.	4835 111 27056
4903	Zero ohm,.	4835 111 27056
4904	Zero ohm,.	4835 111 27056
4905	Zero ohm,.	4835 111 27056
4909	Zero ohm,.	4835 111 27056
4911	Zero ohm,.	4835 111 27056
4912	Zero ohm,.	4835 111 27056
4914	Zero ohm,.	4835 111 27056
4957	Zero ohm,.	4835 111 27056
4999	Zero ohm,.	4835 111 27056
5000	Coil, 5u6.	3198 018 25680
5004	Coil, 820n	2422 535 97314
5201	Coil, 22u.	3198 018 22290
5202	Coil, 6u8.	3198 018 16880
5342	Coil, 22u.	3198 018 22290
S 5445	Transformer, L.O.T., models ending in C101, C121, and C125	2422 531 02327
S 5445	Transformer, L.O.T., models ending in C221 and C225.	3128 138 20941
5451	Coil, 27u.	2422 535 96614
5457	Coil, Linear Correction.	3128 138 53241
5461	Transformer.	3128 138 33811
5480	Coil, 27u.	2422 535 97334
5480	Coil, 39u.	2422 535 97336
5480	Coil, 27u.	3198 018 22790
5480	33uH., Peaking Coil, only in 25. . .	4835 157 58205
S 5500	Filter, Mains, 5mH, 2A	2422 549 43432
5516	100uH., Coil	4835 157 67078
5518	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5521	Coil, 2u2.	3198 018 12280
5540	Coil, 4u7.	3198 018 14780
S 5545	Transfomer,.	2422 531 02314
5551	27uH., 5%, Coil, Peaking	4835 157 67052
5552	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5572	100uH., Coil	4835 157 67078
5573	100uH., Coil	4835 157 67078
5576	100uH., Coil	4835 157 67078
5577	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5600	Coil, 8u2.	3198 018 18280
5601	Coil, 8u2.	3198 018 18280
5620	Coil, 6u8.	3198 018 16880
5821	Coil, 100u	3198 018 21010
5822	Coil, 18u.	3198 018 21890

S = Safety Part Be sure to use exact replacement part.

PC9225C221 (continued)

6008	Zener, 33 Volt BZX79-C33	4835 130 37904
6113	Zener Diode, 6.8 volt.	9340 386 40115
6211	Diode, 1N4148.	4835 130 37048
6212	Diode, 1N4148.	4835 130 37048
6213	Diode, 1N4148.	4835 130 37048
6331	Diode.	4835 130 37294
6333	Diode.	4835 130 37294
6335	Diode.	4835 130 37294
6401	Diode.	4835 130 37094
6402	Zener, 33 Volt, BZX79-C33.	4835 130 37904
6403	Diode.	4835 130 37094
6404	Diode.	4835 130 37094
6449	Diode, 1N4148.	4835 130 37048
6450	Diode, 1N4148.	4835 130 37048
6460	Diode, Rect, BY228/20	9336 215 80112
6463	Diode, 1N4148.	4835 130 37048
6464	Zener Diode, 6.2 volt.	9337 242 70133
6465	Diode, BYD33J.	4835 130 37094
6466	Diode, BYD33J.	4835 130 37094
6480	Diode, Zener	4835 130 37947
6481	Diode, 1N4148.	4835 130 37048
6485	Diode, BYD33J.	4835 130 37094
6486	Diode, EGP20DL-530	4835 130 37919
6487	Diode.	4835 130 37094
6488	Diode, Rect, BYV27-200.	9322 126 72673
6490	Diode, Rect, BYV27-200.	9322 126 72673
6505	Diode, Bridge Rect, GBU6JL-7002	9322 138 08667
6507	Diode, BYD33J.	4835 130 37094
6508	Diode, BYD33J.	4835 130 37094
6510	Zener Diode, 20 volt	9331 178 60133
6511	Diode, BYV95C.	4835 130 37052
6512	Diode, Rect, BY228/20	4822 130 41275
6513	Diode, Rect, BY228/20	4822 130 41275
6514	Zener, 18 Volt, BZX79-C18.	4835 130 37908
6540	Diode.	4835 130 37294
6550	Diode, Rect, BY229X-800	9340 380 30127
6560	Diode, EGP20DL-530	4835 130 37919
6580	Diode, Rect, SB140.	9339 577 60673
6584	Diode, 1N4148.	4835 130 37048
6585	Diode, 1N4148.	4835 130 37048
6591	Diode, BAS216.	4835 130 37905
6601	Diode, Zener	4835 130 37684
6602	Diode, 1N4148.	4835 130 37048
6603	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
6604	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
6605	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
6606	Zener, 4.7 Volt, BZX79-C4V7.	4835 130 37005
6607	Zener, 6.8 Volt, BZX79-C6V8.	4835 130 37945
6690	LED, LTL-307P.	4835 130 97096
6821	Zener Diode, 9.1 volt.	9331 177 80133
6822	Fixed Coil	4835 130 37048
6951	Diode, BAS216.	4835 130 37905
6961	Diode, BAS216.	4835 130 37905
7250	IC,.	9352 620 26112
7251	IC, LM317T	9337 220 80682
7254	Transistor, NPN, BC847B.	4822 130 60511
7256	Transistor, NPN, BC847B.	4822 130 60511
7258	Transistor, NPN, BC847B.	4822 130 60511
7263	Transistor, PNP, BC857B.	5322 130 60508
7266	Transistor, NPN, BC847B.	4822 130 60511
7330	IC,.	9352 184 10112
7401	IC,.	9322 121 47687
7460	Transistor, NPN, BU1508DX.	9340 170 50127
7461	Transistor, NPN, BF819	9335 354 50127
7462	Transistor, BC547B	4835 130 47055
7463	Transistor, BC557B	4835 130 47409
7480	IC,.	9322 028 93682
7481	Transistor, BC557B	4835 130 47409
7482	Transistor, PNP, BC857B.	5322 130 60508
7518	STH8NA60FI SMPS FET	9322 068 92687
7518	STH10NC60FI SMPS FET.	9322 155 66687
7520	IC, MC44603A	4835 209 88537
7570	IC,.	9337 711 00676
S 7581	Coupler, TCDT1101G	9338 431 30682
7590	Transistor, NPN, BC847B.	4822 130 60511
7591	Transistor, NPN, BC847B.	4822 130 60511
7592	Transistor, NPN, BC847B.	4822 130 60511
7600	IC, SAA5543-PS/M4/0167 L9 v3.2 (Commercial Models - NON Pro Plus)	9352 670 84112
7601	IC, ST24W16B6, commercial models only	9322 095 35682
7603	Transistor, NPN, BC337	9331 796 00126
7604	Transistor, NPN, BC847B.	4822 130 60511
7605	Transistor, NPN, BC847B.	4822 130 60511
7608	Transistor, NPN, BC847B.	4822 130 60511
7609	Transistor, NPN, BC847B.	4822 130 60511
7680	IR Receiver.	9322 127 53667
7821	IC,.	9352 374 70112
7822	IC, HEF4052BT.	9333 729 50653
7823	Transistor, NPN, BC337-25.	3198 020 43530
7904	Transistor, NPN, BC847B.	4822 130 60511
7905	Transistor, NPN, BC847B.	4822 130 60511
7906	Transistor, NPN, BC847B.	4822 130 60511
7908	Transistor, NPN, BC847B.	4822 130 60511
7909	Transistor, NPN, BC847B.	4822 130 60511
7910	Transistor, NPN, BC847B.	4822 130 60511
7951	IC,.	4822 209 13706
7953	IC,.	4835 209 88474
CBA	00EMF891A102 Main Chassis Board Asm.	00EM F89 1A102

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Mains Cord	3135 010 07161
S AC02	Anode Clip	4835 256 97264
AC03	Cabinet Back	3135 014 07981
AC04	Cabinet Front.	3135 017 04111
AC05	Chassis Guide.	3139 124 31381
AC06	Customer Control Button.	3139 124 27471
S AC07	Convergence and Purity Assembly.	2422 549 43385
S AC08	CRT A63AFW36X (C121 Version)	9301 763 20443
S AC09	Coil, Degaussing	3121 218 62961
AC11	Light Guide.	3139 124 26461
AC12	Nameplate.	4835 459 17546
AC14	Power Button	3139 124 30891
AC16	Speaker, 16R, 1W5 (2 Used)	2422 264 00343
S AC18	Yoke (C121 Version).	3321 203 00121
AC19	Yoke Wedge (3 Used).	4835 535 27001
AC22	Card Do Cover.	4835 432 17929
AC23	Card Housing	3135 014 08741
AC24	Spring	3139 121 26231
AC25	Owner's Manual	3135 015 16031
AC28	RF Cable	3135 010 07461
AC29	Vent Cover	3135 013 03371

S = Safety Part Be sure to use exact replacement part.

PC9227C101 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts	
S 0127	3.15 Amp Fuse, ...	3122 358 72141
0152	Cable, DIP, 6 Pin, 400mm	3104 301 09421
0153	4 Pin Cable.	3104 301 09431
0212	Connector, 2 Pin	2422 025 15396
0214	Connector, 3 Pin	2422 025 16382
0215	Connector, 2 Pin,.	2422 025 16343
0216	Connector, 4 Pin	2422 025 15847
0219	Connector, 5 Pin	2422 025 15848
0220	4 Pin Board Connector.	2422 025 04852
0224	1 Pin Board Connector.	2422 034 20021
0227	Connector, 4 Pin	2422 025 16385
0228	1 Pin Board Connector.	2422 034 20021
0234	Connector, 4 Pin	2422 025 15847
0236	4 Pin Board Connector.	2422 025 16384
0237	Connector, 4 Pin	2422 025 12479
0238	5 Pin Board Connector.	2422 025 16387
S 0243	Connector, 6 Pin	2422 025 04854
0244	4 Pin Board Connector.	2422 025 04852
S 0245	Connector, 6 Pin	2422 025 04854
S 0254	CRT Socket (9 Pin)	2422 500 80022
0259	Connector, 3 Pin	2422 025 16383
0262	Connector, 4 Pin	2422 025 16385
0267	Connector, 3 Pin	2412 020 00725
1000	Tuner.	2422 542 90051
1001	Filter	2422 549 42501
1003	45 MHz SAW, Filter,.	2422 549 42433
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807
1208	Crystal Resonator.	4835 242 77276
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10869
S 1571	1 Amp, Radial Fuse,.	4835 253 97162
S 1572	1 Amp, Radial Fuse,.	4835 253 97162
S 1580	Relay, 12V	2422 132 07317
1600	Switch, Tactile.	2422 128 02742
1601	Switch, Tactile.	2422 128 02742
1602	Switch, Tactile.	2422 128 02742
1603	Switch, Tactile.	2422 128 02742
1606	Switch, Tactile.	2422 128 02742
1660	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488
1821	Ceramic Resonator.	4835 122 97102
2001	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2003	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2004	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2011	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2102	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2103	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2104	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2201	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2202	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2203	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2204	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2205	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2208	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2209	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2211	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2212	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2213	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2214	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2215	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 16654
2220	Cap, 18p, 5%, 50V, Ceramic	3198 016 01890
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2222	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2226	Cap, 33u, 20%, 25V, Electrolytic . .	2020 021 90124
2227	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2247	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2248	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2249	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2330	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2340	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320
S 2343	Cap, 3n3, 10%, 2KV, Ceramic.	2020 558 90529
2345	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2401	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2402	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2404	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2405	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2407	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2409	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2420	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2426	Cap, 100n, 10%, 63V, Metalized Polyes ter.	2222 370 75104
2428	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2429	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2430	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2431	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2437	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2438	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2448	Cap, 220p, 10%, 500V, Ceramic. . . .	3198 019 42210
2450	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91139
2451	Cap, 15n, 10%, 50V, Polyester. . . .	2020 300 90575
2451	0.01uF., 10%, 50V, Polyester, only 27	3198 138 20941
2456	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176
2457	Cap, 390n, 5%, 250V, Metalized Polypr opylene.	2222 479 90021
2458	Cap, 2u2, 20%, 100V, Electrolytic. .	2020 021 91331
2459	Cap, 680p, 10%, 500V, Ceramic. . . .	3198 019 46810
2461	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2462	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176
2463	680pF., 10%, 2KV, Ceramic.	4835 122 47584
S 2465	Cap, 10n, 5%, 1600V, Polypropylene .	2222 375 90154
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050
2473	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2481	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2482	Cap, 68n, 10%, 250V, Polyester . . .	2222 347 90234
2484	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2485	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2486	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2487	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2488	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2489	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2490	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2491	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810
2500	0.47uF., 250V, Polyester	4835 121 47569
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
S 2507	Cap, 1n5, 10%, 1KV, Ceramic.	2020 558 90443
2508	Cap, 470u, 20%, 200V, Electrolytic .	2020 024 90647
S 2511	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
S 2518	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2530	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 021 91147
2531	Cap, 1n, 2%, 50V, Polypropylene. . .	2020 310 90049
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2540	Cap, 100u, 20%, 25V, Electrolytic. .	2020 021 90547
S 2545	1500pF., 250VAC, Ceramic	4835 122 47621
S 2550	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2551	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91358
2561	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
S 2562	Cap, 220p, 10%, 1KV, Ceramic	2020 558 90424
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2572	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2575	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2577	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2586	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2604	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2613	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2615	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2619	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2622	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2629	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2679	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2681	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2821	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280
2823	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720

S = Safety Part Be sure to use exact replacement part.

PC9227C101 (continued)

2825	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080		3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
2826	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090		3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046
2827	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	S	3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
2828	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	S	3341	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483
2829	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	S	3342	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483
2830	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280		3343	1.5k, 20%, 1/2W, Carbon Composition.	4835 110 47034
2831	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
2832	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280	S	3345	VDR, DC, 1mA, 50V, MAX 115V	2322 593 13507
2833	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280		3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
2834	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780		3401	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2835	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3402	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2836	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3403	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2837	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740		3405	Res, 1K8, 1%, 3/5W, Metal Film . . .	2322 156 21802
2838	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3406	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2839	Cap, 1u, 5%, 50V, Metalized Polyester	2020 308 90124		3407	Res, 1K8, 1%, 3/5W, Metal Film . . .	2322 156 21802
2840	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2841	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3409	1.5 ohm, 5%, 1/3W, Metal Film. . . .	4835 116 57664
2842	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2844	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3420	470k, 5%, 1/10W, Metal Film.	4835 111 37407
2845	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2913	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280		3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2914	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330		3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840
2915	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606
2916	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648		3425	Res, 120K, 5%, 1/10W, Metalized Glass	2120 108 91716
2917	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3426	39k, 5%, 1/10W, Metal Film	4835 111 27051
2918	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330		3428	22k, 5%, 1/10W, Metal Film	4835 111 37441
2919	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3429	27k, 5%, 1/10W, Metal Film	4835 111 37442
2920	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648		3431	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
2921	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3432	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
2931	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280		3436	Res, 1K, 2%, 0,25W	4822 051 10102
2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3437	10k, 5%, 1/10W, Metal Film	4835 111 37216
2952	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3438	33k, 1/4W, Carbon Film	4835 110 57375
2954	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
2955	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3447	10k, 5%, 1/10W, Metal Film	4835 111 37216
2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	S	3452	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63229
2960	Cap, 220u, 20%, 50V, Electrolytic. .	3198 026 52210	S	3453	Res, 4R7, 5%, 5W, Wire Wound	2322 251 41478
2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090	S	3454	Res, 33K, 5%, 1 1/3W, Metal Film . .	2322 194 63333
2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090		3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090		3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3462	Res, 6K8, 5%, 5W, Metal Film	2322 257 41682
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3010	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610		3464	Res, 1K, 2%, 0,25W	4822 051 10102
3013	Zero ohm,.	4835 111 27056	S	3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
3014	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052		3466	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903
3015	22k, 5%, 1/10W, Metal Film	4835 111 37441		3467	Res, 14K, 1%, 3/5W, Metal Film . . .	2322 156 21403
3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810		3467	Res, 15K, 1%, 3/5W, Metal Film . . .	2322 156 21503
3021	Res, 1K, 2%, 0,25W	4822 051 10102		3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3103	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3469	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
3104	10k, 5%, 1/10W, Metal Film	4835 111 37216		3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3108	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703
3109	10k, 5%, 1/10W, Metal Film	4835 111 37216		3481	Res, 35K7, 1%, 3/5W, Metal Film. . .	2322 156 23573
3123	75 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37276		3482	Res, 56K, 1%, 3/5W, Metal Film . . .	2322 156 25603
3200	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3201	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253		3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3203	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443	S	3485	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	S	3486	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3205	Res, 1K, 2%, 0,25W	4822 051 10102	S	3487	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3206	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	S	3488	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3490	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3209	22k, 5%, 1/10W, Metal Film	4835 111 37441	S	3491	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3212	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253	S	3492	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3213	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3495	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272
3215	22k, 5%, 1/10W, Metal Film	4835 111 37441		3496	10k, 5%, 1/10W, Metal Film	4835 111 37216
3216	Zero ohm,.	4835 111 27056		3497	10k, 5%, 1/10W, Metal Film	4835 111 37216
3217	Res, 1M5, 5%, 1/8W, Metalized Glass.	2322 730 61155		3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3218	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225
3219	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3503	10ohm, 120VAC, Positive Temperature C	
3220	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432			oefficient	4835 116 47001
3225	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S	3505	Surge Protector.	2422 549 43073
3228	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3231	Zero ohm,.	4835 111 27056	S	3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333
3232	Zero ohm,.	4835 111 27056	S	3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102
3233	Zero ohm,.	4835 111 27056		3512	15k, 5%, 1/10W, Metal Film	4835 111 37458
3243	1.2k, 5%, 1/10W, Metal Film.	4835 111 27042		3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184
3246	82k, 5%, 1/10W, Metal Film	4835 111 37277		3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204
3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3515	2.5 ohm, 20%, 3.6W, Negative Temperat	
3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010			ure Coefficient.	2122 612 00023
3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340		3516	Res, 1K, 2%, 0,25W	4822 051 10102
3250	Zero ohm,.	4835 111 27056		3517	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3251	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S	3518	Res, 0R22, 5%, 3W, Metal Film. . . .	2120 106 90548
3252	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		3520	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3253	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		3521	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443
3257	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3525	33 ohm, 5%, 1/3W, Metal Film	4835 116 57665
3258	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3528	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3259	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3529	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3530	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3532	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3534	15k, 5%, 1/10W, Metal Film	4835 111 37458
3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3536	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830

S = Safety Part Be sure to use exact replacement part.

PC9227C101 (continued)

	3537	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
S	3542	4.7 Megohm, 5%, 1/2W, Metal Film . .	4835 116 57009
	3570	15k, 5%, 1/10W, Metal Film	4835 111 37458
	3571	Res, 150K, 1%, 3/5W, Metal Film. . .	2322 156 21504
	3573	Res, 2K, 1%, 1/10W, Metalized Glass.	2120 108 92657
	3574	33k, 5%, 1/10W, Metal Film	4835 111 37248
	3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3577	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3578	Res, 1K, 2%, 0,25W	4822 051 10102
	3579	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
	3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3592	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3594	22k, 5%, 1/10W, Metal Film	4835 111 37441
	3595	68k, 5%, 1/6W, Carbon Film	4835 111 37205
	3596	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3597	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
	3598	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3599	22k, 5%, 1/10W, Metal Film	4835 111 37441
	3607	8.2k, 5%, 1/8W, Inline Package . . .	4835 111 97046
	3608	2.2k, 5%, 1/8W, Inline Package . . .	4835 111 97049
	3609	2.2k, 5%, Resistor Network	2120 108 93868
	3611	Res, 1K, 2%, 0,25W	4822 051 10102
	3612	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3613	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3615	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3617	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
	3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3619	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
	3629	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259
	3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
	3631	27k, 5%, 1/10W, Metal Film	4835 111 37442
S	3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63479
	3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210
	3634	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
	3635	22k, 5%, 1/10W, Metal Film	4835 111 37441
	3636	22k, 5%, 1/10W, Metal Film	4835 111 37441
	3637	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
	3649	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
	3650	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
	3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3653	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3654	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
	3655	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
	3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710
	3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3662	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
	3663	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
	3664	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
	3665	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
	3666	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376
	3667	27k, 5%, 1/10W, Metal Film	4835 111 37442
	3672	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
	3673	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3674	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259
	3675	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
	3676	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
	3677	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
	3680	680 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37271
	3681	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
	3682	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
	3683	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
	3684	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
	3685	220 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37371
	3821	15k, 5%, 1/10W, Metal Film	4835 111 37458
	3822	1.2k, 5%, 1/10W, Metal Film.	4835 111 27042
	3823	100k, 5%, 1/10W, Metal Film.	4835 111 37434
	3824	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
	3825	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
	3826	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
	3827	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3828	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3829	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272
	3830	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272
	3831	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198 011 03310
	3832	47 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37262
	3908	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710
	3909	Res, 1K, 2%, 0,25W	4822 051 10102
	3910	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376
	3911	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230
	3912	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
	3913	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
	3914	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820
	3915	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231
	3916	220 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37371
	3917	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
	3918	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
	3919	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376
	3920	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231
	3921	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230
	3922	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820
	3923	220 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37371
	3924	39k, 5%, 1/10W, Metal Film	4835 111 27051
	3925	39k, 5%, 1/10W, Metal Film	4835 111 27051
	3926	39k, 5%, 1/10W, Metal Film	4835 111 27051
	3929	39k, 5%, 1/10W, Metal Film	4835 111 27051
	3930	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710
	3931	Res, 1K, 2%, 0,25W	4822 051 10102
	3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810
	3951	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
	3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3953	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3955	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
	3957	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
	4001	Zero ohm,.	4835 111 27056
	4002	Zero ohm,.	4835 111 27056
	4004	Zero ohm,.	4835 111 27056
	4007	Zero ohm,.	4835 111 27056
	4009	Zero ohm,.	4835 111 27056
	4010	Zero ohm,.	4835 111 27056
	4011	Zero ohm,.	4835 111 27056
	4012	Zero ohm,.	4835 111 27056
	4013	Zero ohm,.	4835 111 27056
	4020	Zero ohm,.	4835 111 27056
	4051	Zero ohm,.	4835 111 27056
	4100	Zero ohm,.	4835 111 27056
	4101	Zero ohm,.	4835 111 27056
	4102	Zero ohm,.	4835 111 27056
	4103	Zero ohm,.	4835 111 27056
	4143	Zero ohm,.	4835 111 27056
	4144	Zero ohm,.	4835 111 27056
	4203	Zero ohm,.	4835 111 27056
	4207	Zero ohm,.	4835 111 27056
	4212	Zero ohm,.	4835 111 27056
	4214	Zero ohm,.	4835 111 27056
	4215	Zero ohm,.	4835 111 27056
	4216	Zero ohm,.	4835 111 27056
	4501	Zero ohm,.	4835 111 27056
	4602	Zero ohm,.	4835 111 27056
	4650	Zero ohm,.	4835 111 27056
	4651	Zero ohm,.	4835 111 27056
	4652	Zero ohm,.	4835 111 27056
	4654	Zero ohm,.	4835 111 27056
	4655	Zero ohm,.	4835 111 27056
	4684	Zero ohm,.	4835 111 27056
	4687	Zero ohm,.	4835 111 27056
	4831	Zero ohm,.	4835 111 27056
	4832	Zero ohm,.	4835 111 27056
	4833	Zero ohm,.	4835 111 27056
	4902	Zero ohm,.	4835 111 27056
	4903	Zero ohm,.	4835 111 27056
	4904	Zero ohm,.	4835 111 27056
	4905	Zero ohm,.	4835 111 27056
	4909	Zero ohm,.	4835 111 27056
	4911	Zero ohm,.	4835 111 27056
	4912	Zero ohm,.	4835 111 27056
	4914	Zero ohm,.	4835 111 27056
	4957	Zero ohm,.	4835 111 27056
	4999	Zero ohm,.	4835 111 27056
	5000	Coil, 5u6.	3198 018 25680
	5004	Coil, 820n	2422 535 97314
	5201	Coil, 22u.	3198 018 22290
	5202	Coil, 6u8.	3198 018 16880
	5342	22uH., 10%, Coil, Peaking.	4835 157 67069
S	5445	Transformer, L.O.T., models ending in C101, C121, and C125	2422 531 02327
S	5445	Transformer, L.O.T., models ending in C221 and C225.	3128 138 20941
	5451	Coil, 27u.	2422 535 96614
	5457	Coil, Linear Correction.	3128 138 53241
	5461	Transformer.	3128 138 33811
	5480	Coil, 27u.	2422 535 97334
	5480	Coil, 39u.	2422 535 97336
	5480	33uH., Peaking Coil, only in 25. . .	4835 157 58205
S	5500	Filter, Mains, 5mH, 2A	2422 549 43432
	5516	100uH., Coil	4835 157 67078
	5518	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
	5521	Coil, 2u2.	3198 018 12280
	5540	Coil, 4u7.	3198 018 14780
S	5545	Transfomer,.	2422 531 02314
	5551	27uH., 5%, Coil, Peaking	4835 157 67052
	5552	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
	5572	100uH., Coil	4835 157 67078
	5573	100uH., Coil	4835 157 67078
	5576	100uH., Coil	4835 157 67078
	5577	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
	5600	Coil, 8u2.	3198 018 18280
	5601	Coil, 8u2.	3198 018 18280
	5620	Coil, 6u8.	3198 018 16880
	5821	Coil, 100u	3198 018 21010
	5822	Coil, 18u.	3198 018 21890

S = Safety Part Be sure to use exact replacement part.

PC9227C101 (continued)

6008	Zener, 33 Volt BZX79-C33	4835 130 37904
6113	Zener Diode, 6.8 volt.	9340 386 40115
6211	Diode, 1N4148.	4835 130 37048
6212	Diode, 1N4148.	4835 130 37048
6213	Diode, 1N4148.	4835 130 37048
6331	Diode.	4835 130 37294
6333	Diode.	4835 130 37294
6335	Diode.	4835 130 37294
6401	Diode.	4835 130 37094
6402	Zener, 33 Volt, BZX79-C33.	4835 130 37904
6403	Diode.	4835 130 37094
6404	Diode.	4835 130 37094
6449	Diode, 1N4148.	4835 130 37048
6450	Diode, 1N4148.	4835 130 37048
6460	Diode, Rect, BY228/20	9336 215 80112
6463	Diode, 1N4148.	4835 130 37048
6464	Zener Diode, 6.2 volt.	9337 242 70133
6465	Diode, BYD33J.	4835 130 37094
6466	Diode, BYD33J.	4835 130 37094
6480	Diode, Zener	4835 130 37947
6481	Diode, 1N4148.	4835 130 37048
6485	Diode, BYD33J.	4835 130 37094
6486	Diode, EGP20DL-530	4835 130 37919
6487	Diode.	4835 130 37094
6488	Diode, Rect, BYV27-200.	9322 126 72673
6490	Diode, Rect, BYV27-200.	9322 126 72673
6505	Diode, Bridge Rect, GBU6JL-7002	9322 138 08667
6507	Diode, BYD33J.	4835 130 37094
6508	Diode, BYD33J.	4835 130 37094
6510	Zener Diode, 20 volt	9331 178 60133
6511	Diode, BYV95C.	4835 130 37052
6512	Diode, Rect, BY228/20	4822 130 41275
6513	Diode, Rect, BY228/20	4822 130 41275
6514	Zener, 18 Volt, BZX79-C18.	4835 130 37908
6540	Diode.	4835 130 37294
6550	Diode, Rect, BY229X-800	9340 380 30127
6560	Diode, EGP20DL-530	4835 130 37919
6580	Diode, Rect, SB140.	9339 577 60673
6584	Diode, 1N4148.	4835 130 37048
6585	Diode, 1N4148.	4835 130 37048
6591	Diode, BAS216.	4835 130 37905
6601	Diode, Zener	4835 130 37684
6602	Diode, 1N4148.	4835 130 37048
6603	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
6604	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
6605	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
6606	Zener, 4.7 Volt, BZX79-C4V7.	4835 130 37005
6607	Zener, 6.8 Volt, BZX79-C6V8.	4835 130 37945
6690	LED, LTL-307P.	4835 130 97096
6821	Zener Diode, 9.1 volt.	9331 177 80133
6822	Fixed Coil	4835 130 37048
6951	Diode, BAS216.	4835 130 37905
6961	Diode, BAS216.	4835 130 37905
7250	IC,	9352 620 26112
7251	IC, LM317T	9337 220 80682
7254	Transistor, NPN, BC847B.	4822 130 60511
7256	Transistor, NPN, BC847B.	4822 130 60511
7258	Transistor, NPN, BC847B.	4822 130 60511
7263	Transistor, PNP, BC857B.	5322 130 60508
7266	Transistor, NPN, BC847B.	4822 130 60511
7330	IC,	9352 184 10112
7401	IC,	9322 121 47687
7460	Transistor, NPN, BU1508DX.	9340 170 50127
7461	Transistor, NPN, BF819	9335 354 50127
7462	Transistor, BC547B	4835 130 47055
7463	Transistor, BC557B	4835 130 47409
7480	IC,	9322 028 93682
7481	Transistor, BC557B	4835 130 47409
7482	Transistor, PNP, BC857B.	5322 130 60508
7518	STH8NA60FI SMPS FET	9322 068 92687
7518	STH10NC60FI SMPS FET.	9322 155 66687
7520	IC, MC44603A	4835 209 88537
7570	IC,	9337 711 00676
S 7581	Coupler, TCDT1101G	9338 431 30682
7590	Transistor, NPN, BC847B.	4822 130 60511
7591	Transistor, NPN, BC847B.	4822 130 60511
7592	Transistor, NPN, BC847B.	4822 130 60511
7600	IC, SAA5543-PS/M4/0167 L9 v3.2 (Commercial Models - NON Pro Plus)	9352 670 84112
7600	IC, SAA5565-PS/M3/0195 L9 v3.2 (Commercial Models - Pro Plus Models).	9352 673 97112
7601	IC, ST24W16B6, commercial models only	9322 095 35682
7603	Transistor, NPN, BC337	9331 796 00126
7604	Transistor, NPN, BC847B.	4822 130 60511
7605	Transistor, NPN, BC847B.	4822 130 60511
7608	Transistor, NPN, BC847B.	4822 130 60511
7609	Transistor, NPN, BC847B.	4822 130 60511
7680	IR Receiver.	9322 127 53667
7821	IC,	9352 374 70112
7822	IC, HEF4052BT.	9333 729 50653
7823	Transistor, NPN, BC337-25.	3198 020 43530
7904	Transistor, NPN, BC847B.	4822 130 60511
7905	Transistor, NPN, BC847B.	4822 130 60511
7906	Transistor, NPN, BC847B.	4822 130 60511
7908	Transistor, NPN, BC847B.	4822 130 60511
7909	Transistor, NPN, BC847B.	4822 130 60511
7910	Transistor, NPN, BC847B.	4822 130 60511
7951	IC,	4822 209 13706
7953	IC,	4835 209 88474
CBA	00EMF893A102 Main Chassis Board Asm.	00EM F89 3A102

A10777 Interface Module Parts

	A10777 Interface Module Parts	
CBA	00A10777A001 Interface Module Asm.	00A1 077 7A001
BR711	Zero ohm,	4835 111 27056
BR712	Zero ohm,	4835 111 27056
BR713	Zero ohm,	4835 111 27056
BR714	Zero ohm,	4835 111 27056
BRS15	Zero ohm,	4835 111 27056
BRS16	Zero ohm,	4835 111 27056
C702	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
C703	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
J0215	Connector, 2 Pin,	2422 025 16343
J0237	Connector, 4 Pin	2422 025 12479
J0238	5 Pin Board Connector.	2422 025 16387
J0259	Connector, 3 Pin	2412 020 00725
J1215	Connector, 2 Pin,	2422 025 16343
J1227	Connector, 4 Pin	2422 025 16385
J1238	Connector, 5 Pin	2422 025 12481
J1259	Connector, 3 Pin	2422 025 16383
J214	Connector, 3 Pin	2422 025 16382
J216	Connector, 4 Pin	2422 025 15847
J219	Connector, 5 Pin	2422 025 15848
J228	Connector, 3 Pin	2422 025 16407
J236	4 Pin Board Connector.	2422 025 16384
J775	Contact Pin.	2422 024 00626
J800	Connector, 32 Pin.	3135 010 03531
Q700	Transistor, NPN, BC847B.	4822 130 60511
Q701	Transistor, NPN, BC847B.	4822 130 60511
Q704	Transistor, PNP, BC857B.	5322 130 60508
Q705	Transistor, PNP, BC857B.	5322 130 60508
Q706	Transistor, NPN, BC847B.	4822 130 60511
Q707	Transistor, NPN, BC847B.	4822 130 60511
R700	10k, 5%, 1/10W, Metal Film	4835 111 37216
R701	47k, 5%, 1/10W, Metal Film	4835 111 37445
R702	75 ohm, 5%, 1/10W, Metal Film.	4835 111 37276
R703	75 ohm, 5%, 1/10W, Metal Film.	4835 111 37276
R711	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
R712	10k, 5%, 1/10W, Metal Film	4835 111 37216
R713	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
R714	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
R715	10k, 5%, 1/10W, Metal Film	4835 111 37216
R716	47k, 5%, 1/10W, Metal Film	4835 111 37445
R717	10k, 5%, 1/10W, Metal Film	4835 111 37216
R718	100 ohm, 5%, 1/10W, Metal Film	4835 111 37432
R719	330 ohm, 5%, 1/10W, Metal Film	4835 111 37443
R720	Res, 1K, 2%, 0,25W	4822 051 10102
R721	75 ohm, 5%, 1/10W, Metal Film.	4835 111 37276
R722	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231
Z700	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z701	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z702	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z703	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z704	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z705	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z706	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z707	Zener Diode, 8.2V, BZX284-C8	4835 130 37922

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	AC Power Cord.	3135 010 08051
S AC02	Anode Clip	4835 256 97264
AC03	Cabinet Back	3135 014 07921
AC04	Cabinet Front.	3135 017 04121
AC05	Chassis Guide.	3139 124 31381
AC06	Control Buttons.	3139 124 27351
S AC07	Convergence and Purity Assembly.	2422 549 43385
S AC08	CRT A68AJB82X.	4835 131 27167
S AC09	Coil, Degaussing	3121 218 62701
AC11	Light Guide.	3139 124 26461
AC12	Nameplate.	4835 459 17546
AC14	Power Button	3139 124 26444
AC16	Speaker, 16R, 1W5 (2 Used)	2422 264 00343
S AC18	Yoke	3313 203 01242
AC19	Yoke Wedge (3 Used).	4835 535 27006
AC22	Card Do Cover.	4835 432 17929
AC23	Card Housing	3135 014 08741
AC24	Spring	3139 121 26231
AC25	Owner's Manual	3135 015 16031
AC28	RF Cable	3135 010 07461

S = Safety Part Be sure to use exact replacement part.

PC9227C121 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts	
0113	L9 SOPS HEATSINK	3139 121 62041
0119	DIODE HEATSINK L9.	3139 121 26691
0121	LINE HEATSINK (CINCH).	3139 121 61942
0123	L9L AUDIO HEATSINK (STERO)	3139 121 61952
S 0127	Holder, Fuse, 2 Pin.	3122 358 71251
0211	Connector, 2 Pin	2422 025 11196
0212	Connector, 2 Pin	2422 025 15396
0213	Connector, 2 Pin	2422 025 15395
0214	Connector, 3 Pin	2422 025 16382
0215	Connector, 2 Pin,.	2422 025 16343
0216	Connector, 4 Pin	2422 025 15847
0219	Connector, 5 Pin	2422 025 15848
0220	4 Pin Board Connector.	2422 025 04852
0221	Connector, 4 Pin	2422 025 15503
0222	Connector, 2 Pin	2422 025 10646
0224	1 Pin Board Connector.	2422 034 20021
0228	1 Pin Board Connector.	2422 034 20021
0234	Connector, 4 Pin	2422 025 15847
0236	4 Pin Board Connector.	2422 025 16384
0237	Connector, 4 Pin	2422 025 12479
0238	5 Pin Board Connector.	2422 025 16387
S 0243	Connector, 6 Pin	2422 025 04854
0244	4 Pin Board Connector.	2422 025 04852
S 0245	Connector, 6 Pin	2422 025 04854
S 0254	CRT Socket (9 Pin)	2422 500 80022
0259	Connector, 3 Pin	2422 025 16383
0262	Connector, 4 Pin	2422 025 16385
0267	Connector, 3 Pin	2412 020 00725
1000	Tuner, V+U PLL PH MN B.	2422 542 90069
1001	Filter	2422 549 42501
1003	45 MHz SAW, Filter,.	2422 549 42433
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807
1208	Crystal Resonator, 3.58MHz	2422 543 00832
S 1500	Fue, 4 A, 250V	2422 086 10905
S 1571	FUSE 1A 250V	2422 086 10779
S 1572	FUSE 1A 250V	2422 086 10779
S 1580	Relay, 12V, 5A G5PA-1.	2422 132 07444
1600	Switch, Tactile.	2422 128 02742
1601	Switch, Tactile.	2422 128 02742
1602	Switch, Tactile.	2422 128 02742
1603	Switch, Tactile.	2422 128 02742
1606	Switch, Tactile.	2422 128 02742
1660	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488
1703	L9 ITV SMARTPORT	3139 178 08561
1821	Ceramic Resonator, 514KHz5, CSB503F58	2422 540 98344
2001	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2002	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2003	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2004	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2011	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2102	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2103	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2104	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2201	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2202	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2203	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2204	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2205	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2208	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2209	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2211	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2212	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2213	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2214	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2215	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 16654
2220	Cap, 18p, 5%, 50V, Ceramic	3198 016 01890
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2222	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2226	Cap, 33u, 20%, 25V, Electrolytic . .	2020 021 90124
2227	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2247	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2248	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2249	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2330	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2340	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320
S 2343	Cap, 3n3, 10%, 2KV, Ceramic.	2020 558 90529
2345	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2401	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2402	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2404	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2405	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2407	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2409	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2420	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2426	Cap, 100n, 10%, 63V, Metalized Polyes ter.	2222 370 75104
2428	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2429	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2430	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2431	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2437	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2438	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2448	Cap, 33p, 5%, 500V, Ceramic.	2020 557 90192
2450	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91139
2451	Cap, 15n, 10%, 50V, Polyester. . . .	2020 300 90575
2456	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176
2457	Cap, 390n, 5%, 250V, Metalized Polypr opylene.	2222 479 90021
2458	Cap, 2u2, 20%, 100V, Electrolytic. .	2020 021 91331
2459	Cap, 680p, 10%, 500V, Ceramic. . . .	3198 019 46810
2461	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2462	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176
S 2463	Cap, 680p, 10%, 2KV, Ceramic	2020 558 90485
S 2465	Cap, 10n, 5%, 1600V, Polypropylene .	2222 375 90154
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050
2473	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2481	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2482	Cap, 68n, 10%, 250V, Polyester . . .	2222 347 90234
2484	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2485	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2486	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2487	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2488	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2489	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2490	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2491	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810
2499	Cap, 220n, 10%, 100V, Metalized Polye ster	2222 365 25224
2500	Cap, 470n, 20%, 275V, Polypropylene.	2222 336 29148
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2507	Cap, 1n5, 10%, 1KV, Ceramic.	3198 019 61520
2508	Cap, 470u, 20%, 200V, Electrolytic .	2020 024 90647
2511	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
2518	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2530	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 021 91147
2531	Cap, 1n, 2%, 50V, Polypropylene. . .	2020 310 90049
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2540	Cap, 100u, 20%, 25V, Electrolytic. .	2020 021 90547
S 2545	Cap, 1n5, 20%, v, Ceramic.	2020 554 90128
2550	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2551	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91358
2561	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2562	Cap, 220p, 10%, 1KV, Ceramic	3198 019 62210
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2572	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2575	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2577	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2586	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2604	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2613	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2615	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2619	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2622	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2629	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040

S = Safety Part Be sure to use exact replacement part.

PC9227C121 (continued)

2631	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3246	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230	
2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
2679	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
2681	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210		3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340	
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3250	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
2821	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280		3251	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040	
2823	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230		3252	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720		3253	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	
2825	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080		3257	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
2826	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090		3258	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
2827	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3259	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
2828	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
2829	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	3198 013 01020	
2830	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280		3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
2831	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	3198 013 01020	
2832	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280		3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
2833	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280		3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	3198 013 01020	
2834	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780	S	3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109	
2835	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	S	3341	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108	
2836	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	S	3342	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108	
2837	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740		3343	Res, 1K5, 20%, 1/2W, Carbon Film . .	3198 013 01520	
2838	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290	
2839	Cap, 1u, 10%, 50V, Polyester	3198 014 01050		3345	VDR DC 1MA/50V S MAX 110V A . . .	2122 550 00152	
2840	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290	
2841	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3401	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380	
2842	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3402	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380	
2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3403	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380	
2844	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3405	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002	
2845	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3406	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
2913	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280		3407	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002	
2914	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330		3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
2915	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3409	Res, 1R5, 5%, 1/3W, Metal Film . . .	2306 204 03158	
2916	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648		3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210	
2917	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210	
2918	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330		3420	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740	
2919	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220	
2920	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648		3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220	
2921	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840	
2931	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280		3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606	
2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3425	Res, 120K, 5%, 1/10W, Metalized Glass	2120 108 91716	
2952	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3426	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930	
2954	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3428	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	
2955	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3429	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730	
2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3431	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	
2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3432	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3433	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
2960	Cap, 220u, 20%, 50V, Electrolytic. .	3198 026 52210		3436	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090		3437	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090		3438	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330	
2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090		3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920	
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3447	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220	
3010	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610		3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320	
3013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	S	3452	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	3198 012 32290	
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	S	3453	Res, 4R7, 5%, 5W, Wire Wound	2322 251 41478	
3015	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	S	3454	Res, 33K, 5%, 1 1/3W, Metal Film . .	2322 194 63333	
3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810		3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
3021	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020		3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
3103	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220	S	3462	Res, 6K8, 5%, 5W, Metal Film	2322 257 41682	
3104	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030		3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790	
3108	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3464	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3109	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	S	3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109	
3123	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590		3466	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903	
				3467	Res, 15K, 1%, 3/5W, Metal Film . . .	2322 156 21503	
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010		3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
3201	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910		3469	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	
				3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240	
3203	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310		3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703	
				3481	Res, 35K7, 1%, 3/5W, Metal Film. . .	2322 156 23573	
3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820		3482	Res, 56K, 1%, 3/5W, Metal Film . . .	2322 156 25603	
3205	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020		3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230	
3206	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610		3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
			S	3486	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108	
3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3487	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108	
3209	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	S	3488	Res, 4R7, 5%, 1/2W, Metal Film . . .	2306 207 03478	
3212	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910	S	3490	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108	
			S	3491	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108	
3213	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610	S	3492	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108	
				3495	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820	
3215	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230		3496	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3216	Res, Zero ohm, 'Chip' Jumper	3198 021 90020		3497	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3217	Res, 1M5, 5%, 1/8W, Metalized Glass.	2322 730 61155		3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	3198 013 04710	
3218	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	S	3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225	
3219	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610	S	3503	PTC, DC, 120V,P3020 B.	2120 661 00025	
			S	3505	Surge Protector.	2422 549 43073	
3220	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	S	3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223	
3225	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040	S	3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333	
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	S	3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102	
3231	Res, Zero ohm, 'Chip' Jumper	3198 021 90020		3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530	
3232	Res, Zero ohm, 'Chip' Jumper	3198 021 90020		3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184	
3233	Res, Zero ohm, 'Chip' Jumper	3198 021 90020		3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204	
3243	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220	S	3515	2.5 ohm, 20%, 3.6W, Negative Temperat ure Coefficient.	2122 612 00023	

S = Safety Part Be sure to use exact replacement part.

PC9227C121 (continued)

3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3517	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
S 3518	Res, 0R22, 5%, 2 1/2W, Metal Film. .	3198 012 32270	
3520	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230	
3521	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310	
S 3525	Res, 47 ohm, 5%, 1/3W, Metal Film. .	2306 204 03479	
3528	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3529	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890	
3530	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320	
3532	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3534	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530	
3536	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830	
3537	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
S 3542	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475	
3570	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530	
3571	Res, 150K, 1%, 3/5W, Metal Film. . .	2322 156 21504	
3573	Res, 2K, 1%, 1/8W, Metalized Glass .	2322 734 62002	
3574	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330	
3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3577	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3578	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3579	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002	
3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3592	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3594	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	
3595	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830	
3596	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3597	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3598	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3599	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	
3607	RST NETW RGLE 10X 8K2 PM5 B . . .	2120 108 93916	
3608	RST NETW RGLE 6X 2K2 PM5 B . . .	2120 108 93913	
3609	RST NETW RGLE 7X 2K2 PM5 B . . .	2120 108 93915	
3611	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3612	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3613	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3615	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3616	Jumper Wire/Staple	0322 179 00003	
3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3619	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3629	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710	
3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3631	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730	
S 3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790	
3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210	
3634	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	
3635	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	
3636	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	
3637	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3649	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3650	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3654	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3655	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3662	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3663	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220	
3664	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220	
3665	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3666	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620	
3667	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730	
3672	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3673	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3674	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710	
3675	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3676	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3677	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3680	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810	
3681	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3682	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220	
3683	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3684	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	
3687	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210	
3821	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530	
3822	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220	
3823	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040	
3824	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	
3825	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3826	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3827	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3828	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3829	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820	
3830	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820	
3831	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198 011 03310	
3832	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790	
3908	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3909	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3910	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620	
3911	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230	
3912	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3913	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3914	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	
3915	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820	
3916	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210	
3917	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3918	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3919	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620	
3920	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820	
3921	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230	
3922	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	
3923	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210	
3924	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930	
3925	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930	
3926	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930	
3929	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930	
3930	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3931	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810	
3951	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	
3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3953	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3955	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
3957	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4004	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4011	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4012	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4020	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4051	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4100	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4102	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4144	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4203	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4207	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4212	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4215	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4216	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4465	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4501	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4650	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4651	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4654	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4655	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4833	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4911	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4912	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4914	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4957	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4999	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
5000	Coil, 5u6.	3198 018 25680	
5004	Coil, 820n	2422 535 97314	
5201	Coil, 22u.	3198 018 22290	
5202	Coil, 6u8.	3198 018 16880	
5342	Coil, 22u.	3198 018 22290	
S 5445	Transformer, L.O.T., models ending in C101, C121, and C125	2422 531 02327	
5451	Coil, 27u.	2422 535 96614	
5457	Coil, Linear Correction.	3128 138 53241	
5461	Transformer.	3128 138 33811	
5480	Coil, 27u.	2422 535 97334	
S 5500	Filter, Mains, 5mH, 2A	2422 549 43432	
5516	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5518	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5521	Coil, 2u2.	3198 018 12280	
5540	Coil, 4u7.	3198 018 14780	
S 5545	Transfomer,.	2422 531 02314	
5551	Coil, 27u.	2422 535 95366	
5552	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	

S = Safety Part Be sure to use exact replacement part.

PC9227C121 (continued)

5572	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5573	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5576	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5577	Fixed, Inductor, 100MHz, 50R. . .	3198 018 90010
5600	Coil, 8u2.	3198 018 18280
5601	Coil, 8u2.	3198 018 18280
5620	Coil, 6u8.	3198 018 16880
5821	Coil, 100u	3198 018 21010
5822	Coil, 18u.	3198 018 21890
6008	Zener Diode, 33 volt	3198 010 23390
6113	Zener Diode, 6.8 volt.	9340 386 40115
6211	Diode, Signal, 1N4148.	3198 010 10010
6212	Diode, Signal, 1N4148.	3198 010 10010
6213	Diode, Signal, 1N4148.	3198 010 10010
6331	Diode, Signal, BAV21	3198 010 10070
6333	Diode, Signal, BAV21	3198 010 10070
6335	Diode, Signal, BAV21	3198 010 10070
6401	Diode, Rect, BYD33D	9337 234 00133
6402	Zener Diode, 33 volt	3198 010 23390
6403	Diode, Rect, BYD33D	9337 234 00133
6404	Zener Diode, 75 volt	9331 180 00133
6449	Diode, Signal, 1N4148.	3198 010 10010
6450	Diode, Signal, 1N4148.	3198 010 10010
6460	Diode, Rect, BY228/20	9336 215 80112
6463	Diode, Signal, 1N4148.	3198 010 10010
6464	Zener Diode, 6.2 volt.	9331 668 30133
6465	Diode, Rect, BYD33J	9337 234 20133
6466	Diode, Rect, BYD33J	9337 234 20133
6480	Zener Diode, 27 volt	3198 010 22790
6481	Diode, Signal, 1N4148.	3198 010 10010
6485	Diode, Rect, BYD33J	9337 234 20133
6486	Diode, Rect, EGP20DL-5300	9322 100 13682
6487	Diode, Rect, BYD33D	9337 234 00133
6488	Diode, Rect, BYV27-200.	9322 126 72673
6490	Diode, Rect, BYV27-200.	9322 126 72673
6505	Diode, Bridge Rect, GBU6JL-7002 . .	9322 138 08667
6507	Diode, Rect, BYD33J	9337 234 20133
6508	Diode, Rect, BYD33J	9337 234 20133
6510	Zener Diode, 20 volt	9331 178 60133
6511	Diode, Rect, BYV95C	9335 001 80133
6512	Diode, Rect, 1N5062	3198 010 10120
6513	Diode, Rect, 1N5062	3198 010 10120
6514	Zener Diode, 18 volt	3198 010 21890
6540	Diode, Signal, BAV21	3198 010 10070
6550	Diode, Rect, BY229X-800	9340 380 30127
6560	Diode, Rect, EGP20DL-5300	9322 100 13682
6580	Diode, Rect, SB140.	9339 577 60673
6584	Diode, Signal, 1N4148.	3198 010 10010
6585	Diode, Signal, 1N4148.	3198 010 10010
6591	Diode, Signal, BAS16WS	9322 031 99685
6601	Zener Diode, 3.9 volt.	3198 010 23980
6602	Diode, Signal, 1N4148.	3198 010 10010
6603	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
6604	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
6605	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
6606	Zener Diode, 4.7 volt.	3198 010 24780
6607	Zener Diode, 6.8 volt.	3198 010 26880
6690	LED VS LTL-307P (LITO) B . . .	9322 033 95682
6821	Zener Diode, 9.1 volt.	9331 177 80133
6822	Diode, Signal, 1N4148.	3198 010 10010
6951	Diode, Signal, BAS16WS	9322 031 99685
6961	Diode, Signal, BAS16WS	9322 031 99685
7250	IC,.	9352 620 26112
7251	IC, LM317T	9337 220 80682
7254	Transistor, NPN, BC847B.	3198 010 42030
7256	Transistor, NPN, BC847B.	3198 010 42030
7258	Transistor, NPN, BC847B.	3198 010 42030
7263	Transistor, PNP, BC857B.	3198 010 42150
7266	Transistor, NPN, BC847B.	3198 010 42030
7330	IC, TDA6107Q/N2.	9352 576 50112
7401	IC,.	9322 121 47687
7460	Transistor, NPN, BU1508DX.	9340 170 50127
7461	Transistor, NPN, BF819	9335 354 50127
7462	Transistor, NPN, BC547B.	3198 020 40030
7463	Transistor, PNP, BC557B.	3198 020 40110
7480	IC,.	9322 028 93682
7481	Transistor, PNP, BC557B.	3198 020 40110
7482	Transistor, PNP, BC857B.	3198 010 42150
7518	STH10NC60FI SMPS FET.	9322 155 66687
7520	IC,.	9322 108 36682
7570	IC,.	9337 711 00676
S 7581	Coupler, TCDT1101G	9338 431 30682
7590	Transistor, NPN, BC847B.	3198 010 42030
7591	Transistor, NPN, BC847B.	3198 010 42030
7592	Transistor, NPN, BC847B.	3198 010 42030
7600	IC, SAA5543-PS/M4/0167 L9 v3.2 (Comme rcial Models - NON Pro Plus)	9352 670 84112
7601	IC, ST24W16B6, commercial models only	9322 095 35682
7603	Transistor, NPN, BC337	9331 796 00126
7604	Transistor, NPN, BC847B.	3198 010 42030
7605	Transistor, NPN, BC847B.	3198 010 42030
7608	Transistor, NPN, BC847B.	3198 010 42030
7609	Transistor, NPN, BC847B.	3198 010 42030
7680	IR Receiver.	9322 127 53667
7821	IC,.	9352 374 70112
7822	IC, HEF4052BT.	9333 729 50653
7823	Transistor, NPN, BC337-25.	3198 020 43530
7904	Transistor, NPN, BC847B.	3198 010 42030
7905	Transistor, NPN, BC847B.	3198 010 42030
7906	Transistor, NPN, BC847B.	3198 010 42030
7908	Transistor, NPN, BC847B.	3198 010 42030
7909	Transistor, NPN, BC847B.	3198 010 42030
7910	Transistor, NPN, BC847B.	3198 010 42030
7951	IC,.	9351 861 60112
9001	Jumper Wire/Staple	0322 179 00003
9003	Jumper Wire/Staple	0322 179 00003
9005	Jumper Wire/Staple	0322 179 00003
9011	Jumper Wire/Staple	0322 179 00003
9012	Jumper Wire/Staple	0322 179 00003
9105	Jumper Wire/Staple	0322 179 00003
9126	Jumper Wire/Staple	0322 179 00003
9132	Jumper Wire/Staple	0322 179 00003
9140	Jumper Wire/Staple	0322 179 00003
9141	Jumper Wire/Staple	0322 179 00003
9200	Jumper Wire/Staple	0322 179 00003
9202	Jumper Wire/Staple	0322 179 00003
9203	Jumper Wire/Staple	0322 179 00003
9204	Jumper Wire/Staple	0322 179 00003
9205	Jumper Wire/Staple	0322 179 00003
9206	Jumper Wire/Staple	0322 179 00003
9207	Jumper Wire/Staple	0322 179 00003
9208	Jumper Wire/Staple	0322 179 00003
9209	Jumper Wire/Staple	0322 179 00003
9210	Jumper Wire/Staple	0322 179 00003
9211	Jumper Wire/Staple	0322 179 00003
9214	Jumper Wire/Staple	0322 179 00003
9215	Jumper Wire/Staple	0322 179 00003
9216	Jumper Wire/Staple	0322 179 00003
9217	Jumper Wire/Staple	0322 179 00003
9218	Jumper Wire/Staple	0322 179 00003
9220	Jumper Wire/Staple	0322 179 00003
9221	Jumper Wire/Staple	0322 179 00003
9222	Jumper Wire/Staple	0322 179 00003
9225	Jumper Wire/Staple	0322 179 00003
9226	Jumper Wire/Staple	0322 179 00003
9227	Jumper Wire/Staple	0322 179 00003
9228	Jumper Wire/Staple	0322 179 00003
9229	Jumper Wire/Staple	0322 179 00003
9230	Jumper Wire/Staple	0322 179 00003
9231	Jumper Wire/Staple	0322 179 00003
9232	Jumper Wire/Staple	0322 179 00003
9233	Jumper Wire/Staple	0322 179 00003
9234	Jumper Wire/Staple	0322 179 00003
9236	Jumper Wire/Staple	0322 179 00003
9237	Jumper Wire/Staple	0322 179 00003
9238	Jumper Wire/Staple	0322 179 00003
9240	Jumper Wire/Staple	0322 179 00003
9241	Jumper Wire/Staple	0322 179 00003
9242	Jumper Wire/Staple	0322 179 00003
9243	Jumper Wire/Staple	0322 179 00003
9245	Jumper Wire/Staple	0322 179 00003
9301	Jumper Wire/Staple	0322 179 00003
9401	Jumper Wire/Staple	0322 179 00003
9402	Jumper Wire/Staple	0322 179 00003
9403	Jumper Wire/Staple	0322 179 00003
9404	Jumper Wire/Staple	0322 179 00003
9407	Jumper Wire/Staple	0322 179 00003
9408	Jumper Wire/Staple	0322 179 00003
9411	Jumper Wire/Staple	0322 179 00003
9414	Jumper Wire/Staple	0322 179 00003
9417	Jumper Wire/Staple	0322 179 00003
9419	Jumper Wire/Staple	0322 179 00003
9420	Jumper Wire/Staple	0322 179 00003
9421	Jumper Wire/Staple	0322 179 00003
9422	Jumper Wire/Staple	0322 179 00003
9424	Jumper Wire/Staple	0322 179 00003
9425	Jumper Wire/Staple	0322 179 00003
9427	Jumper Wire/Staple	0322 179 00003
9428	Jumper Wire/Staple	0322 179 00003
9460	Jumper Wire/Staple	0322 179 00003
9461	Jumper Wire/Staple	0322 179 00003
9500	Jumper Wire/Staple	0322 179 00003
9501	Jumper Wire/Staple	0322 179 00003
9502	Jumper Wire/Staple	0322 179 00003
9503	Jumper Wire/Staple	0322 179 00003
9505	Jumper Wire/Staple	0322 179 00003
9509	Jumper Wire/Staple	0322 179 00003
9510	Jumper Wire/Staple	0322 179 00003
9511	Jumper Wire/Staple	0322 179 00003
9512	Jumper Wire/Staple	0322 179 00003
9513	Jumper Wire/Staple	0322 179 00003
9515	Jumper Wire/Staple	0322 179 00003
9516	Jumper Wire/Staple	0322 179 00003
9517	Jumper Wire/Staple	0322 179 00003

S = Safety Part Be sure to use exact replacement part.

PC9227C121 (continued)

9518	Jumper Wire/Staple	0322 179 00003
9521	Jumper Wire/Staple	0322 179 00003
9526	Jumper Wire/Staple	0322 179 00003
9601	Jumper Wire/Staple	0322 179 00003
9602	Jumper Wire/Staple	0322 179 00003
9603	Jumper Wire/Staple	0322 179 00003
9604	Jumper Wire/Staple	0322 179 00003
9605	Jumper Wire/Staple	0322 179 00003
9606	Jumper Wire/Staple	0322 179 00003
9608	Jumper Wire/Staple	0322 179 00003
9609	Jumper Wire/Staple	0322 179 00003
9610	Jumper Wire/Staple	0322 179 00003
9611	Jumper Wire/Staple	0322 179 00003
9612	Jumper Wire/Staple	0322 179 00003
9613	Jumper Wire/Staple	0322 179 00003
9614	Jumper Wire/Staple	0322 179 00003
9615	Jumper Wire/Staple	0322 179 00003
9618	Jumper Wire/Staple	0322 179 00003
9621	Jumper Wire/Staple	0322 179 00003
9622	Jumper Wire/Staple	0322 179 00003
9624	Jumper Wire/Staple	0322 179 00003
9625	Jumper Wire/Staple	0322 179 00003
9626	Jumper Wire/Staple	0322 179 00003
9629	Jumper Wire/Staple	0322 179 00003
9631	Jumper Wire/Staple	0322 179 00003
9632	Jumper Wire/Staple	0322 179 00003
9637	Jumper Wire/Staple	0322 179 00003
9640	Jumper Wire/Staple	0322 179 00003
9642	Jumper Wire/Staple	0322 179 00003
9643	Jumper Wire/Staple	0322 179 00003
9644	Jumper Wire/Staple	0322 179 00003
9754	Jumper Wire/Staple	0322 179 00003
9788	Jumper Wire/Staple	0322 179 00003
9793	Jumper Wire/Staple	0322 179 00003
9800	Jumper Wire/Staple	0322 179 00003
9805	Jumper Wire/Staple	0322 179 00003
9806	Jumper Wire/Staple	0322 179 00003
9807	Jumper Wire/Staple	0322 179 00003
9810	Jumper Wire/Staple	0322 179 00003
9901	Jumper Wire/Staple	0322 179 00003
9904	Jumper Wire/Staple	0322 179 00003
9905	Jumper Wire/Staple	0322 179 00003
9906	Jumper Wire/Staple	0322 179 00003
9920	Jumper Wire/Staple	0322 179 00003
9933	Jumper Wire/Staple	0322 179 00003
9936	Jumper Wire/Staple	0322 179 00003
9940	Jumper Wire/Staple	0322 179 00003
9941	Jumper Wire/Staple	0322 179 00003
9942	Jumper Wire/Staple	0322 179 00003
9943	Jumper Wire/Staple	0322 179 00003
9944	Jumper Wire/Staple	0322 179 00003
9945	Jumper Wire/Staple	0322 179 00003
9946	Jumper Wire/Staple	0322 179 00003
9947	Jumper Wire/Staple	0322 179 00003
9948	Jumper Wire/Staple	0322 179 00003
9949	Jumper Wire/Staple	0322 179 00003
9950	Jumper Wire/Staple	0322 179 00003
9951	Jumper Wire/Staple	0322 179 00003
9952	Jumper Wire/Staple	0322 179 00003
9953	Jumper Wire/Staple	0322 179 00003
9955	Jumper Wire/Staple	0322 179 00003
9956	Jumper Wire/Staple	0322 179 00003
9957	Jumper Wire/Staple	0322 179 00003
9958	Jumper Wire/Staple	0322 179 00003
9959	Jumper Wire/Staple	0322 179 00003
9960	Jumper Wire/Staple	0322 179 00003
9962	Jumper Wire/Staple	0322 179 00003
9963	Jumper Wire/Staple	0322 179 00003
9964	Jumper Wire/Staple	0322 179 00003
9965	Jumper Wire/Staple	0322 179 00003
9966	Jumper Wire/Staple	0322 179 00003
9967	Jumper Wire/Staple	0322 179 00003
9968	Jumper Wire/Staple	0322 179 00003
9969	Jumper Wire/Staple	0322 179 00003
9970	Jumper Wire/Staple	0322 179 00003
9971	Jumper Wire/Staple	0322 179 00003
9972	Jumper Wire/Staple	0322 179 00003
9974	Jumper Wire/Staple	0322 179 00003
9975	Jumper Wire/Staple	0322 179 00003
9976	Jumper Wire/Staple	0322 179 00003
9977	Jumper Wire/Staple	0322 179 00003
9981	Jumper Wire/Staple	0322 179 00003
9982	Jumper Wire/Staple	0322 179 00003
9983	Jumper Wire/Staple	0322 179 00003
9984	Jumper Wire/Staple	0322 179 00003
9987	Jumper Wire/Staple	0322 179 00003
9989	Jumper Wire/Staple	0322 179 00003
9990	Jumper Wire/Staple	0322 179 00003
9991	Jumper Wire/Staple	0322 179 00003
9992	Jumper Wire/Staple	0322 179 00003
9993	Jumper Wire/Staple	0322 179 00003
CBA	00EMF893A002 Main Chassis Board Asm.	00EM F89 3A002

S = Safety Part Be sure to use exact replacement part.

A10777 Interface Module Parts

	A10777 Interface Module Parts	
CBA	00A10777A001 Interface Module Asm.	00A1 077 7A001
BR711	Zero ohm,	4835 111 27056
BR712	Zero ohm,	4835 111 27056
BR713	Zero ohm,	4835 111 27056
BR714	Zero ohm,	4835 111 27056
BRS15	Zero ohm,	4835 111 27056
BRS16	Zero ohm,	4835 111 27056
C702	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
C703	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
J0215	Connector, 2 Pin,	2422 025 16343
J0237	Connector, 4 Pin	2422 025 12479
J0238	5 Pin Board Connector.	2422 025 16387
J0259	Connector, 3 Pin	2412 020 00725
J1215	Connector, 2 Pin,	2422 025 16343
J1227	Connector, 4 Pin	2422 025 16385
J1238	Connector, 5 Pin	2422 025 12481
J1259	Connector, 3 Pin	2422 025 16383
J214	Connector, 3 Pin	2422 025 16382
J216	Connector, 4 Pin	2422 025 15847
J219	Connector, 5 Pin	2422 025 15848
J228	Connector, 3 Pin	2422 025 16407
J236	4 Pin Board Connector.	2422 025 16384
J775	Contact Pin.	2422 024 00626
J800	Connector, 32 Pin.	3135 010 03531
Q700	Transistor, NPN, BC847B.	4822 130 60511
Q701	Transistor, NPN, BC847B.	4822 130 60511
Q704	Transistor, PNP, BC857B.	5322 130 60508
Q705	Transistor, PNP, BC857B.	5322 130 60508
Q706	Transistor, NPN, BC847B.	4822 130 60511
Q707	Transistor, NPN, BC847B.	4822 130 60511
R700	10k, 5%, 1/10W, Metal Film	4835 111 37216
R701	47k, 5%, 1/10W, Metal Film	4835 111 37445
R702	75 ohm, 5%, 1/10W, Metal Film.	4835 111 37276
R703	75 ohm, 5%, 1/10W, Metal Film.	4835 111 37276
R711	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
R712	10k, 5%, 1/10W, Metal Film	4835 111 37216
R713	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
R714	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
R715	10k, 5%, 1/10W, Metal Film	4835 111 37216
R716	47k, 5%, 1/10W, Metal Film	4835 111 37445
R717	10k, 5%, 1/10W, Metal Film	4835 111 37216
R718	100 ohm, 5%, 1/10W, Metal Film	4835 111 37432
R719	330 ohm, 5%, 1/10W, Metal Film	4835 111 37443
R720	Res, 1K, 2%, 0,25W	4822 051 10102
R721	75 ohm, 5%, 1/10W, Metal Film.	4835 111 37276
R722	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231
Z700	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z701	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z702	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z703	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z704	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z705	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z706	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z707	Zener Diode, 8.2V, BZX284-C8	4835 130 37922

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	AC Power Cord.	3135 010 08051
AC02	Clip, Anode Lead	3135 014 04471
AC03	Cabinet Back	3135 014 07921
AC04	Cabinet Front.	3135 017 04121
AC05	Chassis Guide.	3139 124 31381
AC06	Control Buttons.	3139 124 27351
S AC07	Convergence and Purity Assembly.	2422 549 43385
S AC08	CRT A68AJB82X.	9301 787 60472
S AC09	Coil, Degaussing	2422 549 43967
AC10	Holder, Degaussing (4 Used).	3135 013 01641
AC11	Light Guide.	3139 124 26461
AC12	Nameplate.	3135 015 03571
AC14	Power Button	3139 124 26753
AC16	Speaker, 16R, 1W5 (2 Used)	2422 264 00343
S AC18	Yoke	3313 203 01242
AC19	Yoke Wedge (3 used).	3135 013 00311
AC24	Spring	3139 121 26231

PC9227C201 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts	
0211	Connector, 2 Pin	2422 025 11196
0212	Connector, 2 Pin	2422 025 15396
0213	Connector, 2 Pin	2422 025 15395
0214	Connector, 3 Pin	2422 025 16382
0215	Connector, 2 Pin,.	2422 025 16343
0216	Connector, 4 Pin	2422 025 15847
0219	Connector, 5 Pin	2422 025 15848
0220	4 Pin Board Connector.	2422 025 04852
0221	Connector, 4 Pin	2422 025 15503
0222	Connector, 2 Pin	2422 025 10646
0224	1 Pin Board Connector.	2422 034 20021
0228	1 Pin Board Connector.	2422 034 20021
0234	Connector, 4 Pin	2422 025 15847
0236	4 Pin Board Connector.	2422 025 16384
0237	Connector, 4 Pin	2422 025 12479
0238	5 Pin Board Connector.	2422 025 16387
S 0243	Connector, 6 Pin	2422 025 04854
0244	4 Pin Board Connector.	2422 025 04852
S 0245	Connector, 6 Pin	2422 025 04854
S 0254	CRT Socket (9 Pin)	2422 500 80022
0259	Connector, 3 Pin	2422 025 16383
0262	Connector, 4 Pin	2422 025 16385
0267	Connector, 3 Pin	2412 020 00725
0277	SCR PAN TAP ZN	2539 124 36019
0320	LABEL, ID.	3135 015 00691
0335	BAR CODE LABEL	3135 015 02501
0340	FLUX RF800 ALPHA	1322 526 43002
0341	SOLDER BAR	0622 315 98001
0342	SOLDER, WIRE	0622 314 00002
0343	THERMAL COMPOUND	3135 010 02491
1000	Tuner, V+U PLL PH MN B.	2422 542 90069
1001	Filter	2422 549 42501
1003	45 MHz SAW, Filter,.	2422 549 42433
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807
1208	Crystal Resonator, 3.58MHz	2422 543 00832
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10869
S 1571	FUSE 1A 250V	2422 086 10779
S 1572	FUSE 1A 250V	2422 086 10779
S 1580	Relay, 12V	2422 132 07317
1600	Switch, Tactile.	2422 128 02742
1601	Switch, Tactile.	2422 128 02742
1602	Switch, Tactile.	2422 128 02742
1603	Switch, Tactile.	2422 128 02742
1606	Switch, Tactile.	2422 128 02742
1660	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488
1703	L9 ITV SMARTPORT	3139 178 08561
1821	Ceramic Resonator, 514KHz5, CSB503F58	2422 540 98344
2001	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2002	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2003	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2004	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2011	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2102	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2103	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2104	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2201	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2202	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2203	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2204	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2205	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2208	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2209	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2211	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2212	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2213	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2214	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2215	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 16654
2220	Cap, 18p, 5%, 50V, Ceramic	3198 016 01890
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2222	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2226	Cap, 33u, 20%, 25V, Electrolytic . .	2020 021 90124
2227	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2247	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2248	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2249	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2330	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2340	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320
S 2343	Cap, 3n3, 10%, 2KV, Ceramic.	2020 558 90529
2345	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2401	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2402	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2404	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2405	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2407	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2409	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2420	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2426	Cap, 100n, 10%, 63V, Metalized Polyes ter.	2222 370 75104
2428	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2429	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2430	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2431	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2437	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2438	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2448	Cap, 220p, 10%, 500V, Ceramic. . . .	3198 019 42210
2450	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91139
2451	Cap, 15n, 10%, 50V, Polyester. . . .	2020 300 90575
2456	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176
2457	Cap, 390n, 5%, 250V, Metalized Polypr opylene.	2222 479 90021
2458	Cap, 2u2, 20%, 100V, Electrolytic. .	2020 021 91331
2459	Cap, 680p, 10%, 500V, Ceramic. . . .	3198 019 46810
2461	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2462	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176
S 2463	Cap, 1n, 10%, 2KV, Ceramic	2020 558 90487
S 2465	Cap, 9n1, 5%, 1600V, Polypropylene .	2022 333 00118
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050
2473	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2481	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2482	Cap, 68n, 10%, 250V, Polyester . . .	2222 347 90234
2484	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2485	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2486	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2487	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2488	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2489	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2490	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2491	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810
2500	Cap, 470n, 20%, 275V, Polypropylene.	2222 336 29148
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
S 2507	Cap, 1n5, 10%, 1KV, Ceramic.	2020 558 90443
2508	Cap, 470u, 20%, 200V, Electrolytic .	2020 024 90647
S 2511	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
S 2518	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2530	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 021 91147
2531	Cap, 1n, 2%, 50V, Polypropylene. . .	2020 310 90049
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2540	Cap, 100u, 20%, 25V, Electrolytic. .	2020 021 90547
S 2545	Cap, 1n5, 20%, v, Ceramic.	2020 554 90128
S 2550	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2551	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91358
2561	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
S 2562	Cap, 220p, 10%, 1KV, Ceramic	2020 558 90424
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2572	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2575	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2577	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2586	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2604	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2613	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2615	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2619	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2622	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2629	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040

S = Safety Part Be sure to use exact replacement part.

PC9227C201 (continued)

2631	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3246	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230	
2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
2679	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
2681	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210		3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340	
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3250	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
2821	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280		3251	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040	
2823	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230		3252	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720		3253	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	
2825	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080		3257	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
2826	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090		3258	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
2827	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3259	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
2828	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
2829	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046	
2830	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280		3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
2831	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046	
2832	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280		3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
2833	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280		3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046	
2834	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780	S	3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109	
2835	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	S	3341	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108	
2836	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	S	3342	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108	
2837	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740		3343	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90047	
2838	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290	
2839	Cap, 1u, 5%, 50V, Metalized Polyester	2020 308 90124	S	3345	VDR, DC, 1mA, 50V, MAX 115V	2322 593 13507	
2840	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290	
2841	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3401	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380	
2842	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3402	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380	
2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3403	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380	
2844	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3405	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002	
2845	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3406	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
2913	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280		3407	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002	
2914	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330		3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
2915	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3409	Res, 1R5, 5%, 1/3W, Metal Film . . .	2306 204 03158	
2916	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648		3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210	
2917	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210	
2918	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330		3420	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740	
2919	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220	
2920	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648		3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220	
2921	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840	
2931	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280		3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606	
2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3425	Res, 120K, 5%, 1/10W, Metalized Glass	2120 108 91716	
2952	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3426	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930	
2954	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3428	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	
2955	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3429	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730	
2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3431	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	
2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3432	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3433	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
2960	Cap, 220u, 20%, 50V, Electrolytic. .	3198 026 52210		3436	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090		3437	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090		3438	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330	
2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090		3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920	
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3447	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220	
3010	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610		3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320	
3013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	S	3452	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63229	
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	S	3453	Res, 4R7, 5%, 5W, Wire Wound	2322 251 41478	
3015	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	S	3454	Res, 33K, 5%, 1 1/3W, Metal Film . .	2322 194 63333	
3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810		3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
3021	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020		3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
3103	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220	S	3462	Res, 6K8, 5%, 5W, Metal Film	2322 257 41682	
3104	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030		3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790	
3108	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3464	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3109	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	S	3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109	
3123	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590		3466	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903	
				3467	Res, 15K, 1%, 3/5W, Metal Film . . .	2322 156 21503	
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010		3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
3201	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910		3469	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	
				3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240	
3203	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310		3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703	
				3481	Res, 35K7, 1%, 3/5W, Metal Film. . .	2322 156 23573	
3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820		3482	Res, 56K, 1%, 3/5W, Metal Film . . .	2322 156 25603	
3205	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020		3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230	
3206	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610		3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
			S	3485	Res, 4R7, 5%, 1/2W, Metal Film . . .	2306 207 03478	
3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3486	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108	
3209	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	S	3487	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108	
3212	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910	S	3488	Res, 4R7, 5%, 1/2W, Metal Film . . .	2306 207 03478	
			S	3490	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108	
3213	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610	S	3491	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108	
			S	3492	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108	
3215	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230		3495	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820	
3216	Res, Zero ohm, 'Chip' Jumper	3198 021 90020		3496	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3217	Res, 1M5, 5%, 1/8W, Metalized Glass.	2322 730 61155		3497	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3218	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010		3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019	
3219	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610	S	3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225	
				3503	PTC DC ZPB 120V S 10R PM30 B . . .	2120 661 00019	
3220	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	S	3505	Surge Protector.	2422 549 43073	
3225	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040	S	3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223	
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	S	3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333	
3231	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	S	3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102	
3232	Res, Zero ohm, 'Chip' Jumper	3198 021 90020		3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530	
3233	Res, Zero ohm, 'Chip' Jumper	3198 021 90020		3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184	
3243	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220		3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204	

S = Safety Part Be sure to use exact replacement part.

PC9227C201 (continued)

S 3515	2.5 ohm, 20%, 3.6W, Negative Temperature Coefficient.	2122 612 00023	
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3517	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	
S 3518	Res, 0R22, 5%, 3W, Metal Film.	2120 106 90548	
3520	Res, 82K, 5%, 1/6W, Carbon Film.	3198 011 08230	
3521	Res, 330 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53310	
S 3525	Res, 33 ohm, 5%, 1/3W, Metal Film.	2306 204 03339	
3528	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3529	Res, 68 ohm, 5%, 1/6W, Carbon Film	3198 011 06890	
3530	Res, 3K3, 5%, 1/6W, Carbon Film.	3198 011 03320	
3532	Res, 6K8, 5%, 1/6W, Carbon Film.	3198 011 06820	
3534	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530	
3536	Res, 18K, 5%, 1/6W, Carbon Film.	3198 011 01830	
3537	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030	
S 3542	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475	
3570	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530	
3571	Res, 150K, 1%, 3/5W, Metal Film.	2322 156 21504	
3573	Res, 2K, 1%, 1/10W, Metalized Glass.	2120 108 92657	
3574	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330	
3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3577	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030	
3578	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3579	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451	
3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3592	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3594	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	
3595	Res, 68K, 5%, 1/6W, Carbon Film.	3198 011 06830	
3596	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030	
3597	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010	
3598	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3599	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	
3607	RSIP 1/8W 8K2 PM5.	2120 108 92402	
3608	RSIP 1/8W 2K2 PM5.	2120 108 92591	
3609	2.2k, 5%, Resistor Network	2120 108 93868	
3611	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3612	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3613	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3615	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3616	Jumper Wire/Staple	0322 179 00003	
3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3619	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3629	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710	
3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3631	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730	
S 3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63479	
3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210	
3634	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	
3635	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	
3636	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	
3637	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3649	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010	
3650	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010	
3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3654	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010	
3655	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010	
3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3662	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3663	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220	
3664	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220	
3665	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3666	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620	
3667	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730	
3672	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3673	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3674	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710	
3675	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510	
3676	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510	
3677	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510	
3680	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810	
3681	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3682	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220	
3683	Res, 100 ohm, 5%, 1/10W, Glass	3198 021 51010	
3684	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	
3687	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210	
3821	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530	
3822	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220	
3823	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040	
3824	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	
3825	Res, 6K8, 5%, 1/6W, Carbon Film.	3198 011 06820	
3826	Res, 6K8, 5%, 1/6W, Carbon Film.	3198 011 06820	
3827	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3828	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3829	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820	
3830	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820	
3831	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198 011 03310	
3832	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790	
3908	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3909	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3910	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620	
3911	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230	
3912	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3913	Res, 6K8, 5%, 1/6W, Carbon Film.	3198 011 06820	
3914	Res, 1K8, 5%, 1/6W, Carbon Film.	3198 011 01820	
3915	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820	
3916	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210	
3917	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3918	Res, 6K8, 5%, 1/6W, Carbon Film.	3198 011 06820	
3919	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620	
3920	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820	
3921	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230	
3922	Res, 1K8, 5%, 1/6W, Carbon Film.	3198 011 01820	
3923	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210	
3924	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930	
3925	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930	
3926	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930	
3929	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930	
3930	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3931	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810	
3951	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	
3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3953	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3955	Res, 4K7, 5%, 1/6W, Carbon Film.	3198 011 04720	
3957	Res, 4K7, 5%, 1/6W, Carbon Film.	3198 011 04720	
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4004	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4011	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4012	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4020	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4051	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4100	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4102	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4144	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4203	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4207	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4212	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4215	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4216	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4501	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4650	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4651	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4654	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4655	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4833	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4911	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4912	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4914	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4957	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4999	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
5000	Coil, 5u6.	3198 018 25680	
5004	Coil, 820n	2422 535 97314	
5201	Coil, 22u.	3198 018 22290	
5202	Coil, 6u8.	3198 018 16880	
5342	Coil, 22u.	2422 535 97333	
S 5445	Transformer, L.O.T., models ending in C101, C121, and C125	2422 531 02327	
5451	Coil, 27u.	2422 535 96614	
5457	Coil, Linear Correction.	3128 138 53241	
5461	Transformer.	3128 138 33811	
5480	Coil, 27u.	2422 535 97334	
S 5500	Filter, Mains, 5mH, 2A	2422 549 43432	
5516	IND BD 100M 120R R	2422 549 40696	
5518	Fixed, Inductor, 100MHz, 50R.	3198 018 90010	
5521	Coil, 2u2.	3198 018 12280	
5540	Coil, 4u7.	3198 018 14780	
S 5545	Transfomer,.	2422 531 02314	
5551	Coil, 27u.	2422 535 95366	

S = Safety Part Be sure to use exact replacement part.

PC9227C201 (continued)

5552	Fixed, Inductor, 100MHz, 50R.	3198 018 90010	
5572	IND BD 100M 120R R	2422 549 40696	
5573	IND BD 100M 120R R	2422 549 40696	
5576	IND BD 100M 120R R	2422 549 40696	
5577	Fixed, Inductor, 100MHz, 50R.	3198 018 90010	
5600	Coil, 8u2.	3198 018 18280	
5601	Coil, 8u2.	3198 018 18280	
5620	Coil, 6u8.	3198 018 16880	
5821	Coil, 100u	3198 018 21010	
5822	Coil, 18u.	3198 018 21890	
6008	Zener Diode, 33 volt	3198 010 23390	
6113	Zener Diode, 6.8 volt.	9340 386 40115	
6211	Diode, Signal, 1N4148.	3198 010 10010	
6212	Diode, Signal, 1N4148.	3198 010 10010	
6213	Diode, Signal, 1N4148.	3198 010 10010	
6331	Diode, Signal, BAV21	3198 010 10070	
6333	Diode, Signal, BAV21	3198 010 10070	
6335	Diode, Signal, BAV21	3198 010 10070	
6401	Diode, Rect, BYD33D	9337 234 00133	
6402	Zener Diode, 33 volt	3198 010 23390	
6403	Diode, Rect, BYD33D	9337 234 00133	
6404	Zener Diode, 75 volt	9331 180 00133	
6449	Diode, Signal, 1N4148.	3198 010 10010	
6450	Diode, Signal, 1N4148.	3198 010 10010	
6460	Diode, Rect, BY228/20	9336 215 80112	
6463	Diode, Signal, 1N4148.	3198 010 10010	
6464	Zener Diode, 6.2 volt.	9331 668 30133	
6465	Diode, Rect, BYD33J	9337 234 20133	
6466	Diode, Rect, BYD33J	9337 234 20133	
6480	Zener Diode, 27 volt	3198 010 22790	
6481	Diode, Signal, 1N4148.	3198 010 10010	
6485	Diode, Rect, BYD33J	9337 234 20133	
6486	Diode, Rect, EGP20DL-5300	9322 100 13682	
6487	Diode, Rect, BYD33D	9337 234 00133	
6488	Diode, Rect, BYV27-200.	9322 126 72673	
6490	Diode, Rect, BYV27-200.	9322 126 72673	
6505	Diode, Bridge Rect, GBU6JL-7002	9322 138 08667	
6507	Diode, Rect, BYD33J	9337 234 20133	
6508	Diode, Rect, BYD33J	9337 234 20133	
6510	Zener Diode, 20 volt	9331 178 60133	
6511	Diode, Rect, BYV95C	9335 001 80133	
6512	Diode, Rect, 1N5062	3198 010 10120	
6513	Diode, Rect, 1N5062	3198 010 10120	
6514	Zener Diode, 18 volt	3198 010 21890	
6540	Diode, Signal, BAV21	3198 010 10070	
6550	Diode, Rect, BY229X-800	9340 380 30127	
6560	Diode, Rect, EGP20DL-5300	9322 100 13682	
6580	Diode, Rect, SB140.	9339 577 60673	
6584	Diode, Signal, 1N4148.	3198 010 10010	
6585	Diode, Signal, 1N4148.	3198 010 10010	
6591	Diode, Signal, BAS216.	9340 255 30115	
6601	Zener Diode, 3.9 volt.	3198 010 23980	
6602	Diode, Signal, 1N4148.	3198 010 10010	
6603	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610	
6604	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610	
6605	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610	
6606	Zener Diode, 4.7 volt.	3198 010 24780	
6607	Zener Diode, 6.8 volt.	3198 010 26880	
6690	LED VS LTL-307P (LITO) B	9322 033 95682	
6821	Zener Diode, 9.1 volt.	9331 177 80133	
6822	Diode, Signal, 1N4148.	3198 010 10010	
6951	Diode, Signal, BAS216.	9340 255 30115	
6961	Diode, Signal, BAS216.	9340 255 30115	
7250	IC,.	9352 620 26112	
7251	IC, LM317T	9337 220 80682	
7254	Transistor, NPN, BC847B.	3198 010 42030	
7256	Transistor, NPN, BC847B.	3198 010 42030	
7258	Transistor, NPN, BC847B.	3198 010 42030	
7263	Transistor, PNP, BC857B.	3198 010 42150	
7266	Transistor, NPN, BC847B.	3198 010 42030	
7330	IC, TDA6107Q/N2.	9352 576 50112	
7401	IC,.	9322 121 47687	
7460	Transistor, NPN, BU1508DX.	9340 170 50127	
7461	Transistor, NPN, BF819	9335 354 50127	
7462	Transistor, NPN, BC547B.	3198 020 40030	
7463	Transistor, PNP, BC557B.	3198 020 40110	
7480	IC,.	9322 028 93682	
7481	Transistor, PNP, BC557B.	3198 020 40110	
7482	Transistor, PNP, BC857B.	3198 010 42150	
7518	STH8NA60FI SMPS FET	9322 068 92687	
7520	IC,.	9322 108 36682	
7570	IC,.	9337 711 00676	
S 7581	Coupler, TCDT1101G	9338 431 30682	
7590	Transistor, NPN, BC847B.	3198 010 42030	
7591	Transistor, NPN, BC847B.	3198 010 42030	
7592	Transistor, NPN, BC847B.	3198 010 42030	
7600	IC, SAA5543-PS/M4/0167 L9 v3.2 (Commercial Models - NON Pro Plus)	9352 670 84112	
7601	IC, ST24W16B6, commercial models only	9322 095 35682	
7603	Transistor, NPN, BC337	9331 796 00126	
7604	Transistor, NPN, BC847B.	3198 010 42030	
7605	Transistor, NPN, BC847B.	3198 010 42030	
7608	Transistor, NPN, BC847B.	3198 010 42030	
7609	Transistor, NPN, BC847B.	3198 010 42030	
7680	IR Receiver.	9322 127 53667	
7821	IC,.	9352 374 70112	
7822	IC, HEF4052BT.	9333 729 50653	
7823	Transistor, NPN, BC337-25.	3198 020 43530	
7904	Transistor, NPN, BC847B.	3198 010 42030	
7905	Transistor, NPN, BC847B.	3198 010 42030	
7906	Transistor, NPN, BC847B.	3198 010 42030	
7908	Transistor, NPN, BC847B.	3198 010 42030	
7909	Transistor, NPN, BC847B.	3198 010 42030	
7910	Transistor, NPN, BC847B.	3198 010 42030	
7951	IC,.	9351 861 60112	
9001	Jumper Wire/Staple	0322 179 00003	
9003	Jumper Wire/Staple	0322 179 00003	
9005	Jumper Wire/Staple	0322 179 00003	
9011	Jumper Wire/Staple	0322 179 00003	
9012	Jumper Wire/Staple	0322 179 00003	
9105	Jumper Wire/Staple	0322 179 00003	
9126	Jumper Wire/Staple	0322 179 00003	
9132	Jumper Wire/Staple	0322 179 00003	
9140	Jumper Wire/Staple	0322 179 00003	
9141	Jumper Wire/Staple	0322 179 00003	
9200	Jumper Wire/Staple	0322 179 00003	
9202	Jumper Wire/Staple	0322 179 00003	
9203	Jumper Wire/Staple	0322 179 00003	
9204	Jumper Wire/Staple	0322 179 00003	
9205	Jumper Wire/Staple	0322 179 00003	
9206	Jumper Wire/Staple	0322 179 00003	
9207	Jumper Wire/Staple	0322 179 00003	
9208	Jumper Wire/Staple	0322 179 00003	
9209	Jumper Wire/Staple	0322 179 00003	
9210	Jumper Wire/Staple	0322 179 00003	
9211	Jumper Wire/Staple	0322 179 00003	
9214	Jumper Wire/Staple	0322 179 00003	
9215	Jumper Wire/Staple	0322 179 00003	
9216	Jumper Wire/Staple	0322 179 00003	
9217	Jumper Wire/Staple	0322 179 00003	
9218	Jumper Wire/Staple	0322 179 00003	
9220	Jumper Wire/Staple	0322 179 00003	
9221	Jumper Wire/Staple	0322 179 00003	
9222	Jumper Wire/Staple	0322 179 00003	
9225	Jumper Wire/Staple	0322 179 00003	
9226	Jumper Wire/Staple	0322 179 00003	
9227	Jumper Wire/Staple	0322 179 00003	
9228	Jumper Wire/Staple	0322 179 00003	
9229	Jumper Wire/Staple	0322 179 00003	
9230	Jumper Wire/Staple	0322 179 00003	
9231	Jumper Wire/Staple	0322 179 00003	
9232	Jumper Wire/Staple	0322 179 00003	
9233	Jumper Wire/Staple	0322 179 00003	
9234	Jumper Wire/Staple	0322 179 00003	
9236	Jumper Wire/Staple	0322 179 00003	
9237	Jumper Wire/Staple	0322 179 00003	
9238	Jumper Wire/Staple	0322 179 00003	
9240	Jumper Wire/Staple	0322 179 00003	
9241	Jumper Wire/Staple	0322 179 00003	
9242	Jumper Wire/Staple	0322 179 00003	
9243	Jumper Wire/Staple	0322 179 00003	
9245	Jumper Wire/Staple	0322 179 00003	
9301	Jumper Wire/Staple	0322 179 00003	
9401	Jumper Wire/Staple	0322 179 00003	
9402	Jumper Wire/Staple	0322 179 00003	
9403	Jumper Wire/Staple	0322 179 00003	
9404	Jumper Wire/Staple	0322 179 00003	
9407	Jumper Wire/Staple	0322 179 00003	
9408	Jumper Wire/Staple	0322 179 00003	
9411	Jumper Wire/Staple	0322 179 00003	
9414	Jumper Wire/Staple	0322 179 00003	
9417	Jumper Wire/Staple	0322 179 00003	
9419	Jumper Wire/Staple	0322 179 00003	
9420	Jumper Wire/Staple	0322 179 00003	
9421	Jumper Wire/Staple	0322 179 00003	
9422	Jumper Wire/Staple	0322 179 00003	
9424	Jumper Wire/Staple	0322 179 00003	
9425	Jumper Wire/Staple	0322 179 00003	
9427	Jumper Wire/Staple	0322 179 00003	
9428	Jumper Wire/Staple	0322 179 00003	
9460	Jumper Wire/Staple	0322 179 00003	
9461	Jumper Wire/Staple	0322 179 00003	
9465	Jumper Wire/Staple	0322 179 00003	
9500	Jumper Wire/Staple	0322 179 00003	
9501	Jumper Wire/Staple	0322 179 00003	
9502	Jumper Wire/Staple	0322 179 00003	
9503	Jumper Wire/Staple	0322 179 00003	
9505	Jumper Wire/Staple	0322 179 00003	
9509	Jumper Wire/Staple	0322 179 00003	
9510	Jumper Wire/Staple	0322 179 00003	
9511	Jumper Wire/Staple	0322 179 00003	
9512	Jumper Wire/Staple	0322 179 00003	
9513	Jumper Wire/Staple	0322 179 00003	
9515	Jumper Wire/Staple	0322 179 00003	

S = Safety Part Be sure to use exact replacement part.

PC9227C201 (continued)

9516	Jumper Wire/Staple	0322 179 00003
9517	Jumper Wire/Staple	0322 179 00003
9518	Jumper Wire/Staple	0322 179 00003
9521	Jumper Wire/Staple	0322 179 00003
9526	Jumper Wire/Staple	0322 179 00003
9601	Jumper Wire/Staple	0322 179 00003
9602	Jumper Wire/Staple	0322 179 00003
9603	Jumper Wire/Staple	0322 179 00003
9604	Jumper Wire/Staple	0322 179 00003
9605	Jumper Wire/Staple	0322 179 00003
9606	Jumper Wire/Staple	0322 179 00003
9608	Jumper Wire/Staple	0322 179 00003
9609	Jumper Wire/Staple	0322 179 00003
9610	Jumper Wire/Staple	0322 179 00003
9611	Jumper Wire/Staple	0322 179 00003
9612	Jumper Wire/Staple	0322 179 00003
9613	Jumper Wire/Staple	0322 179 00003
9614	Jumper Wire/Staple	0322 179 00003
9615	Jumper Wire/Staple	0322 179 00003
9618	Jumper Wire/Staple	0322 179 00003
9621	Jumper Wire/Staple	0322 179 00003
9622	Jumper Wire/Staple	0322 179 00003
9624	Jumper Wire/Staple	0322 179 00003
9625	Jumper Wire/Staple	0322 179 00003
9626	Jumper Wire/Staple	0322 179 00003
9629	Jumper Wire/Staple	0322 179 00003
9631	Jumper Wire/Staple	0322 179 00003
9632	Jumper Wire/Staple	0322 179 00003
9637	Jumper Wire/Staple	0322 179 00003
9640	Jumper Wire/Staple	0322 179 00003
9642	Jumper Wire/Staple	0322 179 00003
9643	Jumper Wire/Staple	0322 179 00003
9644	Jumper Wire/Staple	0322 179 00003
9754	Jumper Wire/Staple	0322 179 00003
9788	Jumper Wire/Staple	0322 179 00003
9793	Jumper Wire/Staple	0322 179 00003
9800	Jumper Wire/Staple	0322 179 00003
9805	Jumper Wire/Staple	0322 179 00003
9806	Jumper Wire/Staple	0322 179 00003
9807	Jumper Wire/Staple	0322 179 00003
9810	Jumper Wire/Staple	0322 179 00003
9901	Jumper Wire/Staple	0322 179 00003
9904	Jumper Wire/Staple	0322 179 00003
9905	Jumper Wire/Staple	0322 179 00003
9906	Jumper Wire/Staple	0322 179 00003
9920	Jumper Wire/Staple	0322 179 00003
9933	Jumper Wire/Staple	0322 179 00003
9936	Jumper Wire/Staple	0322 179 00003
9940	Jumper Wire/Staple	0322 179 00003
9941	Jumper Wire/Staple	0322 179 00003
9942	Jumper Wire/Staple	0322 179 00003
9943	Jumper Wire/Staple	0322 179 00003
9944	Jumper Wire/Staple	0322 179 00003
9945	Jumper Wire/Staple	0322 179 00003
9946	Jumper Wire/Staple	0322 179 00003
9947	Jumper Wire/Staple	0322 179 00003
9948	Jumper Wire/Staple	0322 179 00003
9949	Jumper Wire/Staple	0322 179 00003
9950	Jumper Wire/Staple	0322 179 00003
9951	Jumper Wire/Staple	0322 179 00003
9952	Jumper Wire/Staple	0322 179 00003
9953	Jumper Wire/Staple	0322 179 00003
9955	Jumper Wire/Staple	0322 179 00003
9956	Jumper Wire/Staple	0322 179 00003
9957	Jumper Wire/Staple	0322 179 00003
9958	Jumper Wire/Staple	0322 179 00003
9959	Jumper Wire/Staple	0322 179 00003
9960	Jumper Wire/Staple	0322 179 00003
9962	Jumper Wire/Staple	0322 179 00003
9963	Jumper Wire/Staple	0322 179 00003
9964	Jumper Wire/Staple	0322 179 00003
9965	Jumper Wire/Staple	0322 179 00003
9966	Jumper Wire/Staple	0322 179 00003
9967	Jumper Wire/Staple	0322 179 00003
9968	Jumper Wire/Staple	0322 179 00003
9969	Jumper Wire/Staple	0322 179 00003
9970	Jumper Wire/Staple	0322 179 00003
9971	Jumper Wire/Staple	0322 179 00003
9972	Jumper Wire/Staple	0322 179 00003
9974	Jumper Wire/Staple	0322 179 00003
9975	Jumper Wire/Staple	0322 179 00003
9976	Jumper Wire/Staple	0322 179 00003
9977	Jumper Wire/Staple	0322 179 00003
9981	Jumper Wire/Staple	0322 179 00003
9982	Jumper Wire/Staple	0322 179 00003
9983	Jumper Wire/Staple	0322 179 00003
9984	Jumper Wire/Staple	0322 179 00003
9987	Jumper Wire/Staple	0322 179 00003
9989	Jumper Wire/Staple	0322 179 00003
9990	Jumper Wire/Staple	0322 179 00003
9991	Jumper Wire/Staple	0322 179 00003
9992	Jumper Wire/Staple	0322 179 00003
9993	Jumper Wire/Staple	0322 179 00003
CBA	00EMF893A103 Main Chassis Board Asm.	00EM F89 3A103

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Mains Cord	3135 010 07161
AC02	Clip, Anode Lead	3135 014 04471
AC03	Cabinet Back	3135 014 07911
AC04	Cabinet Front.	3135 017 04121
AC05	Chassis Guide.	3139 124 31381
AC06	Control Buttons.	3139 124 27351
S AC07	Convergence and Purity Assembly.	2422 549 43385
S AC08	CRT A68AJB82X.	9301 787 60472
S AC09	Coil, Degaussing	3121 218 62701
AC10	Holder, Degaussing (4 Used).	3135 013 01641
AC11	Light Guide.	3139 124 26461
AC12	Nameplate.	3135 015 03561
AC14	Power Button	3139 124 26444
REMOTE	Remote Transmitter	3139 228 80572
AC16	Speaker, 16R, 1W5 (2 Used)	2422 264 00343
S AC18	Yoke	3313 203 01242
AC19	Yoke Wedge (3 used).	3135 013 01961
AC21	Batteries f/Remote Transmitter	9299 000 13827
AC24	Spring	3139 121 26231

S = Safety Part Be sure to use exact replacement part.

PCW027C121 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts	
0113	L9 SOPS HEATSINK	3139 121 62041
0119	DIODE HEATSINK L9.	3139 121 26691
0121	LINE HEATSINK (CINCH).	3139 121 61942
0123	L9L AUDIO HEATSINK (STERO)	3139 121 61952
S 0127	Holder, Fuse, 2 Pin.	3122 358 71251
0211	Connector, 2 Pin	2422 025 11196
0212	Connector, 2 Pin	2422 025 15396
0213	Connector, 2 Pin	2422 025 15395
0214	Connector, 3 Pin	2422 025 16382
0215	Connector, 2 Pin,.	2422 025 16343
0216	Connector, 4 Pin	2422 025 15847
0219	Connector, 5 Pin	2422 025 15848
0220	4 Pin Board Connector.	2422 025 04852
0221	Connector, 4 Pin	2422 025 15503
0222	Connector, 2 Pin	2422 025 10646
0224	1 Pin Board Connector.	2422 034 20021
0228	1 Pin Board Connector.	2422 034 20021
0234	Connector, 4 Pin	2422 025 15847
0236	4 Pin Board Connector.	2422 025 16384
0237	Connector, 4 Pin	2422 025 12479
0238	5 Pin Board Connector.	2422 025 16387
S 0243	Connector, 6 Pin	2422 025 04854
0244	4 Pin Board Connector.	2422 025 04852
S 0245	Connector, 6 Pin	2422 025 04854
S 0254	CRT Socket (9 Pin)	2422 500 80022
0259	Connector, 3 Pin	2422 025 16383
0262	Connector, 4 Pin	2422 025 16385
0267	Connector, 3 Pin	2412 020 00725
1000	Tuner, V+U PLL PH MN B.	2422 542 90069
1001	Filter	2422 549 42501
1003	45 MHz SAW, Filter,.	2422 549 42433
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807
1208	Crystal Resonator, 3.58MHz	2422 543 00832
S 1500	Fue, 4 A, 250V	2422 086 10905
S 1571	FUSE 1A 250V	2422 086 10779
S 1572	FUSE 1A 250V	2422 086 10779
S 1580	Relay, 12V, 5A G5PA-1.	2422 132 07444
1600	Switch, Tactile.	2422 128 02742
1601	Switch, Tactile.	2422 128 02742
1602	Switch, Tactile.	2422 128 02742
1603	Switch, Tactile.	2422 128 02742
1606	Switch, Tactile.	2422 128 02742
1660	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488
1703	L9 ITV SMARTPORT	3139 178 08561
1821	Ceramic Resonator, 514KHz5, CSB503F58	2422 540 98344
2001	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2002	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2003	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2004	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2011	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2102	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2103	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2104	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2201	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2202	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2203	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2204	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2205	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2208	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2209	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2211	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2212	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2213	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2214	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2215	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 16654
2220	Cap, 18p, 5%, 50V, Ceramic	3198 016 01890
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2222	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2226	Cap, 33u, 20%, 25V, Electrolytic . .	2020 021 90124
2227	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2247	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2248	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2249	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2330	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2340	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320
S 2343	Cap, 3n3, 10%, 2KV, Ceramic.	2020 558 90529
2345	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2401	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2402	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2404	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2405	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2407	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2409	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2420	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2426	Cap, 100n, 10%, 63V, Metalized Polyes ter.	2222 370 75104
2428	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2429	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2430	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2431	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2437	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2438	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2448	Cap, 33p, 5%, 500V, Ceramic.	2020 557 90192
2450	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91139
2451	Cap, 15n, 10%, 50V, Polyester. . . .	2020 300 90575
2456	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176
2457	Cap, 390n, 5%, 250V, Metalized Polypr opylene.	2222 479 90021
2458	Cap, 2u2, 20%, 100V, Electrolytic. .	2020 021 91331
2459	Cap, 680p, 10%, 500V, Ceramic. . . .	3198 019 46810
2461	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2462	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176
S 2463	Cap, 680p, 10%, 2KV, Ceramic	2020 558 90485
S 2465	Cap, 10n, 5%, 1600V, Polypropylene .	2222 375 90154
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050
2473	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2481	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2482	Cap, 68n, 10%, 250V, Polyester . . .	2222 347 90234
2484	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2485	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2486	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2487	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2488	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2489	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2490	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2491	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810
2499	Cap, 220n, 10%, 100V, Metalized Polye ster	2222 365 25224
2500	Cap, 470n, 20%, 275V, Polypropylene.	2222 336 29148
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2507	Cap, 1n5, 10%, 1KV, Ceramic.	3198 019 61520
2508	Cap, 470u, 20%, 200V, Electrolytic .	2020 024 90647
2511	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
2518	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2530	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 021 91147
2531	Cap, 1n, 2%, 50V, Polypropylene. . .	2020 310 90049
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2540	Cap, 100u, 20%, 25V, Electrolytic. .	2020 021 90547
S 2545	Cap, 1n5, 20%, v, Ceramic.	2020 554 90128
2550	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2551	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91358
2561	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2562	Cap, 220p, 10%, 1KV, Ceramic	3198 019 62210
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2572	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2575	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2577	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2586	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2604	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2613	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2615	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2619	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2622	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2629	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040

S = Safety Part Be sure to use exact replacement part.

PCW027C121 (continued)

2631	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3246	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230	
2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
2679	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
2681	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210		3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340	
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3250	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
2821	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280		3251	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040	
2823	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230		3252	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720		3253	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	
2825	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080		3257	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
2826	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090		3258	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
2827	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3259	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
2828	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
2829	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	3198 013 01020	
2830	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280		3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
2831	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	3198 013 01020	
2832	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280		3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
2833	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280		3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	3198 013 01020	
2834	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780	S	3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109	
2835	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	S	3341	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108	
2836	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	S	3342	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108	
2837	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740		3343	Res, 1K5, 20%, 1/2W, Carbon Film . .	3198 013 01520	
2838	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290	
2839	Cap, 1u, 10%, 50V, Polyester	3198 014 01050		3345	VDR DC 1MA/50V S MAX 110V A . . .	2122 550 00152	
2840	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290	
2841	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3401	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380	
2842	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3402	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380	
2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3403	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380	
2844	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3405	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002	
2845	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3406	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
2913	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280		3407	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002	
2914	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330		3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
2915	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3409	Res, 1R5, 5%, 1/3W, Metal Film . . .	2306 204 03158	
2916	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648		3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210	
2917	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210	
2918	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330		3420	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740	
2919	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220	
2920	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648		3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220	
2921	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840	
2931	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280		3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606	
2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3425	Res, 120K, 5%, 1/10W, Metalized Glass	2120 108 91716	
2952	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3426	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930	
2954	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3428	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	
2955	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3429	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730	
2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3431	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	
2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3432	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3433	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
2960	Cap, 220u, 20%, 50V, Electrolytic. .	3198 026 52210		3436	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090		3437	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090		3438	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330	
2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090		3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920	
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3447	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220	
3010	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610		3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320	
3013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	S	3452	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	3198 012 32290	
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	S	3453	Res, 4R7, 5%, 5W, Wire Wound	2322 251 41478	
3015	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	S	3454	Res, 33K, 5%, 1 1/3W, Metal Film . .	2322 194 63333	
3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810		3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
3021	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020		3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
3103	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220	S	3462	Res, 6K8, 5%, 5W, Metal Film	2322 257 41682	
3104	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030		3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790	
3108	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3464	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3109	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	S	3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109	
3123	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590		3466	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903	
				3467	Res, 15K, 1%, 3/5W, Metal Film . . .	2322 156 21503	
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010		3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
3201	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910		3469	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	
				3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240	
3203	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310		3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703	
				3481	Res, 35K7, 1%, 3/5W, Metal Film. . .	2322 156 23573	
3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820		3482	Res, 56K, 1%, 3/5W, Metal Film . . .	2322 156 25603	
3205	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020		3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230	
3206	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610		3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
			S	3486	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108	
3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3487	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108	
3209	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	S	3488	Res, 4R7, 5%, 1/2W, Metal Film . . .	2306 207 03478	
3212	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910	S	3490	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108	
			S	3491	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108	
3213	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610	S	3492	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108	
				3495	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820	
3215	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230		3496	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3216	Res, Zero ohm, 'Chip' Jumper	3198 021 90020		3497	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3217	Res, 1M5, 5%, 1/8W, Metalized Glass.	2322 730 61155		3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	3198 013 04710	
3218	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	S	3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225	
3219	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610	S	3503	PTC, DC, 120V,P3020 B.	2120 661 00025	
			S	3505	Surge Protector.	2422 549 43073	
3220	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	S	3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223	
3225	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040	S	3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333	
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	S	3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102	
3231	Res, Zero ohm, 'Chip' Jumper	3198 021 90020		3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530	
3232	Res, Zero ohm, 'Chip' Jumper	3198 021 90020		3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184	
3233	Res, Zero ohm, 'Chip' Jumper	3198 021 90020		3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204	
3243	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220	S	3515	2.5 ohm, 20%, 3.6W, Negative Temperat ure Coefficient.	2122 612 00023	

S = Safety Part Be sure to use exact replacement part.

PCW027C121 (continued)

3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3517	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
S 3518	Res, 0R22, 5%, 2 1/2W, Metal Film. .	3198 012 32270	
3520	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230	
3521	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310	
S 3525	Res, 47 ohm, 5%, 1/3W, Metal Film. .	2306 204 03479	
3528	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3529	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890	
3530	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320	
3532	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3534	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530	
3536	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830	
3537	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
S 3542	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475	
3570	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530	
3571	Res, 150K, 1%, 3/5W, Metal Film. . .	2322 156 21504	
3573	Res, 2K, 1%, 1/8W, Metalized Glass .	2322 734 62002	
3574	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330	
3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3577	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3578	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3579	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002	
3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3592	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3594	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	
3595	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830	
3596	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3597	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3598	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3599	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	
3607	RST NETW RGLE 10X 8K2 PM5 B . . .	2120 108 93916	
3608	RST NETW RGLE 6X 2K2 PM5 B . . .	2120 108 93913	
3609	RST NETW RGLE 7X 2K2 PM5 B . . .	2120 108 93915	
3611	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3612	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3613	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3615	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3616	Jumper Wire/Staple	0322 179 00003	
3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3619	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3629	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710	
3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3631	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730	
S 3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790	
3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210	
3634	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	
3635	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	
3636	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	
3637	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3649	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3650	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3654	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3655	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3662	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3663	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220	
3664	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220	
3665	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3666	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620	
3667	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730	
3672	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3673	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3674	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710	
3675	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3676	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3677	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3680	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810	
3681	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3682	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220	
3683	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3684	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	
3687	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210	
3821	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530	
3822	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220	
3823	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040	
3824	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	
3825	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3826	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3827	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3828	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3829	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820	
3830	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820	
3831	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198 011 03310	
3832	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790	
3908	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3909	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3910	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620	
3911	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230	
3912	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3913	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3914	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	
3915	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820	
3916	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210	
3917	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3918	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3919	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620	
3920	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820	
3921	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230	
3922	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	
3923	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210	
3924	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930	
3925	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930	
3926	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930	
3929	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930	
3930	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3931	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810	
3951	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	
3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3953	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3955	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
3957	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4004	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4011	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4012	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4020	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4051	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4100	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4102	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4144	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4203	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4207	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4212	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4215	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4216	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4465	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4501	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4650	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4651	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4654	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4655	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4833	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4911	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4912	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4914	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4957	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4999	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
5000	Coil, 5u6.	3198 018 25680	
5004	Coil, 820n	2422 535 97314	
5201	Coil, 22u.	3198 018 22290	
5202	Coil, 6u8.	3198 018 16880	
5342	Coil, 22u.	3198 018 22290	
S 5445	Transformer, L.O.T., models ending in C101, C121, and C125	2422 531 02327	
5451	Coil, 27u.	2422 535 96614	
5457	Coil, Linear Correction.	3128 138 53241	
5461	Transformer.	3128 138 33811	
5480	Coil, 27u.	2422 535 97334	
S 5500	Filter, Mains, 5mH, 2A	2422 549 43432	
5516	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5518	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5521	Coil, 2u2.	3198 018 12280	
5540	Coil, 4u7.	3198 018 14780	
S 5545	Transfomer,.	2422 531 02314	
5551	Coil, 27u.	2422 535 95366	
5552	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	

S = Safety Part Be sure to use exact replacement part.

PCW027C121 (continued)

5572	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5573	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5576	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5577	Fixed, Inductor, 100MHz, 50R. . .	3198 018 90010	
5600	Coil, 8u2.	3198 018 18280	
5601	Coil, 8u2.	3198 018 18280	
5620	Coil, 6u8.	3198 018 16880	
5821	Coil, 100u	3198 018 21010	
5822	Coil, 18u.	3198 018 21890	
6008	Zener Diode, 33 volt	3198 010 23390	
6113	Zener Diode, 6.8 volt.	9340 386 40115	
6211	Diode, Signal, 1N4148.	3198 010 10010	
6212	Diode, Signal, 1N4148.	3198 010 10010	
6213	Diode, Signal, 1N4148.	3198 010 10010	
6331	Diode, Signal, BAV21	3198 010 10070	
6333	Diode, Signal, BAV21	3198 010 10070	
6335	Diode, Signal, BAV21	3198 010 10070	
6401	Diode, Rect, BYD33D	9337 234 00133	
6402	Zener Diode, 33 volt	3198 010 23390	
6403	Diode, Rect, BYD33D	9337 234 00133	
6404	Zener Diode, 75 volt	9331 180 00133	
6449	Diode, Signal, 1N4148.	3198 010 10010	
6450	Diode, Signal, 1N4148.	3198 010 10010	
6460	Diode, Rect, BY228/20	9336 215 80112	
6463	Diode, Signal, 1N4148.	3198 010 10010	
6464	Zener Diode, 6.2 volt.	9331 668 30133	
6465	Diode, Rect, BYD33J	9337 234 20133	
6466	Diode, Rect, BYD33J	9337 234 20133	
6480	Zener Diode, 27 volt	3198 010 22790	
6481	Diode, Signal, 1N4148.	3198 010 10010	
6485	Diode, Rect, BYD33J	9337 234 20133	
6486	Diode, Rect, EGP20DL-5300	9322 100 13682	
6487	Diode, Rect, BYD33D	9337 234 00133	
6488	Diode, Rect, BYV27-200.	9322 126 72673	
6490	Diode, Rect, BYV27-200.	9322 126 72673	
6505	Diode, Bridge Rect, GBU6JL-7002 . .	9322 138 08667	
6507	Diode, Rect, BYD33J	9337 234 20133	
6508	Diode, Rect, BYD33J	9337 234 20133	
6510	Zener Diode, 20 volt	9331 178 60133	
6511	Diode, Rect, BYV95C	9335 001 80133	
6512	Diode, Rect, 1N5062	3198 010 10120	
6513	Diode, Rect, 1N5062	3198 010 10120	
6514	Zener Diode, 18 volt	3198 010 21890	
6540	Diode, Signal, BAV21	3198 010 10070	
6550	Diode, Rect, BY229X-800	9340 380 30127	
6560	Diode, Rect, EGP20DL-5300	9322 100 13682	
6580	Diode, Rect, SB140.	9339 577 60673	
6584	Diode, Signal, 1N4148.	3198 010 10010	
6585	Diode, Signal, 1N4148.	3198 010 10010	
6591	Diode, Signal, BAS16WS	9322 031 99685	
6601	Zener Diode, 3.9 volt.	3198 010 23980	
6602	Diode, Signal, 1N4148.	3198 010 10010	
6603	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610	
6604	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610	
6605	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610	
6606	Zener Diode, 4.7 volt.	3198 010 24780	
6607	Zener Diode, 6.8 volt.	3198 010 26880	
6690	LED VS LTL-307P (LITO) B . . .	9322 033 95682	
6821	Zener Diode, 9.1 volt.	9331 177 80133	
6822	Diode, Signal, 1N4148.	3198 010 10010	
6951	Diode, Signal, BAS16WS	9322 031 99685	
6961	Diode, Signal, BAS16WS	9322 031 99685	
7250	IC,.	9352 620 26112	
7251	IC, LM317T	9337 220 80682	
7254	Transistor, NPN, BC847B.	3198 010 42030	
7256	Transistor, NPN, BC847B.	3198 010 42030	
7258	Transistor, NPN, BC847B.	3198 010 42030	
7263	Transistor, PNP, BC857B.	3198 010 42150	
7266	Transistor, NPN, BC847B.	3198 010 42030	
7330	IC, TDA6107Q/N2.	9352 576 50112	
7401	IC,.	9322 121 47687	
7460	Transistor, NPN, BU1508DX.	9340 170 50127	
7461	Transistor, NPN, BF819	9335 354 50127	
7462	Transistor, NPN, BC547B.	3198 020 40030	
7463	Transistor, PNP, BC557B.	3198 020 40110	
7480	IC,.	9322 028 93682	
7481	Transistor, PNP, BC557B.	3198 020 40110	
7482	Transistor, PNP, BC857B.	3198 010 42150	
7518	STH10NC60FI SMPS FET.	9322 155 66687	
7520	IC,.	9322 108 36682	
7570	IC,.	9337 711 00676	
S 7581	Coupler, TCDT1101G	9338 431 30682	
7590	Transistor, NPN, BC847B.	3198 010 42030	
7591	Transistor, NPN, BC847B.	3198 010 42030	
7592	Transistor, NPN, BC847B.	3198 010 42030	
7600	IC, SAA5543-PS/M4/0167 L9 v3.2 (Commercial Models - NON Pro Plus)	9352 670 84112	
7601	IC, ST24W16B6, commercial models only	9322 095 35682	
7603	Transistor, NPN, BC337	9331 796 00126	
7604	Transistor, NPN, BC847B.	3198 010 42030	
7605	Transistor, NPN, BC847B.	3198 010 42030	
7608	Transistor, NPN, BC847B.	3198 010 42030	
7609	Transistor, NPN, BC847B.	3198 010 42030	
7680	IR Receiver.	9322 127 53667	
7821	IC,.	9352 374 70112	
7822	IC, HEF4052BT.	9333 729 50653	
7823	Transistor, NPN, BC337-25.	3198 020 43530	
7904	Transistor, NPN, BC847B.	3198 010 42030	
7905	Transistor, NPN, BC847B.	3198 010 42030	
7906	Transistor, NPN, BC847B.	3198 010 42030	
7908	Transistor, NPN, BC847B.	3198 010 42030	
7909	Transistor, NPN, BC847B.	3198 010 42030	
7910	Transistor, NPN, BC847B.	3198 010 42030	
7951	IC,.	9351 861 60112	
9001	Jumper Wire/Staple	0322 179 00003	
9003	Jumper Wire/Staple	0322 179 00003	
9005	Jumper Wire/Staple	0322 179 00003	
9011	Jumper Wire/Staple	0322 179 00003	
9012	Jumper Wire/Staple	0322 179 00003	
9105	Jumper Wire/Staple	0322 179 00003	
9126	Jumper Wire/Staple	0322 179 00003	
9132	Jumper Wire/Staple	0322 179 00003	
9140	Jumper Wire/Staple	0322 179 00003	
9141	Jumper Wire/Staple	0322 179 00003	
9200	Jumper Wire/Staple	0322 179 00003	
9202	Jumper Wire/Staple	0322 179 00003	
9203	Jumper Wire/Staple	0322 179 00003	
9204	Jumper Wire/Staple	0322 179 00003	
9205	Jumper Wire/Staple	0322 179 00003	
9206	Jumper Wire/Staple	0322 179 00003	
9207	Jumper Wire/Staple	0322 179 00003	
9208	Jumper Wire/Staple	0322 179 00003	
9209	Jumper Wire/Staple	0322 179 00003	
9210	Jumper Wire/Staple	0322 179 00003	
9211	Jumper Wire/Staple	0322 179 00003	
9214	Jumper Wire/Staple	0322 179 00003	
9215	Jumper Wire/Staple	0322 179 00003	
9216	Jumper Wire/Staple	0322 179 00003	
9217	Jumper Wire/Staple	0322 179 00003	
9218	Jumper Wire/Staple	0322 179 00003	
9220	Jumper Wire/Staple	0322 179 00003	
9221	Jumper Wire/Staple	0322 179 00003	
9222	Jumper Wire/Staple	0322 179 00003	
9225	Jumper Wire/Staple	0322 179 00003	
9226	Jumper Wire/Staple	0322 179 00003	
9227	Jumper Wire/Staple	0322 179 00003	
9228	Jumper Wire/Staple	0322 179 00003	
9229	Jumper Wire/Staple	0322 179 00003	
9230	Jumper Wire/Staple	0322 179 00003	
9231	Jumper Wire/Staple	0322 179 00003	
9232	Jumper Wire/Staple	0322 179 00003	
9233	Jumper Wire/Staple	0322 179 00003	
9234	Jumper Wire/Staple	0322 179 00003	
9236	Jumper Wire/Staple	0322 179 00003	
9237	Jumper Wire/Staple	0322 179 00003	
9238	Jumper Wire/Staple	0322 179 00003	
9240	Jumper Wire/Staple	0322 179 00003	
9241	Jumper Wire/Staple	0322 179 00003	
9242	Jumper Wire/Staple	0322 179 00003	
9243	Jumper Wire/Staple	0322 179 00003	
9245	Jumper Wire/Staple	0322 179 00003	
9301	Jumper Wire/Staple	0322 179 00003	
9401	Jumper Wire/Staple	0322 179 00003	
9402	Jumper Wire/Staple	0322 179 00003	
9403	Jumper Wire/Staple	0322 179 00003	
9404	Jumper Wire/Staple	0322 179 00003	
9407	Jumper Wire/Staple	0322 179 00003	
9408	Jumper Wire/Staple	0322 179 00003	
9411	Jumper Wire/Staple	0322 179 00003	
9414	Jumper Wire/Staple	0322 179 00003	
9417	Jumper Wire/Staple	0322 179 00003	
9419	Jumper Wire/Staple	0322 179 00003	
9420	Jumper Wire/Staple	0322 179 00003	
9421	Jumper Wire/Staple	0322 179 00003	
9422	Jumper Wire/Staple	0322 179 00003	
9424	Jumper Wire/Staple	0322 179 00003	
9425	Jumper Wire/Staple	0322 179 00003	
9427	Jumper Wire/Staple	0322 179 00003	
9428	Jumper Wire/Staple	0322 179 00003	
9460	Jumper Wire/Staple	0322 179 00003	
9461	Jumper Wire/Staple	0322 179 00003	
9500	Jumper Wire/Staple	0322 179 00003	
9501	Jumper Wire/Staple	0322 179 00003	
9502	Jumper Wire/Staple	0322 179 00003	
9503	Jumper Wire/Staple	0322 179 00003	
9505	Jumper Wire/Staple	0322 179 00003	
9509	Jumper Wire/Staple	0322 179 00003	
9510	Jumper Wire/Staple	0322 179 00003	
9511	Jumper Wire/Staple	0322 179 00003	
9512	Jumper Wire/Staple	0322 179 00003	
9513	Jumper Wire/Staple	0322 179 00003	
9515	Jumper Wire/Staple	0322 179 00003	
9516	Jumper Wire/Staple	0322 179 00003	
9517	Jumper Wire/Staple	0322 179 00003	

S = Safety Part Be sure to use exact replacement part.

PCW027C121 (continued)

9518	Jumper Wire/Staple	0322 179 00003
9521	Jumper Wire/Staple	0322 179 00003
9526	Jumper Wire/Staple	0322 179 00003
9601	Jumper Wire/Staple	0322 179 00003
9602	Jumper Wire/Staple	0322 179 00003
9603	Jumper Wire/Staple	0322 179 00003
9604	Jumper Wire/Staple	0322 179 00003
9605	Jumper Wire/Staple	0322 179 00003
9606	Jumper Wire/Staple	0322 179 00003
9608	Jumper Wire/Staple	0322 179 00003
9609	Jumper Wire/Staple	0322 179 00003
9610	Jumper Wire/Staple	0322 179 00003
9611	Jumper Wire/Staple	0322 179 00003
9612	Jumper Wire/Staple	0322 179 00003
9613	Jumper Wire/Staple	0322 179 00003
9614	Jumper Wire/Staple	0322 179 00003
9615	Jumper Wire/Staple	0322 179 00003
9618	Jumper Wire/Staple	0322 179 00003
9621	Jumper Wire/Staple	0322 179 00003
9622	Jumper Wire/Staple	0322 179 00003
9624	Jumper Wire/Staple	0322 179 00003
9625	Jumper Wire/Staple	0322 179 00003
9626	Jumper Wire/Staple	0322 179 00003
9629	Jumper Wire/Staple	0322 179 00003
9631	Jumper Wire/Staple	0322 179 00003
9632	Jumper Wire/Staple	0322 179 00003
9637	Jumper Wire/Staple	0322 179 00003
9640	Jumper Wire/Staple	0322 179 00003
9642	Jumper Wire/Staple	0322 179 00003
9643	Jumper Wire/Staple	0322 179 00003
9644	Jumper Wire/Staple	0322 179 00003
9754	Jumper Wire/Staple	0322 179 00003
9788	Jumper Wire/Staple	0322 179 00003
9793	Jumper Wire/Staple	0322 179 00003
9800	Jumper Wire/Staple	0322 179 00003
9805	Jumper Wire/Staple	0322 179 00003
9806	Jumper Wire/Staple	0322 179 00003
9807	Jumper Wire/Staple	0322 179 00003
9810	Jumper Wire/Staple	0322 179 00003
9901	Jumper Wire/Staple	0322 179 00003
9904	Jumper Wire/Staple	0322 179 00003
9905	Jumper Wire/Staple	0322 179 00003
9906	Jumper Wire/Staple	0322 179 00003
9920	Jumper Wire/Staple	0322 179 00003
9933	Jumper Wire/Staple	0322 179 00003
9936	Jumper Wire/Staple	0322 179 00003
9940	Jumper Wire/Staple	0322 179 00003
9941	Jumper Wire/Staple	0322 179 00003
9942	Jumper Wire/Staple	0322 179 00003
9943	Jumper Wire/Staple	0322 179 00003
9944	Jumper Wire/Staple	0322 179 00003
9945	Jumper Wire/Staple	0322 179 00003
9946	Jumper Wire/Staple	0322 179 00003
9947	Jumper Wire/Staple	0322 179 00003
9948	Jumper Wire/Staple	0322 179 00003
9949	Jumper Wire/Staple	0322 179 00003
9950	Jumper Wire/Staple	0322 179 00003
9951	Jumper Wire/Staple	0322 179 00003
9952	Jumper Wire/Staple	0322 179 00003
9953	Jumper Wire/Staple	0322 179 00003
9955	Jumper Wire/Staple	0322 179 00003
9956	Jumper Wire/Staple	0322 179 00003
9957	Jumper Wire/Staple	0322 179 00003
9958	Jumper Wire/Staple	0322 179 00003
9959	Jumper Wire/Staple	0322 179 00003
9960	Jumper Wire/Staple	0322 179 00003
9962	Jumper Wire/Staple	0322 179 00003
9963	Jumper Wire/Staple	0322 179 00003
9964	Jumper Wire/Staple	0322 179 00003
9965	Jumper Wire/Staple	0322 179 00003
9966	Jumper Wire/Staple	0322 179 00003
9967	Jumper Wire/Staple	0322 179 00003
9968	Jumper Wire/Staple	0322 179 00003
9969	Jumper Wire/Staple	0322 179 00003
9970	Jumper Wire/Staple	0322 179 00003
9971	Jumper Wire/Staple	0322 179 00003
9972	Jumper Wire/Staple	0322 179 00003
9974	Jumper Wire/Staple	0322 179 00003
9975	Jumper Wire/Staple	0322 179 00003
9976	Jumper Wire/Staple	0322 179 00003
9977	Jumper Wire/Staple	0322 179 00003
9981	Jumper Wire/Staple	0322 179 00003
9982	Jumper Wire/Staple	0322 179 00003
9983	Jumper Wire/Staple	0322 179 00003
9984	Jumper Wire/Staple	0322 179 00003
9987	Jumper Wire/Staple	0322 179 00003
9989	Jumper Wire/Staple	0322 179 00003
9990	Jumper Wire/Staple	0322 179 00003
9991	Jumper Wire/Staple	0322 179 00003
9992	Jumper Wire/Staple	0322 179 00003
9993	Jumper Wire/Staple	0322 179 00003
CBA	00EMF893A002 Main Chassis Board Asm.	00EM F89 3A002

S = Safety Part Be sure to use exact replacement part.

A10777 Interface Module Parts

	A10777 Interface Module Parts	
CBA	00A10777A001 Interface Module Asm. .	00A1 077 7A001
BR711	Zero ohm,.	4835 111 27056
BR712	Zero ohm,.	4835 111 27056
BR713	Zero ohm,.	4835 111 27056
BR714	Zero ohm,.	4835 111 27056
BRS15	Zero ohm,.	4835 111 27056
BRS16	Zero ohm,.	4835 111 27056
C702	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
C703	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
J0215	Connector, 2 Pin,.	2422 025 16343
J0237	Connector, 4 Pin	2422 025 12479
J0238	5 Pin Board Connector.	2422 025 16387
J0259	Connector, 3 Pin	2412 020 00725
J1215	Connector, 2 Pin,.	2422 025 16343
J1227	Connector, 4 Pin	2422 025 16385
J1238	Connector, 5 Pin	2422 025 12481
J1259	Connector, 3 Pin	2422 025 16383
J214	Connector, 3 Pin	2422 025 16382
J216	Connector, 4 Pin	2422 025 15847
J219	Connector, 5 Pin	2422 025 15848
J228	Connector, 3 Pin	2422 025 16407
J236	4 Pin Board Connector.	2422 025 16384
J775	Contact Pin.	2422 024 00626
J800	Connector, 32 Pin.	3135 010 03531
Q700	Transistor, NPN, BC847B.	4822 130 60511
Q701	Transistor, NPN, BC847B.	4822 130 60511
Q704	Transistor, PNP, BC857B.	5322 130 60508
Q705	Transistor, PNP, BC857B.	5322 130 60508
Q706	Transistor, NPN, BC847B.	4822 130 60511
Q707	Transistor, NPN, BC847B.	4822 130 60511
R700	10k, 5%, 1/10W, Metal Film	4835 111 37216
R701	47k, 5%, 1/10W, Metal Film	4835 111 37445
R702	75 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37276
R703	75 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37276
R711	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
R712	10k, 5%, 1/10W, Metal Film	4835 111 37216
R713	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
R714	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
R715	10k, 5%, 1/10W, Metal Film	4835 111 37216
R716	47k, 5%, 1/10W, Metal Film	4835 111 37445
R717	10k, 5%, 1/10W, Metal Film	4835 111 37216
R718	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
R719	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443
R720	Res, 1K, 2%, 0,25W	4822 051 10102
R721	75 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37276
R722	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231
Z700	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z701	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z702	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z703	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z704	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z705	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z706	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z707	Zener Diode, 8.2V, BZX284-C8	4835 130 37922

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Mains Cord	3135 010 07161
AC02	Clip, Anode Lead	3135 014 04471
AC03	Cabinet Back	3135 014 10281
AC04	Cabinet Front.	3135 017 07151
AC05	Chassis Guide.	3139 124 31381
AC06	Control Buttons.	3139 124 27351
S AC07	Convergence and Purity Assembly. . .	2422 549 43385
S AC08	CRT A68AJB82X.	9301 787 60472
S AC09	Coil, Degaussing	2422 549 43967
AC10	Holder, Degaussing (4 Used).	3135 013 01641
AC11	Light Guide.	3139 124 26461
AC12	Nameplate.	3135 015 03571
AC14	Power Button	3139 124 26444
AC16	Speaker, 16R, 1W5 (2 Used)	2422 264 00343
S AC18	Yoke	3313 203 01242
AC19	Yoke Wedge (3 used).	3135 013 00311
AC24	Spring	3139 121 26231

PCW027C221 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts	
0113	L9 SOPS HEATSINK	3139 121 62041
0119	DIODE HEATSINK L9.	3139 121 26691
0121	LINE HEATSINK (CINCH).	3139 121 61942
0123	L9L AUDIO HEATSINK (STERO)	3139 121 61952
S 0127	Holder, Fuse, 2 Pin.	3122 358 71251
0211	Connector, 2 Pin	2422 025 11196
0212	Connector, 2 Pin	2422 025 15396
0213	Connector, 2 Pin	2422 025 15395
0214	Connector, 3 Pin	2422 025 16382
0215	Connector, 2 Pin,.	2422 025 16343
0216	Connector, 4 Pin	2422 025 15847
0219	Connector, 5 Pin	2422 025 15848
0220	4 Pin Board Connector.	2422 025 04852
0221	Connector, 4 Pin	2422 025 15503
0222	Connector, 2 Pin	2422 025 10646
0224	1 Pin Board Connector.	2422 034 20021
0228	1 Pin Board Connector.	2422 034 20021
0234	Connector, 4 Pin	2422 025 15847
0236	4 Pin Board Connector.	2422 025 16384
0237	Connector, 4 Pin	2422 025 12479
0238	5 Pin Board Connector.	2422 025 16387
S 0243	Connector, 6 Pin	2422 025 04854
0244	4 Pin Board Connector.	2422 025 04852
S 0245	Connector, 6 Pin	2422 025 04854
S 0254	CRT Socket (9 Pin)	2422 500 80022
0259	Connector, 3 Pin	2422 025 16383
0262	Connector, 4 Pin	2422 025 16385
0267	Connector, 3 Pin	2412 020 00725
1000	Tuner, V+U PLL PH MN B.	2422 542 90069
1001	Filter	2422 549 42501
1003	45 MHz SAW, Filter,.	2422 549 42433
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807
1208	Crystal Resonator, 3.58MHz	2422 543 00832
S 1500	Fue, 4 A, 250V	2422 086 10905
S 1571	FUSE 1A 250V	2422 086 10779
S 1572	FUSE 1A 250V	2422 086 10779
S 1580	Relay, 12V, 5A G5PA-1.	2422 132 07444
1600	Switch, Tactile.	2422 128 02742
1601	Switch, Tactile.	2422 128 02742
1602	Switch, Tactile.	2422 128 02742
1603	Switch, Tactile.	2422 128 02742
1606	Switch, Tactile.	2422 128 02742
1660	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488
1703	L9 ITV SMARTPORT	3139 178 08561
1821	Ceramic Resonator, 514KHz5, CSB503F58	2422 540 98344
2001	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2002	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2003	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2004	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2011	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2102	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2103	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2104	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2201	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2202	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2203	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2204	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2205	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2208	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2209	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2211	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2212	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2213	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2214	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2215	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 16654
2220	Cap, 18p, 5%, 50V, Ceramic	3198 016 01890
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2222	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2226	Cap, 33u, 20%, 25V, Electrolytic . .	2020 021 90124
2227	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2247	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2248	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2249	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2330	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2340	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320
S 2343	Cap, 3n3, 10%, 2KV, Ceramic.	2020 558 90529
2345	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2401	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2402	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2404	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2405	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2407	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2409	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2420	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2426	Cap, 100n, 10%, 63V, Metalized Polyes ter.	2222 370 75104
2428	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2429	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2430	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2431	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2437	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2438	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2448	Cap, 33p, 5%, 500V, Ceramic.	2020 557 90192
2450	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91139
2451	Cap, 15n, 10%, 50V, Polyester. . . .	2020 300 90575
2456	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176
2457	Cap, 390n, 5%, 250V, Metalized Polypr opylene.	2222 479 90021
2458	Cap, 2u2, 20%, 100V, Electrolytic. .	2020 021 91331
2459	Cap, 680p, 10%, 500V, Ceramic. . . .	3198 019 46810
2461	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2462	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176
S 2463	Cap, 1n, 10%, 2KV, Ceramic	2020 558 90487
S 2465	Cap, 9n1, 5%, 1600V, Polypropylene .	2022 333 00118
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050
2473	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2481	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2482	Cap, 68n, 10%, 250V, Polyester . . .	2222 347 90234
2484	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2485	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2486	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2487	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2488	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2489	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2490	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2491	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810
2499	Cap, 220n, 10%, 100V, Metalized Polye ster	2222 365 25224
2500	Cap, 470n, 20%, 275V, Polypropylene.	2222 336 29148
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2507	Cap, 1n5, 10%, 1KV, Ceramic.	3198 019 61520
2508	Cap, 470u, 20%, 200V, Electrolytic .	2020 024 90647
S 2511	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
S 2518	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2530	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 021 91147
2531	Cap, 1n, 2%, 50V, Polypropylene. . .	2020 310 90049
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2540	Cap, 100u, 20%, 25V, Electrolytic. .	2020 021 90547
S 2545	Cap, 1n5, 20%, v, Ceramic.	2020 554 90128
S 2550	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2551	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91358
2561	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
S 2562	Cap, 220p, 10%, 1KV, Ceramic	2020 558 90424
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2572	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2575	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2577	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2586	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2604	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2613	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2615	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2619	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2622	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2629	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040

S = Safety Part Be sure to use exact replacement part.

PCW027C221 (continued)

2631	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3246	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230	
2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
2679	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
2681	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210		3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340	
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3250	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
2821	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280		3251	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040	
2823	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230		3252	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720		3253	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	
2825	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080		3257	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
2826	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090		3258	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
2827	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3259	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
2828	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
2829	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046	
2830	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280		3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
2831	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046	
2832	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280		3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
2833	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280		3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046	
2834	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780	S	3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109	
2835	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	S	3341	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108	
2836	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	S	3342	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108	
2837	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740		3343	Res, 1K5, 20%, 1/2W, Carbon Film . .	2120 103 90047	
2838	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290	
2839	Cap, 1u, 5%, 50V, Metalized Polyester	2020 308 90124		3345	VDR DC 1MA/50V S MAX 110V A . . .	2122 550 00152	
2840	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290	
2841	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3401	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380	
2842	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3402	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380	
2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3403	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380	
2844	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3405	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002	
2845	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3406	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
2913	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280		3407	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002	
2914	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330		3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
2915	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3409	Res, 1R5, 5%, 1/3W, Metal Film . . .	2306 204 03158	
2916	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648		3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210	
2917	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210	
2918	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330		3420	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740	
2919	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220	
2920	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648		3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220	
2921	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840	
2931	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280		3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606	
2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3425	Res, 120K, 5%, 1/10W, Metalized Glass	2120 108 91716	
2952	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3426	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930	
2954	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3428	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	
2955	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3429	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730	
2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3431	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	
2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3432	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3433	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
2960	Cap, 220u, 20%, 50V, Electrolytic. .	3198 026 52210		3436	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090		3437	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090		3438	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330	
2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090		3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920	
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3447	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220	
3010	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610		3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320	
3013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	S	3452	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	3198 012 32290	
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	S	3453	Res, 4R7, 5%, 5W, Wire Wound	2322 251 41478	
3015	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	S	3454	Res, 33K, 5%, 1 1/3W, Metal Film . .	2322 194 63333	
3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810		3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
3021	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020		3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
3103	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220	S	3462	Res, 6K8, 5%, 5W, Metal Film	2322 257 41682	
3104	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030		3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790	
3108	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3464	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3109	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	S	3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109	
3123	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590		3466	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903	
				3467	Res, 13K, 1%, 3/5W, Metal Film . . .	2322 156 21303	
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010		3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
3201	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910		3469	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	
				3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240	
3203	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310		3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703	
				3481	Res, 35K7, 1%, 3/5W, Metal Film. . .	2322 156 23573	
3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820		3482	Res, 56K, 1%, 3/5W, Metal Film . . .	2322 156 25603	
3205	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020		3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230	
3206	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610		3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
			S	3486	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108	
3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3487	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108	
3209	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	S	3488	Res, 4R7, 5%, 1/2W, Metal Film . . .	2306 207 03478	
3212	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910	S	3490	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108	
			S	3491	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108	
3213	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610	S	3492	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108	
				3495	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820	
3215	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230		3496	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3216	Res, Zero ohm, 'Chip' Jumper	3198 021 90020		3497	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3217	Res, 1M5, 5%, 1/8W, Metalized Glass.	2322 730 61155		3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	3198 013 04710	
3218	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	S	3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225	
3219	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610		3503	PTC DC ZPB 120V S 10R PM30 B . . .	2120 661 00019	
			S	3505	Surge Protector.	2422 549 43073	
3220	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	S	3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223	
3225	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040	S	3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333	
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	S	3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102	
3231	Res, Zero ohm, 'Chip' Jumper	3198 021 90020		3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530	
3232	Res, Zero ohm, 'Chip' Jumper	3198 021 90020		3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184	
3233	Res, Zero ohm, 'Chip' Jumper	3198 021 90020		3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204	
3243	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220	S	3515	2.5 ohm, 20%, 3.6W, Negative Temperat ure Coefficient.	2122 612 00023	

S = Safety Part Be sure to use exact replacement part.

PCW027C221 (continued)

3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3517	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
S 3518	Res, 0R22, 5%, 2 1/2W, Metal Film. .	3198 012 32270	
3520	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230	
3521	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310	
S 3525	Res, 47 ohm, 5%, 1/3W, Metal Film. .	2306 204 03479	
3528	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3529	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890	
3530	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320	
3532	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3534	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530	
3536	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830	
3537	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
S 3542	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475	
3570	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530	
3571	Res, 150K, 1%, 3/5W, Metal Film. . .	2322 156 21504	
3573	Res, 2K, 1%, 1/8W, Metalized Glass .	2322 734 62002	
3574	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330	
3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3577	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3578	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3579	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002	
3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3592	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3594	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	
3595	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830	
3596	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3597	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3598	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3599	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	
3607	RST NETW RGLE 10X 8K2 PM5 B . . .	2120 108 93916	
3608	RST NETW RGLE 6X 2K2 PM5 B . . .	2120 108 93913	
3609	RST NETW RGLE 7X 2K2 PM5 B . . .	2120 108 93915	
3611	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3612	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3613	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3615	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3616	Jumper Wire/Staple	0322 179 00003	
3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3619	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3629	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710	
3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3631	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730	
S 3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790	
3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210	
3634	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	
3635	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	
3636	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	
3637	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3649	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3650	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3654	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3655	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3662	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3663	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220	
3664	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220	
3665	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3666	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620	
3667	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730	
3672	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3673	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3674	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710	
3675	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3676	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3677	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3680	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810	
3681	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3682	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220	
3683	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3684	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	
3687	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210	
3821	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530	
3822	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220	
3823	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040	
3824	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	
3825	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3826	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3827	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3828	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3829	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820	
3830	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820	
3831	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198 011 03310	
3832	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790	
3908	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3909	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3910	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620	
3911	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230	
3912	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3913	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3914	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	
3915	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820	
3916	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210	
3917	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3918	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3919	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620	
3920	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820	
3921	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230	
3922	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	
3923	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210	
3924	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930	
3925	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930	
3926	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930	
3929	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930	
3930	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3931	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810	
3951	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	
3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3953	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3955	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
3957	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4004	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4011	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4012	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4020	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4051	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4100	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4102	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4144	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4203	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4207	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4212	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4215	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4216	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4465	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4501	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4650	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4651	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4654	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4655	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4833	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4911	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4912	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4914	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4957	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4999	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
5000	Coil, 5u6.	3198 018 25680	
5004	Coil, 820n	2422 535 97314	
5201	Coil, 22u.	3198 018 22290	
5202	Coil, 6u8.	3198 018 16880	
5342	Coil, 22u.	3198 018 22290	
S 5445	Transformer, L.O.T., models ending in C101, C121, and C125	2422 531 02327	
5451	Coil, 27u.	2422 535 96614	
5457	Coil, Linear Correction.	3128 138 53241	
5461	Transformer.	3128 138 33811	
5463	Coil, 126u	3135 019 02161	
5480	Coil, 27u.	2422 535 97334	
S 5500	Filter, Mains, 5mH, 2A	2422 549 43432	
5516	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5518	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5521	Coil, 2u2.	3198 018 12280	
5540	Coil, 4u7.	3198 018 14780	
S 5545	Transfomer,.	2422 531 02314	
5551	Coil, 27u.	2422 535 95366	

S = Safety Part Be sure to use exact replacement part.

PCW027C221 (continued)

5552	Fixed, Inductor, 100MHz, 50R.	3198 018 90010	
5572	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5573	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5576	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	
5577	Fixed, Inductor, 100MHz, 50R.	3198 018 90010	
5600	Coil, 8u2.	3198 018 18280	
5601	Coil, 8u2.	3198 018 18280	
5620	Coil, 6u8.	3198 018 16880	
5821	Coil, 100u	3198 018 21010	
5822	Coil, 18u.	3198 018 21890	
6008	Zener Diode, 33 volt	3198 010 23390	
6113	Zener Diode, 6.8 volt.	9340 386 40115	
6211	Diode, Signal, 1N4148.	3198 010 10010	
6212	Diode, Signal, 1N4148.	3198 010 10010	
6213	Diode, Signal, 1N4148.	3198 010 10010	
6331	Diode, Signal, BAV21	3198 010 10070	
6333	Diode, Signal, BAV21	3198 010 10070	
6335	Diode, Signal, BAV21	3198 010 10070	
6401	Diode, Rect, BYD33D	9337 234 00133	
6402	Zener Diode, 33 volt	3198 010 23390	
6403	Diode, Rect, BYD33D	9337 234 00133	
6404	Zener Diode, 75 volt	9331 180 00133	
6449	Diode, Signal, 1N4148.	3198 010 10010	
6450	Diode, Signal, 1N4148.	3198 010 10010	
6460	Diode, Rect, BY228/20	9336 215 80112	
6463	Diode, Signal, 1N4148.	3198 010 10010	
6464	Zener Diode, 6.2 volt.	9331 668 30133	
6465	Diode, Rect, BYD33J	9337 234 20133	
6466	Diode, Rect, BYD33J	9337 234 20133	
6480	Zener Diode, 27 volt	3198 010 22790	
6481	Diode, Signal, 1N4148.	3198 010 10010	
6485	Diode, Rect, BYD33J	9337 234 20133	
6486	Diode, Rect, EGP20DL-5300	9322 100 13682	
6487	Diode, Rect, BYD33D	9337 234 00133	
6488	Diode, Rect, BYV27-200.	9322 126 72673	
6490	Diode, Rect, BYV27-200.	9322 126 72673	
6505	Diode, Bridge Rect, GBU6JL-7002	9322 138 08667	
6507	Diode, Rect, BYD33J	9337 234 20133	
6508	Diode, Rect, BYD33J	9337 234 20133	
6510	Zener Diode, 20 volt	9331 178 60133	
6511	Diode, Rect, BYV95C	9335 001 80133	
6512	Diode, Rect, 1N5062	3198 010 10120	
6513	Diode, Rect, 1N5062	3198 010 10120	
6514	Zener Diode, 18 volt	3198 010 21890	
6540	Diode, Signal, BAV21	3198 010 10070	
6550	Diode, Rect, BY229X-800	9340 380 30127	
6560	Diode, Rect, EGP20DL-5300	9322 100 13682	
6580	Diode, Rect, SB140.	9339 577 60673	
6584	Diode, Signal, 1N4148.	3198 010 10010	
6585	Diode, Signal, 1N4148.	3198 010 10010	
6591	Diode, Signal, BAS16WS	9322 031 99685	
6601	Zener Diode, 3.9 volt.	3198 010 23980	
6602	Diode, Signal, 1N4148.	3198 010 10010	
6603	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610	
6604	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610	
6605	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610	
6606	Zener Diode, 4.7 volt.	3198 010 24780	
6607	Zener Diode, 6.8 volt.	3198 010 26880	
6690	LED VS LTL-307P (LITO) B	9322 033 95682	
6821	Zener Diode, 9.1 volt.	9331 177 80133	
6822	Diode, Signal, 1N4148.	3198 010 10010	
6951	Diode, Signal, BAS16WS	9322 031 99685	
6961	Diode, Signal, BAS16WS	9322 031 99685	
7250	IC,.	9352 620 26112	
7251	IC, LM317T	9337 220 80682	
7254	Transistor, NPN, BC847B.	3198 010 42030	
7256	Transistor, NPN, BC847B.	3198 010 42030	
7258	Transistor, NPN, BC847B.	3198 010 42030	
7263	Transistor, PNP, BC857B.	3198 010 42150	
7266	Transistor, NPN, BC847B.	3198 010 42030	
7330	IC, TDA6107Q/N2.	9352 576 50112	
7401	IC,.	9322 121 47687	
7460	Transistor, NPN, BU1508DX.	9340 170 50127	
7461	Transistor, NPN, BF819	9335 354 50127	
7462	Transistor, NPN, BC547B.	3198 020 40030	
7463	Transistor, PNP, BC557B.	3198 020 40110	
7480	IC,.	9322 028 93682	
7481	Transistor, PNP, BC557B.	3198 020 40110	
7482	Transistor, PNP, BC857B.	3198 010 42150	
7518	STH10NC60FI SMPS FET.	9322 155 66687	
7520	IC,.	9322 108 36682	
7570	IC,.	9337 711 00676	
S 7581	Coupler, TCDT1101G	9338 431 30682	
7590	Transistor, NPN, BC847B.	3198 010 42030	
7591	Transistor, NPN, BC847B.	3198 010 42030	
7592	Transistor, NPN, BC847B.	3198 010 42030	
7600	IC, SAA5543-PS/M4/0167 L9 v3.2 (Commercial Models - NON Pro Plus)	9352 670 84112	
7601	IC, ST24W16B6, commercial models only	9322 095 35682	
7603	Transistor, NPN, BC337	9331 796 00126	
7604	Transistor, NPN, BC847B.	3198 010 42030	
7605	Transistor, NPN, BC847B.	3198 010 42030	
7608	Transistor, NPN, BC847B.	3198 010 42030	
7609	Transistor, NPN, BC847B.	3198 010 42030	
7680	IR Receiver.	9322 127 53667	
7821	IC,.	9352 374 70112	
7822	IC, HEF4052BT.	9333 729 50653	
7823	Transistor, NPN, BC337-25.	3198 020 43530	
7904	Transistor, NPN, BC847B.	3198 010 42030	
7905	Transistor, NPN, BC847B.	3198 010 42030	
7906	Transistor, NPN, BC847B.	3198 010 42030	
7908	Transistor, NPN, BC847B.	3198 010 42030	
7909	Transistor, NPN, BC847B.	3198 010 42030	
7910	Transistor, NPN, BC847B.	3198 010 42030	
7951	IC,.	9351 861 60112	
9001	Jumper Wire/Staple	0322 179 00003	
9003	Jumper Wire/Staple	0322 179 00003	
9005	Jumper Wire/Staple	0322 179 00003	
9011	Jumper Wire/Staple	0322 179 00003	
9012	Jumper Wire/Staple	0322 179 00003	
9105	Jumper Wire/Staple	0322 179 00003	
9126	Jumper Wire/Staple	0322 179 00003	
9132	Jumper Wire/Staple	0322 179 00003	
9140	Jumper Wire/Staple	0322 179 00003	
9141	Jumper Wire/Staple	0322 179 00003	
9200	Jumper Wire/Staple	0322 179 00003	
9202	Jumper Wire/Staple	0322 179 00003	
9203	Jumper Wire/Staple	0322 179 00003	
9204	Jumper Wire/Staple	0322 179 00003	
9205	Jumper Wire/Staple	0322 179 00003	
9206	Jumper Wire/Staple	0322 179 00003	
9207	Jumper Wire/Staple	0322 179 00003	
9208	Jumper Wire/Staple	0322 179 00003	
9209	Jumper Wire/Staple	0322 179 00003	
9210	Jumper Wire/Staple	0322 179 00003	
9211	Jumper Wire/Staple	0322 179 00003	
9214	Jumper Wire/Staple	0322 179 00003	
9215	Jumper Wire/Staple	0322 179 00003	
9216	Jumper Wire/Staple	0322 179 00003	
9217	Jumper Wire/Staple	0322 179 00003	
9218	Jumper Wire/Staple	0322 179 00003	
9220	Jumper Wire/Staple	0322 179 00003	
9221	Jumper Wire/Staple	0322 179 00003	
9222	Jumper Wire/Staple	0322 179 00003	
9225	Jumper Wire/Staple	0322 179 00003	
9226	Jumper Wire/Staple	0322 179 00003	
9227	Jumper Wire/Staple	0322 179 00003	
9228	Jumper Wire/Staple	0322 179 00003	
9229	Jumper Wire/Staple	0322 179 00003	
9230	Jumper Wire/Staple	0322 179 00003	
9231	Jumper Wire/Staple	0322 179 00003	
9232	Jumper Wire/Staple	0322 179 00003	
9233	Jumper Wire/Staple	0322 179 00003	
9234	Jumper Wire/Staple	0322 179 00003	
9236	Jumper Wire/Staple	0322 179 00003	
9237	Jumper Wire/Staple	0322 179 00003	
9238	Jumper Wire/Staple	0322 179 00003	
9240	Jumper Wire/Staple	0322 179 00003	
9241	Jumper Wire/Staple	0322 179 00003	
9242	Jumper Wire/Staple	0322 179 00003	
9243	Jumper Wire/Staple	0322 179 00003	
9245	Jumper Wire/Staple	0322 179 00003	
9301	Jumper Wire/Staple	0322 179 00003	
9401	Jumper Wire/Staple	0322 179 00003	
9402	Jumper Wire/Staple	0322 179 00003	
9403	Jumper Wire/Staple	0322 179 00003	
9404	Jumper Wire/Staple	0322 179 00003	
9407	Jumper Wire/Staple	0322 179 00003	
9408	Jumper Wire/Staple	0322 179 00003	
9411	Jumper Wire/Staple	0322 179 00003	
9414	Jumper Wire/Staple	0322 179 00003	
9417	Jumper Wire/Staple	0322 179 00003	
9419	Jumper Wire/Staple	0322 179 00003	
9420	Jumper Wire/Staple	0322 179 00003	
9421	Jumper Wire/Staple	0322 179 00003	
9422	Jumper Wire/Staple	0322 179 00003	
9424	Jumper Wire/Staple	0322 179 00003	
9425	Jumper Wire/Staple	0322 179 00003	
9427	Jumper Wire/Staple	0322 179 00003	
9428	Jumper Wire/Staple	0322 179 00003	
9461	Jumper Wire/Staple	0322 179 00003	
9464	Jumper Wire/Staple	0322 179 00003	
9500	Jumper Wire/Staple	0322 179 00003	
9501	Jumper Wire/Staple	0322 179 00003	
9502	Jumper Wire/Staple	0322 179 00003	
9503	Jumper Wire/Staple	0322 179 00003	
9505	Jumper Wire/Staple	0322 179 00003	
9509	Jumper Wire/Staple	0322 179 00003	
9510	Jumper Wire/Staple	0322 179 00003	
9511	Jumper Wire/Staple	0322 179 00003	
9512	Jumper Wire/Staple	0322 179 00003	
9513	Jumper Wire/Staple	0322 179 00003	
9515	Jumper Wire/Staple	0322 179 00003	
9516	Jumper Wire/Staple	0322 179 00003	

S = Safety Part Be sure to use exact replacement part.

PCW027C221 (continued)

9517	Jumper Wire/Staple	0322 179 00003
9518	Jumper Wire/Staple	0322 179 00003
9521	Jumper Wire/Staple	0322 179 00003
9526	Jumper Wire/Staple	0322 179 00003
9601	Jumper Wire/Staple	0322 179 00003
9602	Jumper Wire/Staple	0322 179 00003
9603	Jumper Wire/Staple	0322 179 00003
9604	Jumper Wire/Staple	0322 179 00003
9605	Jumper Wire/Staple	0322 179 00003
9606	Jumper Wire/Staple	0322 179 00003
9608	Jumper Wire/Staple	0322 179 00003
9609	Jumper Wire/Staple	0322 179 00003
9610	Jumper Wire/Staple	0322 179 00003
9611	Jumper Wire/Staple	0322 179 00003
9612	Jumper Wire/Staple	0322 179 00003
9613	Jumper Wire/Staple	0322 179 00003
9614	Jumper Wire/Staple	0322 179 00003
9615	Jumper Wire/Staple	0322 179 00003
9618	Jumper Wire/Staple	0322 179 00003
9621	Jumper Wire/Staple	0322 179 00003
9622	Jumper Wire/Staple	0322 179 00003
9624	Jumper Wire/Staple	0322 179 00003
9625	Jumper Wire/Staple	0322 179 00003
9626	Jumper Wire/Staple	0322 179 00003
9629	Jumper Wire/Staple	0322 179 00003
9631	Jumper Wire/Staple	0322 179 00003
9632	Jumper Wire/Staple	0322 179 00003
9637	Jumper Wire/Staple	0322 179 00003
9640	Jumper Wire/Staple	0322 179 00003
9642	Jumper Wire/Staple	0322 179 00003
9643	Jumper Wire/Staple	0322 179 00003
9644	Jumper Wire/Staple	0322 179 00003
9754	Jumper Wire/Staple	0322 179 00003
9788	Jumper Wire/Staple	0322 179 00003
9793	Jumper Wire/Staple	0322 179 00003
9800	Jumper Wire/Staple	0322 179 00003
9805	Jumper Wire/Staple	0322 179 00003
9806	Jumper Wire/Staple	0322 179 00003
9807	Jumper Wire/Staple	0322 179 00003
9810	Jumper Wire/Staple	0322 179 00003
9901	Jumper Wire/Staple	0322 179 00003
9904	Jumper Wire/Staple	0322 179 00003
9905	Jumper Wire/Staple	0322 179 00003
9906	Jumper Wire/Staple	0322 179 00003
9920	Jumper Wire/Staple	0322 179 00003
9933	Jumper Wire/Staple	0322 179 00003
9936	Jumper Wire/Staple	0322 179 00003
9940	Jumper Wire/Staple	0322 179 00003
9941	Jumper Wire/Staple	0322 179 00003
9942	Jumper Wire/Staple	0322 179 00003
9943	Jumper Wire/Staple	0322 179 00003
9944	Jumper Wire/Staple	0322 179 00003
9945	Jumper Wire/Staple	0322 179 00003
9946	Jumper Wire/Staple	0322 179 00003
9947	Jumper Wire/Staple	0322 179 00003
9948	Jumper Wire/Staple	0322 179 00003
9949	Jumper Wire/Staple	0322 179 00003
9950	Jumper Wire/Staple	0322 179 00003
9951	Jumper Wire/Staple	0322 179 00003
9952	Jumper Wire/Staple	0322 179 00003
9953	Jumper Wire/Staple	0322 179 00003
9955	Jumper Wire/Staple	0322 179 00003
9956	Jumper Wire/Staple	0322 179 00003
9957	Jumper Wire/Staple	0322 179 00003
9958	Jumper Wire/Staple	0322 179 00003
9959	Jumper Wire/Staple	0322 179 00003
9960	Jumper Wire/Staple	0322 179 00003
9962	Jumper Wire/Staple	0322 179 00003
9963	Jumper Wire/Staple	0322 179 00003
9964	Jumper Wire/Staple	0322 179 00003
9965	Jumper Wire/Staple	0322 179 00003
9966	Jumper Wire/Staple	0322 179 00003
9967	Jumper Wire/Staple	0322 179 00003
9968	Jumper Wire/Staple	0322 179 00003
9969	Jumper Wire/Staple	0322 179 00003
9970	Jumper Wire/Staple	0322 179 00003
9971	Jumper Wire/Staple	0322 179 00003
9972	Jumper Wire/Staple	0322 179 00003
9974	Jumper Wire/Staple	0322 179 00003
9975	Jumper Wire/Staple	0322 179 00003
9976	Jumper Wire/Staple	0322 179 00003
9977	Jumper Wire/Staple	0322 179 00003
9981	Jumper Wire/Staple	0322 179 00003
9982	Jumper Wire/Staple	0322 179 00003
9983	Jumper Wire/Staple	0322 179 00003
9984	Jumper Wire/Staple	0322 179 00003
9987	Jumper Wire/Staple	0322 179 00003
9989	Jumper Wire/Staple	0322 179 00003
9990	Jumper Wire/Staple	0322 179 00003
9991	Jumper Wire/Staple	0322 179 00003
9992	Jumper Wire/Staple	0322 179 00003
9993	Jumper Wire/Staple	0322 179 00003

	CBA	00EMF893A003 Main Chassis Board Asm.	00EM F89 3A003

Cabinet & Accessory Parts

		Cabinet & Accessory Parts	
S	AC01	Mains Cord	3135 010 07161
	AC02	Clip, Anode Lead	3135 014 04471
	AC03	Cabinet Back	3135 014 10281
	AC04	Cabinet Front.	3135 017 07151
	AC05	Chassis Guide.	3139 124 31381
	AC06	Control Buttons.	3139 124 27351
S	AC07	Convergence and Purity Assembly.	2422 549 43385
S	AC08	CRT A68AHB82X.	9301 759 20405
S	AC09	Coil, Degaussing	3121 218 62701
	AC10	Holder, Degaussing (4 Used).	3135 013 01641
	AC11	Light Guide.	3139 124 26461
	AC12	Nameplate.	3135 015 03571
	AC14	Power Button	3139 124 26444
	AC16	Speaker, 16R, 1W5 (2 Used)	2422 264 00343
S	AC18	Yoke	2422 549 43726
	AC19	Yoke Wedge (3 used).	3135 013 00311
	AC24	Spring	3139 121 26231

S = Safety Part Be sure to use exact replacement part.

PL9125C121 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts	
S 0127	3.15 Amp Fuse, ...	3122 358 72141
0152	Cable, DIP, 6 Pin, 400mm	3104 301 09421
0153	4 Pin Cable.	3104 301 09431
0212	Connector, 2 Pin	2422 025 15396
0215	Connector, 2 Pin,.	2422 025 16343
0220	4 Pin Board Connector.	2422 025 04852
0224	1 Pin Board Connector.	2422 034 20021
0228	1 Pin Board Connector.	2422 034 20021
0238	Connector, 5 Pin	2422 025 12481
S 0243	Connector, 6 Pin	2422 025 04854
0244	4 Pin Board Connector.	2422 025 04852
S 0245	Connector, 6 Pin	2422 025 04854
S 0254	CRT Socket (9 Pin)	2422 500 80022
0259	Connector, 3 Pin	2412 020 00725
0267	Connector, 3 Pin	2412 020 00725
1000	Tuner.	2422 542 90057
1001	Filter	2422 549 42501
1003	45 MHz SAW, Filter,.	2422 549 42433
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807
1208	Crystal Resonator, 3.58MHz	2422 543 00832
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10869
S 1571	1 Amp, Radial Fuse,.	4835 253 97162
S 1572	1 Amp, Radial Fuse,.	4835 253 97162
S 1580	Relay, 12V	2422 132 07317
1600	Switch, Tactile.	2422 128 02742
1601	Switch, Tactile.	2422 128 02742
1602	Switch, Tactile.	2422 128 02742
1603	Switch, Tactile.	2422 128 02742
1606	Switch, Tactile.	2422 128 02742
1660	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488
2001	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2002	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2003	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2004	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2011	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2201	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2202	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2203	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2204	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2205	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2208	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2209	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2211	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2212	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2213	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2214	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2215	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 16654
2220	Cap, 18p, 5%, 50V, Ceramic	3198 016 01890
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2222	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2226	Cap, 33u, 20%, 25V, Electrolytic . .	2020 021 90124
2227	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2247	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2248	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2249	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2330	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2340	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320
S 2343	Cap, 3n3, 10%, 2KV, Ceramic.	2020 558 90529
2345	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2401	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2402	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2405	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2407	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2409	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2420	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2426	Cap, 100n, 10%, 63V, Metalized Polyes ter.	2222 370 75104
2428	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2429	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2430	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2431	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2437	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2437	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2438	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2448	Cap, 220p, 10%, 500V, Ceramic. . . .	3198 019 42210
2450	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91139
2451	Cap, 15n, 10%, 50V, Polyester. . . .	2020 300 90575
2451	0.01uF., 10%, 50V, Polyester, only 27	3198 138 20941
2456	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176
2457	Cap, 390n, 5%, 250V, Metalized Polypr opylene.	2222 479 90021
2458	Cap, 10u, 20%, 100V, Electrolytic. .	2020 021 90813
2459	Cap, 680p, 10%, 500V, Ceramic. . . .	3198 019 46810
2461	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2462	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176
2463	470pF., 10%, 2KV, Ceramic.	4835 122 47638
S 2465	Cap, 10n, 5%, 1600V, Polypropylene .	2222 375 90154
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050
2481	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2482	Cap, 68n, 10%, 250V, Polyester . . .	2222 347 90234
2484	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2485	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93282
2486	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2487	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2488	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2489	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2490	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2491	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810
2500	0.47uF., 250V, Polyester	4835 121 47569
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
S 2507	Cap, 1n5, 10%, 1KV, Ceramic.	2020 558 90443
2508	Cap, 470u, 20%, 200V, Electrolytic .	2020 024 90626
S 2511	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
S 2518	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2530	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 021 91147
2531	Cap, 1n, 2%, 50V, Polypropylene. . .	2020 310 90049
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2540	Cap, 100u, 20%, 25V, Electrolytic. .	2020 021 90547
S 2545	1500pF., 250VAC, Ceramic	4835 122 47622
S 2550	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2551	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91358
2561	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
S 2562	Cap, 220p, 10%, 1KV, Ceramic	2020 558 90424
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2572	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2575	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2577	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2586	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2604	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2613	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2615	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2619	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2622	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2629	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2679	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2681	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2913	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2914	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2915	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2916	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648
2917	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090
2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010

S = Safety Part Be sure to use exact replacement part.

PL9125C121 (continued)

3010	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610		3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240	
3013	Zero ohm,.	4835 111 27056		3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703	
3014	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052		3481	Res, 100K, 1%, 3/5W, Metal Film. . .	2322 156 21004	
3015	22k, 5%, 1/10W, Metal Film	4835 111 37441		3482	Res, 32K4, 1%, 3/5W, Metal Film. . .	2322 156 23243	
3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810		3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230	
3021	Res, 1K, 2%, 0,25W	4822 051 10102		3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3200	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	S	3485	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023	
3201	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253	S	3486	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012	
3203	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443	S	3487	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012	
3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	S	3488	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023	
3205	Res, 1K, 2%, 0,25W	4822 051 10102	S	3490	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012	
3206	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	S	3491	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012	
3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3492	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012	
3209	22k, 5%, 1/10W, Metal Film	4835 111 37441		3496	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3212	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253		3497	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3213	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019	
3215	22k, 5%, 1/10W, Metal Film	4835 111 37441	S	3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225	
3216	Zero ohm,.	4835 111 27056		3503	10ohm, 120VAC, Positive Temperature C		
3218	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432			oefficient	4835 116 47001	
3219	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	S	3505	Surge Protector.	2422 549 43073	
3220	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223	
3225	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S	3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333	
3228	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102	
3231	Zero ohm,.	4835 111 27056		3512	15k, 5%, 1/10W, Metal Film	4835 111 37458	
3232	Zero ohm,.	4835 111 27056		3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184	
3233	Zero ohm,.	4835 111 27056		3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204	
3243	1.2k, 5%, 1/10W, Metal Film.	4835 111 27042	S	3515	2.5 ohm, 20%, 3.6W, Negative Temperat		
3243	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052			ure Coefficient.	2122 612 00023	
3246	82k, 5%, 1/10W, Metal Film	4835 111 37277		3516	Res, 1K, 2%, 0,25W	4822 051 10102	
3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3517	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3518	Res, 0R22, 5%, 3W, Metal Film. . . .	2120 106 90548	
3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340		3520	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230	
3250	Zero ohm,.	4835 111 27056		3521	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443	
3252	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	S	3525	33 ohm, 5%, 1/3W, Metal Film	4835 116 57665	
3253	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		3528	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3257	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3529	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890	
3258	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3530	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320	
3259	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3532	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3534	15k, 5%, 1/10W, Metal Film	4835 111 37458	
3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3536	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830	
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3537	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046	S	3542	4.7 Megohm, 5%, 1/2W, Metal Film . .	4835 116 57009	
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3570	15k, 5%, 1/10W, Metal Film	4835 111 37458	
3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3571	Res, 150K, 1%, 3/5W, Metal Film. . .	2322 156 21504	
S 3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109		3573	Res, 2K, 1%, 1/10W, Metalized Glass.	2120 108 92657	
S 3341	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483		3574	33k, 5%, 1/10W, Metal Film	4835 111 37248	
S 3342	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483		3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3343	1.5k, 20%, 1/2W, Carbon Composition.	4835 110 47034		3577	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290		3578	Res, 1K, 2%, 0,25W	4822 051 10102	
S 3345	VDR, DC, 1mA, 50V, MAX 115V	2322 593 13507		3579	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451	
3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290		3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3401	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380		3592	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3402	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380		3594	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3403	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380		3595	68k, 5%, 1/6W, Carbon Film	4835 111 37205	
3405	Res, 1K8, 1%, 3/5W, Metal Film . . .	2322 156 21802		3596	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3406	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020		3597	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3407	Res, 1K8, 1%, 3/5W, Metal Film . . .	2322 156 21802		3598	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020		3599	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3409	1.5 ohm, 5%, 1/3W, Metal Film. . . .	4835 116 57664		3607	8.2k, 5%, 1/8W, Inline Package . . .	4835 111 97046	
3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210		3608	2.2k, 5%, 1/8W, Inline Package . . .	4835 111 97049	
3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210		3609	2.2k, 5%, Resistor Network	2120 108 93868	
3420	470k, 5%, 1/10W, Metal Film.	4835 111 37407		3611	Res, 1K, 2%, 0,25W	4822 051 10102	
3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220		3612	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220		3613	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840		3615	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606		3617	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3425	150k, 5%, 1/10W, Metal Film.	4835 111 27045		3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3426	39k, 5%, 1/10W, Metal Film	4835 111 27051		3619	820 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37466	
3428	22k, 5%, 1/10W, Metal Film	4835 111 37441		3629	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259	
3429	27k, 5%, 1/10W, Metal Film	4835 111 37442		3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3431	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247		3631	27k, 5%, 1/10W, Metal Film	4835 111 37442	
3432	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63479	
3436	Res, 1K, 2%, 0,25W	4822 051 10102		3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210	
3437	10k, 5%, 1/10W, Metal Film	4835 111 37216		3634	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3438	33k, 1/4W, Carbon Film	4835 110 57375		3635	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920		3636	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3447	10k, 5%, 1/10W, Metal Film	4835 111 37216		3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320		3653	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
S 3452	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63229		3654	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
S 3454	Res, 33K, 5%, 1 1/3W, Metal Film . .	2322 194 63333		3655	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020		3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720		3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
S 3462	Res, 6K8, 5%, 5W, Metal Film	2322 257 41682		3662	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790		3663	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3464	Res, 1K, 2%, 0,25W	4822 051 10102		3664	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
S 3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109		3665	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3466	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903		3666	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376	
3467	Res, 14K, 1%, 3/5W, Metal Film . . .	2322 156 21403		3667	27k, 5%, 1/10W, Metal Film	4835 111 37442	
3467	Res, 15K, 1%, 3/5W, Metal Film . . .	2322 156 21503		3672	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020		3673	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3469	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247		3674	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259	

S = Safety Part Be sure to use exact replacement part.

PL9125C121 (continued)

3675	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510
3676	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510
3677	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510
3680	680 ohm, 5%, 1/10W, Metal Film	4835 111 37271
3681	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
3682	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
3683	100 ohm, 5%, 1/10W, Metal Film	4835 111 37432
3684	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
3685	220 ohm, 5%, 1/10W, Metal Film	4835 111 37371
3908	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710
3909	Res, 1K, 2%, 0,25W	4822 051 10102
3910	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376
3911	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230
3912	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
3913	Res, 6K8, 5%, 1/6W, Carbon Film.	3198 011 06820
3914	Res, 1K8, 5%, 1/6W, Carbon Film.	3198 011 01820
3915	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231
3916	220 ohm, 5%, 1/10W, Metal Film	4835 111 37371
3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810
3951	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3953	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272
3955	Res, 4K7, 5%, 1/6W, Carbon Film.	3198 011 04720
4001	Zero ohm,	4835 111 27056
4002	Zero ohm,	4835 111 27056
4004	Zero ohm,	4835 111 27056
4007	Zero ohm,	4835 111 27056
4009	Zero ohm,	4835 111 27056
4010	Zero ohm,	4835 111 27056
4011	Zero ohm,	4835 111 27056
4012	Zero ohm,	4835 111 27056
4013	Zero ohm,	4835 111 27056
4020	Zero ohm,	4835 111 27056
4051	Zero ohm,	4835 111 27056
4100	Zero ohm,	4835 111 27056
4101	Zero ohm,	4835 111 27056
4102	Zero ohm,	4835 111 27056
4103	Zero ohm,	4835 111 27056
4143	Zero ohm,	4835 111 27056
4144	Zero ohm,	4835 111 27056
4203	Zero ohm,	4835 111 27056
4207	Zero ohm,	4835 111 27056
4212	Zero ohm,	4835 111 27056
4214	Zero ohm,	4835 111 27056
4215	Zero ohm,	4835 111 27056
4216	Zero ohm,	4835 111 27056
4501	Zero ohm,	4835 111 27056
4602	Zero ohm,	4835 111 27056
4650	Zero ohm,	4835 111 27056
4651	Zero ohm,	4835 111 27056
4652	Zero ohm,	4835 111 27056
4654	Zero ohm,	4835 111 27056
4655	Zero ohm,	4835 111 27056
4684	Zero ohm,	4835 111 27056
4687	Zero ohm,	4835 111 27056
4831	Zero ohm,	4835 111 27056
4832	Zero ohm,	4835 111 27056
4833	Zero ohm,	4835 111 27056
4902	Zero ohm,	4835 111 27056
4903	Zero ohm,	4835 111 27056
4904	Zero ohm,	4835 111 27056
4905	Zero ohm,	4835 111 27056
4909	Zero ohm,	4835 111 27056
4911	Zero ohm,	4835 111 27056
4912	Zero ohm,	4835 111 27056
4914	Zero ohm,	4835 111 27056
4957	Zero ohm,	4835 111 27056
4999	Zero ohm,	4835 111 27056
5000	Coil, 5u6.	3198 018 25680
5004	Coil, 820n	2422 535 97314
5201	Coil, 22u.	3198 018 22290
5202	Coil, 6u8.	3198 018 16880
S 5445	Transformer, L.O.T., models ending in C101, C121, and C125	2422 531 02327
S 5445	Transformer, L.O.T., models ending in C221 and C225.	3128 138 20941
5451	Coil, 27u.	2422 535 96614
5461	Transformer.	3128 138 33811
5480	Coil, 27u.	2422 535 97334
5480	Coil, 39u.	2422 535 97336
5480	33uH., Peaking Coil, only in 25.	4835 157 58205
S 5500	Filter, Mains, 5mH, 2A	2422 549 43432
5516	100uH., Coil	4835 157 67078
5518	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
5521	Coil, 2u2.	3198 018 12280
5540	Coil, 4u7.	3198 018 14780
S 5545	Transfomer,	2422 531 02314
5551	27uH., 5%, Coil, Peaking	4835 157 67052
5552	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
5572	100uH., Coil	4835 157 67078
5573	100uH., Coil	4835 157 67078
5576	100uH., Coil	4835 157 67078
5577	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
5600	Coil, 8u2.	3198 018 18280
5601	Coil, 8u2.	3198 018 18280
5620	Coil, 6u8.	3198 018 16880
5821	Coil, 100u	3198 018 21010
6008	Zener, 33 Volt BZX79-C33	4835 130 37904
6211	Diode, 1N4148.	4835 130 37048
6212	Diode, 1N4148.	4835 130 37048
6213	Diode, 1N4148.	4835 130 37048
6331	Diode.	4835 130 37294
6333	Diode.	4835 130 37294
6335	Diode.	4835 130 37294
6401	Diode.	4835 130 37094
6404	Diode.	4835 130 37094
6449	Diode, 1N4148.	4835 130 37048
6450	Diode, 1N4148.	4835 130 37048
6460	Diode, Rect, BY228/20	9336 215 80112
6463	Diode, 1N4148.	4835 130 37048
6464	Zener, 6.2 Volt, BZX79-B6V2.	4835 130 37948
6465	Diode, BYD33J.	4835 130 37094
6466	Diode, BYD33J.	4835 130 37094
6480	Diode, Zener	4835 130 37947
6481	Diode, 1N4148.	4835 130 37048
6485	Diode, BYD33J.	4835 130 37094
6486	Diode, EGP20DL-530	4835 130 37919
6487	Diode.	4835 130 37094
6488	Diode, Rect, BYV27-200.	9322 126 72673
6490	Diode, Rect, BYV27-200.	9322 126 72673
6505	Diode, Bridge Rect, GBU6JL-7002	9322 138 08667
6507	Diode, BYD33J.	4835 130 37094
6508	Diode, BYD33J.	4835 130 37094
6510	Zener Diode, 20 volt	9331 178 60133
6511	Diode, BYV95C.	4835 130 37052
6512	Diode, Rect, BY228/20	4822 130 41275
6513	Diode, Rect, BY228/20	4822 130 41275
6514	Zener, 18 Volt, BZX79-C18.	4835 130 37908
6540	Diode.	4835 130 37294
6550	Diode, Rect, BY229X-800	9340 380 30127
6560	Diode, EGP20DL-530	4835 130 37919
6580	Diode, Rect, BYV27-200.	9322 126 72673
6584	Diode, 1N4148.	4835 130 37048
6585	Diode, 1N4148.	4835 130 37048
6591	Diode, BAS216.	4835 130 37905
6601	Diode, Zener	4835 130 37684
6602	Diode, 1N4148.	4835 130 37048
6603	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
6604	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
6605	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
6606	Zener, 4.7 Volt, BZX79-C4V7.	4835 130 37005
6607	Zener, 6.8 Volt, BZX79-C6V8.	4835 130 37945
6690	LED, LTL-307P.	4835 130 97096
6951	Diode, BAS216.	4835 130 37905
6961	Diode, BAS216.	4835 130 37905
7250	IC,	9352 620 26112
7251	IC, LM317T	9337 220 80682
7254	Transistor, NPN, BC847B.	4822 130 60511
7256	Transistor, NPN, BC847B.	4822 130 60511
7258	Transistor, NPN, BC847B.	4822 130 60511
7263	Transistor, PNP, BC857B.	5322 130 60508
7266	Transistor, NPN, BC847B.	4822 130 60511
7330	IC,	9352 184 10112
7401	IC,	9322 121 47687
7460	Transistor, NPN, BU1508DX.	9340 170 50127
7461	Transistor, NPN, BF819	9335 354 50127
7462	Transistor, BC547B	4835 130 47055
7463	Transistor, BC557B	4835 130 47409
7480	IC,	9322 028 93682
7481	Transistor, BC557B	4835 130 47409
7482	Transistor, PNP, BC857B.	5322 130 60508
7518	STH8NA60FI SMPS FET	9322 068 92687
7518	STH10NC60FI SMPS FET.	9322 155 66687
7520	IC, MC44603A	4835 209 88537
7570	IC,	9337 711 00676
S 7581	Coupler, TCDT1101G	9338 431 30682
7590	Transistor, NPN, BC847B.	4822 130 60511
7591	Transistor, NPN, BC847B.	4822 130 60511
7592	Transistor, NPN, BC847B.	4822 130 60511
7600	IC, SAA5543-PS/M4/0167 L9 v3.2 (Commercial Models - NON Pro Plus)	9352 670 84112
7600	IC, SAA5565-PS/M3/0195 L9 v3.2 (Commercial Models - Pro Plus Models).	9352 673 97112
7601	IC, ST24W16B6, commercial models only	9322 095 35682
7603	Transistor, NPN, BC337	9331 796 00126
7604	Transistor, NPN, BC847B.	4822 130 60511
7605	Transistor, NPN, BC847B.	4822 130 60511
7608	Transistor, NPN, BC847B.	4822 130 60511
7609	Transistor, NPN, BC847B.	4822 130 60511
7680	IR Receiver.	9322 127 53667
7904	Transistor, NPN, BC847B.	4822 130 60511

S = Safety Part Be sure to use exact replacement part.

PL9125C121 (continued)

	7954	IC,.	4835 209 88542
	CBA	00EMF892A102 Main Chassis Board Asm.	00EM F89 2A102

Cabinet & Accessory Parts

		Cabinet & Accessory Parts	
S	AC01	Mains Cord	3135 010 07161
S	AC02	Anode Clip	4835 256 97264
	AC03	Cabinet Back	3135 014 07961
	AC04	Cabinet Front.	3135 017 04101
	AC05	Chassis Guide.	3139 124 31381
	AC06	Control Buttons.	3139 124 27351
S	AC07	Convergence and Purity Assembly. . .	2422 549 43385
S	AC08	CRT A63AFW36X (C121 Version)	9301 763 20443
S	AC09	Coil, Degaussing	3121 218 62961
	AC11	Light Guide.	3139 124 26461
	AC12	Nameplate.	4835 459 17546
	AC14	Power Button	3139 124 26444
	AC16	Speaker, 16R, 1W5 (2 Used)	2422 264 00343
S	AC18	Yoke (C121 Version).	3321 203 00121
	AC19	Yoke Wedge (3 Used).	4835 535 27001
	AC24	Spring	3139 121 26231
	AC25	Owner's Manual	3135 015 16021
	AC29	Vent Cover	3135 013 03371

PL9125C221 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts	
S 0127	3.15 Amp Fuse, ...	3122 358 72141
0152	Cable, DIP, 6 Pin, 400mm	3104 301 09421
0153	4 Pin Cable.	3104 301 09431
0212	Connector, 2 Pin	2422 025 15396
0215	Connector, 2 Pin,.	2422 025 16343
0220	4 Pin Board Connector.	2422 025 04852
0224	1 Pin Board Connector.	2422 034 20021
0228	1 Pin Board Connector.	2422 034 20021
0238	Connector, 5 Pin	2422 025 12481
S 0243	Connector, 6 Pin	2422 025 04854
0244	4 Pin Board Connector.	2422 025 04852
S 0245	Connector, 6 Pin	2422 025 04854
S 0254	CRT Socket (9 Pin)	2422 500 80022
0259	Connector, 3 Pin	2412 020 00725
0267	Connector, 3 Pin	2412 020 00725
1000	Tuner.	2422 542 90057
1001	Filter	2422 549 42501
1003	45 MHz SAW, Filter,.	2422 549 42433
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807
1208	Crystal Resonator, 3.58MHz	2422 543 00832
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10869
S 1571	1 Amp, Radial Fuse,.	4835 253 97162
S 1572	1 Amp, Radial Fuse,.	4835 253 97162
S 1580	Relay, 12V	2422 132 07317
1600	Switch, Tactile.	2422 128 02742
1601	Switch, Tactile.	2422 128 02742
1602	Switch, Tactile.	2422 128 02742
1603	Switch, Tactile.	2422 128 02742
1606	Switch, Tactile.	2422 128 02742
1660	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488
2001	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2002	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2003	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2004	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2011	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2201	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2202	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2203	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2204	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2205	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2208	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2209	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2211	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2212	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2213	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2214	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2215	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 16654
2220	Cap, 18p, 5%, 50V, Ceramic	3198 016 01890
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2222	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2226	Cap, 33u, 20%, 25V, Electrolytic . .	2020 021 90124
2227	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2247	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2248	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2249	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2330	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2340	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320
S 2343	Cap, 3n3, 10%, 2KV, Ceramic.	2020 558 90529
2345	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2401	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2402	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2405	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2407	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2409	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2420	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2426	Cap, 100n, 10%, 63V, Metalized Polyes ter.	2222 370 75104
2428	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2429	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2430	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2431	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2437	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2437	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2438	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2448	Cap, 220p, 10%, 500V, Ceramic. . . .	3198 019 42210
2450	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91139
2451	Cap, 15n, 10%, 50V, Polyester. . . .	2020 300 90575
2451	0.01uF., 10%, 50V, Polyester, only 27	3198 138 20941
2456	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176
2457	Cap, 390n, 5%, 250V, Metalized Polypr opylene.	2222 479 90021
2458	Cap, 10u, 20%, 100V, Electrolytic. .	2020 021 90813
2459	Cap, 680p, 10%, 500V, Ceramic. . . .	3198 019 46810
2461	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2462	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176
2463	470pF., 10%, 2KV, Ceramic.	4835 122 47638
S 2465	Cap, 10n, 5%, 1600V, Polypropylene .	2222 375 90154
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050
2481	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2482	Cap, 68n, 10%, 250V, Polyester . . .	2222 347 90234
2484	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2485	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93282
2486	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2487	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2488	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2489	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2490	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2491	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810
2500	0.47uF., 250V, Polyester	4835 121 47569
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
S 2507	Cap, 1n5, 10%, 1KV, Ceramic.	2020 558 90443
2508	Cap, 470u, 20%, 200V, Electrolytic .	2020 024 90626
S 2511	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
S 2518	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2530	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 021 91147
2531	Cap, 1n, 2%, 50V, Polypropylene. . .	2020 310 90049
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2540	Cap, 100u, 20%, 25V, Electrolytic. .	2020 021 90547
S 2545	1500pF., 250VAC, Ceramic	4835 122 47622
S 2550	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2551	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91358
2561	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
S 2562	Cap, 220p, 10%, 1KV, Ceramic	2020 558 90424
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2572	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2575	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2577	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2586	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2604	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2613	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2615	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2619	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2622	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2629	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2679	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2681	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2913	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2914	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2915	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2916	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648
2917	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090
2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010

S = Safety Part Be sure to use exact replacement part.

PL9125C221 (continued)

3010	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610		3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240	
3013	Zero ohm,.	4835 111 27056		3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703	
3014	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052		3481	Res, 100K, 1%, 3/5W, Metal Film. . .	2322 156 21004	
3015	22k, 5%, 1/10W, Metal Film	4835 111 37441		3482	Res, 32K4, 1%, 3/5W, Metal Film. . .	2322 156 23243	
3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810		3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230	
3021	Res, 1K, 2%, 0,25W	4822 051 10102		3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3200	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	S	3485	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023	
3201	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253	S	3486	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012	
3203	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443	S	3487	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012	
3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	S	3488	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023	
3205	Res, 1K, 2%, 0,25W	4822 051 10102	S	3490	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012	
3206	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	S	3491	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012	
3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3492	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012	
3209	22k, 5%, 1/10W, Metal Film	4835 111 37441		3496	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3212	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253		3497	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3213	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019	
3215	22k, 5%, 1/10W, Metal Film	4835 111 37441	S	3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225	
3216	Zero ohm,.	4835 111 27056		3503	10ohm, 120VAC, Positive Temperature C		
3218	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432			oefficient	4835 116 47001	
3219	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	S	3505	Surge Protector.	2422 549 43073	
3220	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223	
3225	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S	3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333	
3228	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102	
3231	Zero ohm,.	4835 111 27056		3512	15k, 5%, 1/10W, Metal Film	4835 111 37458	
3232	Zero ohm,.	4835 111 27056		3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184	
3233	Zero ohm,.	4835 111 27056		3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204	
3243	1.2k, 5%, 1/10W, Metal Film.	4835 111 27042	S	3515	2.5 ohm, 20%, 3.6W, Negative Temperat		
3243	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052			ure Coefficient.	2122 612 00023	
3246	82k, 5%, 1/10W, Metal Film	4835 111 37277		3516	Res, 1K, 2%, 0,25W	4822 051 10102	
3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3517	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3518	Res, 0R22, 5%, 3W, Metal Film. . . .	2120 106 90548	
3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340		3520	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230	
3250	Zero ohm,.	4835 111 27056		3521	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443	
3252	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	S	3525	33 ohm, 5%, 1/3W, Metal Film	4835 116 57665	
3253	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		3528	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3257	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3529	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890	
3258	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3530	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320	
3259	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3532	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3534	15k, 5%, 1/10W, Metal Film	4835 111 37458	
3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3536	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830	
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3537	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046	S	3542	4.7 Megohm, 5%, 1/2W, Metal Film . .	4835 116 57009	
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3570	15k, 5%, 1/10W, Metal Film	4835 111 37458	
3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3571	Res, 150K, 1%, 3/5W, Metal Film. . .	2322 156 21504	
S 3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109		3573	Res, 2K, 1%, 1/10W, Metalized Glass.	2120 108 92657	
S 3341	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483		3574	33k, 5%, 1/10W, Metal Film	4835 111 37248	
S 3342	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483		3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3343	1.5k, 20%, 1/2W, Carbon Composition.	4835 110 47034		3577	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290		3578	Res, 1K, 2%, 0,25W	4822 051 10102	
S 3345	VDR, DC, 1mA, 50V, MAX 115V	2322 593 13507		3579	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451	
3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290		3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3401	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380		3592	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3402	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380		3594	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3403	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380		3595	68k, 5%, 1/6W, Carbon Film	4835 111 37205	
3405	Res, 1K8, 1%, 3/5W, Metal Film . . .	2322 156 21802		3596	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3406	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020		3597	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3407	Res, 1K8, 1%, 3/5W, Metal Film . . .	2322 156 21802		3598	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020		3599	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3409	1.5 ohm, 5%, 1/3W, Metal Film. . . .	4835 116 57664		3607	8.2k, 5%, 1/8W, Inline Package . . .	4835 111 97046	
3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210		3608	2.2k, 5%, 1/8W, Inline Package . . .	4835 111 97049	
3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210		3609	2.2k, 5%, Resistor Network	2120 108 93868	
3420	470k, 5%, 1/10W, Metal Film.	4835 111 37407		3611	Res, 1K, 2%, 0,25W	4822 051 10102	
3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220		3612	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220		3613	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840		3615	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606		3617	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3425	150k, 5%, 1/10W, Metal Film.	4835 111 27045		3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3426	39k, 5%, 1/10W, Metal Film	4835 111 27051		3619	820 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37466	
3428	22k, 5%, 1/10W, Metal Film	4835 111 37441		3629	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259	
3429	27k, 5%, 1/10W, Metal Film	4835 111 37442		3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3431	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247		3631	27k, 5%, 1/10W, Metal Film	4835 111 37442	
3432	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63479	
3436	Res, 1K, 2%, 0,25W	4822 051 10102		3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210	
3437	10k, 5%, 1/10W, Metal Film	4835 111 37216		3634	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3438	33k, 1/4W, Carbon Film	4835 110 57375		3635	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920		3636	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3447	10k, 5%, 1/10W, Metal Film	4835 111 37216		3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320		3653	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
S 3452	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63229		3654	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
S 3454	Res, 33K, 5%, 1 1/3W, Metal Film . .	2322 194 63333		3655	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020		3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720		3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
S 3462	Res, 6K8, 5%, 5W, Metal Film	2322 257 41682		3662	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790		3663	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3464	Res, 1K, 2%, 0,25W	4822 051 10102		3664	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
S 3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109		3665	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3466	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903		3666	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376	
3467	Res, 14K, 1%, 3/5W, Metal Film . . .	2322 156 21403		3667	27k, 5%, 1/10W, Metal Film	4835 111 37442	
3467	Res, 15K, 1%, 3/5W, Metal Film . . .	2322 156 21503		3672	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020		3673	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3469	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247		3674	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259	

S = Safety Part Be sure to use exact replacement part.

PL9125C221 (continued)

3675	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3676	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3677	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3680	680 ohm, 5%, 1/10W, Metal Film	4835 111 37271
3681	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
3682	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
3683	100 ohm, 5%, 1/10W, Metal Film	4835 111 37432
3684	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
3685	220 ohm, 5%, 1/10W, Metal Film	4835 111 37371
3908	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710
3909	Res, 1K, 2%, 0,25W	4822 051 10102
3910	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376
3911	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230
3912	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
3913	Res, 6K8, 5%, 1/6W, Carbon Film.	3198 011 06820
3914	Res, 1K8, 5%, 1/6W, Carbon Film.	3198 011 01820
3915	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231
3916	220 ohm, 5%, 1/10W, Metal Film	4835 111 37371
3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810
3951	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3953	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272
3955	Res, 4K7, 5%, 1/6W, Carbon Film.	3198 011 04720
4001	Zero ohm,	4835 111 27056
4002	Zero ohm,	4835 111 27056
4004	Zero ohm,	4835 111 27056
4007	Zero ohm,	4835 111 27056
4009	Zero ohm,	4835 111 27056
4010	Zero ohm,	4835 111 27056
4011	Zero ohm,	4835 111 27056
4012	Zero ohm,	4835 111 27056
4013	Zero ohm,	4835 111 27056
4020	Zero ohm,	4835 111 27056
4051	Zero ohm,	4835 111 27056
4100	Zero ohm,	4835 111 27056
4101	Zero ohm,	4835 111 27056
4102	Zero ohm,	4835 111 27056
4103	Zero ohm,	4835 111 27056
4143	Zero ohm,	4835 111 27056
4144	Zero ohm,	4835 111 27056
4203	Zero ohm,	4835 111 27056
4207	Zero ohm,	4835 111 27056
4212	Zero ohm,	4835 111 27056
4214	Zero ohm,	4835 111 27056
4215	Zero ohm,	4835 111 27056
4216	Zero ohm,	4835 111 27056
4501	Zero ohm,	4835 111 27056
4602	Zero ohm,	4835 111 27056
4650	Zero ohm,	4835 111 27056
4651	Zero ohm,	4835 111 27056
4652	Zero ohm,	4835 111 27056
4654	Zero ohm,	4835 111 27056
4655	Zero ohm,	4835 111 27056
4684	Zero ohm,	4835 111 27056
4687	Zero ohm,	4835 111 27056
4831	Zero ohm,	4835 111 27056
4832	Zero ohm,	4835 111 27056
4833	Zero ohm,	4835 111 27056
4902	Zero ohm,	4835 111 27056
4903	Zero ohm,	4835 111 27056
4904	Zero ohm,	4835 111 27056
4905	Zero ohm,	4835 111 27056
4909	Zero ohm,	4835 111 27056
4911	Zero ohm,	4835 111 27056
4912	Zero ohm,	4835 111 27056
4914	Zero ohm,	4835 111 27056
4957	Zero ohm,	4835 111 27056
4999	Zero ohm,	4835 111 27056
5000	Coil, 5u6.	3198 018 25680
5004	Coil, 820n	2422 535 97314
5201	Coil, 22u.	3198 018 22290
5202	Coil, 6u8.	3198 018 16880
S 5445	Transformer, L.O.T., models ending in C101, C121, and C125	2422 531 02327
S 5445	Transformer, L.O.T., models ending in C221 and C225.	3128 138 20941
5451	Coil, 27u.	2422 535 96614
5461	Transformer.	3128 138 33811
5480	Coil, 27u.	2422 535 97334
5480	Coil, 39u.	2422 535 97336
5480	33uH., Peaking Coil, only in 25.	4835 157 58205
S 5500	Filter, Mains, 5mH, 2A	2422 549 43432
5516	100uH., Coil	4835 157 67078
5518	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
5521	Coil, 2u2.	3198 018 12280
5540	Coil, 4u7.	3198 018 14780
S 5545	Transfomer,	2422 531 02314
5551	27uH., 5%, Coil, Peaking	4835 157 67052
5552	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
5572	100uH., Coil	4835 157 67078
5573	100uH., Coil	4835 157 67078
5576	100uH., Coil	4835 157 67078
5577	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
5600	Coil, 8u2.	3198 018 18280
5601	Coil, 8u2.	3198 018 18280
5620	Coil, 6u8.	3198 018 16880
5821	Coil, 100u	3198 018 21010
6008	Zener, 33 Volt BZX79-C33	4835 130 37904
6211	Diode, 1N4148.	4835 130 37048
6212	Diode, 1N4148.	4835 130 37048
6213	Diode, 1N4148.	4835 130 37048
6331	Diode.	4835 130 37294
6333	Diode.	4835 130 37294
6335	Diode.	4835 130 37294
6401	Diode.	4835 130 37094
6404	Diode.	4835 130 37094
6449	Diode, 1N4148.	4835 130 37048
6450	Diode, 1N4148.	4835 130 37048
6460	Diode, Rect, BY228/20	9336 215 80112
6463	Diode, 1N4148.	4835 130 37048
6464	Zener, 6.2 Volt, BZX79-B6V2.	4835 130 37948
6465	Diode, BYD33J.	4835 130 37094
6466	Diode, BYD33J.	4835 130 37094
6480	Diode, Zener	4835 130 37947
6481	Diode, 1N4148.	4835 130 37048
6485	Diode, BYD33J.	4835 130 37094
6486	Diode, EGP20DL-530	4835 130 37919
6487	Diode.	4835 130 37094
6488	Diode, Rect, BYV27-200.	9322 126 72673
6490	Diode, Rect, BYV27-200.	9322 126 72673
6505	Diode, Bridge Rect, GBU6JL-7002	9322 138 08667
6507	Diode, BYD33J.	4835 130 37094
6508	Diode, BYD33J.	4835 130 37094
6510	Zener Diode, 20 volt	9331 178 60133
6511	Diode, BYV95C.	4835 130 37052
6512	Diode, Rect, BY228/20	4822 130 41275
6513	Diode, Rect, BY228/20	4822 130 41275
6514	Zener, 18 Volt, BZX79-C18.	4835 130 37908
6540	Diode.	4835 130 37294
6550	Diode, Rect, BY229X-800	9340 380 30127
6560	Diode, EGP20DL-530	4835 130 37919
6580	Diode, Rect, BYV27-200.	9322 126 72673
6584	Diode, 1N4148.	4835 130 37048
6585	Diode, 1N4148.	4835 130 37048
6591	Diode, BAS216.	4835 130 37905
6601	Diode, Zener	4835 130 37684
6602	Diode, 1N4148.	4835 130 37048
6603	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
6604	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
6605	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
6606	Zener, 4.7 Volt, BZX79-C4V7.	4835 130 37005
6607	Zener, 6.8 Volt, BZX79-C6V8.	4835 130 37945
6690	LED, LTL-307P.	4835 130 97096
6951	Diode, BAS216.	4835 130 37905
6961	Diode, BAS216.	4835 130 37905
7250	IC,	9352 620 26112
7251	IC, LM317T	9337 220 80682
7254	Transistor, NPN, BC847B.	4822 130 60511
7256	Transistor, NPN, BC847B.	4822 130 60511
7258	Transistor, NPN, BC847B.	4822 130 60511
7263	Transistor, PNP, BC857B.	5322 130 60508
7266	Transistor, NPN, BC847B.	4822 130 60511
7330	IC,	9352 184 10112
7401	IC,	9322 121 47687
7460	Transistor, NPN, BU1508DX.	9340 170 50127
7461	Transistor, NPN, BF819	9335 354 50127
7462	Transistor, BC547B	4835 130 47055
7463	Transistor, BC557B	4835 130 47409
7480	IC,	9322 028 93682
7481	Transistor, BC557B	4835 130 47409
7482	Transistor, PNP, BC857B.	5322 130 60508
7518	STH8NA60FI SMPS FET	9322 068 92687
7518	STH10NC60FI SMPS FET.	9322 155 66687
7520	IC, MC44603A	4835 209 88537
7570	IC,	9337 711 00676
S 7581	Coupler, TCDT1101G	9338 431 30682
7590	Transistor, NPN, BC847B.	4822 130 60511
7591	Transistor, NPN, BC847B.	4822 130 60511
7592	Transistor, NPN, BC847B.	4822 130 60511
7600	IC, SAA5543-PS/M4/0167 L9 v3.2 (Commercial Models - NON Pro Plus)	9352 670 84112
7600	IC, SAA5565-PS/M3/0195 L9 v3.2 (Commercial Models - Pro Plus Models).	9352 673 97112
7601	IC, ST24W16B6, commercial models only	9322 095 35682
7603	Transistor, NPN, BC337	9331 796 00126
7604	Transistor, NPN, BC847B.	4822 130 60511
7605	Transistor, NPN, BC847B.	4822 130 60511
7608	Transistor, NPN, BC847B.	4822 130 60511
7609	Transistor, NPN, BC847B.	4822 130 60511
7680	IR Receiver.	9322 127 53667
7904	Transistor, NPN, BC847B.	4822 130 60511

S = Safety Part Be sure to use exact replacement part.

PL9125C221 (continued)

	7954	IC,.	4835 209 88542
	CBA	00EMF892A102 Main Chassis Board Asm.	00EM F89 2A102

Cabinet & Accessory Parts

		Cabinet & Accessory Parts	
S	AC01	Mains Cord	3135 010 07161
S	AC02	Anode Clip	4835 256 97264
	AC03	Cabinet Back	3135 014 07961
	AC04	Cabinet Front.	3135 017 04101
	AC05	Chassis Guide.	3139 124 31381
	AC06	Control Buttons.	3139 124 27351
S	AC07	Convergence and Purity Assembly. . .	2422 549 43385
S	AC08	CRT A63AFW36X (C121 Version)	9301 763 20443
S	AC09	Coil, Degaussing	3121 218 62961
	AC11	Light Guide.	3139 124 26461
	AC12	Nameplate.	4835 459 17546
	AC14	Power Button	3139 124 26444
	AC16	Speaker, 16R, 1W5 (2 Used)	2422 264 00343
S	AC18	Yoke (C121 Version).	3321 203 00121
	AC19	Yoke Wedge (3 Used).	4835 535 27001
	AC24	Spring	3139 121 26231
	AC25	Owner's Manual	3135 015 16021
	AC29	Vent Cover	3135 013 03371

S = Safety Part Be sure to use exact replacement part.

PL9127C101 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts		
S 0127	3.15 Amp Fuse, ...	3122 358 72141	
0152	Cable, DIP, 6 Pin, 400mm	3104 301 09421	
0153	4 Pin Cable.	3104 301 09431	
0212	Connector, 2 Pin	2422 025 15396	
0215	Connector, 2 Pin,.	2422 025 16343	
0220	4 Pin Board Connector.	2422 025 04852	
0224	1 Pin Board Connector.	2422 034 20021	
0228	1 Pin Board Connector.	2422 034 20021	
0234	Connector, 4 Pin	2422 025 15847	
0238	Connector, 5 Pin	2422 025 12481	
S 0243	Connector, 6 Pin	2422 025 04854	
0244	4 Pin Board Connector.	2422 025 04852	
S 0245	Connector, 6 Pin	2422 025 04854	
S 0254	CRT Socket (9 Pin)	2422 500 80022	
0259	Connector, 3 Pin	2412 020 00725	
0267	Connector, 3 Pin	2412 020 00725	
1000	Tuner.	2422 542 90057	
1001	Filter	2422 549 42501	
1003	45 MHz SAW, Filter,.	2422 549 42433	
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807	
1208	Crystal Resonator.	4835 242 77276	
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10869	
S 1571	1 Amp, Radial Fuse,.	4835 253 97162	
S 1572	1 Amp, Radial Fuse,.	4835 253 97162	
S 1580	Relay, 12V	2422 132 07317	
1600	Switch, Tactile.	2422 128 02742	
1601	Switch, Tactile.	2422 128 02742	
1602	Switch, Tactile.	2422 128 02742	
1603	Switch, Tactile.	2422 128 02742	
1606	Switch, Tactile.	2422 128 02742	
1660	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488	
1821	Ceramic Resonator.	4835 122 97102	
2001	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2002	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2003	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2004	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2006	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290	
2011	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2102	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2103	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2104	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2201	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2202	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2203	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2204	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2205	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2207	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2208	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2209	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2211	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2212	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2213	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2214	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2215	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280	
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 16654	
2220	Cap, 18p, 5%, 50V, Ceramic	3198 016 01890	
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2222	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2226	Cap, 33u, 20%, 25V, Electrolytic . .	2020 021 90124	
2227	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2247	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2248	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2249	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2330	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177	
2340	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495	
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320	
S 2343	Cap, 3n3, 10%, 2KV, Ceramic.	2020 558 90529	
2345	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020	
2401	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2402	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2404	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2405	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2407	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2409	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2420	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2426	Cap, 100n, 10%, 63V, Metalized Polyes ter.	2222 370 75104	
2428	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220	
2429	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2430	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2431	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2437	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2438	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2448	Cap, 220p, 10%, 500V, Ceramic. . . .	3198 019 42210	
2450	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91139	
2451	Cap, 15n, 10%, 50V, Polyester. . . .	2020 300 90575	
2451	0.01uF., 10%, 50V, Polyester, only 27	3198 138 20941	
2456	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176	
2457	Cap, 390n, 5%, 250V, Metalized Polypr opylene.	2222 479 90021	
2458	Cap, 2u2, 20%, 100V, Electrolytic. .	2020 021 91331	
2459	Cap, 680p, 10%, 500V, Ceramic. . . .	3198 019 46810	
2461	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020	
2462	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176	
2463	680pF., 10%, 2KV, Ceramic.	4835 122 47584	
S 2465	Cap, 10n, 5%, 1600V, Polypropylene .	2222 375 90154	
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050	
2473	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790	
2481	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740	
2482	Cap, 68n, 10%, 250V, Polyester . . .	2222 347 90234	
2484	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2485	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293	
2486	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2487	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2488	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2489	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2490	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710	
2491	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710	
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810	
2500	0.47uF., 250V, Polyester	4835 121 47569	
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
S 2507	Cap, 1n5, 10%, 1KV, Ceramic.	2020 558 90443	
2508	Cap, 470u, 20%, 200V, Electrolytic .	2020 024 90647	
S 2511	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020	
S 2518	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290	
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320	
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320	
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2530	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 021 91147	
2531	Cap, 1n, 2%, 50V, Polypropylene. . .	2020 310 90049	
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220	
2540	Cap, 100u, 20%, 25V, Electrolytic. .	2020 021 90547	
S 2545	1500pF., 250VAC, Ceramic	4835 122 47621	
S 2550	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2551	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91358	
2561	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020	
S 2562	Cap, 220p, 10%, 1KV, Ceramic	2020 558 90424	
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020	
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020	
2572	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330	
2575	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820	
2577	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020	
2586	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2604	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290	
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2613	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2615	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2619	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2622	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890	
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2629	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230	
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2631	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2679	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2681	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2821	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280	
2823	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2825	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2826	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090	
2827	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2828	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2829	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	
2830	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280	

S = Safety Part Be sure to use exact replacement part.

PL9127C101 (continued)

2831	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
2832	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280	S	3345	VDR, DC, 1mA, 50V, MAX 115V	2322 593 13507
2833	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280		3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
2834	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780		3401	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2835	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3402	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2836	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3403	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2837	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740		3405	Res, 1K8, 1%, 3/5W, Metal Film . . .	2322 156 21802
2838	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3406	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2839	Cap, 1u, 5%, 50V, Metalized Polyester	2020 308 90124		3407	Res, 1K8, 1%, 3/5W, Metal Film . . .	2322 156 21802
2840	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2841	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3409	1.5 ohm, 5%, 1/3W, Metal Film. . . .	4835 116 57664
2842	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2844	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3420	470k, 5%, 1/10W, Metal Film.	4835 111 37407
2845	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2913	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280		3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2914	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330		3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840
2915	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606
2916	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648		3425	Res, 120K, 5%, 1/10W, Metalized Glass	2120 108 91716
2917	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3426	39k, 5%, 1/10W, Metal Film	4835 111 27051
2918	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330		3428	22k, 5%, 1/10W, Metal Film	4835 111 37441
2919	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3429	27k, 5%, 1/10W, Metal Film	4835 111 37442
2920	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648		3431	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
2921	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3432	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
2931	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280		3436	Res, 1K, 2%, 0,25W	4822 051 10102
2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3437	10k, 5%, 1/10W, Metal Film	4835 111 37216
2952	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3438	33k, 1/4W, Carbon Film	4835 110 57375
2954	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
2955	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3447	10k, 5%, 1/10W, Metal Film	4835 111 37216
2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	S	3452	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63229
2960	Cap, 220u, 20%, 50V, Electrolytic. .	3198 026 52210	S	3453	Res, 4R7, 5%, 5W, Wire Wound	2322 251 41478
2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090	S	3454	Res, 33K, 5%, 1 1/3W, Metal Film . .	2322 194 63333
2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090		3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090		3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3462	Res, 6K8, 5%, 5W, Metal Film	2322 257 41682
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3010	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610		3464	Res, 1K, 2%, 0,25W	4822 051 10102
3013	Zero ohm,.	4835 111 27056	S	3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
3014	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052		3466	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903
3015	22k, 5%, 1/10W, Metal Film	4835 111 37441		3467	Res, 14K, 1%, 3/5W, Metal Film . . .	2322 156 21403
3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810		3467	Res, 15K, 1%, 3/5W, Metal Film . . .	2322 156 21503
3021	Res, 1K, 2%, 0,25W	4822 051 10102		3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3103	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3469	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
3104	10k, 5%, 1/10W, Metal Film	4835 111 37216		3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3108	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703
3109	10k, 5%, 1/10W, Metal Film	4835 111 37216		3481	Res, 35K7, 1%, 3/5W, Metal Film. . .	2322 156 23573
3123	75 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37276		3482	Res, 56K, 1%, 3/5W, Metal Film . . .	2322 156 25603
3200	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3201	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253		3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3203	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443	S	3485	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	S	3486	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3205	Res, 1K, 2%, 0,25W	4822 051 10102	S	3487	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3206	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	S	3488	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3490	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3209	22k, 5%, 1/10W, Metal Film	4835 111 37441	S	3491	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3212	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253	S	3492	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3213	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3495	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272
3215	22k, 5%, 1/10W, Metal Film	4835 111 37441		3496	10k, 5%, 1/10W, Metal Film	4835 111 37216
3216	Zero ohm,.	4835 111 27056		3497	10k, 5%, 1/10W, Metal Film	4835 111 37216
3217	Res, 1M5, 5%, 1/8W, Metalized Glass.	2322 730 61155		3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3218	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225
3219	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3503	10ohm, 120VAC, Positive Temperature C	
3220	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432			oefficient	4835 116 47001
3225	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S	3505	Surge Protector.	2422 549 43073
3228	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3231	Zero ohm,.	4835 111 27056	S	3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333
3232	Zero ohm,.	4835 111 27056	S	3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102
3233	Zero ohm,.	4835 111 27056		3512	15k, 5%, 1/10W, Metal Film	4835 111 37458
3243	1.2k, 5%, 1/10W, Metal Film.	4835 111 27042		3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184
3246	82k, 5%, 1/10W, Metal Film	4835 111 37277		3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204
3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3515	2.5 ohm, 20%, 3.6W, Negative Temperat	
3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010			ure Coefficient.	2122 612 00023
3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340		3516	Res, 1K, 2%, 0,25W	4822 051 10102
3250	Zero ohm,.	4835 111 27056		3517	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3251	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S	3518	Res, 0R22, 5%, 3W, Metal Film. . . .	2120 106 90548
3252	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		3520	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3253	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		3521	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443
3257	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3525	33 ohm, 5%, 1/3W, Metal Film	4835 116 57665
3258	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3528	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3259	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3529	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3530	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3532	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3534	15k, 5%, 1/10W, Metal Film	4835 111 37458
3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3536	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3537	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046	S	3542	4.7 Megohm, 5%, 1/2W, Metal Film . .	4835 116 57009
S 3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109		3570	15k, 5%, 1/10W, Metal Film	4835 111 37458
S 3341	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483		3571	Res, 150K, 1%, 3/5W, Metal Film. . .	2322 156 21504
S 3342	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483		3573	Res, 2K, 1%, 1/10W, Metalized Glass.	2120 108 92657
3343	1.5k, 20%, 1/2W, Carbon Composition.	4835 110 47034		3574	33k, 5%, 1/10W, Metal Film	4835 111 37248

S = Safety Part Be sure to use exact replacement part.

PL9127C101 (continued)

3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3577	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3578	Res, 1K, 2%, 0,25W	4822 051 10102	
3579	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451	
3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3592	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3594	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3595	68k, 5%, 1/6W, Carbon Film	4835 111 37205	
3596	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3597	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3598	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3599	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3607	8.2k, 5%, 1/8W, Inline Package . . .	4835 111 97046	
3608	2.2k, 5%, 1/8W, Inline Package . . .	4835 111 97049	
3609	2.2k, 5%, Resistor Network	2120 108 93868	
3611	Res, 1K, 2%, 0,25W	4822 051 10102	
3612	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3613	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3615	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3617	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3619	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3629	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259	
3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3631	27k, 5%, 1/10W, Metal Film	4835 111 37442	
S 3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63479	
3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210	
3634	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3635	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3636	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3637	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3653	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3654	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3655	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3662	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3663	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3664	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3665	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3666	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376	
3667	27k, 5%, 1/10W, Metal Film	4835 111 37442	
3672	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3673	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3674	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259	
3675	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510	
3676	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510	
3677	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510	
3680	680 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37271	
3681	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3682	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3683	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3684	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3685	220 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37371	
3821	15k, 5%, 1/10W, Metal Film	4835 111 37458	
3822	1.2k, 5%, 1/10W, Metal Film.	4835 111 27042	
3823	100k, 5%, 1/10W, Metal Film.	4835 111 37434	
3824	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3825	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3826	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3827	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3828	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3829	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272	
3830	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272	
3831	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198 011 03310	
3832	47 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37262	
3908	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3909	Res, 1K, 2%, 0,25W	4822 051 10102	
3910	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376	
3911	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230	
3913	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3914	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	
3915	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231	
3916	220 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37371	
3918	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3919	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376	
3920	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231	
3921	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230	
3922	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	
3923	220 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37371	
3924	39k, 5%, 1/10W, Metal Film	4835 111 27051	
3925	39k, 5%, 1/10W, Metal Film	4835 111 27051	
3926	39k, 5%, 1/10W, Metal Film	4835 111 27051	
3929	39k, 5%, 1/10W, Metal Film	4835 111 27051	
3930	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3931	Res, 1K, 2%, 0,25W	4822 051 10102	
3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810	
3951	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3953	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3955	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
3957	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
4001	Zero ohm,.	4835 111 27056	
4002	Zero ohm,.	4835 111 27056	
4004	Zero ohm,.	4835 111 27056	
4007	Zero ohm,.	4835 111 27056	
4009	Zero ohm,.	4835 111 27056	
4010	Zero ohm,.	4835 111 27056	
4011	Zero ohm,.	4835 111 27056	
4012	Zero ohm,.	4835 111 27056	
4013	Zero ohm,.	4835 111 27056	
4020	Zero ohm,.	4835 111 27056	
4051	Zero ohm,.	4835 111 27056	
4100	Zero ohm,.	4835 111 27056	
4101	Zero ohm,.	4835 111 27056	
4102	Zero ohm,.	4835 111 27056	
4103	Zero ohm,.	4835 111 27056	
4143	Zero ohm,.	4835 111 27056	
4144	Zero ohm,.	4835 111 27056	
4203	Zero ohm,.	4835 111 27056	
4207	Zero ohm,.	4835 111 27056	
4212	Zero ohm,.	4835 111 27056	
4214	Zero ohm,.	4835 111 27056	
4215	Zero ohm,.	4835 111 27056	
4216	Zero ohm,.	4835 111 27056	
4501	Zero ohm,.	4835 111 27056	
4602	Zero ohm,.	4835 111 27056	
4650	Zero ohm,.	4835 111 27056	
4651	Zero ohm,.	4835 111 27056	
4652	Zero ohm,.	4835 111 27056	
4654	Zero ohm,.	4835 111 27056	
4655	Zero ohm,.	4835 111 27056	
4684	Zero ohm,.	4835 111 27056	
4687	Zero ohm,.	4835 111 27056	
4831	Zero ohm,.	4835 111 27056	
4832	Zero ohm,.	4835 111 27056	
4833	Zero ohm,.	4835 111 27056	
4902	Zero ohm,.	4835 111 27056	
4903	Zero ohm,.	4835 111 27056	
4904	Zero ohm,.	4835 111 27056	
4905	Zero ohm,.	4835 111 27056	
4909	Zero ohm,.	4835 111 27056	
4911	Zero ohm,.	4835 111 27056	
4912	Zero ohm,.	4835 111 27056	
4914	Zero ohm,.	4835 111 27056	
4957	Zero ohm,.	4835 111 27056	
4999	Zero ohm,.	4835 111 27056	
5000	Coil, 5u6.	3198 018 25680	
5004	Coil, 820n	2422 535 97314	
5201	Coil, 22u.	3198 018 22290	
5202	Coil, 6u8.	3198 018 16880	
5342	22uH., 10%, Coil, Peaking.	4835 157 67069	
S 5445	Transformer, L.O.T., models ending in C101, C121, and C125	2422 531 02327	
S 5445	Transformer, L.O.T., models ending in C221 and C225.	3128 138 20941	
5451	Coil, 27u.	2422 535 96614	
5457	Coil, Linear Correction.	3128 138 53241	
5461	Transformer.	3128 138 33811	
5480	Coil, 27u.	2422 535 97334	
5480	Coil, 39u.	2422 535 97336	
5480	33uH., Peaking Coil, only in 25. . .	4835 157 58205	
S 5500	Filter, Mains, 5mH, 2A	2422 549 43432	
5516	100uH., Coil	4835 157 67078	
5518	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5521	Coil, 2u2.	3198 018 12280	
5540	Coil, 4u7.	3198 018 14780	
S 5545	Transfomer,.	2422 531 02314	
5551	27uH., 5%, Coil, Peaking	4835 157 67052	
5552	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5572	100uH., Coil	4835 157 67078	
5573	100uH., Coil	4835 157 67078	
5576	100uH., Coil	4835 157 67078	
5577	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5600	Coil, 8u2.	3198 018 18280	
5601	Coil, 8u2.	3198 018 18280	
5620	Coil, 6u8.	3198 018 16880	
5821	Coil, 100u	3198 018 21010	
5822	Coil, 18u.	3198 018 21890	
6008	Zener, 33 Volt BZX79-C33	4835 130 37904	
6113	Zener Diode, 6.8 volt.	9340 386 40115	
6211	Diode, 1N4148.	4835 130 37048	
6212	Diode, 1N4148.	4835 130 37048	
6213	Diode, 1N4148.	4835 130 37048	
6331	Diode.	4835 130 37294	
6333	Diode.	4835 130 37294	
6335	Diode.	4835 130 37294	
6401	Diode.	4835 130 37094	
6402	Zener, 33 Volt, BZX79-C33.	4835 130 37904	

S = Safety Part Be sure to use exact replacement part.

PL9127C101 (continued)

6403	Diode.	4835 130 37094	
6404	Diode.	4835 130 37094	
6449	Diode, 1N4148.	4835 130 37048	
6450	Diode, 1N4148.	4835 130 37048	
6460	Diode, Rect, BY228/20	9336 215 80112	
6463	Diode, 1N4148.	4835 130 37048	
6464	Zener Diode, 6.2 volt.	9337 242 70133	
6465	Diode, BYD33J.	4835 130 37094	
6466	Diode, BYD33J.	4835 130 37094	
6480	Diode, Zener	4835 130 37947	
6481	Diode, 1N4148.	4835 130 37048	
6485	Diode, BYD33J.	4835 130 37094	
6486	Diode, EGP20DL-530	4835 130 37919	
6487	Diode.	4835 130 37094	
6488	Diode, Rect, BYV27-200.	9322 126 72673	
6490	Diode, Rect, BYV27-200.	9322 126 72673	
6505	Diode, Bridge Rect, GBU6JL-7002	9322 138 08667	
6507	Diode, BYD33J.	4835 130 37094	
6508	Diode, BYD33J.	4835 130 37094	
6510	Zener Diode, 20 volt	9331 178 60133	
6511	Diode, BYV95C.	4835 130 37052	
6512	Diode, Rect, BY228/20	4822 130 41275	
6513	Diode, Rect, BY228/20	4822 130 41275	
6514	Zener, 18 Volt, BZX79-C18.	4835 130 37908	
6540	Diode.	4835 130 37294	
6550	Diode, Rect, BY229X-800	9340 380 30127	
6560	Diode, EGP20DL-530	4835 130 37919	
6580	Diode, Rect, SB140.	9339 577 60673	
6584	Diode, 1N4148.	4835 130 37048	
6585	Diode, 1N4148.	4835 130 37048	
6591	Diode, BAS216.	4835 130 37905	
6601	Diode, Zener	4835 130 37684	
6602	Diode, 1N4148.	4835 130 37048	
6603	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610	
6604	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610	
6605	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610	
6606	Zener, 4.7 Volt, BZX79-C4V7.	4835 130 37005	
6607	Zener, 6.8 Volt, BZX79-C6V8.	4835 130 37945	
6690	LED, LTL-307P.	4835 130 97096	
6821	Zener Diode, 9.1 volt.	9331 177 80133	
6822	Fixed Coil	4835 130 37048	
6951	Diode, BAS216.	4835 130 37905	
6961	Diode, BAS216.	4835 130 37905	
7250	IC,.	9352 620 26112	
7251	IC, LM317T	9337 220 80682	
7254	Transistor, NPN, BC847B.	4822 130 60511	
7256	Transistor, NPN, BC847B.	4822 130 60511	
7258	Transistor, NPN, BC847B.	4822 130 60511	
7263	Transistor, PNP, BC857B.	5322 130 60508	
7266	Transistor, NPN, BC847B.	4822 130 60511	
7330	IC,.	9352 184 10112	
7401	IC,.	9322 121 47687	
7460	Transistor, NPN, BU1508DX.	9340 170 50127	
7461	Transistor, NPN, BF819	9335 354 50127	
7462	Transistor, BC547B	4835 130 47055	
7463	Transistor, BC557B	4835 130 47409	
7480	IC,.	9322 028 93682	
7481	Transistor, BC557B	4835 130 47409	
7482	Transistor, PNP, BC857B.	5322 130 60508	
7518	STH8NA60FI SMPS FET	9322 068 92687	
7518	STH10NC60FI SMPS FET.	9322 155 66687	
7520	IC, MC44603A	4835 209 88537	
7570	IC,.	9337 711 00676	
S 7581	Coupler, TCDT1101G	9338 431 30682	
7590	Transistor, NPN, BC847B.	4822 130 60511	
7591	Transistor, NPN, BC847B.	4822 130 60511	
7592	Transistor, NPN, BC847B.	4822 130 60511	
7600	IC, SAA5543-PS/M4/0167 L9 v3.2 (Commercial Models - NON Pro Plus)	9352 670 84112	
7600	IC, SAA5565-PS/M3/0195 L9 v3.2 (Commercial Models - Pro Plus Models).	9352 673 97112	
7601	IC, ST24W16B6, commercial models only	9322 095 35682	
7603	Transistor, NPN, BC337	9331 796 00126	
7604	Transistor, NPN, BC847B.	4822 130 60511	
7605	Transistor, NPN, BC847B.	4822 130 60511	
7608	Transistor, NPN, BC847B.	4822 130 60511	
7609	Transistor, NPN, BC847B.	4822 130 60511	
7680	IR Receiver.	9322 127 53667	
7821	IC,.	9352 374 70112	
7822	IC, HEF4052BT.	9333 729 50653	
7823	Transistor, NPN, BC337-25.	3198 020 43530	
7904	Transistor, NPN, BC847B.	4822 130 60511	
7908	Transistor, NPN, BC847B.	4822 130 60511	
7951	IC,.	4822 209 13706	
CBA	00EMF892A102 Main Chassis Board Asm.	00EM F89 2A102	

Cabinet & Accessory Parts

	Cabinet & Accessory Parts		
S AC01	Mains Cord	3135 010 07161	
S AC02	Anode Clip	4835 256 97264	
AC03	Cabinet Back	3135 014 07911	
AC04	Cabinet Front.	3135 017 04121	
AC05	Chassis Guide.	3139 124 31381	
AC06	Control Buttons.	3139 124 27351	
S AC07	Convergence and Purity Assembly.	2422 549 43385	
S AC08	CRT A68AJB82X.	4835 131 27167	
S AC09	Coil, Degaussing	3121 218 62701	
AC11	Light Guide.	3139 124 26461	
AC12	Nameplate.	4835 459 17546	
AC14	Power Button	3139 124 26444	
AC16	Speaker, 16R, 1W5 (2 Used)	2422 264 00343	
S AC18	Yoke	3313 203 01242	
AC19	Yoke Wedge (3 Used).	4835 535 27006	
AC24	Spring	3139 121 26231	
AC25	Owner's Manual	3135 015 16021	

S = Safety Part Be sure to use exact replacement part.

PL9127C121 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts	
0113	L9 SOPS HEATSINK	3139 121 62041
0119	DIODE HEATSINK L9.	3139 121 26691
0121	LINE HEATSINK (CINCH).	3139 121 61942
S 0127	Holder, Fuse, 2 Pin.	3122 358 71251
0211	Connector, 2 Pin	2422 025 11196
0212	Connector, 2 Pin	2422 025 15396
0215	Connector, 2 Pin,.	2422 025 16343
0220	4 Pin Board Connector.	2422 025 04852
0221	Connector, 4 Pin	2422 025 15503
0222	Connector, 2 Pin	2422 025 10646
0224	1 Pin Board Connector.	2422 034 20021
0228	1 Pin Board Connector.	2422 034 20021
0234	Connector, 4 Pin	2422 025 15847
0238	Connector, 5 Pin	2422 025 12481
S 0243	Connector, 6 Pin	2422 025 04854
0244	4 Pin Board Connector.	2422 025 04852
S 0245	Connector, 6 Pin	2422 025 04854
S 0254	CRT Socket (9 Pin)	2422 500 80022
0259	Connector, 3 Pin	2412 020 00725
0267	Connector, 3 Pin	2412 020 00725
1000	TUNER.	3139 147 16412
1001	Filter	2422 549 42501
1003	45 MHz SAW, Filter,.	2422 549 42433
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807
1208	Crystal Resonator, 3.58MHz	2422 543 00832
S 1500	Fue, 4 A, 250V	2422 086 10905
S 1571	FUSE 1A 250V	2422 086 10779
S 1572	FUSE 1A 250V	2422 086 10779
S 1580	Relay, 12V, 5A G5PA-1.	2422 132 07444
1600	Switch, Tactile.	2422 128 02742
1601	Switch, Tactile.	2422 128 02742
1602	Switch, Tactile.	2422 128 02742
1603	Switch, Tactile.	2422 128 02742
1606	Switch, Tactile.	2422 128 02742
1660	Crystal, Resonator, 12MHz, 20 Pin.	2422 543 00488
1703	L9 ITV SMARTPORT	3139 178 08561
1821	Ceramic Resonator, 514KHz5, CSB503F58	2422 540 98344
2001	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2002	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2003	Cap, 470u, 20%, 16V, Electrolytic.	3198 025 24710
2004	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2011	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
2013	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2102	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2103	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2104	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2201	Cap, 220n, 10%, 50V, Polyester	3198 014 02240
2202	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2203	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
2204	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2205	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2206	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2207	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2208	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
2209	Cap, 470n, +80/-20%, 16V, Ceramic.	3198 017 24740
2211	Cap, 470n, +80/-20%, 16V, Ceramic.	3198 017 24740
2212	Cap, 470n, +80/-20%, 16V, Ceramic.	3198 017 24740
2213	Cap, 470n, +80/-20%, 16V, Ceramic.	3198 017 24740
2214	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2215	Cap, 2u2, 20%, 50V, Electrolytic	3198 025 52280
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 16654
2220	Cap, 18p, 5%, 50V, Ceramic	3198 016 01890
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2222	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2226	Cap, 33u, 20%, 25V, Electrolytic	2020 021 90124
2227	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2247	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2248	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2249	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2330	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2340	Cap, 10u, 20%, 250V, Electrolytic.	2020 012 93495
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320
S 2343	Cap, 3n3, 10%, 2KV, Ceramic.	2020 558 90529
2345	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2401	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2402	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2404	Cap, 220n, 10%, 50V, Polyester	3198 014 02240
2405	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2407	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2409	Cap, 220n, 10%, 50V, Polyester	3198 014 02240
2420	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2426	Cap, 100n, 10%, 63V, Metalized Polyes ter.	2222 370 75104
2428	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2429	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2430	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090
2431	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2437	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2438	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2448	Cap, 33p, 5%, 500V, Ceramic.	2020 557 90192
2450	Cap, 47u, 20%, 160v, Electrolytic.	2020 021 91139
2451	Cap, 15n, 10%, 50V, Polyester.	2020 300 90575
2456	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176
2457	Cap, 390n, 5%, 250V, Metalized Polypr opylene.	2222 479 90021
2458	Cap, 2u2, 20%, 100V, Electrolytic.	2020 021 91331
2459	Cap, 680p, 10%, 500V, Ceramic.	3198 019 46810
2461	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2462	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176
S 2463	Cap, 680p, 10%, 2KV, Ceramic	2020 558 90485
S 2465	Cap, 10n, 5%, 1600V, Polypropylene	2222 375 90154
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050
2473	Cap, 47u, 20%, 50V, Electrolytic	3198 025 54790
2481	Cap, 470n, 10%, 50V, Polyester	3198 014 04740
2482	Cap, 68n, 10%, 250V, Polyester	2222 347 90234
2484	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2485	Cap, 4u7, 20%, 250V, Electrolytic.	2020 012 93293
2486	Cap, 470u, 20%, 16V, Electrolytic.	3198 025 24710
2487	Cap, 100u, 20%, 50V, Electrolytic.	3198 025 51010
2488	Cap, 470u, 20%, 16V, Electrolytic.	3198 025 24710
2489	Cap, 470u, 20%, 16V, Electrolytic.	3198 025 24710
2490	Cap, 470p, 10%, 500V, Ceramic.	3198 019 44710
2491	Cap, 470p, 10%, 500V, Ceramic.	3198 019 44710
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810
2499	Cap, 220n, 10%, 100V, Metalized Polye ster	2222 365 25224
2500	Cap, 470n, 20%, 275V, Polypropylene.	2222 336 29148
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2507	Cap, 1n5, 10%, 1KV, Ceramic.	3198 019 61520
2508	Cap, 470u, 20%, 200V, Electrolytic	2020 024 90647
2511	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
2518	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2529	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2530	Cap, 1u, 20%, 50V, Electrolytic.	2020 021 91147
2531	Cap, 1n, 2%, 50V, Polypropylene.	2020 310 90049
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2540	Cap, 100u, 20%, 25V, Electrolytic.	2020 021 90547
S 2545	Cap, 1n5, 20%, v, Ceramic.	2020 554 90128
2550	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2551	Cap, 47u, 20%, 160v, Electrolytic.	2020 021 91358
2561	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020
2562	Cap, 220p, 10%, 1KV, Ceramic	3198 019 62210
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2572	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2575	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2577	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020
2586	Cap, 220u, 20%, 25V, Electrolytic.	3198 025 32210
2604	Cap, 22u, 20%, 50V, Electrolytic	3198 025 52290
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2613	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2615	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2619	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2622	Cap, 220u, 20%, 25V, Electrolytic.	3198 025 32210
2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2629	Cap, 22n, +80/-20%, 50V, Ceramic	3198 019 22230
2630	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2631	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2679	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2681	Cap, 220u, 20%, 25V, Electrolytic.	3198 025 32210
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2821	Cap, 2u2, 20%, 50V, Electrolytic	3198 028 52280
2823	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720

S = Safety Part Be sure to use exact replacement part.

PL9127C121 (continued)

2825	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080		3257	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
2826	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090		3258	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
2827	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3259	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
2828	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
2829	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	3198 013 01020
2830	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280		3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
2831	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	3198 013 01020
2832	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280		3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
2833	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280		3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	3198 013 01020
2834	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780	S	3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
2835	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	S	3341	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
2836	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	S	3342	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
2837	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740		3343	Res, 1K5, 20%, 1/2W, Carbon Film . .	3198 013 01520
2838	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
2839	Cap, 1u, 10%, 50V, Polyester	3198 014 01050		3345	VDR DC 1MA/50V S MAX 110V A . . .	2122 550 00152
2840	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
2841	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3401	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2842	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3402	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3403	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2844	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3405	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002
2845	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3406	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2913	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280		3407	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002
2914	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330		3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2915	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3409	Res, 1R5, 5%, 1/3W, Metal Film . . .	2306 204 03158
2916	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648		3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2917	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2918	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330		3420	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
2919	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2920	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648		3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2921	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840
2931	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280		3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606
2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3425	Res, 120K, 5%, 1/10W, Metalized Glass	2120 108 91716
2952	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3426	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
2954	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3428	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
2955	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3429	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3431	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3432	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3433	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
2960	Cap, 220u, 20%, 50V, Electrolytic. .	3198 026 52210		3436	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090		3437	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090		3438	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090		3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3447	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3010	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610		3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
3013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	S	3452	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	3198 012 32290
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	S	3453	Res, 4R7, 5%, 5W, Wire Wound	2322 251 41478
3015	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	S	3454	Res, 33K, 5%, 1 1/3W, Metal Film . .	2322 194 63333
3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810		3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3021	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020		3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3103	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220	S	3462	Res, 6K8, 5%, 5W, Metal Film	2322 257 41682
3104	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030		3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3108	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3464	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3109	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	S	3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
3123	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590		3466	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010		3467	Res, 15K, 1%, 3/5W, Metal Film . . .	2322 156 21503
3201	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910		3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3203	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310		3469	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820		3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3205	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020		3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703
3206	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610		3481	Res, 35K7, 1%, 3/5W, Metal Film. . .	2322 156 23573
3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3482	Res, 56K, 1%, 3/5W, Metal Film . . .	2322 156 25603
3209	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230		3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3212	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910		3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3213	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610	S	3486	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
3215	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	S	3487	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
3216	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	S	3488	Res, 4R7, 5%, 1/2W, Metal Film . . .	2306 207 03478
3217	Res, 1M5, 5%, 1/8W, Metalized Glass.	2322 730 61155	S	3490	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
3218	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	S	3491	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
3219	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610	S	3492	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
3220	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010		3495	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3225	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040		3496	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010		3497	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3231	Res, Zero ohm, 'Chip' Jumper	3198 021 90020		3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	3198 013 04710
3232	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	S	3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225
3233	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	S	3503	PTC, DC, 120V,P3020 B.	2120 661 00025
3243	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220	S	3505	Surge Protector.	2422 549 43073
3246	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230	S	3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333
3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102
3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340		3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3250	Res, Zero ohm, 'Chip' Jumper	3198 021 90020		3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184
3251	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040		3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204
3252	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	S	3515	2.5 ohm, 20%, 3.6W, Negative Temperat ure Coefficient.	2122 612 00023
3253	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220		3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
				3517	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
			S	3518	Res, 0R22, 5%, 2 1/2W, Metal Film. .	3198 012 32270
				3520	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
				3521	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
			S	3525	Res, 47 ohm, 5%, 1/3W, Metal Film. .	2306 204 03479

S = Safety Part Be sure to use exact replacement part.

PL9127C121 (continued)

3528	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3529	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3530	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
3532	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3534	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3536	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3537	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
S 3542	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3570	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3571	Res, 150K, 1%, 3/5W, Metal Film. . .	2322 156 21504
3573	Res, 2K, 1%, 1/8W, Metalized Glass .	2322 734 62002
3574	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3577	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3578	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3579	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3592	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3594	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3595	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3596	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3597	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3598	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3599	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3607	RST NETW RGLE 10X 8K2 PM5 B . . .	2120 108 93916
3608	RST NETW RGLE 6X 2K2 PM5 B . . .	2120 108 93913
3609	RST NETW RGLE 7X 2K2 PM5 B . . .	2120 108 93915
3611	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3612	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3613	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3615	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3616	Jumper Wire/Staple	0322 179 00003
3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3619	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3629	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
3631	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
S 3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210
3634	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3635	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3636	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3637	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3654	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3655	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710
3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3662	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3663	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220
3664	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220
3665	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3666	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3667	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3672	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3673	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3674	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3675	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3676	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3677	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3680	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3681	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3682	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220
3683	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3684	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3687	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3821	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3822	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3823	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3824	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3825	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3826	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3827	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3828	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3829	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3830	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3831	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198 011 03310
3832	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3908	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710
3909	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3910	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3911	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230
3913	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3914	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820
3915	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3916	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3918	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3919	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3920	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3921	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230
3922	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820
3923	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3924	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3925	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3926	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3929	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3930	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710
3931	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810
3951	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3953	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3955	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3957	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4004	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4011	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4012	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4020	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4051	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4100	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4144	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4203	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4207	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4212	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4215	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4216	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4465	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4501	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4650	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4651	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4654	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4655	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4833	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4911	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4912	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4914	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4957	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4999	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 5u6.	3198 018 25680
5004	Coil, 820n	2422 535 97314
5201	Coil, 22u.	3198 018 22290
5202	Coil, 6u8.	3198 018 16880
5342	Coil, 22u.	3198 018 22290
S 5445	Transformer, L.O.T., models ending in C101, C121, and C125	2422 531 02327
5451	Coil, 27u.	2422 535 96614
5457	Coil, Linear Correction.	3128 138 53241
5461	Transformer.	3128 138 33811
5480	Coil, 27u.	2422 535 97334
S 5500	Filter, Mains, 5mH, 2A	2422 549 43432
5516	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5518	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5521	Coil, 2u2.	3198 018 12280
5540	Coil, 4u7.	3198 018 14780
S 5545	Transfomer,.	2422 531 02314
5551	Coil, 27u.	2422 535 95366
5552	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5572	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5573	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5576	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5577	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5600	Coil, 8u2.	3198 018 18280
5601	Coil, 8u2.	3198 018 18280
5620	Coil, 6u8.	3198 018 16880
5821	Coil, 100u	3198 018 21010
5822	Coil, 18u.	3198 018 21890
6008	Zener Diode, 33 volt	3198 010 23390
6113	Zener Diode, 6.8 volt.	9340 386 40115
6211	Diode, Signal, 1N4148.	3198 010 10010

S = Safety Part Be sure to use exact replacement part.

PL9127C121 (continued)

6212	Diode, Signal, 1N4148.	3198 010 10010	9105	Jumper Wire/Staple	0322 179 00003
6213	Diode, Signal, 1N4148.	3198 010 10010	9126	Jumper Wire/Staple	0322 179 00003
6331	Diode, Signal, BAV21	3198 010 10070	9132	Jumper Wire/Staple	0322 179 00003
6333	Diode, Signal, BAV21	3198 010 10070	9140	Jumper Wire/Staple	0322 179 00003
6335	Diode, Signal, BAV21	3198 010 10070	9200	Jumper Wire/Staple	0322 179 00003
6401	Diode, Rect, BYD33D	9337 234 00133	9202	Jumper Wire/Staple	0322 179 00003
6402	Zener Diode, 33 volt	3198 010 23390	9203	Jumper Wire/Staple	0322 179 00003
6403	Diode, Rect, BYD33D	9337 234 00133	9204	Jumper Wire/Staple	0322 179 00003
6404	Zener Diode, 75 volt	9331 180 00133	9205	Jumper Wire/Staple	0322 179 00003
6449	Diode, Signal, 1N4148.	3198 010 10010	9206	Jumper Wire/Staple	0322 179 00003
6450	Diode, Signal, 1N4148.	3198 010 10010	9207	Jumper Wire/Staple	0322 179 00003
6460	Diode, Rect, BY228/20	9336 215 80112	9208	Jumper Wire/Staple	0322 179 00003
6463	Diode, Signal, 1N4148.	3198 010 10010	9209	Jumper Wire/Staple	0322 179 00003
6465	Diode, Rect, BYD33J	9337 234 20133	9210	Jumper Wire/Staple	0322 179 00003
6466	Diode, Rect, BYD33J	9337 234 20133	9211	Jumper Wire/Staple	0322 179 00003
6480	Zener Diode, 27 volt	3198 010 22790	9214	Jumper Wire/Staple	0322 179 00003
6481	Diode, Signal, 1N4148.	3198 010 10010	9215	Jumper Wire/Staple	0322 179 00003
6485	Diode, Rect, BYD33J	9337 234 20133	9216	Jumper Wire/Staple	0322 179 00003
6486	Diode, Rect, EGP20DL-5300	9322 100 13682	9217	Jumper Wire/Staple	0322 179 00003
6487	Diode, Rect, BYD33D	9337 234 00133	9218	Jumper Wire/Staple	0322 179 00003
6488	Diode, Rect, BYV27-200.	9322 126 72673	9220	Jumper Wire/Staple	0322 179 00003
6490	Diode, Rect, BYV27-200.	9322 126 72673	9221	Jumper Wire/Staple	0322 179 00003
6505	Diode, Bridge Rect, GBU6JL-7002 . .	9322 138 08667	9222	Jumper Wire/Staple	0322 179 00003
6507	Diode, Rect, BYD33J	9337 234 20133	9225	Jumper Wire/Staple	0322 179 00003
6508	Diode, Rect, BYD33J	9337 234 20133	9226	Jumper Wire/Staple	0322 179 00003
6510	Zener Diode, 20 volt	9331 178 60133	9227	Jumper Wire/Staple	0322 179 00003
6511	Diode, Rect, BYV95C	9335 001 80133	9228	Jumper Wire/Staple	0322 179 00003
6512	Diode, Rect, 1N5062	3198 010 10120	9229	Jumper Wire/Staple	0322 179 00003
6513	Diode, Rect, 1N5062	3198 010 10120	9230	Jumper Wire/Staple	0322 179 00003
6514	Zener Diode, 18 volt	3198 010 21890	9231	Jumper Wire/Staple	0322 179 00003
6540	Diode, Signal, BAV21	3198 010 10070	9232	Jumper Wire/Staple	0322 179 00003
6550	Diode, Rect, BY229X-800	9340 380 30127	9233	Jumper Wire/Staple	0322 179 00003
6560	Diode, Rect, EGP20DL-5300	9322 100 13682	9234	Jumper Wire/Staple	0322 179 00003
6580	Diode, Rect, SB140.	9339 577 60673	9236	Jumper Wire/Staple	0322 179 00003
6584	Diode, Signal, 1N4148.	3198 010 10010	9237	Jumper Wire/Staple	0322 179 00003
6585	Diode, Signal, 1N4148.	3198 010 10010	9238	Jumper Wire/Staple	0322 179 00003
6591	Diode, Signal, BAS16WS	9322 031 99685	9240	Jumper Wire/Staple	0322 179 00003
6601	Zener Diode, 3.9 volt.	3198 010 23980	9241	Jumper Wire/Staple	0322 179 00003
6602	Diode, Signal, 1N4148.	3198 010 10010	9242	Jumper Wire/Staple	0322 179 00003
6603	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610	9243	Jumper Wire/Staple	0322 179 00003
6604	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610	9245	Jumper Wire/Staple	0322 179 00003
6605	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610	9301	Jumper Wire/Staple	0322 179 00003
6606	Zener Diode, 4.7 volt.	3198 010 24780	9401	Jumper Wire/Staple	0322 179 00003
6607	Zener Diode, 6.8 volt.	3198 010 26880	9402	Jumper Wire/Staple	0322 179 00003
6690	LED VS LTL-307P (LITO) B . . .	9322 033 95682	9403	Jumper Wire/Staple	0322 179 00003
6821	Zener Diode, 9.1 volt.	9331 177 80133	9404	Jumper Wire/Staple	0322 179 00003
6822	Diode, Signal, 1N4148.	3198 010 10010	9407	Jumper Wire/Staple	0322 179 00003
6951	Diode, Signal, BAS16WS	9322 031 99685	9408	Jumper Wire/Staple	0322 179 00003
6961	Diode, Signal, BAS16WS	9322 031 99685	9411	Jumper Wire/Staple	0322 179 00003
7250	IC,.	9352 620 26112	9414	Jumper Wire/Staple	0322 179 00003
7251	IC, LM317T	9337 220 80682	9417	Jumper Wire/Staple	0322 179 00003
7254	Transistor, NPN, BC847B.	3198 010 42030	9419	Jumper Wire/Staple	0322 179 00003
7256	Transistor, NPN, BC847B.	3198 010 42030	9420	Jumper Wire/Staple	0322 179 00003
7258	Transistor, NPN, BC847B.	3198 010 42030	9421	Jumper Wire/Staple	0322 179 00003
7263	Transistor, PNP, BC857B.	3198 010 42150	9422	Jumper Wire/Staple	0322 179 00003
7266	Transistor, NPN, BC847B.	3198 010 42030	9424	Jumper Wire/Staple	0322 179 00003
7330	IC, TDA6107Q/N2.	9352 576 50112	9425	Jumper Wire/Staple	0322 179 00003
7401	IC,.	9322 121 47687	9427	Jumper Wire/Staple	0322 179 00003
7460	Transistor, NPN, BU1508DX.	9340 170 50127	9428	Jumper Wire/Staple	0322 179 00003
7461	Transistor, NPN, BF819	9335 354 50127	9460	Jumper Wire/Staple	0322 179 00003
7462	Transistor, NPN, BC547B.	3198 020 40030	9461	Jumper Wire/Staple	0322 179 00003
7463	Transistor, PNP, BC557B.	3198 020 40110	9500	Jumper Wire/Staple	0322 179 00003
7480	IC,.	9322 028 93682	9501	Jumper Wire/Staple	0322 179 00003
7481	Transistor, PNP, BC557B.	3198 020 40110	9502	Jumper Wire/Staple	0322 179 00003
7482	Transistor, PNP, BC857B.	3198 010 42150	9503	Jumper Wire/Staple	0322 179 00003
7518	STH10NC60FI SMPS FET.	9322 155 66687	9505	Jumper Wire/Staple	0322 179 00003
7520	IC,.	9322 108 36682	9509	Jumper Wire/Staple	0322 179 00003
7570	IC,.	9337 711 00676	9510	Jumper Wire/Staple	0322 179 00003
S 7581	Coupler, TCDT1101G	9338 431 30682	9511	Jumper Wire/Staple	0322 179 00003
7590	Transistor, NPN, BC847B.	3198 010 42030	9512	Jumper Wire/Staple	0322 179 00003
7591	Transistor, NPN, BC847B.	3198 010 42030	9513	Jumper Wire/Staple	0322 179 00003
7592	Transistor, NPN, BC847B.	3198 010 42030	9515	Jumper Wire/Staple	0322 179 00003
7600	IC, SAA5543-PS/M4/0167 L9 v3.2 (Comme rcial Models - NON Pro Plus)	9352 670 84112	9516	Jumper Wire/Staple	0322 179 00003
			9517	Jumper Wire/Staple	0322 179 00003
7601	IC, ST24W16B6, commercial models only	9322 095 35682	9518	Jumper Wire/Staple	0322 179 00003
7603	Transistor, NPN, BC337	9331 796 00126	9521	Jumper Wire/Staple	0322 179 00003
7604	Transistor, NPN, BC847B.	3198 010 42030	9526	Jumper Wire/Staple	0322 179 00003
7605	Transistor, NPN, BC847B.	3198 010 42030	9601	Jumper Wire/Staple	0322 179 00003
7608	Transistor, NPN, BC847B.	3198 010 42030	9602	Jumper Wire/Staple	0322 179 00003
7609	Transistor, NPN, BC847B.	3198 010 42030	9603	Jumper Wire/Staple	0322 179 00003
7680	IR Receiver.	9322 127 53667	9604	Jumper Wire/Staple	0322 179 00003
7821	IC,.	9352 374 70112	9605	Jumper Wire/Staple	0322 179 00003
7822	IC, HEF4052BT.	9333 729 50653	9606	Jumper Wire/Staple	0322 179 00003
7823	Transistor, NPN, BC337-25.	3198 020 43530	9608	Jumper Wire/Staple	0322 179 00003
7904	Transistor, NPN, BC847B.	3198 010 42030	9609	Jumper Wire/Staple	0322 179 00003
7908	Transistor, NPN, BC847B.	3198 010 42030	9610	Jumper Wire/Staple	0322 179 00003
7951	IC,.	9351 861 60112	9611	Jumper Wire/Staple	0322 179 00003
9001	Jumper Wire/Staple	0322 179 00003	9612	Jumper Wire/Staple	0322 179 00003
9003	Jumper Wire/Staple	0322 179 00003	9613	Jumper Wire/Staple	0322 179 00003
9005	Jumper Wire/Staple	0322 179 00003	9614	Jumper Wire/Staple	0322 179 00003
9011	Jumper Wire/Staple	0322 179 00003	9615	Jumper Wire/Staple	0322 179 00003
9012	Jumper Wire/Staple	0322 179 00003	9618	Jumper Wire/Staple	0322 179 00003

S = Safety Part Be sure to use exact replacement part.

PL9127C121 (continued)

9621	Jumper Wire/Staple	0322 179 00003
9622	Jumper Wire/Staple	0322 179 00003
9624	Jumper Wire/Staple	0322 179 00003
9625	Jumper Wire/Staple	0322 179 00003
9626	Jumper Wire/Staple	0322 179 00003
9629	Jumper Wire/Staple	0322 179 00003
9631	Jumper Wire/Staple	0322 179 00003
9632	Jumper Wire/Staple	0322 179 00003
9637	Jumper Wire/Staple	0322 179 00003
9640	Jumper Wire/Staple	0322 179 00003
9642	Jumper Wire/Staple	0322 179 00003
9643	Jumper Wire/Staple	0322 179 00003
9644	Jumper Wire/Staple	0322 179 00003
9754	Jumper Wire/Staple	0322 179 00003
9788	Jumper Wire/Staple	0322 179 00003
9793	Jumper Wire/Staple	0322 179 00003
9800	Jumper Wire/Staple	0322 179 00003
9805	Jumper Wire/Staple	0322 179 00003
9806	Jumper Wire/Staple	0322 179 00003
9807	Jumper Wire/Staple	0322 179 00003
9810	Jumper Wire/Staple	0322 179 00003
9901	Jumper Wire/Staple	0322 179 00003
9904	Jumper Wire/Staple	0322 179 00003
9905	Jumper Wire/Staple	0322 179 00003
9906	Jumper Wire/Staple	0322 179 00003
9920	Jumper Wire/Staple	0322 179 00003
9933	Jumper Wire/Staple	0322 179 00003
9936	Jumper Wire/Staple	0322 179 00003
9940	Jumper Wire/Staple	0322 179 00003
9941	Jumper Wire/Staple	0322 179 00003
9942	Jumper Wire/Staple	0322 179 00003
9943	Jumper Wire/Staple	0322 179 00003
9944	Jumper Wire/Staple	0322 179 00003
9945	Jumper Wire/Staple	0322 179 00003
9946	Jumper Wire/Staple	0322 179 00003
9947	Jumper Wire/Staple	0322 179 00003
9948	Jumper Wire/Staple	0322 179 00003
9949	Jumper Wire/Staple	0322 179 00003
9950	Jumper Wire/Staple	0322 179 00003
9951	Jumper Wire/Staple	0322 179 00003
9952	Jumper Wire/Staple	0322 179 00003
9953	Jumper Wire/Staple	0322 179 00003
9955	Jumper Wire/Staple	0322 179 00003
9956	Jumper Wire/Staple	0322 179 00003
9957	Jumper Wire/Staple	0322 179 00003
9958	Jumper Wire/Staple	0322 179 00003
9959	Jumper Wire/Staple	0322 179 00003
9960	Jumper Wire/Staple	0322 179 00003
9962	Jumper Wire/Staple	0322 179 00003
9963	Jumper Wire/Staple	0322 179 00003
9964	Jumper Wire/Staple	0322 179 00003
9965	Jumper Wire/Staple	0322 179 00003
9966	Jumper Wire/Staple	0322 179 00003
9967	Jumper Wire/Staple	0322 179 00003
9968	Jumper Wire/Staple	0322 179 00003
9969	Jumper Wire/Staple	0322 179 00003
9970	Jumper Wire/Staple	0322 179 00003
9971	Jumper Wire/Staple	0322 179 00003
9972	Jumper Wire/Staple	0322 179 00003
9974	Jumper Wire/Staple	0322 179 00003
9975	Jumper Wire/Staple	0322 179 00003
9976	Jumper Wire/Staple	0322 179 00003
9977	Jumper Wire/Staple	0322 179 00003
9981	Jumper Wire/Staple	0322 179 00003
9982	Jumper Wire/Staple	0322 179 00003
9983	Jumper Wire/Staple	0322 179 00003
9984	Jumper Wire/Staple	0322 179 00003
9987	Jumper Wire/Staple	0322 179 00003
9989	Jumper Wire/Staple	0322 179 00003
9990	Jumper Wire/Staple	0322 179 00003
9991	Jumper Wire/Staple	0322 179 00003
9992	Jumper Wire/Staple	0322 179 00003
9993	Jumper Wire/Staple	0322 179 00003
CBA	00EMF892A002 Main Chassis Board Asm.	00EM F89 2A002

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Mains Cord	3135 010 07161
AC02	Clip, Anode Lead	3135 014 04471
AC03	Cabinet Back	3135 014 07911
AC04	Cabinet Front.	3135 017 04121
AC05	Chassis Guide.	3139 124 31381
AC06	Control Buttons.	3139 124 27351
S AC07	Convergence and Purity Assembly. . .	2422 549 43385
S AC08	CRT A68AJB82X.	9301 787 60472
S AC09	Coil, Degaussing	3121 218 62701
AC10	Holder, Degaussing (4 Used).	3135 013 01641
AC11	Light Guide.	3139 124 26461
AC14	Power Button	3139 124 26444
REMOTE	Remote Transmitter	3139 228 80572
AC16	Speaker, 16R, 1W5 (2 Used)	2422 264 00343
S AC18	Yoke	3313 203 01242
AC19	Yoke Wedge (3 used).	3135 013 01961
AC21	Batteries f/Remote Transmitter . . .	9299 000 13827

S = Safety Part Be sure to use exact replacement part.

S = Safety Part Be sure to use exact replacement part.

PL9127C221 - Manual no. 7583

Main Chassis Parts

Main Chassis Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts

S	AC01	Mains Cord	3135 010 07161
	AC02	Clip, Anode Lead	3135 014 04471
	AC03	Cabinet Back	3135 014 07911
	AC04	Cabinet Front.	3135 017 04121
	AC05	Chassis Guide.	3139 124 31381
	AC06	Control Buttons.	3139 124 27351
S	AC07	Convergence and Purity Assembly.	2422 549 43385
S	AC08	CRT A68AHB82X.	9301 759 20405
S	AC09	Coil, Degaussing	3121 218 62701
	AC10	Holder, Degaussing (4 Used).	3135 013 01641
	AC11	Light Guide.	3139 124 26461
	AC12	Nameplate.	3135 015 03571
	AC14	Power Button	3139 124 26444
	AC16	Speaker, 16R, 1W5 (2 Used)	2422 264 00343
S	AC18	Yoke	2422 549 43727
	AC19	Yoke Wedge (3 used).	3135 013 01961
	AC24	Spring	3139 121 26231

PPC927C101 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts	
0113	L9 SOPS HEATSINK	3139 121 62041
0119	DIODE HEATSINK L9.	3139 121 26691
0121	LINE HEATSINK (CINCH).	3139 121 61942
S 0127	Holder, Fuse, 2 Pin.	3122 358 71251
0211	Connector, 2 Pin	2422 025 11196
0212	Connector, 2 Pin	2422 025 15396
0213	Connector, 2 Pin	2422 025 15395
0214	Connector, 3 Pin	2422 025 16382
0215	Connector, 2 Pin,.	2422 025 16343
0216	Connector, 4 Pin	2422 025 15847
0219	Connector, 5 Pin	2422 025 15848
0220	4 Pin Board Connector.	2422 025 04852
0221	Connector, 4 Pin	2422 025 15503
0222	Connector, 2 Pin	2422 025 10646
0224	1 Pin Board Connector.	2422 034 20021
0227	Connector, 4 Pin	2422 025 16385
0228	1 Pin Board Connector.	2422 034 20021
0229	Connector, 3 Pin	2412 020 00725
0229	Cable Header, 3P/280/3P, HR WH UL. .	3104 311 01641
0234	Connector, 4 Pin	2422 025 12479
0236	4 Pin Board Connector.	2422 025 16384
0237	Connector, 4 Pin	2422 025 12479
0238	5 Pin Board Connector.	2422 025 16387
S 0243	Connector, 6 Pin	2422 025 04854
0244	4 Pin Board Connector.	2422 025 04852
S 0245	Connector, 6 Pin	2422 025 04854
S 0254	CRT Socket (9 Pin)	2422 500 80022
0259	Connector, 3 Pin	2422 025 16383
0262	Connector, 6 Pin	2422 025 12482
1000	Tuner, V+U PLL PH MN B.	2422 542 90069
1003	45 MHz SAW, Filter,.	2422 549 42433
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807
1208	Crystal Resonator, 3.58MHz	2422 543 00832
S 1500	Fue, 4 A, 250V	2422 086 10905
S 1572	FUSE 1A 250V	2422 086 10779
S 1573	2.5 Amp Fuse, Radial,.	2422 086 10422
S 1580	Relay, 12V, 5A G5PA-1.	2422 132 07444
1600	Switch, Tactile.	2422 128 02742
1601	Switch, Tactile.	2422 128 02742
1602	Switch, Tactile.	2422 128 02742
1603	Switch, Tactile.	2422 128 02742
1606	Switch, Tactile.	2422 128 02742
1660	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488
1822	Crystal Resonator, 18MHz432, 12 Pin, HC49/U A	2422 543 00842
2001	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2002	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2003	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2004	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2011	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2101	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2102	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2103	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2104	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2111	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2112	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2115	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2201	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2205	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2208	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2209	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2211	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2212	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2213	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2214	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2215	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 16654
2220	Cap, 18p, 5%, 50V, Ceramic	3198 016 01890
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2222	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2226	Cap, 33u, 20%, 25V, Electrolytic . .	2020 021 90124
2227	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2247	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2248	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2249	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2330	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2340	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320
S 2343	Cap, 3n3, 10%, 2KV, Ceramic.	2020 558 90529
2345	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2401	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2402	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2404	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2405	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2407	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2409	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2420	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2426	Cap, 100n, 10%, 63V, Metalized Polyester.	2222 370 75104
2428	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2429	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2430	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2431	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2437	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2438	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2448	Cap, 33p, 5%, 500V, Ceramic.	2020 557 90192
2450	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91139
2451	Cap, 15n, 10%, 50V, Polyester. . . .	2020 300 90575
2456	Cap, 47n, 10%, 250V, Metalized Polyester.	2222 368 90176
2457	Cap, 390n, 5%, 250V, Metalized Polypropylene.	2222 479 90021
2458	Cap, 10u, 20%, 100V, Electrolytic. .	2020 021 90813
2459	Cap, 680p, 10%, 500V, Ceramic. . . .	3198 019 46810
2461	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2462	Cap, 47n, 10%, 250V, Metalized Polyester.	2222 368 90176
S 2463	Cap, 680p, 10%, 2KV, Ceramic	2020 558 90485
S 2465	Cap, 10n, 5%, 1600V, Polypropylene .	2222 375 90154
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050
2473	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2481	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2482	Cap, 68n, 10%, 250V, Polyester . . .	2222 347 90234
2484	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2485	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93282
2486	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2487	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2488	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2489	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2490	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2491	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810
2499	Cap, 220n, 10%, 100V, Metalized Polyester	2222 365 25224
2500	Cap, 470n, 20%, 275V, Polypropylene.	2222 336 29148
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2507	Cap, 1n5, 10%, 1KV, Ceramic.	3198 019 61520
2508	Cap, 470u, 20%, 200V, Electrolytic .	2020 024 90626
2511	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
2518	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2530	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 021 91147
2531	Cap, 1n, 2%, 50V, Polypropylene. . .	2020 310 90049
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2540	Cap, 100u, 20%, 25V, Electrolytic. .	2020 021 90547
S 2545	Cap, 1n5, 20%, v, Ceramic.	2020 554 90157
2550	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2551	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91358
2561	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2562	Cap, 220p, 10%, 1KV, Ceramic	3198 019 62210
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2571	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91353
2572	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2575	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2586	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2604	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2613	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2615	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2619	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2622	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2629	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050

S = Safety Part Be sure to use exact replacement part.

PPC927C101 (continued)

2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
2679	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
2681	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210		3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3250	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3251	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
2850	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810		3252	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
2851	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3253	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
2852	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3257	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
2853	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3258	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
2854	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3259	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
2855	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380		3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
2856	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380		3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	3198 013 01020
2858	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790		3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
2859	Cap, 15p, 5%, 50V, Ceramic	3198 016 01590		3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	3198 013 01020
2860	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090		3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
2861	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	3198 013 01020
2862	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	S	3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
2863	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	S	3341	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
2864	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	S	3342	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
2865	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3343	Res, 1K5, 20%, 1/2W, Carbon Film . .	3198 013 01520
2866	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
2867	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3345	VDR DC 1MA/50V S MAX 110V A . . .	2122 550 00152
2868	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780		3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
2869	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3401	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2870	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3402	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2871	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090		3403	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2874	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790		3405	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002
2875	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790		3406	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2877	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3407	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002
2882	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2883	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090		3409	Res, 1R5, 5%, 1/3W, Metal Film . . .	2306 204 03158
2884	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2887	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810		3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2888	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3420	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
2889	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2891	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390		3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840
2952	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606
2954	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3425	Res, 120K, 5%, 1/10W, Metalized Glass	2120 108 91716
2955	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3426	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3428	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3429	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3431	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
2960	Cap, 2u2, 20%, 25V, Electrolytic . .	3198 026 32220		3432	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090		3433	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090		3436	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090		3437	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3438	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
3013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020		3447	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720		3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3015	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230		3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810	S	3452	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	3198 012 32290
3100	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510	S	3453	Res, 4R7, 5%, 5W, Wire Wound	2322 251 41478
3101	Res, 220K, 5%, 1/10W, Metalized Glass	3198 021 52240	S	3454	Res, 33K, 5%, 1 1/3W, Metal Film . .	2322 194 63333
3103	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3104	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030		3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510	S	3462	Res, 6K8, 5%, 5W, Metal Film	2322 257 41682
3108	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3109	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030		3464	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3122	Res, 220K, 5%, 1/10W, Metalized Glass	3198 021 52240	S	3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
3125	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890		3466	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903
3134	Jumper Wire/Staple	0322 179 00003		3467	Res, 15K, 1%, 3/5W, Metal Film . . .	2322 156 21503
3155	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710		3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
				3469	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3201	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910		3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
				3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703
3203	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310		3481	Res, 35K7, 1%, 3/5W, Metal Film. . .	2322 156 23573
				3482	Res, 56K, 1%, 3/5W, Metal Film . . .	2322 156 25603
3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820		3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3205	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020		3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3206	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610	S	3486	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
			S	3487	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3488	Res, 4R7, 5%, 1/2W, Metal Film . . .	2306 207 03478
3209	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	S	3490	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
3212	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910	S	3491	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
			S	3492	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
3213	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610		3495	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
				3496	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3215	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230		3497	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3216	Res, Zero ohm, 'Chip' Jumper	3198 021 90020		3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	3198 013 04710
3218	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	S	3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225
3219	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610	S	3503	PTC, DC, 120V,P3020 B.	2120 661 00025
			S	3505	Surge Protector.	2422 549 43073
3220	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	S	3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3225	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040	S	3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	S	3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102
3231	Res, Zero ohm, 'Chip' Jumper	3198 021 90020		3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3232	Res, Zero ohm, 'Chip' Jumper	3198 021 90020		3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184
3233	Res, Zero ohm, 'Chip' Jumper	3198 021 90020		3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204
3243	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220	S	3515	2.5 ohm, 20%, 3.6W, Negative Temperat ure Coefficient.	2122 612 00023
3246	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230				

S = Safety Part Be sure to use exact replacement part.

PPC927C101 (continued)

	3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
	3517	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
S	3518	Res, 0R22, 5%, 2 1/2W, Metal Film. .	3198 012 32270
	3520	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
	3521	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
S	3525	Res, 47 ohm, 5%, 1/3W, Metal Film. .	2306 204 03479
	3528	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3529	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
	3530	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
	3532	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
	3534	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
	3536	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
	3537	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
S	3542	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3570	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
	3571	Res, 150K, 1%, 3/5W, Metal Film. . .	2322 156 21504
	3573	Res, 2K, 1%, 1/8W, Metalized Glass .	2322 734 62002
	3574	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
	3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3577	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3578	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
	3579	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
	3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3592	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	3594	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
	3595	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
	3596	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3597	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
	3598	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	3599	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
	3607	RST NETW RGLE 10X 8K2 PM5 B . . .	2120 108 93916
	3608	RST NETW RGLE 6X 2K2 PM5 B . . .	2120 108 93913
	3609	2.2k, 5%, Resistor Network	2120 108 93868
	3611	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
	3612	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	3613	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	3615	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	3616	Jumper Wire/Staple	0322 179 00003
	3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3619	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
	3629	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
	3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
	3631	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
S	3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
	3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210
	3634	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
	3635	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
	3636	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
	3637	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
	3649	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
	3650	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
	3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3654	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
	3655	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
	3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710
	3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3662	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
	3663	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220
	3664	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220
	3665	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
	3666	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
	3667	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
	3672	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
	3673	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	3674	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
	3675	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
	3676	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
	3677	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
	3680	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
	3681	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
	3682	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220
	3683	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
	3684	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
	3687	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
	3841	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3842	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3843	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
	3844	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
	3845	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
	3850	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
	3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810
	3951	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
	3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3953	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
	3954	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
	3955	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
	3956	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
	3957	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
	4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4004	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4011	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4012	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4020	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4051	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4100	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4102	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4104	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4144	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4203	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4207	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4212	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4214	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4465	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4501	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4650	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4651	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4654	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4655	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4831	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4833	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4911	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4914	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4957	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4999	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	5000	Coil, 5u6.	3198 018 25680
	5004	Coil, 820n	2422 535 97314
	5101	Coil, 5u6.	3198 018 15680
	5201	Coil, 22u.	3198 018 22290
	5202	Coil, 6u8.	3198 018 16880
	5342	Coil, 22u.	3198 018 22290
S	5445	Transformer, L.O.T., models ending in C101, C121, and C125	2422 531 02327
	5451	Coil, 27u.	2422 535 96614
	5457	Coil, Linear Correction.	3128 138 53241
	5461	Transformer.	3128 138 33811
	5470	CBLE HR BK 9P/270/9X F.HOOK UL . . .	3104 311 02361
	5480	Coil, 27u.	2422 535 97334
S	5500	Filter, Mains, 5mH, 2A	2422 549 43432
	5516	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
	5518	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
	5521	Coil, 2u2.	3198 018 12280
	5540	Coil, 4u7.	3198 018 14780
S	5545	Transfomer,.	2422 531 02314
	5551	Coil, 27u.	2422 535 95366
	5552	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
	5572	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
	5573	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
	5575	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
	5576	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
	5577	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
	5600	Coil, 8u2.	3198 018 18280
	5601	Coil, 8u2.	3198 018 18280
	5620	Coil, 6u8.	3198 018 16880
	5821	Coil, 100u	3198 018 21010
	5831	Coil, 12u.	3198 018 21290
	5832	Coil, 12u.	3198 018 21290
	5833	Coil, 12u.	3198 018 11290
	6008	Zener Diode, 33 volt	3198 010 23390
	6113	Zener Diode, 6.8 volt.	9340 386 40115
	6125	Zener Diode, 6.8 volt.	9340 386 40115
	6211	Diode, Signal, 1N4148.	3198 010 10010
	6212	Diode, Signal, 1N4148.	3198 010 10010
	6213	Diode, Signal, 1N4148.	3198 010 10010
	6331	Diode, Signal, BAV21	3198 010 10070
	6333	Diode, Signal, BAV21	3198 010 10070
	6335	Diode, Signal, BAV21	3198 010 10070
	6401	Diode, Rect, BYD33D	9337 234 00133
	6402	Zener Diode, 33 volt	3198 010 23390
	6403	Diode, Rect, BYD33D	9337 234 00133
	6404	Zener Diode, 75 volt	9331 180 00133
	6449	Diode, Signal, 1N4148.	3198 010 10010

S = Safety Part Be sure to use exact replacement part.

PPC927C101 (continued)

6450	Diode, Signal, 1N4148.	3198 010 10010	9207	Jumper Wire/Staple	0322 179 00003
6460	Diode, Rect, BY228/20	9336 215 80112	9208	Jumper Wire/Staple	0322 179 00003
6463	Diode, Signal, 1N4148.	3198 010 10010	9209	Jumper Wire/Staple	0322 179 00003
6464	Zener Diode, 6.2 volt.	9331 668 30133	9210	Jumper Wire/Staple	0322 179 00003
6465	Diode, Rect, BYD33J	9337 234 20133	9211	Jumper Wire/Staple	0322 179 00003
6466	Diode, Rect, BYD33J	9337 234 20133	9214	Jumper Wire/Staple	0322 179 00003
6480	Zener Diode, 27 volt	3198 010 22790	9215	Jumper Wire/Staple	0322 179 00003
6481	Diode, Signal, 1N4148.	3198 010 10010	9216	Jumper Wire/Staple	0322 179 00003
6485	Diode, Rect, BYD33J	9337 234 20133	9217	Jumper Wire/Staple	0322 179 00003
6486	Diode, Rect, EGP20DL-5300	9322 100 13682	9218	Jumper Wire/Staple	0322 179 00003
6487	Diode, Rect, BYD33D	9337 234 00133	9220	Jumper Wire/Staple	0322 179 00003
6488	Diode, Rect, BYV27-200.	9322 126 72673	9221	Jumper Wire/Staple	0322 179 00003
6490	Diode, Rect, BYV27-200.	9322 126 72673	9222	Jumper Wire/Staple	0322 179 00003
6505	Diode, Bridge Rect, GBU6JL-7002	9322 138 08667	9225	Jumper Wire/Staple	0322 179 00003
6507	Diode, Rect, BYD33J	9337 234 20133	9226	Jumper Wire/Staple	0322 179 00003
6508	Diode, Rect, BYD33J	9337 234 20133	9227	Jumper Wire/Staple	0322 179 00003
6510	Zener Diode, 20 volt	9331 178 60133	9228	Jumper Wire/Staple	0322 179 00003
6511	Diode, Rect, BYV95C	9335 001 80133	9229	Jumper Wire/Staple	0322 179 00003
6512	Diode, Rect, 1N5062	3198 010 10120	9230	Jumper Wire/Staple	0322 179 00003
6513	Diode, Rect, 1N5062	3198 010 10120	9231	Jumper Wire/Staple	0322 179 00003
6514	Zener Diode, 18 volt	3198 010 21890	9232	Jumper Wire/Staple	0322 179 00003
6540	Diode, Signal, BAV21	3198 010 10070	9233	Jumper Wire/Staple	0322 179 00003
6550	Diode, Rect, BY229X-800	9340 380 30127	9234	Jumper Wire/Staple	0322 179 00003
6560	Diode, Rect, EGP20DL-5300	9322 100 13682	9236	Jumper Wire/Staple	0322 179 00003
6570	Diode, Rect, EGP20DL-5300	9322 100 13682	9237	Jumper Wire/Staple	0322 179 00003
6582	Diode, Rect, EGP20DL-5300	9322 100 13682	9238	Jumper Wire/Staple	0322 179 00003
6584	Diode, Signal, 1N4148.	3198 010 10010	9240	Jumper Wire/Staple	0322 179 00003
6585	Diode, Signal, 1N4148.	3198 010 10010	9241	Jumper Wire/Staple	0322 179 00003
6590	Diode, Rect, EGP20DL-5300	9322 100 13682	9242	Jumper Wire/Staple	0322 179 00003
6591	Diode, Signal, BAS16WS	9322 031 99685	9245	Jumper Wire/Staple	0322 179 00003
6601	Zener Diode, 3.9 volt.	3198 010 23980	9301	Jumper Wire/Staple	0322 179 00003
6602	Diode, Signal, 1N4148.	3198 010 10010	9401	Jumper Wire/Staple	0322 179 00003
6603	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610	9402	Jumper Wire/Staple	0322 179 00003
6604	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610	9403	Jumper Wire/Staple	0322 179 00003
6605	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610	9404	Jumper Wire/Staple	0322 179 00003
6606	Zener Diode, 4.7 volt.	3198 010 24780	9407	Jumper Wire/Staple	0322 179 00003
6607	Zener Diode, 6.8 volt.	3198 010 26880	9408	Jumper Wire/Staple	0322 179 00003
6690	LED VS LTL-307P (LITO) B	9322 033 95682	9411	Jumper Wire/Staple	0322 179 00003
6831	Diode, Signal, BAS16WS	9322 031 99685	9414	Jumper Wire/Staple	0322 179 00003
6951	Diode, Signal, BAS16WS	9322 031 99685	9417	Jumper Wire/Staple	0322 179 00003
6961	Diode, Signal, BAS16WS	9322 031 99685	9419	Jumper Wire/Staple	0322 179 00003
7134	Transistor, NPN, BC547B.	3198 020 40030	9420	Jumper Wire/Staple	0322 179 00003
7250	IC,	9352 620 26112	9421	Jumper Wire/Staple	0322 179 00003
7251	IC, LM317T	9337 220 80682	9422	Jumper Wire/Staple	0322 179 00003
7254	Transistor, NPN, BC847B.	3198 010 42030	9424	Jumper Wire/Staple	0322 179 00003
7256	Transistor, NPN, BC847B.	3198 010 42030	9425	Jumper Wire/Staple	0322 179 00003
7258	Transistor, NPN, BC847B.	3198 010 42030	9427	Jumper Wire/Staple	0322 179 00003
7263	Transistor, PNP, BC857B.	3198 010 42150	9428	Jumper Wire/Staple	0322 179 00003
7266	Transistor, NPN, BC847B.	3198 010 42030	9460	Jumper Wire/Staple	0322 179 00003
7330	IC,	9352 184 10112	9461	Jumper Wire/Staple	0322 179 00003
7401	IC,	9322 121 47687	9500	Jumper Wire/Staple	0322 179 00003
7460	Transistor, NPN, BU1508DX.	9340 170 50127	9501	Jumper Wire/Staple	0322 179 00003
7461	Transistor, NPN, BF819	9335 354 50127	9502	Jumper Wire/Staple	0322 179 00003
7462	Transistor, NPN, BC547B.	3198 020 40030	9503	Jumper Wire/Staple	0322 179 00003
7463	Transistor, PNP, BC557B.	3198 020 40110	9505	Jumper Wire/Staple	0322 179 00003
7480	IC,	9322 028 93682	9510	Jumper Wire/Staple	0322 179 00003
7481	Transistor, PNP, BC557B.	3198 020 40110	9511	Jumper Wire/Staple	0322 179 00003
7482	Transistor, PNP, BC857B.	3198 010 42150	9512	Jumper Wire/Staple	0322 179 00003
7518	STH10NC60FI SMPS FET.	9322 155 66687	9513	Jumper Wire/Staple	0322 179 00003
7520	IC,	9322 108 36682	9515	Jumper Wire/Staple	0322 179 00003
7570	IC,	9337 711 00676	9516	Jumper Wire/Staple	0322 179 00003
S 7581	Coupler, TCDT1101G	9338 431 30682	9517	Jumper Wire/Staple	0322 179 00003
7590	Transistor, NPN, BC847B.	3198 010 42030	9518	Jumper Wire/Staple	0322 179 00003
7591	Transistor, NPN, BC847B.	3198 010 42030	9521	Jumper Wire/Staple	0322 179 00003
7592	Transistor, NPN, BC847B.	3198 010 42030	9526	Jumper Wire/Staple	0322 179 00003
7600	IC, SAA5565-PS/M3/0195 L9 v3.2 (Commercial Models - Pro Plus Models).	9352 673 97112	9601	Jumper Wire/Staple	0322 179 00003
			9602	Jumper Wire/Staple	0322 179 00003
7601	IC, ST24W16B6, commercial models only	9322 095 35682	9603	Jumper Wire/Staple	0322 179 00003
7603	Transistor, NPN, BC337	9331 796 00126	9604	Jumper Wire/Staple	0322 179 00003
7604	Transistor, NPN, BC847B.	3198 010 42030	9605	Jumper Wire/Staple	0322 179 00003
7605	Transistor, NPN, BC847B.	3198 010 42030	9606	Jumper Wire/Staple	0322 179 00003
7608	Transistor, NPN, BC847B.	3198 010 42030	9608	Jumper Wire/Staple	0322 179 00003
7609	Transistor, NPN, BC847B.	3198 010 42030	9609	Jumper Wire/Staple	0322 179 00003
7680	IR Receiver.	9322 127 53667	9610	Jumper Wire/Staple	0322 179 00003
7833	IC,	9322 136 54682	9611	Jumper Wire/Staple	0322 179 00003
7950	IC,	9351 861 80112	9612	Jumper Wire/Staple	0322 179 00003
7980	ISOPROPYL ALCOHOL.	1306 500 43201	9613	Jumper Wire/Staple	0322 179 00003
7990	Connector, 3 Pin	2412 020 00725	9614	Jumper Wire/Staple	0322 179 00003
9001	Jumper Wire/Staple	0322 179 00003	9615	Jumper Wire/Staple	0322 179 00003
9003	Jumper Wire/Staple	0322 179 00003	9618	Jumper Wire/Staple	0322 179 00003
9005	Jumper Wire/Staple	0322 179 00003	9621	Jumper Wire/Staple	0322 179 00003
9011	Jumper Wire/Staple	0322 179 00003	9622	Jumper Wire/Staple	0322 179 00003
9012	Jumper Wire/Staple	0322 179 00003	9624	Jumper Wire/Staple	0322 179 00003
9105	Jumper Wire/Staple	0322 179 00003	9625	Jumper Wire/Staple	0322 179 00003
9126	Jumper Wire/Staple	0322 179 00003	9626	Jumper Wire/Staple	0322 179 00003
9132	Jumper Wire/Staple	0322 179 00003	9629	Jumper Wire/Staple	0322 179 00003
9140	Jumper Wire/Staple	0322 179 00003	9631	Jumper Wire/Staple	0322 179 00003
9141	Jumper Wire/Staple	0322 179 00003	9632	Jumper Wire/Staple	0322 179 00003
9200	Jumper Wire/Staple	0322 179 00003	9637	Jumper Wire/Staple	0322 179 00003
9202	Jumper Wire/Staple	0322 179 00003	9640	Jumper Wire/Staple	0322 179 00003
9205	Jumper Wire/Staple	0322 179 00003	9642	Jumper Wire/Staple	0322 179 00003
9206	Jumper Wire/Staple	0322 179 00003	9643	Jumper Wire/Staple	0322 179 00003

S = Safety Part Be sure to use exact replacement part.

9644	Jumper Wire/Staple	0322 179 00003
9754	Jumper Wire/Staple	0322 179 00003
9788	Jumper Wire/Staple	0322 179 00003
9793	Jumper Wire/Staple	0322 179 00003
9800	Jumper Wire/Staple	0322 179 00003
9805	Jumper Wire/Staple	0322 179 00003
9806	Jumper Wire/Staple	0322 179 00003
9807	Jumper Wire/Staple	0322 179 00003
9810	Jumper Wire/Staple	0322 179 00003
9901	Jumper Wire/Staple	0322 179 00003
9903	Jumper Wire/Staple	0322 179 00003
9904	Jumper Wire/Staple	0322 179 00003
9905	Jumper Wire/Staple	0322 179 00003
9906	Jumper Wire/Staple	0322 179 00003
9920	Jumper Wire/Staple	0322 179 00003
9933	Jumper Wire/Staple	0322 179 00003
9936	Jumper Wire/Staple	0322 179 00003
9939	Jumper Wire/Staple	0322 179 00003
9940	Jumper Wire/Staple	0322 179 00003
9941	Jumper Wire/Staple	0322 179 00003
9942	Jumper Wire/Staple	0322 179 00003
9943	Jumper Wire/Staple	0322 179 00003
9944	Jumper Wire/Staple	0322 179 00003
9945	Jumper Wire/Staple	0322 179 00003
9946	Jumper Wire/Staple	0322 179 00003
9947	Jumper Wire/Staple	0322 179 00003
9948	Jumper Wire/Staple	0322 179 00003
9949	Jumper Wire/Staple	0322 179 00003
9950	Jumper Wire/Staple	0322 179 00003
9951	Jumper Wire/Staple	0322 179 00003
9952	Jumper Wire/Staple	0322 179 00003
9953	Jumper Wire/Staple	0322 179 00003
9955	Jumper Wire/Staple	0322 179 00003
9956	Jumper Wire/Staple	0322 179 00003
9957	Jumper Wire/Staple	0322 179 00003
9958	Jumper Wire/Staple	0322 179 00003
9959	Jumper Wire/Staple	0322 179 00003
9960	Jumper Wire/Staple	0322 179 00003
9962	Jumper Wire/Staple	0322 179 00003
9963	Jumper Wire/Staple	0322 179 00003
9964	Jumper Wire/Staple	0322 179 00003
9965	Jumper Wire/Staple	0322 179 00003
9966	Jumper Wire/Staple	0322 179 00003
9967	Jumper Wire/Staple	0322 179 00003
9968	Jumper Wire/Staple	0322 179 00003
9969	Jumper Wire/Staple	0322 179 00003
9970	Jumper Wire/Staple	0322 179 00003
9971	Jumper Wire/Staple	0322 179 00003
9972	Jumper Wire/Staple	0322 179 00003
9974	Jumper Wire/Staple	0322 179 00003
9975	Jumper Wire/Staple	0322 179 00003
9976	Jumper Wire/Staple	0322 179 00003
9977	Jumper Wire/Staple	0322 179 00003
9981	Jumper Wire/Staple	0322 179 00003
9982	Jumper Wire/Staple	0322 179 00003
9983	Jumper Wire/Staple	0322 179 00003
9984	Jumper Wire/Staple	0322 179 00003
9987	Jumper Wire/Staple	0322 179 00003
9989	Jumper Wire/Staple	0322 179 00003
9990	Jumper Wire/Staple	0322 179 00003
9991	Jumper Wire/Staple	0322 179 00003
9992	Jumper Wire/Staple	0322 179 00003
9993	Jumper Wire/Staple	0322 179 00003
CBA	00EMF894A102 Main Chassis Board Asm.	00EM F89 4A102

A10757 L9 Audio Jack Panel Parts

	A10757 L9 Audio Jack Panel Parts	
CBA	00A10757A001 L9 Audio Jack Panel Asm.	00A1 075 7A001
C1	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280
C2	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280
J0214	Connector, 3 Pin	2422 025 16601
J0234	4 Pin Board Connector.	2422 025 15851
J100	Socket, Click, 4 Pin	2422 015 18711
J1214	Connector, 3 Pin	2422 025 16601
J1234	4 Pin Board Connector.	2422 025 12489
JP11	Socket, Cinch, 1 Pin	2422 026 04912
JP12	Socket, Cinch, 1 Pin	2422 026 04374
SW1	Switch	4835 277 27061

A10778 L9 ITV Front A/V Panel

	A10778 L9 ITV Front A/V Panel	
CBA	00A10778A001 L9 ITV Front A/V Panel.	00A1 077 8A001
C1	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
C2	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
D1	Zener, 6.8 Volt, BZX79-C6V8.	4835 130 37945
D2	Zener, 6.8 Volt, BZX79-C6V8.	4835 130 37945
D3	Zener, 6.8 Volt, BZX79-C6V8.	4835 130 37945
D4	Zener, 6.8 Volt, BZX79-C6V8.	4835 130 37945
D5	Zener, 6.8 Volt, BZX79-C6V8.	4835 130 37945
J100	Connector.	2422 026 04731
J22	Connector, 3 Pin	2422 025 09191
J23	Connector, 6 Pin	2422 025 10738
R1	Res, 75 ohm, 5%, 1/6W, Carbon Film .	3198 011 07590
R2	Zero ohm,.	4835 111 27056
R3	47k, 5%, 1/10W, Metal Film	4835 111 37445
R4	Res, 1K, 2%, 0,25W	4822 051 10102
R5	Res, 1K, 2%, 0,25W	4822 051 10102
R6	47k, 5%, 1/10W, Metal Film	4835 111 37445

Cabinet & Accessory Parts

		Cabinet & Accessory Parts	
S	AC01	AC Power Cord.	3135 010 04321
	AC02	Clip, Anode Lead	3135 014 04471
	AC03	Cabinet Back	3135 014 06521
	AC04	Cabinet Front.	3135 017 03891
	AC05	Chassis Guide.	3139 124 31322
	AC06	Control Buttons.	3139 124 26741
S	AC07	Convergence and Purity Assembly. . .	2422 549 43385
S	AC08	CRT A68AHB82X.	9301 759 20405
S	AC09	Coil, Degaussing	3121 218 62701
	AC10	Holder, Degaussing (4 Used).	3135 013 01641
	AC11	Light Guide.	3139 124 26461
	AC12	Nameplate.	3135 015 03571
	AC13	Owner's Manual	3135 015 20911
	AC14	Power Button	3139 124 26754
	REMOTE	Transmitter, Remote, RC2524 /01. . .	3139 228 84651
	AC16	Speaker, 8W, 8 ohm (2 Used).	2422 264 00322
S	AC18	Yoke	2422 549 43727
	AC19	Yoke Wedge (3 used).	3135 013 01961
	AC21	Battery, 1.5V AA, 2-Pack, (Not Shown	9299 000 10137
	AC24	Spring	3139 121 26231

S = Safety Part Be sure to use exact replacement part.

PPC927C121 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts	
0113	L9 SOPS HEATSINK	3139 121 62041
0119	DIODE HEATSINK L9.	3139 121 26691
0121	LINE HEATSINK (CINCH).	3139 121 61942
S 0127	Holder, Fuse, 2 Pin.	3122 358 71251
0211	Connector, 2 Pin	2422 025 11196
0212	Connector, 2 Pin	2422 025 15396
0213	Connector, 2 Pin	2422 025 15395
0214	Connector, 3 Pin	2422 025 16382
0215	Connector, 2 Pin,.	2422 025 16343
0216	Connector, 4 Pin	2422 025 15847
0219	Connector, 5 Pin	2422 025 15848
0220	4 Pin Board Connector.	2422 025 04852
0221	Connector, 4 Pin	2422 025 15503
0222	Connector, 2 Pin	2422 025 10646
0224	1 Pin Board Connector.	2422 034 20021
0227	Connector, 4 Pin	2422 025 16385
0228	1 Pin Board Connector.	2422 034 20021
0229	Connector, 3 Pin	2412 020 00725
0229	Cable Header, 3P/280/3P, HR WH UL. .	3104 311 01641
0234	Connector, 4 Pin	2422 025 12479
0236	4 Pin Board Connector.	2422 025 16384
0237	Connector, 4 Pin	2422 025 12479
0238	5 Pin Board Connector.	2422 025 16387
S 0243	Connector, 6 Pin	2422 025 04854
0244	4 Pin Board Connector.	2422 025 04852
S 0245	Connector, 6 Pin	2422 025 04854
S 0254	CRT Socket (9 Pin)	2422 500 80022
0259	Connector, 3 Pin	2422 025 16383
0262	Connector, 6 Pin	2422 025 12482
1000	Tuner, V+U PLL PH MN B.	2422 542 90069
1003	45 MHz SAW, Filter,.	2422 549 42433
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807
1208	Crystal Resonator, 3.58MHz	2422 543 00832
S 1500	Fue, 4 A, 250V	2422 086 10905
S 1572	FUSE 1A 250V	2422 086 10779
S 1573	2.5 Amp Fuse, Radial,.	2422 086 10422
S 1580	Relay, 12V, 5A G5PA-1.	2422 132 07444
1600	Switch, Tactile.	2422 128 02742
1601	Switch, Tactile.	2422 128 02742
1602	Switch, Tactile.	2422 128 02742
1603	Switch, Tactile.	2422 128 02742
1606	Switch, Tactile.	2422 128 02742
1660	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488
1822	Crystal Resonator, 18MHz432, 12 Pin, HC49/U A	2422 543 00842
2001	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2002	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2003	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2004	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2011	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2101	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2102	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2103	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2104	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2111	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2112	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2115	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2201	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2205	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2208	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2209	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2211	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2212	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2213	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2214	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2215	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 16654
2220	Cap, 18p, 5%, 50V, Ceramic	3198 016 01890
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2222	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2226	Cap, 33u, 20%, 25V, Electrolytic . .	2020 021 90124
2227	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2247	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2248	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2249	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2330	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2340	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320
S 2343	Cap, 3n3, 10%, 2KV, Ceramic.	2020 558 90529
2345	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2401	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2402	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2404	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2405	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2407	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2409	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2420	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2426	Cap, 100n, 10%, 63V, Metalized Polyester.	2222 370 75104
2428	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2429	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2430	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2431	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2437	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2438	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2448	Cap, 33p, 5%, 500V, Ceramic.	2020 557 90192
2450	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91139
2451	Cap, 15n, 10%, 50V, Polyester. . . .	2020 300 90575
2456	Cap, 47n, 10%, 250V, Metalized Polyester.	2222 368 90176
2457	Cap, 390n, 5%, 250V, Metalized Polypropylene.	2222 479 90021
2458	Cap, 10u, 20%, 100V, Electrolytic. .	2020 021 90813
2459	Cap, 680p, 10%, 500V, Ceramic. . . .	3198 019 46810
2461	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2462	Cap, 47n, 10%, 250V, Metalized Polyester.	2222 368 90176
S 2463	Cap, 680p, 10%, 2KV, Ceramic	2020 558 90485
S 2465	Cap, 10n, 5%, 1600V, Polypropylene .	2222 375 90154
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050
2473	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2481	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2482	Cap, 68n, 10%, 250V, Polyester . . .	2222 347 90234
2484	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2485	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93282
2486	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2487	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2488	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2489	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2490	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2491	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810
2499	Cap, 220n, 10%, 100V, Metalized Polyester	2222 365 25224
2500	Cap, 470n, 20%, 275V, Polypropylene.	2222 336 29148
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2507	Cap, 1n5, 10%, 1KV, Ceramic.	3198 019 61520
2508	Cap, 470u, 20%, 200V, Electrolytic .	2020 024 90626
2511	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
2518	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2530	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 021 91147
2531	Cap, 1n, 2%, 50V, Polypropylene. . .	2020 310 90049
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2540	Cap, 100u, 20%, 25V, Electrolytic. .	2020 021 90547
S 2545	Cap, 1n5, 20%, v, Ceramic.	2020 554 90157
2550	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2551	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91358
2561	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2562	Cap, 220p, 10%, 1KV, Ceramic	3198 019 62210
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2571	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91353
2572	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2575	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2586	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2604	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2613	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2615	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2619	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2622	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2629	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050

S = Safety Part Be sure to use exact replacement part.

PPC927C121 (continued)

2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2679	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2681	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2850	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810
2851	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2852	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2853	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2854	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2855	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2856	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2858	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2859	Cap, 15p, 5%, 50V, Ceramic	3198 016 01590
2860	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2861	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2862	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2863	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2864	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2865	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2866	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2867	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2868	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780
2869	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2870	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2871	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2874	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2875	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2877	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2882	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2883	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2884	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2887	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810
2888	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2889	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2891	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2952	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2954	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2955	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2960	Cap, 2u2, 20%, 25V, Electrolytic . .	3198 026 32220
2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090
2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3015	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810
3100	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3101	Res, 220K, 5%, 1/10W, Metalized Glass	3198 021 52240
3103	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3104	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3108	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3109	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3122	Res, 220K, 5%, 1/10W, Metalized Glass	3198 021 52240
3125	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3134	Jumper Wire/Staple	0322 179 00003
3155	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3201	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3203	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820
3205	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3206	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3209	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3212	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3213	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3215	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3216	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3218	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3219	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3220	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3225	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3231	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3232	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3233	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3243	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3246	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340
3250	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3251	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3252	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3253	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3257	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3258	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3259	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	3198 013 01020
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	3198 013 01020
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	3198 013 01020
S 3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
3343	Res, 1K5, 20%, 1/2W, Carbon Film . .	3198 013 01520
3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
3345	VDR DC 1MA/50V S MAX 110V A . . .	2122 550 00152
3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
3401	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
3402	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
3403	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
3405	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002
3406	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3407	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002
3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3409	Res, 1R5, 5%, 1/3W, Metal Film . . .	2306 204 03158
3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
3420	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840
3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606
3425	Res, 120K, 5%, 1/10W, Metalized Glass	2120 108 91716
3426	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3428	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3429	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3431	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3432	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3433	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3436	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3437	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3438	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
3447	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
S 3452	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	3198 012 32290
S 3453	Res, 4R7, 5%, 5W, Wire Wound	2322 251 41478
S 3454	Res, 33K, 5%, 1 1/3W, Metal Film . .	2322 194 63333
3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
S 3462	Res, 6K8, 5%, 5W, Metal Film	2322 257 41682
3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3464	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
S 3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
3466	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903
3467	Res, 15K, 1%, 3/5W, Metal Film . . .	2322 156 21503
3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3469	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703
3481	Res, 35K7, 1%, 3/5W, Metal Film. . .	2322 156 23573
3482	Res, 56K, 1%, 3/5W, Metal Film . . .	2322 156 25603
3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
S 3486	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
S 3487	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
S 3488	Res, 4R7, 5%, 1/2W, Metal Film . . .	2306 207 03478
S 3490	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
S 3491	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
S 3492	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
3495	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3496	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3497	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	3198 013 04710
S 3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225
S 3503	PTC, DC, 120V,P3020 B.	2120 661 00025
S 3505	Surge Protector.	2422 549 43073
S 3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
S 3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333
S 3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102
3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184
3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204
S 3515	2.5 ohm, 20%, 3.6W, Negative Temperat ure Coefficient.	2122 612 00023

S = Safety Part Be sure to use exact replacement part.

PPC927C121 (continued)

	3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
	3517	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
S	3518	Res, 0R22, 5%, 2 1/2W, Metal Film. .	3198 012 32270
	3520	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
	3521	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
S	3525	Res, 47 ohm, 5%, 1/3W, Metal Film. .	2306 204 03479
	3528	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3529	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
	3530	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
	3532	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
	3534	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
	3536	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
	3537	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
S	3542	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
	3570	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
	3571	Res, 150K, 1%, 3/5W, Metal Film. . .	2322 156 21504
	3573	Res, 2K, 1%, 1/8W, Metalized Glass .	2322 734 62002
	3574	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
	3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3577	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3578	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
	3579	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
	3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3592	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	3594	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
	3595	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
	3596	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3597	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
	3598	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	3599	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
	3607	RST NETW RGLE 10X 8K2 PM5 B . . .	2120 108 93916
	3608	RST NETW RGLE 6X 2K2 PM5 B . . .	2120 108 93913
	3609	2.2k, 5%, Resistor Network	2120 108 93868
	3611	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
	3612	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	3613	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	3615	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	3616	Jumper Wire/Staple	0322 179 00003
	3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3619	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
	3629	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
	3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
	3631	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
S	3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
	3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210
	3634	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
	3635	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
	3636	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
	3637	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
	3649	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
	3650	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
	3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3654	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
	3655	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
	3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710
	3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3662	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
	3663	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220
	3664	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220
	3665	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
	3666	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
	3667	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
	3672	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
	3673	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	3674	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
	3675	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
	3676	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
	3677	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
	3680	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
	3681	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
	3682	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220
	3683	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
	3684	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
	3687	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
	3841	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3842	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3843	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
	3844	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
	3845	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
	3850	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
	3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810
	3951	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
	3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3953	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
	3954	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
	3955	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
	3956	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
	3957	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
	4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4002	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4004	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4011	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4012	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4020	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4051	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4100	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4102	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4104	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4144	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4203	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4207	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4212	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4214	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4465	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4501	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4650	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4651	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4654	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4655	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4831	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4833	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4911	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4914	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4957	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	4999	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
	5000	Coil, 5u6.	3198 018 25680
	5004	Coil, 820n	2422 535 97314
	5101	Coil, 5u6.	3198 018 15680
	5201	Coil, 22u.	3198 018 22290
	5202	Coil, 6u8.	3198 018 16880
	5342	Coil, 22u.	3198 018 22290
S	5445	Transformer, L.O.T., models ending in C101, C121, and C125	2422 531 02327
	5451	Coil, 27u.	2422 535 96614
	5457	Coil, Linear Correction.	3128 138 53241
	5461	Transformer.	3128 138 33811
	5470	CBLE HR BK 9P/270/9X F.HOOK UL . . .	3104 311 02361
	5480	Coil, 27u.	2422 535 97334
S	5500	Filter, Mains, 5mH, 2A	2422 549 43432
	5516	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
	5518	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
	5521	Coil, 2u2.	3198 018 12280
	5540	Coil, 4u7.	3198 018 14780
S	5545	Transfomer,.	2422 531 02314
	5551	Coil, 27u.	2422 535 95366
	5552	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
	5572	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
	5573	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
	5575	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
	5576	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
	5577	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
	5600	Coil, 8u2.	3198 018 18280
	5601	Coil, 8u2.	3198 018 18280
	5620	Coil, 6u8.	3198 018 16880
	5821	Coil, 100u	3198 018 21010
	5831	Coil, 12u.	3198 018 21290
	5832	Coil, 12u.	3198 018 21290
	5833	Coil, 12u.	3198 018 11290
	6008	Zener Diode, 33 volt	3198 010 23390
	6113	Zener Diode, 6.8 volt.	9340 386 40115
	6125	Zener Diode, 6.8 volt.	9340 386 40115
	6211	Diode, Signal, 1N4148.	3198 010 10010
	6212	Diode, Signal, 1N4148.	3198 010 10010
	6213	Diode, Signal, 1N4148.	3198 010 10010
	6331	Diode, Signal, BAV21	3198 010 10070
	6333	Diode, Signal, BAV21	3198 010 10070
	6335	Diode, Signal, BAV21	3198 010 10070
	6401	Diode, Rect, BYD33D	9337 234 00133
	6402	Zener Diode, 33 volt	3198 010 23390
	6403	Diode, Rect, BYD33D	9337 234 00133
	6404	Zener Diode, 75 volt	9331 180 00133
	6449	Diode, Signal, 1N4148.	3198 010 10010

S = Safety Part Be sure to use exact replacement part.

PPC927C121 (continued)

6450	Diode, Signal, 1N4148.	3198 010 10010	9207	Jumper Wire/Staple	0322 179 00003
6460	Diode, Rect, BY228/20	9336 215 80112	9208	Jumper Wire/Staple	0322 179 00003
6463	Diode, Signal, 1N4148.	3198 010 10010	9209	Jumper Wire/Staple	0322 179 00003
6464	Zener Diode, 6.2 volt.	9331 668 30133	9210	Jumper Wire/Staple	0322 179 00003
6465	Diode, Rect, BYD33J	9337 234 20133	9211	Jumper Wire/Staple	0322 179 00003
6466	Diode, Rect, BYD33J	9337 234 20133	9214	Jumper Wire/Staple	0322 179 00003
6480	Zener Diode, 27 volt	3198 010 22790	9215	Jumper Wire/Staple	0322 179 00003
6481	Diode, Signal, 1N4148.	3198 010 10010	9216	Jumper Wire/Staple	0322 179 00003
6485	Diode, Rect, BYD33J	9337 234 20133	9217	Jumper Wire/Staple	0322 179 00003
6486	Diode, Rect, EGP20DL-5300	9322 100 13682	9218	Jumper Wire/Staple	0322 179 00003
6487	Diode, Rect, BYD33D	9337 234 00133	9220	Jumper Wire/Staple	0322 179 00003
6488	Diode, Rect, BYV27-200.	9322 126 72673	9221	Jumper Wire/Staple	0322 179 00003
6490	Diode, Rect, BYV27-200.	9322 126 72673	9222	Jumper Wire/Staple	0322 179 00003
6505	Diode, Bridge Rect, GBU6JL-7002	9322 138 08667	9225	Jumper Wire/Staple	0322 179 00003
6507	Diode, Rect, BYD33J	9337 234 20133	9226	Jumper Wire/Staple	0322 179 00003
6508	Diode, Rect, BYD33J	9337 234 20133	9227	Jumper Wire/Staple	0322 179 00003
6510	Zener Diode, 20 volt	9331 178 60133	9228	Jumper Wire/Staple	0322 179 00003
6511	Diode, Rect, BYV95C	9335 001 80133	9229	Jumper Wire/Staple	0322 179 00003
6512	Diode, Rect, 1N5062	3198 010 10120	9230	Jumper Wire/Staple	0322 179 00003
6513	Diode, Rect, 1N5062	3198 010 10120	9231	Jumper Wire/Staple	0322 179 00003
6514	Zener Diode, 18 volt	3198 010 21890	9232	Jumper Wire/Staple	0322 179 00003
6540	Diode, Signal, BAV21	3198 010 10070	9233	Jumper Wire/Staple	0322 179 00003
6550	Diode, Rect, BY229X-800	9340 380 30127	9234	Jumper Wire/Staple	0322 179 00003
6560	Diode, Rect, EGP20DL-5300	9322 100 13682	9236	Jumper Wire/Staple	0322 179 00003
6570	Diode, Rect, EGP20DL-5300	9322 100 13682	9237	Jumper Wire/Staple	0322 179 00003
6582	Diode, Rect, EGP20DL-5300	9322 100 13682	9238	Jumper Wire/Staple	0322 179 00003
6584	Diode, Signal, 1N4148.	3198 010 10010	9240	Jumper Wire/Staple	0322 179 00003
6585	Diode, Signal, 1N4148.	3198 010 10010	9241	Jumper Wire/Staple	0322 179 00003
6590	Diode, Rect, EGP20DL-5300	9322 100 13682	9242	Jumper Wire/Staple	0322 179 00003
6591	Diode, Signal, BAS16WS	9322 031 99685	9245	Jumper Wire/Staple	0322 179 00003
6601	Zener Diode, 3.9 volt.	3198 010 23980	9301	Jumper Wire/Staple	0322 179 00003
6602	Diode, Signal, 1N4148.	3198 010 10010	9401	Jumper Wire/Staple	0322 179 00003
6603	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610	9402	Jumper Wire/Staple	0322 179 00003
6604	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610	9403	Jumper Wire/Staple	0322 179 00003
6605	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610	9404	Jumper Wire/Staple	0322 179 00003
6606	Zener Diode, 4.7 volt.	3198 010 24780	9407	Jumper Wire/Staple	0322 179 00003
6607	Zener Diode, 6.8 volt.	3198 010 26880	9408	Jumper Wire/Staple	0322 179 00003
6690	LED VS LTL-307P (LITO) B	9322 033 95682	9411	Jumper Wire/Staple	0322 179 00003
6831	Diode, Signal, BAS16WS	9322 031 99685	9414	Jumper Wire/Staple	0322 179 00003
6951	Diode, Signal, BAS16WS	9322 031 99685	9417	Jumper Wire/Staple	0322 179 00003
6961	Diode, Signal, BAS16WS	9322 031 99685	9419	Jumper Wire/Staple	0322 179 00003
7134	Transistor, NPN, BC547B.	3198 020 40030	9420	Jumper Wire/Staple	0322 179 00003
7250	IC,	9352 620 26112	9421	Jumper Wire/Staple	0322 179 00003
7251	IC, LM317T	9337 220 80682	9422	Jumper Wire/Staple	0322 179 00003
7254	Transistor, NPN, BC847B.	3198 010 42030	9424	Jumper Wire/Staple	0322 179 00003
7256	Transistor, NPN, BC847B.	3198 010 42030	9425	Jumper Wire/Staple	0322 179 00003
7258	Transistor, NPN, BC847B.	3198 010 42030	9427	Jumper Wire/Staple	0322 179 00003
7263	Transistor, PNP, BC857B.	3198 010 42150	9428	Jumper Wire/Staple	0322 179 00003
7266	Transistor, NPN, BC847B.	3198 010 42030	9460	Jumper Wire/Staple	0322 179 00003
7330	IC,	9352 184 10112	9461	Jumper Wire/Staple	0322 179 00003
7401	IC,	9322 121 47687	9500	Jumper Wire/Staple	0322 179 00003
7460	Transistor, NPN, BU1508DX.	9340 170 50127	9501	Jumper Wire/Staple	0322 179 00003
7461	Transistor, NPN, BF819	9335 354 50127	9502	Jumper Wire/Staple	0322 179 00003
7462	Transistor, NPN, BC547B.	3198 020 40030	9503	Jumper Wire/Staple	0322 179 00003
7463	Transistor, PNP, BC557B.	3198 020 40110	9505	Jumper Wire/Staple	0322 179 00003
7480	IC,	9322 028 93682	9510	Jumper Wire/Staple	0322 179 00003
7481	Transistor, PNP, BC557B.	3198 020 40110	9511	Jumper Wire/Staple	0322 179 00003
7482	Transistor, PNP, BC857B.	3198 010 42150	9512	Jumper Wire/Staple	0322 179 00003
7518	STH10NC60FI SMPS FET.	9322 155 66687	9513	Jumper Wire/Staple	0322 179 00003
7520	IC,	9322 108 36682	9515	Jumper Wire/Staple	0322 179 00003
7570	IC,	9337 711 00676	9516	Jumper Wire/Staple	0322 179 00003
S 7581	Coupler, TCDT1101G	9338 431 30682	9517	Jumper Wire/Staple	0322 179 00003
7590	Transistor, NPN, BC847B.	3198 010 42030	9518	Jumper Wire/Staple	0322 179 00003
7591	Transistor, NPN, BC847B.	3198 010 42030	9521	Jumper Wire/Staple	0322 179 00003
7592	Transistor, NPN, BC847B.	3198 010 42030	9526	Jumper Wire/Staple	0322 179 00003
7600	IC, SAA5565-PS/M3/0195 L9 v3.2 (Commercial Models - Pro Plus Models).	9352 673 97112	9601	Jumper Wire/Staple	0322 179 00003
			9602	Jumper Wire/Staple	0322 179 00003
7601	IC, ST24W16B6, commercial models only	9322 095 35682	9603	Jumper Wire/Staple	0322 179 00003
7603	Transistor, NPN, BC337	9331 796 00126	9604	Jumper Wire/Staple	0322 179 00003
7604	Transistor, NPN, BC847B.	3198 010 42030	9605	Jumper Wire/Staple	0322 179 00003
7605	Transistor, NPN, BC847B.	3198 010 42030	9606	Jumper Wire/Staple	0322 179 00003
7608	Transistor, NPN, BC847B.	3198 010 42030	9608	Jumper Wire/Staple	0322 179 00003
7609	Transistor, NPN, BC847B.	3198 010 42030	9609	Jumper Wire/Staple	0322 179 00003
7680	IR Receiver.	9322 127 53667	9610	Jumper Wire/Staple	0322 179 00003
7833	IC,	9322 136 54682	9611	Jumper Wire/Staple	0322 179 00003
7950	IC,	9351 861 80112	9612	Jumper Wire/Staple	0322 179 00003
7980	ISOPROPYL ALCOHOL.	1306 500 43201	9613	Jumper Wire/Staple	0322 179 00003
7990	Connector, 3 Pin	2412 020 00725	9614	Jumper Wire/Staple	0322 179 00003
9001	Jumper Wire/Staple	0322 179 00003	9615	Jumper Wire/Staple	0322 179 00003
9003	Jumper Wire/Staple	0322 179 00003	9618	Jumper Wire/Staple	0322 179 00003
9005	Jumper Wire/Staple	0322 179 00003	9621	Jumper Wire/Staple	0322 179 00003
9011	Jumper Wire/Staple	0322 179 00003	9622	Jumper Wire/Staple	0322 179 00003
9012	Jumper Wire/Staple	0322 179 00003	9624	Jumper Wire/Staple	0322 179 00003
9105	Jumper Wire/Staple	0322 179 00003	9625	Jumper Wire/Staple	0322 179 00003
9126	Jumper Wire/Staple	0322 179 00003	9626	Jumper Wire/Staple	0322 179 00003
9132	Jumper Wire/Staple	0322 179 00003	9629	Jumper Wire/Staple	0322 179 00003
9140	Jumper Wire/Staple	0322 179 00003	9631	Jumper Wire/Staple	0322 179 00003
9141	Jumper Wire/Staple	0322 179 00003	9632	Jumper Wire/Staple	0322 179 00003
9200	Jumper Wire/Staple	0322 179 00003	9637	Jumper Wire/Staple	0322 179 00003
9202	Jumper Wire/Staple	0322 179 00003	9640	Jumper Wire/Staple	0322 179 00003
9205	Jumper Wire/Staple	0322 179 00003	9642	Jumper Wire/Staple	0322 179 00003
9206	Jumper Wire/Staple	0322 179 00003	9643	Jumper Wire/Staple	0322 179 00003

S = Safety Part Be sure to use exact replacement part.

PPC927C121 (continued)

9644	Jumper Wire/Staple	0322 179 00003
9754	Jumper Wire/Staple	0322 179 00003
9788	Jumper Wire/Staple	0322 179 00003
9793	Jumper Wire/Staple	0322 179 00003
9800	Jumper Wire/Staple	0322 179 00003
9805	Jumper Wire/Staple	0322 179 00003
9806	Jumper Wire/Staple	0322 179 00003
9807	Jumper Wire/Staple	0322 179 00003
9810	Jumper Wire/Staple	0322 179 00003
9901	Jumper Wire/Staple	0322 179 00003
9903	Jumper Wire/Staple	0322 179 00003
9904	Jumper Wire/Staple	0322 179 00003
9905	Jumper Wire/Staple	0322 179 00003
9906	Jumper Wire/Staple	0322 179 00003
9920	Jumper Wire/Staple	0322 179 00003
9933	Jumper Wire/Staple	0322 179 00003
9936	Jumper Wire/Staple	0322 179 00003
9939	Jumper Wire/Staple	0322 179 00003
9940	Jumper Wire/Staple	0322 179 00003
9941	Jumper Wire/Staple	0322 179 00003
9942	Jumper Wire/Staple	0322 179 00003
9943	Jumper Wire/Staple	0322 179 00003
9944	Jumper Wire/Staple	0322 179 00003
9945	Jumper Wire/Staple	0322 179 00003
9946	Jumper Wire/Staple	0322 179 00003
9947	Jumper Wire/Staple	0322 179 00003
9948	Jumper Wire/Staple	0322 179 00003
9949	Jumper Wire/Staple	0322 179 00003
9950	Jumper Wire/Staple	0322 179 00003
9951	Jumper Wire/Staple	0322 179 00003
9952	Jumper Wire/Staple	0322 179 00003
9953	Jumper Wire/Staple	0322 179 00003
9955	Jumper Wire/Staple	0322 179 00003
9956	Jumper Wire/Staple	0322 179 00003
9957	Jumper Wire/Staple	0322 179 00003
9958	Jumper Wire/Staple	0322 179 00003
9959	Jumper Wire/Staple	0322 179 00003
9960	Jumper Wire/Staple	0322 179 00003
9962	Jumper Wire/Staple	0322 179 00003
9963	Jumper Wire/Staple	0322 179 00003
9964	Jumper Wire/Staple	0322 179 00003
9965	Jumper Wire/Staple	0322 179 00003
9966	Jumper Wire/Staple	0322 179 00003
9967	Jumper Wire/Staple	0322 179 00003
9968	Jumper Wire/Staple	0322 179 00003
9969	Jumper Wire/Staple	0322 179 00003
9970	Jumper Wire/Staple	0322 179 00003
9971	Jumper Wire/Staple	0322 179 00003
9972	Jumper Wire/Staple	0322 179 00003
9974	Jumper Wire/Staple	0322 179 00003
9975	Jumper Wire/Staple	0322 179 00003
9976	Jumper Wire/Staple	0322 179 00003
9977	Jumper Wire/Staple	0322 179 00003
9981	Jumper Wire/Staple	0322 179 00003
9982	Jumper Wire/Staple	0322 179 00003
9983	Jumper Wire/Staple	0322 179 00003
9984	Jumper Wire/Staple	0322 179 00003
9987	Jumper Wire/Staple	0322 179 00003
9989	Jumper Wire/Staple	0322 179 00003
9990	Jumper Wire/Staple	0322 179 00003
9991	Jumper Wire/Staple	0322 179 00003
9992	Jumper Wire/Staple	0322 179 00003
9993	Jumper Wire/Staple	0322 179 00003
CBA	00EMF894A102 Main Chassis Board Asm.	00EM F89 4A102

A10757 L9 Audio Jack Panel Parts

	A10757 L9 Audio Jack Panel Parts	
CBA	00A10757A001 L9 Audio Jack Panel Asm.	00A1 075 7A001
C1	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280
C2	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280
J0214	Connector, 3 Pin	2422 025 16601
J0234	4 Pin Board Connector.	2422 025 15851
J100	Socket, Click, 4 Pin	2422 015 18711
J1214	Connector, 3 Pin	2422 025 16601
J1234	4 Pin Board Connector.	2422 025 12489
JP11	Socket, Cinch, 1 Pin	2422 026 04912
JP12	Socket, Cinch, 1 Pin	2422 026 04374
SW1	Switch	4835 277 27061

A10778 L9 ITV Front A/V Panel

	A10778 L9 ITV Front A/V Panel	
CBA	00A10778A001 L9 ITV Front A/V Panel.	00A1 077 8A001
C1	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
C2	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
D1	Zener, 6.8 Volt, BZX79-C6V8.	4835 130 37945
D2	Zener, 6.8 Volt, BZX79-C6V8.	4835 130 37945
D3	Zener, 6.8 Volt, BZX79-C6V8.	4835 130 37945
D4	Zener, 6.8 Volt, BZX79-C6V8.	4835 130 37945
D5	Zener, 6.8 Volt, BZX79-C6V8.	4835 130 37945
J100	Connector.	2422 026 04731
J22	Connector, 3 Pin	2422 025 09191
J23	Connector, 6 Pin	2422 025 10738
R1	Res, 75 ohm, 5%, 1/6W, Carbon Film .	3198 011 07590
R2	Zero ohm,.	4835 111 27056
R3	47k, 5%, 1/10W, Metal Film	4835 111 37445
R4	Res, 1K, 2%, 0,25W	4822 051 10102
R5	Res, 1K, 2%, 0,25W	4822 051 10102
R6	47k, 5%, 1/10W, Metal Film	4835 111 37445

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	AC Power Cord.	3135 010 04321
AC02	Clip, Anode Lead	3135 014 04471
AC03	Cabinet Back	3135 014 06521
AC04	Cabinet Front.	3135 017 03891
AC05	L9L CHASSIS TRAY-32V	3139 124 31323
AC06	Customer Control Buttons	3139 124 30901
S AC07	Convergence and Purity Assembly. . .	2422 549 43385
S AC08	CRT A68AJB82X.	9301 787 60472
S AC09	Coil, Degaussing	3121 218 62701
AC10	Holder, Degaussing (4 Used).	3135 013 01641
AC11	Light Guide.	3139 124 26461
AC12	Nameplate.	3135 015 03571
AC13	Owner's Manual	3135 015 20911
AC14	Power Button	3139 124 26753
REMOTE	Transmitter, Remote, RC2524 /01. . .	3139 228 84651
AC16	Speaker, 5W, 16 ohm (2 Used)	2422 264 00333
S AC18	Yoke	3313 203 01242
AC19	Yoke Wedge (3 used).	3135 013 00311
AC21	Battery, 1.5V AA, 2-Pack, (Not Shown	9299 000 10137
AC24	Spring	3139 121 26231

S = Safety Part Be sure to use exact replacement part.

PPC927C201 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts		
S 0127	3.15 Amp Fuse, ...	3122 358 72141	
0152	Cable, DIP, 6 Pin, 400mm	3104 301 09421	
0153	4 Pin Cable.	3104 301 09431	
0212	Connector, 2 Pin	2422 025 15396	
0213	Connector, 3 Pin	2412 020 00725	
0214	Connector, 3 Pin	2422 025 16382	
0215	Connector, 2 Pin	2412 020 00724	
0216	4 Pin Board Connector.	2422 025 16384	
0219	5 Pin Board Connector.	2422 025 16387	
0220	4 Pin Board Connector.	2422 025 04852	
0224	1 Pin Board Connector.	2422 034 20021	
0228	1 Pin Board Connector.	2422 034 20021	
0234	Connector, 4 Pin	2422 025 12479	
0236	Connector, 4 Pin	2422 025 12479	
0237	Connector, 4 Pin	2422 025 12479	
0238	Connector, 5 Pin	2422 025 12481	
S 0243	Connector, 6 Pin	2422 025 04854	
0244	4 Pin Board Connector.	2422 025 04852	
S 0245	Connector, 6 Pin	2422 025 04854	
S 0254	CRT Socket (9 Pin)	2422 500 80022	
0259	Connector, 3 Pin	2422 025 16383	
0262	Connector, 4 Pin	2422 025 16385	
0267	Connector, 3 Pin	2412 020 00725	
1000	Tuner.	2422 542 90051	
1003	45 MHz SAW, Filter,.	2422 549 42433	
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807	
1208	Crystal Resonator, 3.58MHz	2422 543 00832	
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10869	
S 1572	1 Amp, Radial Fuse,.	4835 253 97162	
S 1573	2.5 Amp Fuse, Radial,.	2422 086 10422	
S 1580	Relay, 12V	2422 132 07317	
1600	Switch, Tactile.	2422 128 02742	
1601	Switch, Tactile.	2422 128 02742	
1602	Switch, Tactile.	2422 128 02742	
1603	Switch, Tactile.	2422 128 02742	
1606	Switch, Tactile.	2422 128 02742	
1660	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488	
1822	Crystal Resonator, 18MHz432, 12 Pin, HC49/U A	2422 543 00842	
2001	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2002	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2003	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2004	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2011	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2101	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2102	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2103	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2104	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2111	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2112	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2115	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2201	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2205	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2207	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2208	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2209	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2211	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2212	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2213	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2214	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2215	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280	
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 16654	
2220	Cap, 18p, 5%, 50V, Ceramic	3198 016 01890	
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2222	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2226	Cap, 33u, 20%, 25V, Electrolytic . .	2020 021 90124	
2227	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2247	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2248	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2249	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2330	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177	
2340	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495	
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320	
S 2343	Cap, 3n3, 10%, 2KV, Ceramic.	2020 558 90529	
2345	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020	
2401	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2402	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2404	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2405	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2407	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2409	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2420	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2426	Cap, 100n, 10%, 63V, Metalized Polyes ter.	2222 370 75104	
2428	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220	
2429	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2430	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2431	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2437	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	
2438	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2448	Cap, 220p, 10%, 500V, Ceramic. . . .	3198 019 42210	
2450	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91139	
2451	Cap, 15n, 10%, 50V, Polyester. . . .	2020 300 90575	
2451	0.01uF., 10%, 50V, Polyester, only 27	3198 138 20941	
2456	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176	
2457	Cap, 390n, 5%, 250V, Metalized Polypr opylene.	2222 479 90021	
2458	Cap, 10u, 20%, 100V, Electrolytic. .	2020 021 90813	
2459	Cap, 680p, 10%, 500V, Ceramic. . . .	3198 019 46810	
2461	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020	
2462	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176	
2463	1000pF., 10%, 2KV, Ceramic	4835 122 47629	
S 2465	Cap, 9n1, 5%, 1600V, Polypropylene .	2022 333 00118	
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050	
2473	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790	
2481	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740	
2482	Cap, 68n, 10%, 250V, Polyester . . .	2222 347 90234	
2484	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2485	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93282	
2486	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2487	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2488	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2489	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2490	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710	
2491	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710	
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810	
2500	0.47uF., 250V, Polyester	4835 121 47569	
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
S 2507	Cap, 1n5, 10%, 1KV, Ceramic.	2020 558 90443	
2508	Cap, 470u, 20%, 200V, Electrolytic .	2020 024 90626	
S 2511	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020	
S 2518	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290	
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320	
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320	
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2530	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 021 91147	
2531	Cap, 1n, 2%, 50V, Polypropylene. . .	2020 310 90049	
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220	
2540	Cap, 100u, 20%, 25V, Electrolytic. .	2020 021 90547	
S 2545	1500pF., 250VAC, Ceramic	4835 122 47622	
S 2550	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2551	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91358	
2561	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020	
S 2562	Cap, 220p, 10%, 1KV, Ceramic	2020 558 90424	
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020	
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020	
2571	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91353	
2572	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330	
2575	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820	
2586	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2604	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290	
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2613	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2615	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2619	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2622	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890	
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2629	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230	
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2631	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2679	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2681	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2850	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810	
2851	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	

S = Safety Part Be sure to use exact replacement part.

PPC927C201 (continued)

2852	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046
2853	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
2854	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046
2855	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380	S	3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
2856	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380	S	3341	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483
2858	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790	S	3342	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483
2859	Cap, 15p, 5%, 50V, Ceramic	3198 016 01590		3343	1.5k, 20%, 1/2W, Carbon Composition.	4835 110 47034
2860	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090		3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
2861	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	S	3345	VDR, DC, 1mA, 50V, MAX 115V	2322 593 13507
2862	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
2863	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090		3401	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2864	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3402	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2865	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3403	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2866	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3405	Res, 1K8, 1%, 3/5W, Metal Film . . .	2322 156 21802
2867	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3406	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2868	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780		3407	Res, 1K8, 1%, 3/5W, Metal Film . . .	2322 156 21802
2869	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2870	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3409	1.5 ohm, 5%, 1/3W, Metal Film. . . .	4835 116 57664
2871	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090		3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2874	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790		3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2875	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790		3420	470k, 5%, 1/10W, Metal Film.	4835 111 37407
2877	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2882	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2883	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090		3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840
2884	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606
2887	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810		3425	Res, 120K, 5%, 1/10W, Metalized Glass	2120 108 91716
2888	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3426	39k, 5%, 1/10W, Metal Film	4835 111 27051
2889	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3428	22k, 5%, 1/10W, Metal Film	4835 111 37441
2891	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390		3429	27k, 5%, 1/10W, Metal Film	4835 111 37442
2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3431	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
2952	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3432	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
2954	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3436	Res, 1K, 2%, 0,25W	4822 051 10102
2955	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3437	10k, 5%, 1/10W, Metal Film	4835 111 37216
2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3438	33k, 1/4W, Carbon Film	4835 110 57375
2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3447	10k, 5%, 1/10W, Metal Film	4835 111 37216
2960	Cap, 2u2, 20%, 25V, Electrolytic . .	3198 026 32220		3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090		3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090	S	3452	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63229
2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090	S	3453	Res, 4R7, 5%, 5W, Wire Wound	2322 251 41478
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3454	Res, 33K, 5%, 1 1/3W, Metal Film . .	2322 194 63333
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3013	Zero ohm,.	4835 111 27056		3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3014	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	S	3462	Res, 6K8, 5%, 5W, Metal Film	2322 257 41682
3015	22k, 5%, 1/10W, Metal Film	4835 111 37441		3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810		3464	Res, 1K, 2%, 0,25W	4822 051 10102
3100	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510	S	3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
3101	220k, 5%, 1/10W, Metal Film.	4835 111 37235		3466	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903
3103	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3467	Res, 14K, 1%, 3/5W, Metal Film . . .	2322 156 21403
3104	10k, 5%, 1/10W, Metal Film	4835 111 37216		3467	Res, 15K, 1%, 3/5W, Metal Film . . .	2322 156 21503
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510		3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3108	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3469	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
3109	10k, 5%, 1/10W, Metal Film	4835 111 37216		3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3122	220k, 5%, 1/10W, Metal Film.	4835 111 37235		3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703
3123	75 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37276		3481	Res, 35K7, 1%, 3/5W, Metal Film. . .	2322 156 23573
3125	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890		3482	Res, 56K, 1%, 3/5W, Metal Film . . .	2322 156 25603
3134	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790		3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3155	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259		3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3201	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253	S	3485	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
3203	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443	S	3486	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	S	3487	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3205	Res, 1K, 2%, 0,25W	4822 051 10102	S	3488	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
3206	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	S	3490	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3491	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3209	22k, 5%, 1/10W, Metal Film	4835 111 37441	S	3492	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3212	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253		3495	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272
3213	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3496	10k, 5%, 1/10W, Metal Film	4835 111 37216
3215	22k, 5%, 1/10W, Metal Film	4835 111 37441		3497	10k, 5%, 1/10W, Metal Film	4835 111 37216
3216	Zero ohm,.	4835 111 27056		3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3218	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225
3219	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3503	10ohm, 120VAC, Positive Temperature C	
3220	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432			oefficient	4835 116 47001
3225	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S	3505	Surge Protector.	2422 549 43073
3228	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3231	Zero ohm,.	4835 111 27056	S	3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333
3232	Zero ohm,.	4835 111 27056	S	3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102
3233	Zero ohm,.	4835 111 27056		3512	15k, 5%, 1/10W, Metal Film	4835 111 37458
3243	1.2k, 5%, 1/10W, Metal Film.	4835 111 27042		3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184
3246	82k, 5%, 1/10W, Metal Film	4835 111 37277		3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204
3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3515	2.5 ohm, 20%, 3.6W, Negative Temperat	
3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010			ure Coefficient.	2122 612 00023
3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340		3516	Res, 1K, 2%, 0,25W	4822 051 10102
3250	Zero ohm,.	4835 111 27056		3517	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3251	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S	3518	Res, 0R22, 5%, 3W, Metal Film. . . .	2120 106 90548
3252	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		3520	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3253	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		3521	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443
3257	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3525	33 ohm, 5%, 1/3W, Metal Film	4835 116 57665
3258	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3528	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3259	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3529	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3530	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3532	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3534	15k, 5%, 1/10W, Metal Film	4835 111 37458

S = Safety Part Be sure to use exact replacement part.

PPC927C201 (continued)

3536	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3537	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
S 3542	4.7 Megohm, 5%, 1/2W, Metal Film . .	4835 116 57009
3570	15k, 5%, 1/10W, Metal Film	4835 111 37458
3571	Res, 150K, 1%, 3/5W, Metal Film. . .	2322 156 21504
3573	Res, 2K, 1%, 1/10W, Metalized Glass.	2120 108 92657
3574	33k, 5%, 1/10W, Metal Film	4835 111 37248
3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3577	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3578	Res, 1K, 2%, 0,25W	4822 051 10102
3579	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3592	10k, 5%, 1/10W, Metal Film	4835 111 37216
3594	22k, 5%, 1/10W, Metal Film	4835 111 37441
3595	68k, 5%, 1/6W, Carbon Film	4835 111 37205
3596	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3597	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
3598	10k, 5%, 1/10W, Metal Film	4835 111 37216
3599	22k, 5%, 1/10W, Metal Film	4835 111 37441
3607	8.2k, 5%, 1/8W, Inline Package . . .	4835 111 97046
3608	2.2k, 5%, 1/8W, Inline Package . . .	4835 111 97049
3609	8.2k, 5%, Resistor Network	2120 108 92589
3611	Res, 1K, 2%, 0,25W	4822 051 10102
3612	10k, 5%, 1/10W, Metal Film	4835 111 37216
3613	10k, 5%, 1/10W, Metal Film	4835 111 37216
3615	10k, 5%, 1/10W, Metal Film	4835 111 37216
3617	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3619	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
3629	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259
3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
3631	27k, 5%, 1/10W, Metal Film	4835 111 37442
S 3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63479
3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210
3634	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
3635	22k, 5%, 1/10W, Metal Film	4835 111 37441
3636	22k, 5%, 1/10W, Metal Film	4835 111 37441
3637	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
3649	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
3650	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3653	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3654	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
3655	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710
3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3662	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
3663	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
3664	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
3665	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
3666	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376
3667	27k, 5%, 1/10W, Metal Film	4835 111 37442
3672	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
3673	10k, 5%, 1/10W, Metal Film	4835 111 37216
3674	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259
3675	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3676	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3677	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3680	680 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37271
3681	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
3682	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
3683	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
3684	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
3685	220 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37371
3687	220 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37371
3841	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3842	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3843	47k, 5%, 1/10W, Metal Film	4835 111 37445
3844	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259
3845	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259
3850	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810
3951	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3953	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272
3954	1.5k, 5%, 1/10W, Metal Film.	4835 111 37437
3955	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3956	1.5k, 5%, 1/10W, Metal Film.	4835 111 37437
3957	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
4001	Zero ohm,.	4835 111 27056
4002	Zero ohm,.	4835 111 27056
4004	Zero ohm,.	4835 111 27056
4007	Zero ohm,.	4835 111 27056
4009	Zero ohm,.	4835 111 27056
4010	Zero ohm,.	4835 111 27056
4011	Zero ohm,.	4835 111 27056
4012	Zero ohm,.	4835 111 27056
4013	Zero ohm,.	4835 111 27056
4020	Zero ohm,.	4835 111 27056
4051	Zero ohm,.	4835 111 27056
4100	Zero ohm,.	4835 111 27056
4101	Zero ohm,.	4835 111 27056
4102	Zero ohm,.	4835 111 27056
4103	Zero ohm,.	4835 111 27056
4143	Zero ohm,.	4835 111 27056
4144	Zero ohm,.	4835 111 27056
4203	Zero ohm,.	4835 111 27056
4207	Zero ohm,.	4835 111 27056
4212	Zero ohm,.	4835 111 27056
4214	Zero ohm,.	4835 111 27056
4215	Zero ohm,.	4835 111 27056
4216	Zero ohm,.	4835 111 27056
4501	Zero ohm,.	4835 111 27056
4602	Zero ohm,.	4835 111 27056
4650	Zero ohm,.	4835 111 27056
4651	Zero ohm,.	4835 111 27056
4652	Zero ohm,.	4835 111 27056
4654	Zero ohm,.	4835 111 27056
4655	Zero ohm,.	4835 111 27056
4684	Zero ohm,.	4835 111 27056
4687	Zero ohm,.	4835 111 27056
4831	Zero ohm,.	4835 111 27056
4832	Zero ohm,.	4835 111 27056
4833	Zero ohm,.	4835 111 27056
4902	Zero ohm,.	4835 111 27056
4903	Zero ohm,.	4835 111 27056
4904	Zero ohm,.	4835 111 27056
4905	Zero ohm,.	4835 111 27056
4909	Zero ohm,.	4835 111 27056
4911	Zero ohm,.	4835 111 27056
4912	Zero ohm,.	4835 111 27056
4914	Zero ohm,.	4835 111 27056
4957	Zero ohm,.	4835 111 27056
4999	Zero ohm,.	4835 111 27056
5000	Coil, 5u6.	3198 018 25680
5004	Coil, 820n	2422 535 97314
5101	Coil, 5u6.	3198 018 15680
5201	Coil, 22u.	3198 018 22290
5202	Coil, 6u8.	3198 018 16880
5342	22uH., 10%, Coil, Peaking.	4835 157 67069
S 5445	Transformer, L.O.T., models ending in C101, C121, and C125	2422 531 02327
S 5445	Transformer, L.O.T., models ending in C221 and C225.	3128 138 20941
5451	Coil, 27u.	2422 535 96614
5457	Coil, Linear Correction.	3128 138 53241
5461	Transformer.	3128 138 33811
5480	Coil, 27u.	2422 535 97334
5480	Coil, 39u.	2422 535 97336
5480	33uH., Peaking Coil, only in 25. . .	4835 157 58205
S 5500	Filter, Mains, 5mH, 2A	2422 549 43432
5516	100uH., Coil	4835 157 67078
5518	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5521	Coil, 2u2.	3198 018 12280
5540	Coil, 4u7.	3198 018 14780
S 5545	Transfomer,.	2422 531 02314
5551	27uH., 5%, Coil, Peaking	4835 157 67052
5552	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5572	100uH., Coil	4835 157 67078
5573	100uH., Coil	4835 157 67078
5575	100uH., Coil	4835 157 67078
5576	100uH., Coil	4835 157 67078
5577	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5600	Coil, 8u2.	3198 018 18280
5601	Coil, 8u2.	3198 018 18280
5620	Coil, 6u8.	3198 018 16880
5821	Coil, 100u	3198 018 21010
5831	Coil, 12u.	3198 018 21290
5832	Coil, 12u.	3198 018 21290
5833	Coil, 12u.	3198 018 11290
6008	Zener, 33 Volt BZX79-C33	4835 130 37904
6113	Zener Diode, 6.8 volt.	9340 386 40115
6125	Zener Diode, 6.8 volt.	9340 386 40115
6211	Diode, 1N4148.	4835 130 37048
6212	Diode, 1N4148.	4835 130 37048
6213	Diode, 1N4148.	4835 130 37048
6331	Diode.	4835 130 37294
6333	Diode.	4835 130 37294
6335	Diode.	4835 130 37294
6401	Diode.	4835 130 37094
6402	Zener, 33 Volt, BZX79-C33.	4835 130 37904
6403	Diode.	4835 130 37094
6404	Diode.	4835 130 37094
6449	Diode, 1N4148.	4835 130 37048
6450	Diode, 1N4148.	4835 130 37048
6460	Diode, Rect, BY228/20	9336 215 80112
6463	Diode, 1N4148.	4835 130 37048
6464	Zener Diode, 6.2 volt.	9337 242 70133
6465	Diode, BYD33J.	4835 130 37094
6466	Diode, BYD33J.	4835 130 37094

S = Safety Part Be sure to use exact replacement part.

6480	Diode, Zener	4835 130 37947
6481	Diode, 1N4148.	4835 130 37048
6485	Diode, BYD33J.	4835 130 37094
6486	Diode, EGP20DL-530	4835 130 37919
6487	Diode.	4835 130 37094
6488	Diode, Rect, BYV27-200.	9322 126 72673
6490	Diode, Rect, BYV27-200.	9322 126 72673
6505	Diode, Bridge Rect, GBU6JL-7002 . .	9322 138 08667
6507	Diode, BYD33J.	4835 130 37094
6508	Diode, BYD33J.	4835 130 37094
6510	Zener Diode, 20 volt	9331 178 60133
6511	Diode, BYV95C.	4835 130 37052
6512	Diode, Rect, BY228/20	4822 130 41275
6513	Diode, Rect, BY228/20	4822 130 41275
6514	Zener, 18 Volt, BZX79-C18.	4835 130 37908
6540	Diode.	4835 130 37294
6550	Diode, Rect, BY229X-800	9340 380 30127
6560	Diode, EGP20DL-530	4835 130 37919
6570	Diode, EGP20DL-530	4835 130 37919
6582	Diode, EGP20DL-530	4835 130 37919
6584	Diode, 1N4148.	4835 130 37048
6585	Diode, 1N4148.	4835 130 37048
6590	Diode, EGP20DL-530	4835 130 37919
6591	Diode, BAS216.	4835 130 37905
6601	Diode, Zener	4835 130 37684
6602	Diode, 1N4148.	4835 130 37048
6603	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
6604	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
6605	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
6606	Zener, 4.7 Volt, BZX79-C4V7.	4835 130 37005
6607	Zener, 6.8 Volt, BZX79-C6V8.	4835 130 37945
6690	LED, LTL-307P.	4835 130 97096
6831	Diode, BAS216.	4835 130 37905
6951	Diode, BAS216.	4835 130 37905
6961	Diode, BAS216.	4835 130 37905
7134	Transistor, BC547B	4835 130 47055
7250	IC,.	9352 620 26112
7251	IC, LM317T	9337 220 80682
7254	Transistor, NPN, BC847B.	4822 130 60511
7256	Transistor, NPN, BC847B.	4822 130 60511
7258	Transistor, NPN, BC847B.	4822 130 60511
7263	Transistor, PNP, BC857B.	5322 130 60508
7266	Transistor, NPN, BC847B.	4822 130 60511
7330	IC,.	9352 184 10112
7401	IC,.	9322 121 47687
7460	Transistor, NPN, BU1508DX.	9340 170 50127
7461	Transistor, NPN, BF819	9335 354 50127
7462	Transistor, BC547B	4835 130 47055
7463	Transistor, BC557B	4835 130 47409
7480	IC,.	9322 028 93682
7481	Transistor, BC557B	4835 130 47409
7482	Transistor, PNP, BC857B.	5322 130 60508
7518	STH8NA60FI SMPS FET	9322 068 92687
7518	STH10NC60FI SMPS FET.	9322 155 66687
7520	IC, MC44603A	4835 209 88537
7570	IC,.	9337 711 00676
S 7581	Coupler, TCDT1101G	9338 431 30682
7590	Transistor, NPN, BC847B.	4822 130 60511
7591	Transistor, NPN, BC847B.	4822 130 60511
7592	Transistor, NPN, BC847B.	4822 130 60511
7600	IC, SAA5565-PS/M3/0195 L9 v3.2 (Commercial Models - Pro Plus Models). . .	9352 673 97112
7601	IC, ST24W16B6, commercial models only	9322 095 35682
7603	Transistor, NPN, BC337	9331 796 00126
7604	Transistor, NPN, BC847B.	4822 130 60511
7605	Transistor, NPN, BC847B.	4822 130 60511
7608	Transistor, NPN, BC847B.	4822 130 60511
7609	Transistor, NPN, BC847B.	4822 130 60511
7680	IR Receiver.	9322 127 53667
7833	IC,.	9322 136 54682
7950	IC,.	4835 209 88543
CBA	00EMF894A102 Main Chassis Board Asm.	00EM F89 4A102

A10757 L9 Audio Jack Panel Parts

	A10757 L9 Audio Jack Panel Parts	
CBA	00A10757A001 L9 Audio Jack Panel Asm.	00A1 075 7A001
C1	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280
C2	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280
J0214	Connector, 3 Pin	2422 025 16601
J0234	4 Pin Board Connector.	2422 025 15851
J100	Socket, Click, 4 Pin	2422 015 18711
J1214	Connector, 3 Pin	2422 025 16601
J1234	4 Pin Board Connector.	2422 025 12489
JP11	Socket, Cinch, 1 Pin	2422 026 04912
JP12	Socket, Cinch, 1 Pin	2422 026 04374
SW1	Switch	4835 277 27061

A10778 L9 ITV Front A/V Panel

	A10778 L9 ITV Front A/V Panel	
CBA	00A10778A001 L9 ITV Front A/V Panel.	00A1 077 8A001
C1	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
C2	Cap, 330p, 10%, 50V, Ceramic	3198 017 03310
D1	Zener, 6.8 Volt, BZX79-C6V8.	4835 130 37945
D2	Zener, 6.8 Volt, BZX79-C6V8.	4835 130 37945
D3	Zener, 6.8 Volt, BZX79-C6V8.	4835 130 37945
D4	Zener, 6.8 Volt, BZX79-C6V8.	4835 130 37945
D5	Zener, 6.8 Volt, BZX79-C6V8.	4835 130 37945
J100	Connector.	2422 026 04731
J22	Connector, 3 Pin	2422 025 09191
J23	Connector, 6 Pin	2422 025 10738
R1	Res, 75 ohm, 5%, 1/6W, Carbon Film .	3198 011 07590
R2	Zero ohm,.	4835 111 27056
R3	47k, 5%, 1/10W, Metal Film	4835 111 37445
R4	Res, 1K, 2%, 0,25W	4822 051 10102
R5	Res, 1K, 2%, 0,25W	4822 051 10102
R6	47k, 5%, 1/10W, Metal Film	4835 111 37445

A10791 Comb Filter Panel Parts

	A10791 Comb Filter Panel Parts	
CBA	00A10791A001 Comb Filter Panel Asm..	00A1 079 1A001
1000	8 Pin board Connector.	2422 025 12483
1001	Connector, 4 Pin	2422 025 12479
1102	Crystal, Resonator, 32KHz768	2422 543 00056
1254	9 Pin Board Connector.	2422 025 16265
2000	Cap, 100u, 20%, 10V, Electrolytic. .	3198 025 11010
2001	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2002	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2003	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2011	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2012	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2013	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2014	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2020	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2021	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2023	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2025	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2111	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2113	Battery, 3 Volts	2422 526 01206
3012	220 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37371
3013	220 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37371
3020	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
3026	2.2 Megohm, 5%, 1/10W, Metal Film. .	4835 111 27047
3027	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
3028	Zero ohm,.	4835 111 27056
3110	10k, 5%, 1/10W, Metal Film	4835 111 37216
3111	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3116	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
3117	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
3118	10k, 5%, 1/10W, Metal Film	4835 111 37216
3119	10k, 5%, 1/10W, Metal Film	4835 111 37216
5000	Coil, 10u.	3198 018 21090
5012	Coil, 15u.	2422 535 94296
5104	Coil, 6u8.	3198 018 26880
6110	Diode, BAS216.	4835 130 37905
7000	IC, SAA4961/V3/S1.	9352 609 51112
7012	Transistor, NPN, BC847B.	4822 130 60511
7110	IC,.	4835 209 17438
7111	IC,.	5322 209 61482
9001	Jumper Wire.	0322 179 00148

A10808 Pro Plus Interface Parts

	A10808 Pro Plus Interface Parts	
CBA	00A10808A001 Pro Plus Interface Asm.	00A1 080 8A001
BR711	Zero ohm,.	4835 111 27056
BR712	Zero ohm,.	4835 111 27056
BR713	Zero ohm,.	4835 111 27056
BR714	Zero ohm,.	4835 111 27056
BRS15	Zero ohm,.	4835 111 27056
BRS16	Zero ohm,.	4835 111 27056
C702	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
C703	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
J0237	Connector, 4 Pin	2422 025 12479
J0238	Connector, 5 Pin	2422 025 06353
J1215	Connector, 2 Pin,.	2422 025 16343
J1227	Connector, 4 Pin	2422 025 16385
J1237	Connector, 4 Pin	2422 025 12479
J1259	Connector, 3 Pin	2422 025 16383
J214	Connector, 3 Pin	2422 025 16382
J216	Connector, 4 Pin	2422 025 15847
J219	Connector, 5 Pin	2422 025 15848
J228	Connector, 3 Pin	2422 025 16407
J236	4 Pin Board Connector.	2422 025 12489
J775	Contact Pin.	2422 024 00626
J800	Connector, 32 Pin.	3135 010 03531
Q700	Transistor, NPN, BC847B.	4822 130 60511
Q701	Transistor, NPN, BC847B.	4822 130 60511
Q704	Transistor, PNP, BC857B.	5322 130 60508
Q705	Transistor, PNP, BC857B.	5322 130 60508
Q706	Transistor, NPN, BC847B.	4822 130 60511
Q707	Transistor, NPN, BC847B.	4822 130 60511
R700	10k, 5%, 1/10W, Metal Film	4835 111 37216
R701	47k, 5%, 1/10W, Metal Film	4835 111 37445
R702	75 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37276

S = Safety Part Be sure to use exact replacement part.

PPC927C201 (continued)

R703	75 ohm, 5%, 1/10W, Metal Film. . . .	4835	111 37276
R711	4.7k, 5%, 1/10W, Metal Film.	4835	111 27052
R712	10k, 5%, 1/10W, Metal Film	4835	111 37216
R713	4.7k, 5%, 1/10W, Metal Film.	4835	111 27052
R714	4.7k, 5%, 1/10W, Metal Film.	4835	111 27052
R715	10k, 5%, 1/10W, Metal Film	4835	111 37216
R716	47k, 5%, 1/10W, Metal Film	4835	111 37445
R717	10k, 5%, 1/10W, Metal Film	4835	111 37216
R718	100 ohm, 5%, 1/10W, Metal Film . . .	4835	111 37432
R719	330 ohm, 5%, 1/10W, Metal Film . . .	4835	111 37443
R720	Res, 1K, 2%, 0,25W	4822	051 10102
R721	75 ohm, 5%, 1/10W, Metal Film. . . .	4835	111 37276
R722	1.8k, 5%, 1/10W, Metal Film.	4835	111 37231
Z700	Zener Diode, 8.2V, BZX284-C8	4835	130 37922
Z701	Zener Diode, 8.2V, BZX284-C8	4835	130 37922
Z702	Zener Diode, 8.2V, BZX284-C8	4835	130 37922
Z703	Zener Diode, 8.2V, BZX284-C8	4835	130 37922
Z704	Zener Diode, 8.2V, BZX284-C8	4835	130 37922
Z705	Zener Diode, 8.2V, BZX284-C8	4835	130 37922
Z706	Zener Diode, 8.2V, BZX284-C8	4835	130 37922
Z707	Zener Diode, 8.2V, BZX284-C8	4835	130 37922

Cabinet & Accessory Parts

	Cabinet & Accessory Parts		
S AC01	AC Power Cord.	3135	010 04321
S AC02	Anode Clip	4835	256 97264
AC03	Cabinet Back	3135	014 06521
AC04	Cabinet Front.	3135	017 03891
AC05	Chassis Guide.	3139	124 30211
AC06	Control Buttons.	3139	124 26740
S AC07	Convergence and Purity Assembly. . .	2422	549 43385
S AC08	CRT A68AHB82X.	4835	131 27155
S AC09	Coil, Degaussing	3121	218 62701
AC11	Light Guide.	3139	124 26461
AC12	Nameplate.	4835	459 17546
AC14	Power Button	3139	124 26750
REMOTE	Remote Transmitter, T214AG-GA03. . .	4835	219 17627
AC16	Speaker, 8W (2 Used)	2422	264 00279
S AC17	AC Cord Relief (Not Shown)	3135	010 02841
S AC18	Yoke	2422	549 43726
AC19	Yoke Wedge (3 Used).	4835	535 27006
AC21	Batteries f/Remote Transmitter . . .	9299	000 13827
AC22	Card Do Cover.	4835	432 17929
AC24	Spring	3139	121 26231
AC26	Jack Panel, Plastic.	3135	014 09251

S = Safety Part Be sure to use exact replacement part.

PPC932C101 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts		
S 0127	3.15 Amp Fuse, ...	3122 358 72141	
0152	Cable, DIP, 6 Pin, 400mm	3104 301 09421	
0153	4 Pin Cable.	3104 301 09431	
0212	Connector, 2 Pin	2422 025 15396	
0213	Connector, 3 Pin	2412 020 00725	
0214	Connector, 3 Pin	2422 025 16382	
0215	Connector, 2 Pin,.	2422 025 16343	
0216	Connector, 4 Pin	2422 025 15847	
0219	Connector, 5 Pin	2422 025 15848	
0219	5 Pin Board Connector.	2422 025 16387	
0220	4 Pin Board Connector.	2422 025 04852	
0224	1 Pin Board Connector.	2422 034 20021	
0228	1 Pin Board Connector.	2422 034 20021	
0234	Connector, 4 Pin	2422 025 12479	
0236	4 Pin Board Connector.	2422 025 16384	
0237	Connector, 4 Pin	2422 025 12479	
0238	Connector, 5 Pin	2422 025 12481	
0238	Connector, 5 Pin	2422 025 15848	
S 0243	Connector, 6 Pin	2422 025 04854	
0244	4 Pin Board Connector.	2422 025 04852	
S 0245	Connector, 6 Pin	2422 025 04854	
S 0254	CRT Socket (9 Pin)	2422 500 80022	
0259	Connector, 3 Pin	2422 025 16383	
0262	Connector, 4 Pin	2422 025 16385	
0267	Connector, 3 Pin	2412 020 00725	
1000	Tuner.	2422 542 90051	
1003	45 MHz SAW, Filter,.	2422 549 42433	
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807	
1208	Crystal Resonator.	4835 242 77276	
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10869	
S 1572	1 Amp, Radial Fuse,.	4835 253 97162	
S 1573	2.5 Amp Fuse, Radial,.	2422 086 10422	
S 1580	Relay, 12V	2422 132 07317	
1600	Switch, Tactile.	2422 128 02742	
1601	Switch, Tactile.	2422 128 02742	
1602	Switch, Tactile.	2422 128 02742	
1603	Switch, Tactile.	2422 128 02742	
1606	Switch, Tactile.	2422 128 02742	
1660	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488	
1822	Crystal Resonator, 18MHz432, 12 Pin, HC49/U A	2422 543 00842	
2001	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2002	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2003	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2004	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2011	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2101	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2102	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2103	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2104	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2111	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2112	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2115	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2201	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2205	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2207	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2208	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2209	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2211	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2212	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2213	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2214	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2215	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280	
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 16654	
2220	Cap, 18p, 5%, 50V, Ceramic	3198 016 01890	
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2222	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2226	Cap, 33u, 20%, 25V, Electrolytic . .	2020 021 90124	
2227	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2247	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2248	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2249	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2330	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177	
2340	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495	
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320	
S 2343	Cap, 3n3, 10%, 2KV, Ceramic.	2020 558 90529	
2345	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020	
2401	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2402	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2403	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2405	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2407	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2409	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2420	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2426	Cap, 100n, 10%, 63V, Metalized Polyester.	2222 370 75104	
2428	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220	
2429	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2430	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2431	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2437	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2438	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2448	Cap, 220p, 10%, 500V, Ceramic. . . .	3198 019 42210	
2450	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91139	
2451	Cap, 15n, 10%, 50V, Polyester. . . .	2020 300 90575	
2451	0.012uF., 5%, 50V, Polyester	3198 014 01230	
2451	0.01uF., 10%, 50V, Polyester, only 27	3198 138 20941	
2456	Cap, 47n, 10%, 250V, Metalized Polyester.	2222 368 90176	
2457	Cap, 360n, 5%, 250V, Metalized Polypropylene.	2222 479 90019	
2458	Cap, 2u2, 20%, 100V, Electrolytic. .	2020 021 91331	
2459	Cap, 680p, 10%, 500V, Ceramic. . . .	3198 019 46810	
2461	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020	
2462	Cap, 47n, 10%, 250V, Metalized Polyester.	2222 368 90176	
S 2463	Cap, 1n2, 10%, 2KV, Ceramic.	2020 558 90488	
2464	Cap, 2u2, 5%, 160V, Polypropylene. .	2222 479 90042	
S 2465	Cap, 12n, 5%, 1600V, Polypropylene .	2222 375 90156	
2467	Cap, 8n2, 10%, 400V, Polyester . . .	2222 347 51822	
2468	Cap, 18n, 10%, 400V, Polyester . . .	2222 347 90222	
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050	
2470	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710	
2472	Cap, 2u2, 20%, 50V, Electrolytic . .	2020 021 90552	
2473	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790	
2481	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740	
2482	Cap, 68n, 10%, 250V, Polyester . . .	2222 347 90234	
2484	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2485	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293	
2486	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2487	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2488	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2489	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2490	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710	
2491	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710	
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810	
2500	0.47uF., 250V, Polyester	4835 121 47569	
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
S 2507	Cap, 1n5, 10%, 1KV, Ceramic.	2020 558 90443	
2508	Cap, 470u, 20%, 200V, Electrolytic .	2020 024 90647	
S 2511	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020	
S 2518	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290	
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320	
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320	
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2530	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 021 91147	
2531	Cap, 1n, 2%, 50V, Polypropylene. . .	2020 310 90049	
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220	
2540	Cap, 100u, 20%, 25V, Electrolytic. .	2020 021 90547	
S 2545	1500pF., 250VAC, Ceramic	4835 122 47621	
S 2550	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2551	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91358	
2561	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020	
S 2562	Cap, 220p, 10%, 1KV, Ceramic	2020 558 90424	
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020	
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020	
2571	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91353	
2572	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330	
2575	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820	
2586	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2604	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290	
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2613	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2615	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2619	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2622	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890	
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2629	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230	
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	

S = Safety Part Be sure to use exact replacement part.

PPC932C101 (continued)

2631	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3251	270k, 5%, 1/10W, Metal Film.	3198 021 52740
2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3252	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
2679	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3253	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
2681	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210		3257	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3258	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3259	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
2850	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810		3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
2851	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046
2852	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
2853	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046
2854	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
2855	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380		3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046
2856	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380	S	3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
2858	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790	S	3341	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483
2859	Cap, 15p, 5%, 50V, Ceramic	3198 016 01590	S	3342	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483
2860	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090		3343	1.5k, 20%, 1/2W, Carbon Composition.	4835 110 47034
2861	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
2862	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	S	3345	VDR, DC, 1mA, 50V, MAX 115V	2322 593 13507
2863	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090		3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
2864	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3401	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2865	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3402	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2866	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3403	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2867	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3405	2.2k, 1%, 0.6W, Metal Film	4835 116 57676
2868	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780		3406	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2869	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3407	2.2k, 1%, 0.6W, Metal Film	4835 116 57676
2870	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2871	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090		3409	1.5 ohm, 5%, 1/3W, Metal Film. . . .	4835 116 57664
2874	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790		3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2875	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790		3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2877	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3420	470k, 5%, 1/10W, Metal Film.	4835 111 37407
2882	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2883	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090		3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2884	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840
2887	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810		3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606
2888	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3425	68k, 5%, 1/10W, Metal Film	4835 111 37273
2889	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3426	39k, 5%, 1/10W, Metal Film	4835 111 27051
2891	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390		3428	22k, 5%, 1/10W, Metal Film	4835 111 37441
2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3429	27k, 5%, 1/10W, Metal Film	4835 111 37442
2952	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3431	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
2954	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3432	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
2955	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3436	Res, 1K, 2%, 0,25W	4822 051 10102
2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3437	10k, 5%, 1/10W, Metal Film	4835 111 37216
2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3438	33k, 1/4W, Carbon Film	4835 110 57375
2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
2960	Cap, 2u2, 20%, 25V, Electrolytic . .	3198 026 32220		3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090		3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090	S	3452	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63229
2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090	S	3454	Res, 33K, 5%, 1 1/3W, Metal Film . .	2322 194 63333
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3013	Zero ohm,.	4835 111 27056	S	3462	Res, 6K8, 5%, 5W, Metal Film	2322 257 41682
3014	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052		3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3015	22k, 5%, 1/10W, Metal Film	4835 111 37441	S	3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810		3467	Res, 14K, 1%, 3/5W, Metal Film . . .	2322 156 21403
3100	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510		3467	Res, 15K, 1%, 3/5W, Metal Film . . .	2322 156 21503
3101	220k, 5%, 1/10W, Metal Film.	4835 111 37235		3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3103	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3470	Res, 220K, 5%, 1/4W, Carbon Film . .	2120 101 74224
3104	10k, 5%, 1/10W, Metal Film	4835 111 37216		3472	Res, 56K, 5%, 1/6W, Carbon Film. . .	3198 011 05630
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510		3473	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3108	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3474	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3109	10k, 5%, 1/10W, Metal Film	4835 111 37216		3475	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3122	220k, 5%, 1/10W, Metal Film.	4835 111 37235		3477	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3123	75 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37276		3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3125	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890		3479	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198 011 03310
3145	Res, 1K, 2%, 0,25W	4822 051 10102		3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703
3155	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259		3481	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903
3201	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253		3482	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903
3203	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443		3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820		3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3205	Res, 1K, 2%, 0,25W	4822 051 10102	S	3485	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
3206	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	S	3486	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3487	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3209	22k, 5%, 1/10W, Metal Film	4835 111 37441	S	3488	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
3212	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253	S	3490	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3213	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	S	3491	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3215	22k, 5%, 1/10W, Metal Film	4835 111 37441	S	3492	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3216	Zero ohm,.	4835 111 27056		3495	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
3217	Res, 1M5, 5%, 1/8W, Metalized Glass.	2322 730 61155		3496	10k, 5%, 1/10W, Metal Film	4835 111 37216
3218	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3497	10k, 5%, 1/10W, Metal Film	4835 111 37216
3219	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3220	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225
3225	100k, 5%, 1/10W, Metal Film.	4835 111 37434		3503	10ohm, 120VAC, Positive Temperature C	
3228	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432			oefficient	4835 116 47001
3231	Zero ohm,.	4835 111 27056	S	3505	Surge Protector.	2422 549 43073
3232	Zero ohm,.	4835 111 27056	S	3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3233	Zero ohm,.	4835 111 27056	S	3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333
3243	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	S	3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102
3246	82k, 5%, 1/10W, Metal Film	4835 111 37277		3512	15k, 5%, 1/10W, Metal Film	4835 111 37458
3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184
3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204
3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340	S	3515	2.5 ohm, 20%, 3.6W, Negative Temperat	
3250	Zero ohm,.	4835 111 27056			ure Coefficient.	2122 612 00023

S = Safety Part Be sure to use exact replacement part.

PPC932C101 (continued)

3516	Res, 1K, 2%, 0,25W	4822 051 10102	
3517	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
S 3518	Res, 0R22, 5%, 3W, Metal Film. . . .	2120 106 90548	
3520	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230	
3521	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443	
S 3525	33 ohm, 5%, 1/3W, Metal Film	4835 116 57665	
3528	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3529	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890	
3530	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320	
3532	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3534	15k, 5%, 1/10W, Metal Film	4835 111 37458	
3536	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830	
3537	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
S 3542	4.7 Megohm, 5%, 1/2W, Metal Film . .	4835 116 57009	
3570	15k, 5%, 1/10W, Metal Film	4835 111 37458	
3571	Res, 150K, 1%, 3/5W, Metal Film. . .	2322 156 21504	
3573	Res, 2K, 1%, 1/10W, Metalized Glass.	2120 108 92657	
3574	33k, 5%, 1/10W, Metal Film	4835 111 37248	
3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3577	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3578	Res, 1K, 2%, 0,25W	4822 051 10102	
3579	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451	
3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3592	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3594	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3595	68k, 5%, 1/6W, Carbon Film	4835 111 37205	
3596	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3597	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3598	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3599	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3607	8.2k, 5%, 1/8W, Inline Package . . .	4835 111 97046	
3608	2.2k, 5%, 1/8W, Inline Package . . .	4835 111 97049	
3609	2.2k, 5%, Resistor Network	2120 108 93868	
3611	Res, 1K, 2%, 0,25W	4822 051 10102	
3612	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3613	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3615	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3617	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3619	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3629	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259	
3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3631	27k, 5%, 1/10W, Metal Film	4835 111 37442	
S 3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63479	
3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210	
3634	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3635	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3636	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3637	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3653	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3654	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3655	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3662	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3663	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3664	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3665	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3666	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376	
3667	27k, 5%, 1/10W, Metal Film	4835 111 37442	
3672	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3673	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3674	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231	
3675	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510	
3676	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510	
3677	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510	
3680	680 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37271	
3681	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3682	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3683	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3684	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3687	220 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37371	
3841	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3842	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3843	47k, 5%, 1/10W, Metal Film	4835 111 37445	
3844	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259	
3845	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259	
3850	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810	
3951	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3953	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272	
3954	1.5k, 5%, 1/10W, Metal Film.	4835 111 37437	
3955	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
3956	1.5k, 5%, 1/10W, Metal Film.	4835 111 37437	
3957	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
4001	Zero ohm,.	4835 111 27056	
4002	Zero ohm,.	4835 111 27056	
4004	Zero ohm,.	4835 111 27056	
4007	Zero ohm,.	4835 111 27056	
4009	Zero ohm,.	4835 111 27056	
4010	Zero ohm,.	4835 111 27056	
4011	Zero ohm,.	4835 111 27056	
4012	Zero ohm,.	4835 111 27056	
4013	Zero ohm,.	4835 111 27056	
4020	Zero ohm,.	4835 111 27056	
4051	Zero ohm,.	4835 111 27056	
4100	Zero ohm,.	4835 111 27056	
4101	Zero ohm,.	4835 111 27056	
4102	Zero ohm,.	4835 111 27056	
4103	Zero ohm,.	4835 111 27056	
4143	Zero ohm,.	4835 111 27056	
4144	Zero ohm,.	4835 111 27056	
4203	Zero ohm,.	4835 111 27056	
4207	Zero ohm,.	4835 111 27056	
4212	Zero ohm,.	4835 111 27056	
4214	Zero ohm,.	4835 111 27056	
4215	Zero ohm,.	4835 111 27056	
4216	Zero ohm,.	4835 111 27056	
4410	Res, 1K, 2%, 0,25W	4822 051 10102	
4501	Zero ohm,.	4835 111 27056	
4602	Zero ohm,.	4835 111 27056	
4650	Zero ohm,.	4835 111 27056	
4651	Zero ohm,.	4835 111 27056	
4652	Zero ohm,.	4835 111 27056	
4654	Zero ohm,.	4835 111 27056	
4655	Zero ohm,.	4835 111 27056	
4684	Zero ohm,.	4835 111 27056	
4687	Zero ohm,.	4835 111 27056	
4831	Zero ohm,.	4835 111 27056	
4832	Zero ohm,.	4835 111 27056	
4833	Zero ohm,.	4835 111 27056	
4902	Zero ohm,.	4835 111 27056	
4903	Zero ohm,.	4835 111 27056	
4904	Zero ohm,.	4835 111 27056	
4905	Zero ohm,.	4835 111 27056	
4909	Zero ohm,.	4835 111 27056	
4911	Zero ohm,.	4835 111 27056	
4912	Zero ohm,.	4835 111 27056	
4914	Zero ohm,.	4835 111 27056	
4957	Zero ohm,.	4835 111 27056	
4999	Zero ohm,.	4835 111 27056	
5000	Coil, 5u6.	3198 018 25680	
5004	Coil, 820n	2422 535 97314	
5101	Coil, 5u6.	3198 018 15680	
5201	Coil, 22u.	3198 018 22290	
5202	Coil, 6u8.	3198 018 16880	
5342	22uH., 10%, Coil, Peaking.	4835 157 67069	
S 5445	Transformer, L.O.T., models ending in C101, C121, and C125	2422 531 02327	
S 5445	Transformer, L.O.T., models ending in C221 and C225.	3128 138 20941	
5451	Coil, 27u.	2422 535 96614	
5457	Coil	3128 138 53181	
5461	Transformer.	3128 138 33811	
5463	Coil, Choke.	3128 138 37021	
5471	Coil, 1m	2422 535 94652	
5480	Coil, 27u.	2422 535 97334	
5480	Coil, 39u.	2422 535 97336	
5480	Coil, 47u.	2422 535 97337	
5480	33uH., Peaking Coil, only in 25. . .	4835 157 58205	
S 5500	Filter, Mains, 5mH, 2A	2422 549 43432	
5516	100uH., Coil	4835 157 67078	
5518	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5521	Coil, 2u2.	3198 018 12280	
5540	Coil, 4u7.	3198 018 14780	
S 5545	Transfomer,.	2422 531 02314	
5551	27uH., 5%, Coil, Peaking	4835 157 67052	
5552	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5572	100uH., Coil	4835 157 67078	
5573	100uH., Coil	4835 157 67078	
5575	100uH., Coil	4835 157 67078	
5576	100uH., Coil	4835 157 67078	
5577	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5600	Coil, 8u2.	3198 018 18280	
5601	Coil, 8u2.	3198 018 18280	
5620	Coil, 6u8.	3198 018 16880	
5821	Coil, 100u	3198 018 21010	
5831	Coil, 12u.	3198 018 21290	
5832	Coil, 12u.	3198 018 21290	
5833	Coil, 12u.	3198 018 11290	
6008	Zener, 33 Volt BZX79-C33	4835 130 37904	
6113	Zener Diode, 6.8 volt.	9340 386 40115	
6125	Zener Diode, 6.8 volt.	9340 386 40115	
6211	Diode, 1N4148.	4835 130 37048	
6212	Diode, 1N4148.	4835 130 37048	
6213	Diode, 1N4148.	4835 130 37048	
6331	Diode.	4835 130 37294	
6333	Diode.	4835 130 37294	

S = Safety Part Be sure to use exact replacement part.

6335	Diode.	4835 130 37294
6401	Diode.	4835 130 37094
6402	Zener, 18 Volt, BZX79-C18.	4835 130 37908
6449	Diode, 1N4148.	4835 130 37048
6450	Diode, 1N4148.	4835 130 37048
6460	Diode, Rect, BY228/20	9336 215 80112
6461	Diode, Rect, BYW95C-20.	9336 215 90112
6463	Diode, 1N4148.	4835 130 37048
6465	Diode, BYD33J.	4835 130 37094
6466	Diode, BYD33J.	4835 130 37094
6470	Zener Diode, 9.1 volt.	9331 177 80133
6472	Diode, 1N4148.	4835 130 37048
6480	Diode, Zener	4835 130 37947
6481	Diode, 1N4148.	4835 130 37048
6485	Diode, BYD33J.	4835 130 37094
6486	Diode, EGP20DL-530	4835 130 37919
6487	Diode.	4835 130 37094
6488	Diode, Rect, BYV27-200.	9322 126 72673
6490	Diode, Rect, BYV27-200.	9322 126 72673
6505	Diode, Bridge Rect, GBU6JL-7002	9322 138 08667
6507	Diode, BYD33J.	4835 130 37094
6508	Diode, BYD33J.	4835 130 37094
6510	Zener Diode, 20 volt	9331 178 60133
6511	Diode, BYV95C.	4835 130 37052
6512	Diode, Rect, BY228/20	4822 130 41275
6513	Diode, Rect, BY228/20	4822 130 41275
6514	Zener, 18 Volt, BZX79-C18.	4835 130 37908
6540	Diode.	4835 130 37294
6550	Diode, Rect, BY229X-800	9340 380 30127
6560	Diode, EGP20DL-530	4835 130 37919
6570	Diode, EGP20DL-530	4835 130 37919
6582	Diode, EGP20DL-530	4835 130 37919
6584	Diode, 1N4148.	4835 130 37048
6585	Diode, 1N4148.	4835 130 37048
6590	Diode, EGP20DL-530	4835 130 37919
6591	Diode, BAS216.	4835 130 37905
6601	Diode, Zener	4835 130 37684
6602	Diode, 1N4148.	4835 130 37048
6603	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
6604	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
6605	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
6606	Zener, 4.7 Volt, BZX79-C4V7.	4835 130 37005
6607	Zener, 6.8 Volt, BZX79-C6V8.	4835 130 37945
6690	LED, LTL-307P.	4835 130 97096
6831	Diode, BAS216.	4835 130 37905
6951	Diode, BAS216.	4835 130 37905
6961	Diode, BAS216.	4835 130 37905
7134	Transistor, BC547B	4835 130 47055
7250	IC,.	9352 620 27112
7251	IC, LM317T	9337 220 80682
7254	Transistor, NPN, BC847B.	4822 130 60511
7256	Transistor, NPN, BC847B.	4822 130 60511
7258	Transistor, NPN, BC847B.	4822 130 60511
7263	Transistor, PNP, BC857B.	5322 130 60508
7266	Transistor, NPN, BC847B.	4822 130 60511
7330	IC,.	9352 184 10112
7401	IC,.	4835 209 88531
7460	Transistor, NPN, BU1508DX.	9340 170 50127
7461	Transistor, NPN, BF819	9335 354 50127
7470	F.E.T., Power, STP16NE06FP	9322 123 96687
7480	IC,.	9322 028 93682
7481	Transistor, BC557B	4835 130 47409
7482	Transistor, PNP, BC857B.	5322 130 60508
7518	STH8NA60FI SMPS FET	9322 068 92687
7518	STH10NC60FI SMPS FET.	9322 155 66687
7520	IC, MC44603A	4835 209 88537
7570	IC,.	9337 711 00676
S 7581	Coupler, TCDT1101G	9338 431 30682
7590	Transistor, NPN, BC847B.	4822 130 60511
7591	Transistor, NPN, BC847B.	4822 130 60511
7592	Transistor, NPN, BC847B.	4822 130 60511
7600	IC, SAA5565-PS/M3/0195 L9 v3.2 (Commercial Models - Pro Plus Models).	9352 673 97112
7601	IC, ST24W16B6, commercial models only	9322 095 35682
7603	Transistor, NPN, BC337	9331 796 00126
7604	Transistor, NPN, BC847B.	4822 130 60511
7605	Transistor, NPN, BC847B.	4822 130 60511
7608	Transistor, NPN, BC847B.	4822 130 60511
7609	Transistor, NPN, BC847B.	4822 130 60511
7680	IR Receiver.	9322 127 53667
7833	IC,.	9322 136 54682
7950	IC,.	4835 209 88543
CBA	00EMF895A102 Main Chassis Board Asm.	00EM F89 5A102

A10757 L9 Audio Jack Panel Parts

	A10757 L9 Audio Jack Panel Parts	
CBA	00A10757A001 L9 Audio Jack Panel Asm.	00A1 075 7A001
C1	Cap, 2u2, 20%, 50V, Electrolytic	3198 028 52280
C2	Cap, 2u2, 20%, 50V, Electrolytic	3198 028 52280
J0214	Connector, 3 Pin	2422 025 16601
J0234	4 Pin Board Connector.	2422 025 15851
J100	Socket, Click, 4 Pin	2422 015 18711
J1214	Connector, 3 Pin	2422 025 16601
J1234	4 Pin Board Connector.	2422 025 12489
JP11	Socket, Cinch, 1 Pin	2422 026 04912
JP12	Socket, Cinch, 1 Pin	2422 026 04374
SW1	Switch	4835 277 27061

A10791 Comb Filter Panel Parts

	A10791 Comb Filter Panel Parts	
CBA	00A10791A001 Comb Filter Panel Asm.	00A1 079 1A001
1000	8 Pin board Connector.	2422 025 12483
1001	Connector, 4 Pin	2422 025 12479
1102	Crystal, Resonator, 32KHz768	2422 543 00056
1254	9 Pin Board Connector.	2422 025 16265
2000	Cap, 100u, 20%, 10V, Electrolytic.	3198 025 11010
2001	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2002	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2003	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2004	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2011	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2012	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2013	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2014	Cap, 220n, +80/-20%, 25V, Ceramic.	3198 023 22240
2020	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2021	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2023	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2025	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2111	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
2113	Battery, 3 Volts	2422 526 01206
3012	220 ohm, 5%, 1/10W, Metal Film	4835 111 37371
3013	220 ohm, 5%, 1/10W, Metal Film	4835 111 37371
3020	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
3026	2.2 Megohm, 5%, 1/10W, Metal Film.	4835 111 27047
3027	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
3028	Zero ohm,.	4835 111 27056
3110	10k, 5%, 1/10W, Metal Film	4835 111 37216
3111	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3116	100 ohm, 5%, 1/10W, Metal Film	4835 111 37432
3117	100 ohm, 5%, 1/10W, Metal Film	4835 111 37432
3118	10k, 5%, 1/10W, Metal Film	4835 111 37216
3119	10k, 5%, 1/10W, Metal Film	4835 111 37216
5000	Coil, 10u.	3198 018 21090
5012	Coil, 15u.	2422 535 94296
5104	Coil, 6u8.	3198 018 26880
6110	Diode, BAS216.	4835 130 37905
7000	IC, SAA4961/V3/S1.	9352 609 51112
7012	Transistor, NPN, BC847B.	4822 130 60511
7110	IC,.	4835 209 17438
7111	IC,.	5322 209 61482
9001	Jumper Wire.	0322 179 00148

A10808 Pro Plus Interface Parts

	A10808 Pro Plus Interface Parts	
CBA	00A10808A001 Pro Plus Interface Asm.	00A1 080 8A001
BR711	Zero ohm,.	4835 111 27056
BR712	Zero ohm,.	4835 111 27056
BR713	Zero ohm,.	4835 111 27056
BR714	Zero ohm,.	4835 111 27056
BRS15	Zero ohm,.	4835 111 27056
BRS16	Zero ohm,.	4835 111 27056
C702	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
C703	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
J0237	Connector, 4 Pin	2422 025 12479
J0238	Connector, 5 Pin	2422 025 06353
J1215	Connector, 2 Pin,.	2422 025 16343
J1227	Connector, 4 Pin	2422 025 16385
J1237	Connector, 4 Pin	2422 025 12479
J1259	Connector, 3 Pin	2422 025 16383
J214	Connector, 3 Pin	2422 025 16382
J216	Connector, 4 Pin	2422 025 15847
J219	Connector, 5 Pin	2422 025 15848
J228	Connector, 3 Pin	2422 025 16407
J236	4 Pin Board Connector.	2422 025 12489
J775	Contact Pin.	2422 024 00626
J800	Connector, 32 Pin.	3135 010 03531
Q700	Transistor, NPN, BC847B.	4822 130 60511
Q701	Transistor, NPN, BC847B.	4822 130 60511
Q704	Transistor, PNP, BC857B.	5322 130 60508
Q705	Transistor, PNP, BC857B.	5322 130 60508
Q706	Transistor, NPN, BC847B.	4822 130 60511
Q707	Transistor, NPN, BC847B.	4822 130 60511
R700	10k, 5%, 1/10W, Metal Film	4835 111 37216
R701	47k, 5%, 1/10W, Metal Film	4835 111 37445
R702	75 ohm, 5%, 1/10W, Metal Film.	4835 111 37276
R703	75 ohm, 5%, 1/10W, Metal Film.	4835 111 37276
R711	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
R712	10k, 5%, 1/10W, Metal Film	4835 111 37216
R713	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
R714	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
R715	10k, 5%, 1/10W, Metal Film	4835 111 37216
R716	47k, 5%, 1/10W, Metal Film	4835 111 37445
R717	10k, 5%, 1/10W, Metal Film	4835 111 37216
R718	100 ohm, 5%, 1/10W, Metal Film	4835 111 37432

S = Safety Part Be sure to use exact replacement part.

PPC932C101 (continued)

R719	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443
R720	Res, 1K, 2%, 0,25W	4822 051 10102
R721	75 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37276
R722	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231
Z700	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z701	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z702	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z703	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z704	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z705	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z706	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z707	Zener Diode, 8.2V, BZX284-C8	4835 130 37922

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	AC Power Cord.	3135 010 04321
S AC02	Anode Clip	4835 256 97264
AC03	Cabinet, Back (ITV).	3135 014 06531
AC04	Cabinet Front.	3135 017 03901
AC05	Chassis Guide.	3139 124 30211
AC06	Control Buttons.	3139 124 26472
S AC08	CRT A80ECK272X56	4835 131 27165
S AC09	Coil, Degaussing	3121 218 62641
AC11	Light Guide.	3139 124 26461
AC12	Nameplate.	4835 459 17546
AC14	Power Button	3139 124 26444
REMOTE	Remote Transmitter, T214AG-GA03. . .	4835 219 17627
AC16	Speaker, 8W (2 Used)	2422 264 00279
S AC17	AC Cord Relief (Not Shown)	3135 010 02841
S AC18	Yoke	3313 203 13511
AC21	Batteries f/Remote Transmitter . . .	9299 000 13827
AC22	Card Do Cover.	4835 432 17929
AC24	Spring	3139 121 26231
AC26	Jack Panel, Plastic.	3135 014 09251
AC28	RF Cable	3135 010 07461

PPC932C121 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts		
S 0127	3.15 Amp Fuse, ...	3122 358 72141	
0152	Cable, DIP, 6 Pin, 400mm	3104 301 09421	
0153	4 Pin Cable.	3104 301 09431	
0212	Connector, 2 Pin	2422 025 15396	
0213	Connector, 3 Pin	2412 020 00725	
0214	Connector, 3 Pin	2422 025 16382	
0215	Connector, 2 Pin,.	2422 025 16343	
0216	Connector, 4 Pin	2422 025 15847	
0219	Connector, 5 Pin	2422 025 15848	
0219	5 Pin Board Connector.	2422 025 16387	
0220	4 Pin Board Connector.	2422 025 04852	
0224	1 Pin Board Connector.	2422 034 20021	
0228	1 Pin Board Connector.	2422 034 20021	
0234	Connector, 4 Pin	2422 025 12479	
0236	4 Pin Board Connector.	2422 025 16384	
0237	Connector, 4 Pin	2422 025 12479	
0238	Connector, 5 Pin	2422 025 12481	
0238	Connector, 5 Pin	2422 025 15848	
S 0243	Connector, 6 Pin	2422 025 04854	
0244	4 Pin Board Connector.	2422 025 04852	
S 0245	Connector, 6 Pin	2422 025 04854	
S 0254	CRT Socket (9 Pin)	2422 500 80022	
0259	Connector, 3 Pin	2422 025 16383	
0262	Connector, 4 Pin	2422 025 16385	
0267	Connector, 3 Pin	2412 020 00725	
1000	Tuner.	2422 542 90051	
1003	45 MHz SAW, Filter,.	2422 549 42433	
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807	
1208	Crystal Resonator.	4835 242 77276	
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10869	
S 1572	1 Amp, Radial Fuse,.	4835 253 97162	
S 1573	2.5 Amp Fuse, Radial,.	2422 086 10422	
S 1580	Relay, 12V	2422 132 07317	
1600	Switch, Tactile.	2422 128 02742	
1601	Switch, Tactile.	2422 128 02742	
1602	Switch, Tactile.	2422 128 02742	
1603	Switch, Tactile.	2422 128 02742	
1606	Switch, Tactile.	2422 128 02742	
1660	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488	
1822	Crystal Resonator, 18MHz432, 12 Pin, HC49/U A	2422 543 00842	
2001	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2002	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2003	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2004	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2011	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2101	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2102	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2103	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2104	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2111	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2112	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2115	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2201	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2205	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2207	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2208	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2209	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2211	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2212	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2213	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2214	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2215	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280	
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 16654	
2220	Cap, 18p, 5%, 50V, Ceramic	3198 016 01890	
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2222	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2226	Cap, 33u, 20%, 25V, Electrolytic . .	2020 021 90124	
2227	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2247	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2248	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2249	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2330	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177	
2340	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495	
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320	
S 2343	Cap, 3n3, 10%, 2KV, Ceramic.	2020 558 90529	
2345	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020	
2401	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2402	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2403	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2405	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2407	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2409	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2420	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2426	Cap, 100n, 10%, 63V, Metalized Polyester.	2222 370 75104	
2428	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220	
2429	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2430	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2431	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2437	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2438	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2448	Cap, 220p, 10%, 500V, Ceramic. . . .	3198 019 42210	
2450	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91139	
2451	Cap, 15n, 10%, 50V, Polyester. . . .	2020 300 90575	
2451	0.012uF., 5%, 50V, Polyester	3198 014 01230	
2451	0.01uF., 10%, 50V, Polyester, only 27	3198 138 20941	
2456	Cap, 47n, 10%, 250V, Metalized Polyester.	2222 368 90176	
2457	Cap, 360n, 5%, 250V, Metalized Polypropylene.	2222 479 90019	
2458	Cap, 2u2, 20%, 100V, Electrolytic. .	2020 021 91331	
2459	Cap, 680p, 10%, 500V, Ceramic. . . .	3198 019 46810	
2461	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020	
2462	Cap, 47n, 10%, 250V, Metalized Polyester.	2222 368 90176	
S 2463	Cap, 1n2, 10%, 2KV, Ceramic.	2020 558 90488	
2464	Cap, 2u2, 5%, 160V, Polypropylene. .	2222 479 90042	
S 2465	Cap, 12n, 5%, 1600V, Polypropylene .	2222 375 90156	
2467	Cap, 8n2, 10%, 400V, Polyester . . .	2222 347 51822	
2468	Cap, 18n, 10%, 400V, Polyester . . .	2222 347 90222	
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050	
2470	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710	
2472	Cap, 2u2, 20%, 50V, Electrolytic . .	2020 021 90552	
2473	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790	
2481	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740	
2482	Cap, 68n, 10%, 250V, Polyester . . .	2222 347 90234	
2484	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2485	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293	
2486	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2487	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2488	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2489	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2490	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710	
2491	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710	
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810	
2500	0.47uF., 250V, Polyester	4835 121 47569	
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
S 2507	Cap, 1n5, 10%, 1KV, Ceramic.	2020 558 90443	
2508	Cap, 470u, 20%, 200V, Electrolytic .	2020 024 90647	
S 2511	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020	
S 2518	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290	
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320	
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320	
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2530	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 021 91147	
2531	Cap, 1n, 2%, 50V, Polypropylene. . .	2020 310 90049	
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220	
2540	Cap, 100u, 20%, 25V, Electrolytic. .	2020 021 90547	
S 2545	1500pF., 250VAC, Ceramic	4835 122 47621	
S 2550	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2551	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91358	
2561	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020	
S 2562	Cap, 220p, 10%, 1KV, Ceramic	2020 558 90424	
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020	
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020	
2571	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91353	
2572	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330	
2575	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820	
2586	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2604	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290	
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2613	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2615	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2619	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2622	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890	
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2629	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230	
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	

S = Safety Part Be sure to use exact replacement part.

PPC932C121 (continued)

2631	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3251	270k, 5%, 1/10W, Metal Film.	3198 021 52740
2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3252	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
2679	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3253	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
2681	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210		3257	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3258	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3259	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
2850	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810		3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
2851	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046
2852	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
2853	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046
2854	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
2855	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380		3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046
2856	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380	S	3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
2858	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790	S	3341	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483
2859	Cap, 15p, 5%, 50V, Ceramic	3198 016 01590	S	3342	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483
2860	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090		3343	1.5k, 20%, 1/2W, Carbon Composition.	4835 110 47034
2861	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
2862	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	S	3345	VDR, DC, 1mA, 50V, MAX 115V	2322 593 13507
2863	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090		3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
2864	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3401	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2865	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3402	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2866	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3403	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2867	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3405	2.2k, 1%, 0.6W, Metal Film	4835 116 57676
2868	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780		3406	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2869	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3407	2.2k, 1%, 0.6W, Metal Film	4835 116 57676
2870	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2871	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090		3409	1.5 ohm, 5%, 1/3W, Metal Film. . . .	4835 116 57664
2874	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790		3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2875	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790		3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2877	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3420	470k, 5%, 1/10W, Metal Film.	4835 111 37407
2882	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2883	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090		3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2884	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840
2887	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810		3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606
2888	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3425	68k, 5%, 1/10W, Metal Film	4835 111 37273
2889	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3426	39k, 5%, 1/10W, Metal Film	4835 111 27051
2891	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390		3428	22k, 5%, 1/10W, Metal Film	4835 111 37441
2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3429	27k, 5%, 1/10W, Metal Film	4835 111 37442
2952	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3431	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
2954	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3432	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
2955	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3436	Res, 1K, 2%, 0,25W	4822 051 10102
2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3437	10k, 5%, 1/10W, Metal Film	4835 111 37216
2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3438	33k, 1/4W, Carbon Film	4835 110 57375
2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
2960	Cap, 2u2, 20%, 25V, Electrolytic . .	3198 026 32220		3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090		3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090	S	3452	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63229
2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090	S	3454	Res, 33K, 5%, 1 1/3W, Metal Film . .	2322 194 63333
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3013	Zero ohm,.	4835 111 27056	S	3462	Res, 6K8, 5%, 5W, Metal Film	2322 257 41682
3014	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052		3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3015	22k, 5%, 1/10W, Metal Film	4835 111 37441	S	3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810		3467	Res, 14K, 1%, 3/5W, Metal Film . . .	2322 156 21403
3100	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510		3467	Res, 15K, 1%, 3/5W, Metal Film . . .	2322 156 21503
3101	220k, 5%, 1/10W, Metal Film.	4835 111 37235		3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3103	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3470	Res, 220K, 5%, 1/4W, Carbon Film . .	2120 101 74224
3104	10k, 5%, 1/10W, Metal Film	4835 111 37216		3472	Res, 56K, 5%, 1/6W, Carbon Film. . .	3198 011 05630
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510		3473	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3108	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3474	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3109	10k, 5%, 1/10W, Metal Film	4835 111 37216		3475	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3122	220k, 5%, 1/10W, Metal Film.	4835 111 37235		3477	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3123	75 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37276		3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3125	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890		3479	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198 011 03310
3145	Res, 1K, 2%, 0,25W	4822 051 10102		3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703
3155	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259		3481	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903
3201	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253		3482	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903
3203	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443		3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820		3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3205	Res, 1K, 2%, 0,25W	4822 051 10102	S	3485	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
3206	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	S	3486	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3487	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3209	22k, 5%, 1/10W, Metal Film	4835 111 37441	S	3488	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
3212	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253	S	3490	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3213	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	S	3491	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3215	22k, 5%, 1/10W, Metal Film	4835 111 37441	S	3492	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3216	Zero ohm,.	4835 111 27056		3495	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
3217	Res, 1M5, 5%, 1/8W, Metalized Glass.	2322 730 61155		3496	10k, 5%, 1/10W, Metal Film	4835 111 37216
3218	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3497	10k, 5%, 1/10W, Metal Film	4835 111 37216
3219	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3220	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225
3225	100k, 5%, 1/10W, Metal Film.	4835 111 37434		3503	10ohm, 120VAC, Positive Temperature C	
3228	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432			oefficient	4835 116 47001
3231	Zero ohm,.	4835 111 27056	S	3505	Surge Protector.	2422 549 43073
3232	Zero ohm,.	4835 111 27056	S	3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3233	Zero ohm,.	4835 111 27056	S	3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333
3243	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	S	3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102
3246	82k, 5%, 1/10W, Metal Film	4835 111 37277		3512	15k, 5%, 1/10W, Metal Film	4835 111 37458
3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184
3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204
3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340	S	3515	2.5 ohm, 20%, 3.6W, Negative Temperat	
3250	Zero ohm,.	4835 111 27056			ure Coefficient.	2122 612 00023

S = Safety Part Be sure to use exact replacement part.

PPC932C121 (continued)

3516	Res, 1K, 2%, 0,25W	4822 051 10102	
3517	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	
S 3518	Res, 0R22, 5%, 3W, Metal Film.	2120 106 90548	
3520	Res, 82K, 5%, 1/6W, Carbon Film.	3198 011 08230	
3521	330 ohm, 5%, 1/10W, Metal Film	4835 111 37443	
S 3525	33 ohm, 5%, 1/3W, Metal Film	4835 116 57665	
3528	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3529	Res, 68 ohm, 5%, 1/6W, Carbon Film	3198 011 06890	
3530	Res, 3K3, 5%, 1/6W, Carbon Film.	3198 011 03320	
3532	Res, 6K8, 5%, 1/6W, Carbon Film.	3198 011 06820	
3534	15k, 5%, 1/10W, Metal Film	4835 111 37458	
3536	Res, 18K, 5%, 1/6W, Carbon Film.	3198 011 01830	
3537	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030	
S 3542	4.7 Megohm, 5%, 1/2W, Metal Film	4835 116 57009	
3570	15k, 5%, 1/10W, Metal Film	4835 111 37458	
3571	Res, 150K, 1%, 3/5W, Metal Film.	2322 156 21504	
3573	Res, 2K, 1%, 1/10W, Metalized Glass.	2120 108 92657	
3574	33k, 5%, 1/10W, Metal Film	4835 111 37248	
3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3577	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030	
3578	Res, 1K, 2%, 0,25W	4822 051 10102	
3579	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451	
3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3592	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3594	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3595	68k, 5%, 1/6W, Carbon Film	4835 111 37205	
3596	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030	
3597	100 ohm, 5%, 1/10W, Metal Film	4835 111 37432	
3598	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3599	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3607	8.2k, 5%, 1/8W, Inline Package	4835 111 97046	
3608	2.2k, 5%, 1/8W, Inline Package	4835 111 97049	
3609	2.2k, 5%, Resistor Network	2120 108 93868	
3611	Res, 1K, 2%, 0,25W	4822 051 10102	
3612	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3613	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3615	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3617	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3619	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3629	470 ohm, 5%, 1/10W, Metal Film	4835 111 37259	
3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3631	27k, 5%, 1/10W, Metal Film	4835 111 37442	
S 3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63479	
3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210	
3634	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3635	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3636	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3637	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3653	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030	
3654	100 ohm, 5%, 1/10W, Metal Film	4835 111 37432	
3655	100 ohm, 5%, 1/10W, Metal Film	4835 111 37432	
3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3662	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3663	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3664	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3665	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3666	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376	
3667	27k, 5%, 1/10W, Metal Film	4835 111 37442	
3672	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3673	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3674	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231	
3675	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510	
3676	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510	
3677	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510	
3680	680 ohm, 5%, 1/10W, Metal Film	4835 111 37271	
3681	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3682	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3683	100 ohm, 5%, 1/10W, Metal Film	4835 111 37432	
3684	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3687	220 ohm, 5%, 1/10W, Metal Film	4835 111 37371	
3841	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3842	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3843	47k, 5%, 1/10W, Metal Film	4835 111 37445	
3844	470 ohm, 5%, 1/10W, Metal Film	4835 111 37259	
3845	470 ohm, 5%, 1/10W, Metal Film	4835 111 37259	
3850	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810	
3951	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3953	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272	
3954	1.5k, 5%, 1/10W, Metal Film.	4835 111 37437	
3955	Res, 4K7, 5%, 1/6W, Carbon Film.	3198 011 04720	
3956	1.5k, 5%, 1/10W, Metal Film.	4835 111 37437	
3957	Res, 4K7, 5%, 1/6W, Carbon Film.	3198 011 04720	
4001	Zero ohm,	4835 111 27056	
4002	Zero ohm,	4835 111 27056	
4004	Zero ohm,	4835 111 27056	
4007	Zero ohm,	4835 111 27056	
4009	Zero ohm,	4835 111 27056	
4010	Zero ohm,	4835 111 27056	
4011	Zero ohm,	4835 111 27056	
4012	Zero ohm,	4835 111 27056	
4013	Zero ohm,	4835 111 27056	
4020	Zero ohm,	4835 111 27056	
4051	Zero ohm,	4835 111 27056	
4100	Zero ohm,	4835 111 27056	
4101	Zero ohm,	4835 111 27056	
4102	Zero ohm,	4835 111 27056	
4103	Zero ohm,	4835 111 27056	
4143	Zero ohm,	4835 111 27056	
4144	Zero ohm,	4835 111 27056	
4203	Zero ohm,	4835 111 27056	
4207	Zero ohm,	4835 111 27056	
4212	Zero ohm,	4835 111 27056	
4214	Zero ohm,	4835 111 27056	
4215	Zero ohm,	4835 111 27056	
4216	Zero ohm,	4835 111 27056	
4410	Res, 1K, 2%, 0,25W	4822 051 10102	
4501	Zero ohm,	4835 111 27056	
4602	Zero ohm,	4835 111 27056	
4650	Zero ohm,	4835 111 27056	
4651	Zero ohm,	4835 111 27056	
4652	Zero ohm,	4835 111 27056	
4654	Zero ohm,	4835 111 27056	
4655	Zero ohm,	4835 111 27056	
4684	Zero ohm,	4835 111 27056	
4687	Zero ohm,	4835 111 27056	
4831	Zero ohm,	4835 111 27056	
4832	Zero ohm,	4835 111 27056	
4833	Zero ohm,	4835 111 27056	
4902	Zero ohm,	4835 111 27056	
4903	Zero ohm,	4835 111 27056	
4904	Zero ohm,	4835 111 27056	
4905	Zero ohm,	4835 111 27056	
4909	Zero ohm,	4835 111 27056	
4911	Zero ohm,	4835 111 27056	
4912	Zero ohm,	4835 111 27056	
4914	Zero ohm,	4835 111 27056	
4957	Zero ohm,	4835 111 27056	
4999	Zero ohm,	4835 111 27056	
5000	Coil, 5u6.	3198 018 25680	
5004	Coil, 820n	2422 535 97314	
5101	Coil, 5u6.	3198 018 15680	
5201	Coil, 22u.	3198 018 22290	
5202	Coil, 6u8.	3198 018 16880	
5342	22uH., 10%, Coil, Peaking.	4835 157 67069	
S 5445	Transformer, L.O.T., models ending in C101, C121, and C125	2422 531 02327	
S 5445	Transformer, L.O.T., models ending in C221 and C225.	3128 138 20941	
5451	Coil, 27u.	2422 535 96614	
5457	Coil	3128 138 53181	
5461	Transformer.	3128 138 33811	
5463	Coil, Choke.	3128 138 37021	
5471	Coil, 1m	2422 535 94652	
5480	Coil, 27u.	2422 535 97334	
5480	Coil, 39u.	2422 535 97336	
5480	Coil, 47u.	2422 535 97337	
5480	33uH., Peaking Coil, only in 25.	4835 157 58205	
S 5500	Filter, Mains, 5mH, 2A	2422 549 43432	
5516	100uH., Coil	4835 157 67078	
5518	Fixed, Inductor, 100MHz, 50R.	3198 018 90010	
5521	Coil, 2u2.	3198 018 12280	
5540	Coil, 4u7.	3198 018 14780	
S 5545	Transfomer,	2422 531 02314	
5551	27uH., 5%, Coil, Peaking	4835 157 67052	
5552	Fixed, Inductor, 100MHz, 50R.	3198 018 90010	
5572	100uH., Coil	4835 157 67078	
5573	100uH., Coil	4835 157 67078	
5575	100uH., Coil	4835 157 67078	
5576	100uH., Coil	4835 157 67078	
5577	Fixed, Inductor, 100MHz, 50R.	3198 018 90010	
5600	Coil, 8u2.	3198 018 18280	
5601	Coil, 8u2.	3198 018 18280	
5620	Coil, 6u8.	3198 018 16880	
5821	Coil, 100u	3198 018 21010	
5831	Coil, 12u.	3198 018 21290	
5832	Coil, 12u.	3198 018 21290	
5833	Coil, 12u.	3198 018 11290	
6008	Zener, 33 Volt BZX79-C33	4835 130 37904	
6113	Zener Diode, 6.8 volt.	9340 386 40115	
6125	Zener Diode, 6.8 volt.	9340 386 40115	
6211	Diode, 1N4148.	4835 130 37048	
6212	Diode, 1N4148.	4835 130 37048	
6213	Diode, 1N4148.	4835 130 37048	
6331	Diode.	4835 130 37294	
6333	Diode.	4835 130 37294	

S = Safety Part Be sure to use exact replacement part.

PPC932C121 (continued)

6335	Diode.	4835 130 37294
6401	Diode.	4835 130 37094
6402	Zener, 18 Volt, BZX79-C18.	4835 130 37908
6449	Diode, 1N4148.	4835 130 37048
6450	Diode, 1N4148.	4835 130 37048
6460	Diode, Rect, BY228/20	9336 215 80112
6461	Diode, Rect, BYW95C-20.	9336 215 90112
6463	Diode, 1N4148.	4835 130 37048
6465	Diode, BYD33J.	4835 130 37094
6466	Diode, BYD33J.	4835 130 37094
6470	Zener Diode, 9.1 volt.	9331 177 80133
6472	Diode, 1N4148.	4835 130 37048
6480	Diode, Zener	4835 130 37947
6481	Diode, 1N4148.	4835 130 37048
6485	Diode, BYD33J.	4835 130 37094
6486	Diode, EGP20DL-530	4835 130 37919
6487	Diode.	4835 130 37094
6488	Diode, Rect, BYV27-200.	9322 126 72673
6490	Diode, Rect, BYV27-200.	9322 126 72673
6505	Diode, Bridge Rect, GBU6JL-7002	9322 138 08667
6507	Diode, BYD33J.	4835 130 37094
6508	Diode, BYD33J.	4835 130 37094
6510	Zener Diode, 20 volt	9331 178 60133
6511	Diode, BYV95C.	4835 130 37052
6512	Diode, Rect, BY228/20	4822 130 41275
6513	Diode, Rect, BY228/20	4822 130 41275
6514	Zener, 18 Volt, BZX79-C18.	4835 130 37908
6540	Diode.	4835 130 37294
6550	Diode, Rect, BY229X-800	9340 380 30127
6560	Diode, EGP20DL-530	4835 130 37919
6570	Diode, EGP20DL-530	4835 130 37919
6582	Diode, EGP20DL-530	4835 130 37919
6584	Diode, 1N4148.	4835 130 37048
6585	Diode, 1N4148.	4835 130 37048
6590	Diode, EGP20DL-530	4835 130 37919
6591	Diode, BAS216.	4835 130 37905
6601	Diode, Zener	4835 130 37684
6602	Diode, 1N4148.	4835 130 37048
6603	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
6604	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
6605	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
6606	Zener, 4.7 Volt, BZX79-C4V7.	4835 130 37005
6607	Zener, 6.8 Volt, BZX79-C6V8.	4835 130 37945
6690	LED, LTL-307P.	4835 130 97096
6831	Diode, BAS216.	4835 130 37905
6951	Diode, BAS216.	4835 130 37905
6961	Diode, BAS216.	4835 130 37905
7134	Transistor, BC547B	4835 130 47055
7250	IC,.	9352 620 27112
7251	IC, LM317T	9337 220 80682
7254	Transistor, NPN, BC847B.	4822 130 60511
7256	Transistor, NPN, BC847B.	4822 130 60511
7258	Transistor, NPN, BC847B.	4822 130 60511
7263	Transistor, PNP, BC857B.	5322 130 60508
7266	Transistor, NPN, BC847B.	4822 130 60511
7330	IC,.	9352 184 10112
7401	IC,.	4835 209 88531
7460	Transistor, NPN, BU1508DX.	9340 170 50127
7461	Transistor, NPN, BF819	9335 354 50127
7470	F.E.T., Power, STP16NE06FP	9322 123 96687
7480	IC,.	9322 028 93682
7481	Transistor, BC557B	4835 130 47409
7482	Transistor, PNP, BC857B.	5322 130 60508
7518	STH8NA60FI SMPS FET	9322 068 92687
7518	STH10NC60FI SMPS FET.	9322 155 66687
7520	IC, MC44603A	4835 209 88537
7570	IC,.	9337 711 00676
S 7581	Coupler, TCDT1101G	9338 431 30682
7590	Transistor, NPN, BC847B.	4822 130 60511
7591	Transistor, NPN, BC847B.	4822 130 60511
7592	Transistor, NPN, BC847B.	4822 130 60511
7600	IC, SAA5565-PS/M3/0195 L9 v3.2 (Commercial Models - Pro Plus Models).	9352 673 97112
7601	IC, ST24W16B6, commercial models only	9322 095 35682
7603	Transistor, NPN, BC337	9331 796 00126
7604	Transistor, NPN, BC847B.	4822 130 60511
7605	Transistor, NPN, BC847B.	4822 130 60511
7608	Transistor, NPN, BC847B.	4822 130 60511
7609	Transistor, NPN, BC847B.	4822 130 60511
7680	IR Receiver.	9322 127 53667
7833	IC,.	9322 136 54682
7950	IC,.	4835 209 88543
CBA	00EMF895A002 Main Chassis Board Asm.	00EM F89 5A002

A10757 L9 Audio Jack Panel Parts

	A10757 L9 Audio Jack Panel Parts	
CBA	00A10757A001 L9 Audio Jack Panel Asm.	00A1 075 7A001
C1	Cap, 2u2, 20%, 50V, Electrolytic	3198 028 52280
C2	Cap, 2u2, 20%, 50V, Electrolytic	3198 028 52280
J0214	Connector, 3 Pin	2422 025 16601
J0234	4 Pin Board Connector.	2422 025 15851
J100	Socket, Click, 4 Pin	2422 015 18711
J1214	Connector, 3 Pin	2422 025 16601
J1234	4 Pin Board Connector.	2422 025 12489
JP11	Socket, Cinch, 1 Pin	2422 026 04912
JP12	Socket, Cinch, 1 Pin	2422 026 04374
SW1	Switch	4835 277 27061

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	AC Power Cord.	3135 010 04321
AC02	Clip, Anode Lead	3135 014 04471
AC03	Cabinet, Back (ITV).	3135 014 06531
AC04	Cabinet Front.	3135 017 03901
AC05	L9L CHASSIS TRAY-32V	3139 124 31323
AC06	Control Buttons.	3139 124 26472
S AC08	CRT A80ECK272X56	9301 795 00428
S AC09	Coil, Degaussing	2422 549 43977
AC10	Holder, Degaussing (4 Used).	3135 013 01661
AC11	Light Guide.	3139 124 26461
AC12	Nameplate.	3135 015 03571
AC13	Owner's Manual	3135 015 20911
AC14	Power Button	3139 124 26444
REMOTE	Transmitter, Remote, RC2524 /01.	3139 228 84651
AC16	Speaker, 5W, 16 ohm (2 Used)	2422 264 00333
AC21	Battery, 1.5V AA, 2-Pack, (Not Shown	9299 000 10137
AC24	Spring	3139 121 26231

S = Safety Part Be sure to use exact replacement part.

PPC932C221 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts		
S 0127	3.15 Amp Fuse, ...	3122 358 72141	
0152	Cable, DIP, 6 Pin, 400mm	3104 301 09421	
0153	4 Pin Cable.	3104 301 09431	
0212	Connector, 2 Pin	2422 025 15396	
0213	Connector, 3 Pin	2412 020 00725	
0214	Connector, 3 Pin	2422 025 16382	
0215	Connector, 2 Pin,.	2422 025 16343	
0216	Connector, 4 Pin	2422 025 15847	
0219	Connector, 5 Pin	2422 025 15848	
0219	5 Pin Board Connector.	2422 025 16387	
0220	4 Pin Board Connector.	2422 025 04852	
0224	1 Pin Board Connector.	2422 034 20021	
0228	1 Pin Board Connector.	2422 034 20021	
0234	Connector, 4 Pin	2422 025 12479	
0236	4 Pin Board Connector.	2422 025 16384	
0237	Connector, 4 Pin	2422 025 12479	
0238	Connector, 5 Pin	2422 025 12481	
0238	Connector, 5 Pin	2422 025 15848	
S 0243	Connector, 6 Pin	2422 025 04854	
0244	4 Pin Board Connector.	2422 025 04852	
S 0245	Connector, 6 Pin	2422 025 04854	
S 0254	CRT Socket (9 Pin)	2422 500 80022	
0259	Connector, 3 Pin	2422 025 16383	
0262	Connector, 4 Pin	2422 025 16385	
0267	Connector, 3 Pin	2412 020 00725	
1000	Tuner.	2422 542 90051	
1003	45 MHz SAW, Filter,.	2422 549 42433	
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807	
1208	Crystal Resonator.	4835 242 77276	
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10869	
S 1572	1 Amp, Radial Fuse,.	4835 253 97162	
S 1573	2.5 Amp Fuse, Radial,.	2422 086 10422	
S 1580	Relay, 12V	2422 132 07317	
1600	Switch, Tactile.	2422 128 02742	
1601	Switch, Tactile.	2422 128 02742	
1602	Switch, Tactile.	2422 128 02742	
1603	Switch, Tactile.	2422 128 02742	
1606	Switch, Tactile.	2422 128 02742	
1660	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488	
1822	Crystal Resonator, 18MHz432, 12 Pin, HC49/U A	2422 543 00842	
2001	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2002	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2003	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2004	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2011	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2101	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2102	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2103	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2104	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2111	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2112	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2115	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2201	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2205	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2207	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2208	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2209	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2211	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2212	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2213	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2214	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2215	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280	
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 16654	
2220	Cap, 18p, 5%, 50V, Ceramic	3198 016 01890	
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2222	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2226	Cap, 33u, 20%, 25V, Electrolytic . .	2020 021 90124	
2227	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2247	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2248	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2249	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2330	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177	
2340	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495	
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320	
S 2343	Cap, 3n3, 10%, 2KV, Ceramic.	2020 558 90529	
2345	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020	
2401	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2402	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2403	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2405	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2407	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2409	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2420	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2426	Cap, 100n, 10%, 63V, Metalized Polyester.	2222 370 75104	
2428	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220	
2429	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2430	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2431	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2437	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2438	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2448	Cap, 220p, 10%, 500V, Ceramic. . . .	3198 019 42210	
2450	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91139	
2451	Cap, 15n, 10%, 50V, Polyester. . . .	2020 300 90575	
2451	0.012uF., 5%, 50V, Polyester	3198 014 01230	
2451	0.01uF., 10%, 50V, Polyester, only 27	3198 138 20941	
2456	Cap, 47n, 10%, 250V, Metalized Polyester.	2222 368 90176	
2457	Cap, 360n, 5%, 250V, Metalized Polypropylene.	2222 479 90019	
2458	Cap, 2u2, 20%, 100V, Electrolytic. .	2020 021 91331	
2459	Cap, 680p, 10%, 500V, Ceramic. . . .	3198 019 46810	
2461	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020	
2462	Cap, 47n, 10%, 250V, Metalized Polyester.	2222 368 90176	
S 2463	Cap, 1n2, 10%, 2KV, Ceramic.	2020 558 90488	
2464	Cap, 2u2, 5%, 160V, Polypropylene. .	2222 479 90042	
S 2465	Cap, 12n, 5%, 1600V, Polypropylene .	2222 375 90156	
2467	Cap, 8n2, 10%, 400V, Polyester . . .	2222 347 51822	
2468	Cap, 18n, 10%, 400V, Polyester . . .	2222 347 90222	
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050	
2470	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710	
2472	Cap, 2u2, 20%, 50V, Electrolytic . .	2020 021 90552	
2473	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790	
2481	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740	
2482	Cap, 68n, 10%, 250V, Polyester . . .	2222 347 90234	
2484	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2485	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293	
2486	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2487	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2488	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2489	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2490	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710	
2491	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710	
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810	
2500	0.47uF., 250V, Polyester	4835 121 47569	
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
S 2507	Cap, 1n5, 10%, 1KV, Ceramic.	2020 558 90443	
2508	Cap, 470u, 20%, 200V, Electrolytic .	2020 024 90647	
S 2511	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020	
S 2518	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290	
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320	
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320	
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2530	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 021 91147	
2531	Cap, 1n, 2%, 50V, Polypropylene. . .	2020 310 90049	
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220	
2540	Cap, 100u, 20%, 25V, Electrolytic. .	2020 021 90547	
S 2545	1500pF., 250VAC, Ceramic	4835 122 47621	
S 2550	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2551	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91358	
2561	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020	
S 2562	Cap, 220p, 10%, 1KV, Ceramic	2020 558 90424	
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020	
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020	
2571	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91353	
2572	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330	
2575	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820	
2586	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2604	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290	
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2613	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2615	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2619	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2622	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890	
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2629	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230	
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	

S = Safety Part Be sure to use exact replacement part.

PPC932C221 (continued)

2631	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3251	270k, 5%, 1/10W, Metal Film.	3198 021 52740
2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3252	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
2679	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3253	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
2681	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210		3257	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3258	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3259	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
2850	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810		3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
2851	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046
2852	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
2853	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046
2854	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
2855	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380		3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046
2856	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380	S	3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
2858	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790	S	3341	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483
2859	Cap, 15p, 5%, 50V, Ceramic	3198 016 01590	S	3342	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483
2860	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090		3343	1.5k, 20%, 1/2W, Carbon Composition.	4835 110 47034
2861	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
2862	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	S	3345	VDR, DC, 1mA, 50V, MAX 115V	2322 593 13507
2863	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090		3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
2864	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3401	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2865	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3402	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2866	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3403	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2867	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3405	2.2k, 1%, 0.6W, Metal Film	4835 116 57676
2868	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780		3406	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2869	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3407	2.2k, 1%, 0.6W, Metal Film	4835 116 57676
2870	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2871	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090		3409	1.5 ohm, 5%, 1/3W, Metal Film. . . .	4835 116 57664
2874	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790		3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2875	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790		3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2877	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3420	470k, 5%, 1/10W, Metal Film.	4835 111 37407
2882	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2883	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090		3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2884	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840
2887	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810		3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606
2888	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3425	68k, 5%, 1/10W, Metal Film	4835 111 37273
2889	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3426	39k, 5%, 1/10W, Metal Film	4835 111 27051
2891	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390		3428	22k, 5%, 1/10W, Metal Film	4835 111 37441
2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3429	27k, 5%, 1/10W, Metal Film	4835 111 37442
2952	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3431	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
2954	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3432	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
2955	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3436	Res, 1K, 2%, 0,25W	4822 051 10102
2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3437	10k, 5%, 1/10W, Metal Film	4835 111 37216
2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3438	33k, 1/4W, Carbon Film	4835 110 57375
2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
2960	Cap, 2u2, 20%, 25V, Electrolytic . .	3198 026 32220		3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090		3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090	S	3452	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63229
2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090	S	3454	Res, 33K, 5%, 1 1/3W, Metal Film . .	2322 194 63333
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3013	Zero ohm,.	4835 111 27056	S	3462	Res, 6K8, 5%, 5W, Metal Film	2322 257 41682
3014	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052		3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3015	22k, 5%, 1/10W, Metal Film	4835 111 37441	S	3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810		3467	Res, 14K, 1%, 3/5W, Metal Film . . .	2322 156 21403
3100	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510		3467	Res, 15K, 1%, 3/5W, Metal Film . . .	2322 156 21503
3101	220k, 5%, 1/10W, Metal Film.	4835 111 37235		3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3103	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3470	Res, 220K, 5%, 1/4W, Carbon Film . .	2120 101 74224
3104	10k, 5%, 1/10W, Metal Film	4835 111 37216		3472	Res, 56K, 5%, 1/6W, Carbon Film. . .	3198 011 05630
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510		3473	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3108	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3474	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3109	10k, 5%, 1/10W, Metal Film	4835 111 37216		3475	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3122	220k, 5%, 1/10W, Metal Film.	4835 111 37235		3477	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3123	75 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37276		3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3125	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890		3479	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198 011 03310
3145	Res, 1K, 2%, 0,25W	4822 051 10102		3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703
3155	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259		3481	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903
3201	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253		3482	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903
3203	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443		3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820		3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3205	Res, 1K, 2%, 0,25W	4822 051 10102	S	3485	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
3206	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	S	3486	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3487	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3209	22k, 5%, 1/10W, Metal Film	4835 111 37441	S	3488	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
3212	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253	S	3490	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3213	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	S	3491	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3215	22k, 5%, 1/10W, Metal Film	4835 111 37441	S	3492	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3216	Zero ohm,.	4835 111 27056		3495	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
3217	Res, 1M5, 5%, 1/8W, Metalized Glass.	2322 730 61155		3496	10k, 5%, 1/10W, Metal Film	4835 111 37216
3218	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3497	10k, 5%, 1/10W, Metal Film	4835 111 37216
3219	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3220	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225
3225	100k, 5%, 1/10W, Metal Film.	4835 111 37434		3503	10ohm, 120VAC, Positive Temperature C	
3228	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432			oefficient	4835 116 47001
3231	Zero ohm,.	4835 111 27056	S	3505	Surge Protector.	2422 549 43073
3232	Zero ohm,.	4835 111 27056	S	3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3233	Zero ohm,.	4835 111 27056	S	3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333
3243	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	S	3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102
3246	82k, 5%, 1/10W, Metal Film	4835 111 37277		3512	15k, 5%, 1/10W, Metal Film	4835 111 37458
3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184
3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204
3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340	S	3515	2.5 ohm, 20%, 3.6W, Negative Temperat	
3250	Zero ohm,.	4835 111 27056			ure Coefficient.	2122 612 00023

S = Safety Part Be sure to use exact replacement part.

PPC932C221 (continued)

3516	Res, 1K, 2%, 0,25W	4822 051 10102	
3517	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	
S 3518	Res, 0R22, 5%, 3W, Metal Film.	2120 106 90548	
3520	Res, 82K, 5%, 1/6W, Carbon Film.	3198 011 08230	
3521	330 ohm, 5%, 1/10W, Metal Film	4835 111 37443	
S 3525	33 ohm, 5%, 1/3W, Metal Film	4835 116 57665	
3528	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3529	Res, 68 ohm, 5%, 1/6W, Carbon Film	3198 011 06890	
3530	Res, 3K3, 5%, 1/6W, Carbon Film.	3198 011 03320	
3532	Res, 6K8, 5%, 1/6W, Carbon Film.	3198 011 06820	
3534	15k, 5%, 1/10W, Metal Film	4835 111 37458	
3536	Res, 18K, 5%, 1/6W, Carbon Film.	3198 011 01830	
3537	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030	
S 3542	4.7 Megohm, 5%, 1/2W, Metal Film	4835 116 57009	
3570	15k, 5%, 1/10W, Metal Film	4835 111 37458	
3571	Res, 150K, 1%, 3/5W, Metal Film.	2322 156 21504	
3573	Res, 2K, 1%, 1/10W, Metalized Glass.	2120 108 92657	
3574	33k, 5%, 1/10W, Metal Film	4835 111 37248	
3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3577	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030	
3578	Res, 1K, 2%, 0,25W	4822 051 10102	
3579	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451	
3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3592	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3594	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3595	68k, 5%, 1/6W, Carbon Film	4835 111 37205	
3596	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030	
3597	100 ohm, 5%, 1/10W, Metal Film	4835 111 37432	
3598	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3599	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3607	8.2k, 5%, 1/8W, Inline Package	4835 111 97046	
3608	2.2k, 5%, 1/8W, Inline Package	4835 111 97049	
3609	2.2k, 5%, Resistor Network	2120 108 93868	
3611	Res, 1K, 2%, 0,25W	4822 051 10102	
3612	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3613	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3615	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3617	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3619	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3629	470 ohm, 5%, 1/10W, Metal Film	4835 111 37259	
3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3631	27k, 5%, 1/10W, Metal Film	4835 111 37442	
S 3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63479	
3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210	
3634	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3635	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3636	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3637	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3653	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030	
3654	100 ohm, 5%, 1/10W, Metal Film	4835 111 37432	
3655	100 ohm, 5%, 1/10W, Metal Film	4835 111 37432	
3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3662	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3663	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3664	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3665	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3666	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376	
3667	27k, 5%, 1/10W, Metal Film	4835 111 37442	
3672	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3673	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3674	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231	
3675	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510	
3676	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510	
3677	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510	
3680	680 ohm, 5%, 1/10W, Metal Film	4835 111 37271	
3681	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3682	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3683	100 ohm, 5%, 1/10W, Metal Film	4835 111 37432	
3684	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3687	220 ohm, 5%, 1/10W, Metal Film	4835 111 37371	
3841	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3842	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3843	47k, 5%, 1/10W, Metal Film	4835 111 37445	
3844	470 ohm, 5%, 1/10W, Metal Film	4835 111 37259	
3845	470 ohm, 5%, 1/10W, Metal Film	4835 111 37259	
3850	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810	
3951	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3953	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272	
3954	1.5k, 5%, 1/10W, Metal Film.	4835 111 37437	
3955	Res, 4K7, 5%, 1/6W, Carbon Film.	3198 011 04720	
3956	1.5k, 5%, 1/10W, Metal Film.	4835 111 37437	
3957	Res, 4K7, 5%, 1/6W, Carbon Film.	3198 011 04720	
4001	Zero ohm,	4835 111 27056	
4002	Zero ohm,	4835 111 27056	
4004	Zero ohm,	4835 111 27056	
4007	Zero ohm,	4835 111 27056	
4009	Zero ohm,	4835 111 27056	
4010	Zero ohm,	4835 111 27056	
4011	Zero ohm,	4835 111 27056	
4012	Zero ohm,	4835 111 27056	
4013	Zero ohm,	4835 111 27056	
4020	Zero ohm,	4835 111 27056	
4051	Zero ohm,	4835 111 27056	
4100	Zero ohm,	4835 111 27056	
4101	Zero ohm,	4835 111 27056	
4102	Zero ohm,	4835 111 27056	
4103	Zero ohm,	4835 111 27056	
4143	Zero ohm,	4835 111 27056	
4144	Zero ohm,	4835 111 27056	
4203	Zero ohm,	4835 111 27056	
4207	Zero ohm,	4835 111 27056	
4212	Zero ohm,	4835 111 27056	
4214	Zero ohm,	4835 111 27056	
4215	Zero ohm,	4835 111 27056	
4216	Zero ohm,	4835 111 27056	
4410	Res, 1K, 2%, 0,25W	4822 051 10102	
4501	Zero ohm,	4835 111 27056	
4602	Zero ohm,	4835 111 27056	
4650	Zero ohm,	4835 111 27056	
4651	Zero ohm,	4835 111 27056	
4652	Zero ohm,	4835 111 27056	
4654	Zero ohm,	4835 111 27056	
4655	Zero ohm,	4835 111 27056	
4684	Zero ohm,	4835 111 27056	
4687	Zero ohm,	4835 111 27056	
4831	Zero ohm,	4835 111 27056	
4832	Zero ohm,	4835 111 27056	
4833	Zero ohm,	4835 111 27056	
4902	Zero ohm,	4835 111 27056	
4903	Zero ohm,	4835 111 27056	
4904	Zero ohm,	4835 111 27056	
4905	Zero ohm,	4835 111 27056	
4909	Zero ohm,	4835 111 27056	
4911	Zero ohm,	4835 111 27056	
4912	Zero ohm,	4835 111 27056	
4914	Zero ohm,	4835 111 27056	
4957	Zero ohm,	4835 111 27056	
4999	Zero ohm,	4835 111 27056	
5000	Coil, 5u6.	3198 018 25680	
5004	Coil, 820n	2422 535 97314	
5101	Coil, 5u6.	3198 018 15680	
5201	Coil, 22u.	3198 018 22290	
5202	Coil, 6u8.	3198 018 16880	
5342	22uH., 10%, Coil, Peaking.	4835 157 67069	
S 5445	Transformer, L.O.T., models ending in C101, C121, and C125	2422 531 02327	
S 5445	Transformer, L.O.T., models ending in C221 and C225.	3128 138 20941	
5451	Coil, 27u.	2422 535 96614	
5457	Coil	3128 138 53181	
5461	Transformer.	3128 138 33811	
5463	Coil, Choke.	3128 138 37021	
5471	Coil, 1m	2422 535 94652	
5480	Coil, 27u.	2422 535 97334	
5480	Coil, 39u.	2422 535 97336	
5480	Coil, 47u.	2422 535 97337	
5480	33uH., Peaking Coil, only in 25.	4835 157 58205	
S 5500	Filter, Mains, 5mH, 2A	2422 549 43432	
5516	100uH., Coil	4835 157 67078	
5518	Fixed, Inductor, 100MHz, 50R.	3198 018 90010	
5521	Coil, 2u2.	3198 018 12280	
5540	Coil, 4u7.	3198 018 14780	
S 5545	Transfomer,	2422 531 02314	
5551	27uH., 5%, Coil, Peaking	4835 157 67052	
5552	Fixed, Inductor, 100MHz, 50R.	3198 018 90010	
5572	100uH., Coil	4835 157 67078	
5573	100uH., Coil	4835 157 67078	
5575	100uH., Coil	4835 157 67078	
5576	100uH., Coil	4835 157 67078	
5577	Fixed, Inductor, 100MHz, 50R.	3198 018 90010	
5600	Coil, 8u2.	3198 018 18280	
5601	Coil, 8u2.	3198 018 18280	
5620	Coil, 6u8.	3198 018 16880	
5821	Coil, 100u	3198 018 21010	
5831	Coil, 12u.	3198 018 21290	
5832	Coil, 12u.	3198 018 21290	
5833	Coil, 12u.	3198 018 11290	
6008	Zener, 33 Volt BZX79-C33	4835 130 37904	
6113	Zener Diode, 6.8 volt.	9340 386 40115	
6125	Zener Diode, 6.8 volt.	9340 386 40115	
6211	Diode, 1N4148.	4835 130 37048	
6212	Diode, 1N4148.	4835 130 37048	
6213	Diode, 1N4148.	4835 130 37048	
6331	Diode.	4835 130 37294	
6333	Diode.	4835 130 37294	

S = Safety Part Be sure to use exact replacement part.

PPC932C221 (continued)

6335	Diode.	4835 130 37294
6401	Diode.	4835 130 37094
6402	Zener, 18 Volt, BZX79-C18.	4835 130 37908
6449	Diode, 1N4148.	4835 130 37048
6450	Diode, 1N4148.	4835 130 37048
6460	Diode, Rect, BY228/20	9336 215 80112
6461	Diode, Rect, BYW95C-20.	9336 215 90112
6463	Diode, 1N4148.	4835 130 37048
6465	Diode, BYD33J.	4835 130 37094
6466	Diode, BYD33J.	4835 130 37094
6470	Zener Diode, 9.1 volt.	9331 177 80133
6472	Diode, 1N4148.	4835 130 37048
6480	Diode, Zener	4835 130 37947
6481	Diode, 1N4148.	4835 130 37048
6485	Diode, BYD33J.	4835 130 37094
6486	Diode, EGP20DL-530	4835 130 37919
6487	Diode.	4835 130 37094
6488	Diode, Rect, BYV27-200.	9322 126 72673
6490	Diode, Rect, BYV27-200.	9322 126 72673
6505	Diode, Bridge Rect, GBU6JL-7002	9322 138 08667
6507	Diode, BYD33J.	4835 130 37094
6508	Diode, BYD33J.	4835 130 37094
6510	Zener Diode, 20 volt	9331 178 60133
6511	Diode, BYV95C.	4835 130 37052
6512	Diode, Rect, BY228/20	4822 130 41275
6513	Diode, Rect, BY228/20	4822 130 41275
6514	Zener, 18 Volt, BZX79-C18.	4835 130 37908
6540	Diode.	4835 130 37294
6550	Diode, Rect, BY229X-800	9340 380 30127
6560	Diode, EGP20DL-530	4835 130 37919
6570	Diode, EGP20DL-530	4835 130 37919
6582	Diode, EGP20DL-530	4835 130 37919
6584	Diode, 1N4148.	4835 130 37048
6585	Diode, 1N4148.	4835 130 37048
6590	Diode, EGP20DL-530	4835 130 37919
6591	Diode, BAS216.	4835 130 37905
6601	Diode, Zener	4835 130 37684
6602	Diode, 1N4148.	4835 130 37048
6603	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
6604	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
6605	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
6606	Zener, 4.7 Volt, BZX79-C4V7.	4835 130 37005
6607	Zener, 6.8 Volt, BZX79-C6V8.	4835 130 37945
6690	LED, LTL-307P.	4835 130 97096
6831	Diode, BAS216.	4835 130 37905
6951	Diode, BAS216.	4835 130 37905
6961	Diode, BAS216.	4835 130 37905
7134	Transistor, BC547B	4835 130 47055
7250	IC,.	9352 620 27112
7251	IC, LM317T	9337 220 80682
7254	Transistor, NPN, BC847B.	4822 130 60511
7256	Transistor, NPN, BC847B.	4822 130 60511
7258	Transistor, NPN, BC847B.	4822 130 60511
7263	Transistor, PNP, BC857B.	5322 130 60508
7266	Transistor, NPN, BC847B.	4822 130 60511
7330	IC,.	9352 184 10112
7401	IC,.	4835 209 88531
7460	Transistor, NPN, BU1508DX.	9340 170 50127
7461	Transistor, NPN, BF819	9335 354 50127
7470	F.E.T., Power, STP16NE06FP	9322 123 96687
7480	IC,.	9322 028 93682
7481	Transistor, BC557B	4835 130 47409
7482	Transistor, PNP, BC857B.	5322 130 60508
7518	STH8NA60FI SMPS FET	9322 068 92687
7518	STH10NC60FI SMPS FET.	9322 155 66687
7520	IC, MC44603A	4835 209 88537
7570	IC,.	9337 711 00676
S 7581	Coupler, TCDT1101G	9338 431 30682
7590	Transistor, NPN, BC847B.	4822 130 60511
7591	Transistor, NPN, BC847B.	4822 130 60511
7592	Transistor, NPN, BC847B.	4822 130 60511
7600	IC, SAA5565-PS/M3/0195 L9 v3.2 (Comme rcial Models - Pro Plus Models).	9352 673 97112
7601	IC, ST24W16B6, commercial models only	9322 095 35682
7603	Transistor, NPN, BC337	9331 796 00126
7604	Transistor, NPN, BC847B.	4822 130 60511
7605	Transistor, NPN, BC847B.	4822 130 60511
7608	Transistor, NPN, BC847B.	4822 130 60511
7609	Transistor, NPN, BC847B.	4822 130 60511
7680	IR Receiver.	9322 127 53667
7833	IC,.	9322 136 54682
7950	IC,.	4835 209 88543
CBA	00EMF895A002 Main Chassis Board Asm.	00EM F89 5A002

A10757 L9 Audio Jack Panel Parts

	A10757 L9 Audio Jack Panel Parts	
CBA	00A10757A001 L9 Audio Jack Panel Asm.	00A1 075 7A001
C1	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280
C2	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280
J0214	Connector, 3 Pin	2422 025 16601
J0234	4 Pin Board Connector.	2422 025 15851
J100	Socket, Click, 4 Pin	2422 015 18711
J1214	Connector, 3 Pin	2422 025 16601
J1234	4 Pin Board Connector.	2422 025 12489
JP11	Socket, Cinch, 1 Pin	2422 026 04912
JP12	Socket, Cinch, 1 Pin	2422 026 04374
SW1	Switch	4835 277 27061

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	AC Power Cord.	3135 010 04321
AC02	Clip, Anode Lead	3135 014 04471
AC03	Cabinet, Back (ITV).	3135 014 06531
AC04	Cabinet Front.	3135 017 03901
AC05	L9L CHASSIS TRAY-32V	3139 124 31323
AC06	Control Buttons.	3139 124 26472
S AC08	CRT A80ECK272X56	9301 795 00428
S AC09	Coil, Degaussing	2422 549 43977
AC10	Holder, Degaussing (4 Used).	3135 013 01661
AC11	Light Guide.	3139 124 26461
AC12	Nameplate.	3135 015 03571
AC13	Owner's Manual	3135 015 20911
AC14	Power Button	3139 124 26444
REMOTE	Transmitter, Remote, RC2524 /01.	3139 228 84651
AC16	Speaker, 5W, 16 ohm (2 Used)	2422 264 00333
AC21	Battery, 1.5V AA, 2-Pack, (Not Shown	9299 000 10137
AC24	Spring	3139 121 26231

S = Safety Part Be sure to use exact replacement part.

SC2927C121 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts	
0113	L9 SOPS HEATSINK	3139 121 62041
0119	DIODE HEATSINK L9.	3139 121 26691
0121	LINE HEATSINK (CINCH).	3139 121 61942
0123	L9L AUDIO HEATSINK (STERO)	3139 121 61952
S 0127	Holder, Fuse, 2 Pin.	3122 358 71251
0211	Connector, 2 Pin	2422 025 11196
0212	Connector, 2 Pin	2422 025 15396
0213	Connector, 2 Pin	2422 025 15395
0214	Connector, 3 Pin	2422 025 16382
0215	Connector, 2 Pin,.	2422 025 16343
0216	Connector, 4 Pin	2422 025 15847
0219	Connector, 5 Pin	2422 025 15848
0220	4 Pin Board Connector.	2422 025 04852
0221	Connector, 4 Pin	2422 025 15503
0222	Connector, 2 Pin	2422 025 10646
0224	1 Pin Board Connector.	2422 034 20021
0228	1 Pin Board Connector.	2422 034 20021
0234	Connector, 4 Pin	2422 025 15847
0236	4 Pin Board Connector.	2422 025 16384
0237	Connector, 4 Pin	2422 025 12479
0238	5 Pin Board Connector.	2422 025 16387
S 0243	Connector, 6 Pin	2422 025 04854
0244	4 Pin Board Connector.	2422 025 04852
S 0245	Connector, 6 Pin	2422 025 04854
S 0254	CRT Socket (9 Pin)	2422 500 80022
0259	Connector, 3 Pin	2422 025 16383
0262	Connector, 4 Pin	2422 025 16385
0267	Connector, 3 Pin	2412 020 00725
1000	Tuner, V+U PLL PH MN B.	2422 542 90069
1001	Filter	2422 549 42501
1003	45 MHz SAW, Filter,.	2422 549 42433
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807
1208	Crystal Resonator, 3.58MHz	2422 543 00832
S 1500	Fue, 4 A, 250V	2422 086 10905
S 1571	FUSE 1A 250V	2422 086 10779
S 1572	FUSE 1A 250V	2422 086 10779
S 1580	Relay, 12V, 5A G5PA-1.	2422 132 07444
1600	Switch, Tactile.	2422 128 02742
1601	Switch, Tactile.	2422 128 02742
1602	Switch, Tactile.	2422 128 02742
1603	Switch, Tactile.	2422 128 02742
1606	Switch, Tactile.	2422 128 02742
1660	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488
1703	L9 ITV SMARTPORT	3139 178 08561
1821	Ceramic Resonator, 514KHz5, CSB503F58	2422 540 98344
2001	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2002	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2003	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2004	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2011	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2102	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2103	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2104	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2201	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2202	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2203	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2204	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2205	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2208	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2209	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2211	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2212	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2213	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2214	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2215	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 16654
2220	Cap, 18p, 5%, 50V, Ceramic	3198 016 01890
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2222	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2226	Cap, 33u, 20%, 25V, Electrolytic . .	2020 021 90124
2227	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2247	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2248	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2249	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2330	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2340	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320
S 2343	Cap, 3n3, 10%, 2KV, Ceramic.	2020 558 90529
2345	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2401	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2402	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2404	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2405	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2407	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2409	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2420	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2426	Cap, 100n, 10%, 63V, Metalized Polyes ter.	2222 370 75104
2428	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2429	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2430	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2431	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2437	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2438	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2448	Cap, 33p, 5%, 500V, Ceramic.	2020 557 90192
2450	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91139
2451	Cap, 15n, 10%, 50V, Polyester. . . .	2020 300 90575
2456	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176
2457	Cap, 390n, 5%, 250V, Metalized Polypr opylene.	2222 479 90021
2458	Cap, 2u2, 20%, 100V, Electrolytic. .	2020 021 91331
2459	Cap, 680p, 10%, 500V, Ceramic. . . .	3198 019 46810
2461	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2462	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176
S 2463	Cap, 680p, 10%, 2KV, Ceramic	2020 558 90485
S 2465	Cap, 10n, 5%, 1600V, Polypropylene .	2222 375 90154
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050
2473	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2481	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2482	Cap, 68n, 10%, 250V, Polyester . . .	2222 347 90234
2484	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2485	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2486	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2487	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2488	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2489	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2490	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2491	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810
2499	Cap, 220n, 10%, 100V, Metalized Polye ster	2222 365 25224
2500	Cap, 470n, 20%, 275V, Polypropylene.	2222 336 29148
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2507	Cap, 1n5, 10%, 1KV, Ceramic.	3198 019 61520
2508	Cap, 470u, 20%, 200V, Electrolytic .	2020 024 90647
2511	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
2518	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2530	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 021 91147
2531	Cap, 1n, 2%, 50V, Polypropylene. . .	2020 310 90049
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2540	Cap, 100u, 20%, 25V, Electrolytic. .	2020 021 90547
S 2545	Cap, 1n5, 20%, v, Ceramic.	2020 554 90128
2550	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2551	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91358
2561	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2562	Cap, 220p, 10%, 1KV, Ceramic	3198 019 62210
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2572	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2575	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2577	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2586	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2604	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2613	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2615	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2619	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2622	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2629	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040

S = Safety Part Be sure to use exact replacement part.

SC2927C121 (continued)

2631	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3246	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230	
2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
2679	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
2681	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210		3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340	
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3250	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
2821	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280		3251	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040	
2823	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230		3252	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720		3253	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	
2825	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080		3257	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
2826	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090		3258	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
2827	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3259	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
2828	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
2829	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	3198 013 01020	
2830	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280		3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
2831	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	3198 013 01020	
2832	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280		3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
2833	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280		3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	3198 013 01020	
2834	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780	S	3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109	
2835	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	S	3341	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108	
2836	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	S	3342	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108	
2837	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740		3343	Res, 1K5, 20%, 1/2W, Carbon Film . .	3198 013 01520	
2838	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290	
2839	Cap, 1u, 10%, 50V, Polyester	3198 014 01050		3345	VDR DC 1MA/50V S MAX 110V A . . .	2122 550 00152	
2840	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290	
2841	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3401	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380	
2842	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3402	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380	
2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3403	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380	
2844	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3405	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002	
2845	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3406	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
2913	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280		3407	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002	
2914	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330		3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
2915	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3409	Res, 1R5, 5%, 1/3W, Metal Film . . .	2306 204 03158	
2916	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648		3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210	
2917	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210	
2918	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330		3420	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740	
2919	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220	
2920	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648		3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220	
2921	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840	
2931	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280		3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606	
2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3425	Res, 120K, 5%, 1/10W, Metalized Glass	2120 108 91716	
2952	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3426	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930	
2954	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3428	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	
2955	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3429	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730	
2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3431	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	
2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3432	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3433	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
2960	Cap, 220u, 20%, 50V, Electrolytic. .	3198 026 52210		3436	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090		3437	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090		3438	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330	
2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090		3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920	
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3447	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220	
3010	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610		3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320	
3013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	S	3452	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	3198 012 32290	
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	S	3453	Res, 4R7, 5%, 5W, Wire Wound	2322 251 41478	
3015	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	S	3454	Res, 33K, 5%, 1 1/3W, Metal Film . .	2322 194 63333	
3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810		3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
3021	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020		3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
3103	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220	S	3462	Res, 6K8, 5%, 5W, Metal Film	2322 257 41682	
3104	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030		3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790	
3108	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3464	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3109	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	S	3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109	
3123	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590		3466	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903	
				3467	Res, 15K, 1%, 3/5W, Metal Film . . .	2322 156 21503	
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010		3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
3201	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910		3469	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	
				3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240	
3203	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310		3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703	
				3481	Res, 35K7, 1%, 3/5W, Metal Film. . .	2322 156 23573	
3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820		3482	Res, 56K, 1%, 3/5W, Metal Film . . .	2322 156 25603	
3205	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020		3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230	
3206	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610		3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
			S	3486	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108	
3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3487	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108	
3209	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	S	3488	Res, 4R7, 5%, 1/2W, Metal Film . . .	2306 207 03478	
3212	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910	S	3490	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108	
			S	3491	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108	
3213	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610	S	3492	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108	
				3495	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820	
3215	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230		3496	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3216	Res, Zero ohm, 'Chip' Jumper	3198 021 90020		3497	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3217	Res, 1M5, 5%, 1/8W, Metalized Glass.	2322 730 61155		3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	3198 013 04710	
3218	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	S	3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225	
3219	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610	S	3503	PTC, DC, 120V,P3020 B.	2120 661 00025	
			S	3505	Surge Protector.	2422 549 43073	
3220	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	S	3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223	
3225	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040	S	3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333	
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	S	3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102	
3231	Res, Zero ohm, 'Chip' Jumper	3198 021 90020		3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530	
3232	Res, Zero ohm, 'Chip' Jumper	3198 021 90020		3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184	
3233	Res, Zero ohm, 'Chip' Jumper	3198 021 90020		3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204	
3243	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220	S	3515	2.5 ohm, 20%, 3.6W, Negative Temperat ure Coefficient.	2122 612 00023	

S = Safety Part Be sure to use exact replacement part.

SC2927C121 (continued)

3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3517	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
S 3518	Res, 0R22, 5%, 2 1/2W, Metal Film. .	3198 012 32270	
3520	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230	
3521	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310	
S 3525	Res, 47 ohm, 5%, 1/3W, Metal Film. .	2306 204 03479	
3528	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3529	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890	
3530	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320	
3532	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3534	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530	
3536	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830	
3537	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
S 3542	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475	
3570	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530	
3571	Res, 150K, 1%, 3/5W, Metal Film. . .	2322 156 21504	
3573	Res, 2K, 1%, 1/8W, Metalized Glass .	2322 734 62002	
3574	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330	
3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3577	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3578	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3579	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002	
3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3592	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3594	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	
3595	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830	
3596	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3597	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3598	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3599	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	
3607	RST NETW RGLE 10X 8K2 PM5 B . . .	2120 108 93916	
3608	RST NETW RGLE 6X 2K2 PM5 B . . .	2120 108 93913	
3609	RST NETW RGLE 7X 2K2 PM5 B . . .	2120 108 93915	
3611	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3612	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3613	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3615	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3616	Jumper Wire/Staple	0322 179 00003	
3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3619	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3629	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710	
3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3631	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730	
S 3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790	
3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210	
3634	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	
3635	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	
3636	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	
3637	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3649	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3650	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3654	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3655	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3662	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3663	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220	
3664	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220	
3665	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3666	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620	
3667	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730	
3672	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3673	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3674	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710	
3675	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3676	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3677	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3680	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810	
3681	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3682	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220	
3683	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3684	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	
3687	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210	
3821	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530	
3822	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220	
3823	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040	
3824	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	
3825	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3826	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3827	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3828	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3829	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820	
3830	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820	
3831	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198 011 03310	
3832	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790	
3908	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3909	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3910	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620	
3911	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230	
3912	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3913	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3914	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	
3915	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820	
3916	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210	
3917	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3918	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3919	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620	
3920	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820	
3921	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230	
3922	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	
3923	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210	
3924	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930	
3925	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930	
3926	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930	
3929	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930	
3930	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3931	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810	
3951	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	
3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3953	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3955	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
3957	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4004	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4011	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4012	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4020	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4051	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4100	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4102	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4144	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4203	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4207	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4212	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4215	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4216	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4465	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4501	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4650	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4651	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4654	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4655	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4833	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4911	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4912	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4914	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4957	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4999	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
5000	Coil, 5u6.	3198 018 25680	
5004	Coil, 820n	2422 535 97314	
5201	Coil, 22u.	3198 018 22290	
5202	Coil, 6u8.	3198 018 16880	
5342	Coil, 22u.	3198 018 22290	
S 5445	Transformer, L.O.T., models ending in C101, C121, and C125	2422 531 02327	
5451	Coil, 27u.	2422 535 96614	
5457	Coil, Linear Correction.	3128 138 53241	
5461	Transformer.	3128 138 33811	
5480	Coil, 27u.	2422 535 97334	
S 5500	Filter, Mains, 5mH, 2A	2422 549 43432	
5516	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5518	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5521	Coil, 2u2.	3198 018 12280	
5540	Coil, 4u7.	3198 018 14780	
S 5545	Transfomer,.	2422 531 02314	
5551	Coil, 27u.	2422 535 95366	
5552	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	

S = Safety Part Be sure to use exact replacement part.

SC2927C121 (continued)

5572	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5573	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5576	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5577	Fixed, Inductor, 100MHz, 50R. . .	3198 018 90010	
5600	Coil, 8u2.	3198 018 18280	
5601	Coil, 8u2.	3198 018 18280	
5620	Coil, 6u8.	3198 018 16880	
5821	Coil, 100u	3198 018 21010	
5822	Coil, 18u.	3198 018 21890	
6008	Zener Diode, 33 volt	3198 010 23390	
6113	Zener Diode, 6.8 volt.	9340 386 40115	
6211	Diode, Signal, 1N4148.	3198 010 10010	
6212	Diode, Signal, 1N4148.	3198 010 10010	
6213	Diode, Signal, 1N4148.	3198 010 10010	
6331	Diode, Signal, BAV21	3198 010 10070	
6333	Diode, Signal, BAV21	3198 010 10070	
6335	Diode, Signal, BAV21	3198 010 10070	
6401	Diode, Rect, BYD33D	9337 234 00133	
6402	Zener Diode, 33 volt	3198 010 23390	
6403	Diode, Rect, BYD33D	9337 234 00133	
6404	Zener Diode, 75 volt	9331 180 00133	
6449	Diode, Signal, 1N4148.	3198 010 10010	
6450	Diode, Signal, 1N4148.	3198 010 10010	
6460	Diode, Rect, BY228/20	9336 215 80112	
6463	Diode, Signal, 1N4148.	3198 010 10010	
6464	Zener Diode, 6.2 volt.	9331 668 30133	
6465	Diode, Rect, BYD33J	9337 234 20133	
6466	Diode, Rect, BYD33J	9337 234 20133	
6480	Zener Diode, 27 volt	3198 010 22790	
6481	Diode, Signal, 1N4148.	3198 010 10010	
6485	Diode, Rect, BYD33J	9337 234 20133	
6486	Diode, Rect, EGP20DL-5300	9322 100 13682	
6487	Diode, Rect, BYD33D	9337 234 00133	
6488	Diode, Rect, BYV27-200.	9322 126 72673	
6490	Diode, Rect, BYV27-200.	9322 126 72673	
6505	Diode, Bridge Rect, GBU6JL-7002 . .	9322 138 08667	
6507	Diode, Rect, BYD33J	9337 234 20133	
6508	Diode, Rect, BYD33J	9337 234 20133	
6510	Zener Diode, 20 volt	9331 178 60133	
6511	Diode, Rect, BYV95C	9335 001 80133	
6512	Diode, Rect, 1N5062	3198 010 10120	
6513	Diode, Rect, 1N5062	3198 010 10120	
6514	Zener Diode, 18 volt	3198 010 21890	
6540	Diode, Signal, BAV21	3198 010 10070	
6550	Diode, Rect, BY229X-800	9340 380 30127	
6560	Diode, Rect, EGP20DL-5300	9322 100 13682	
6580	Diode, Rect, SB140.	9339 577 60673	
6584	Diode, Signal, 1N4148.	3198 010 10010	
6585	Diode, Signal, 1N4148.	3198 010 10010	
6591	Diode, Signal, BAS16WS	9322 031 99685	
6601	Zener Diode, 3.9 volt.	3198 010 23980	
6602	Diode, Signal, 1N4148.	3198 010 10010	
6603	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610	
6604	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610	
6605	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610	
6606	Zener Diode, 4.7 volt.	3198 010 24780	
6607	Zener Diode, 6.8 volt.	3198 010 26880	
6690	LED VS LTL-307P (LITO) B . . .	9322 033 95682	
6821	Zener Diode, 9.1 volt.	9331 177 80133	
6822	Diode, Signal, 1N4148.	3198 010 10010	
6951	Diode, Signal, BAS16WS	9322 031 99685	
6961	Diode, Signal, BAS16WS	9322 031 99685	
7250	IC,.	9352 620 26112	
7251	IC, LM317T	9337 220 80682	
7254	Transistor, NPN, BC847B.	3198 010 42030	
7256	Transistor, NPN, BC847B.	3198 010 42030	
7258	Transistor, NPN, BC847B.	3198 010 42030	
7263	Transistor, PNP, BC857B.	3198 010 42150	
7266	Transistor, NPN, BC847B.	3198 010 42030	
7330	IC, TDA6107Q/N2.	9352 576 50112	
7401	IC,.	9322 121 47687	
7460	Transistor, NPN, BU1508DX.	9340 170 50127	
7461	Transistor, NPN, BF819	9335 354 50127	
7462	Transistor, NPN, BC547B.	3198 020 40030	
7463	Transistor, PNP, BC557B.	3198 020 40110	
7480	IC,.	9322 028 93682	
7481	Transistor, PNP, BC557B.	3198 020 40110	
7482	Transistor, PNP, BC857B.	3198 010 42150	
7518	STH10NC60FI SMPS FET.	9322 155 66687	
7520	IC,.	9322 108 36682	
7570	IC,.	9337 711 00676	
S 7581	Coupler, TCDT1101G	9338 431 30682	
7590	Transistor, NPN, BC847B.	3198 010 42030	
7591	Transistor, NPN, BC847B.	3198 010 42030	
7592	Transistor, NPN, BC847B.	3198 010 42030	
7600	IC, SAA5543-PS/M4/0167 L9 v3.2 (Comme rcial Models - NON Pro Plus)	9352 670 84112	
7601	IC, ST24W16B6, commercial models only	9322 095 35682	
7603	Transistor, NPN, BC337	9331 796 00126	
7604	Transistor, NPN, BC847B.	3198 010 42030	
7605	Transistor, NPN, BC847B.	3198 010 42030	
7608	Transistor, NPN, BC847B.	3198 010 42030	
7609	Transistor, NPN, BC847B.	3198 010 42030	
7680	IR Receiver.	9322 127 53667	
7821	IC,.	9352 374 70112	
7822	IC, HEF4052BT.	9333 729 50653	
7823	Transistor, NPN, BC337-25.	3198 020 43530	
7904	Transistor, NPN, BC847B.	3198 010 42030	
7905	Transistor, NPN, BC847B.	3198 010 42030	
7906	Transistor, NPN, BC847B.	3198 010 42030	
7908	Transistor, NPN, BC847B.	3198 010 42030	
7909	Transistor, NPN, BC847B.	3198 010 42030	
7910	Transistor, NPN, BC847B.	3198 010 42030	
7951	IC,.	9351 861 60112	
9001	Jumper Wire/Staple	0322 179 00003	
9003	Jumper Wire/Staple	0322 179 00003	
9005	Jumper Wire/Staple	0322 179 00003	
9011	Jumper Wire/Staple	0322 179 00003	
9012	Jumper Wire/Staple	0322 179 00003	
9105	Jumper Wire/Staple	0322 179 00003	
9126	Jumper Wire/Staple	0322 179 00003	
9132	Jumper Wire/Staple	0322 179 00003	
9140	Jumper Wire/Staple	0322 179 00003	
9141	Jumper Wire/Staple	0322 179 00003	
9200	Jumper Wire/Staple	0322 179 00003	
9202	Jumper Wire/Staple	0322 179 00003	
9203	Jumper Wire/Staple	0322 179 00003	
9204	Jumper Wire/Staple	0322 179 00003	
9205	Jumper Wire/Staple	0322 179 00003	
9206	Jumper Wire/Staple	0322 179 00003	
9207	Jumper Wire/Staple	0322 179 00003	
9208	Jumper Wire/Staple	0322 179 00003	
9209	Jumper Wire/Staple	0322 179 00003	
9210	Jumper Wire/Staple	0322 179 00003	
9211	Jumper Wire/Staple	0322 179 00003	
9214	Jumper Wire/Staple	0322 179 00003	
9215	Jumper Wire/Staple	0322 179 00003	
9216	Jumper Wire/Staple	0322 179 00003	
9217	Jumper Wire/Staple	0322 179 00003	
9218	Jumper Wire/Staple	0322 179 00003	
9220	Jumper Wire/Staple	0322 179 00003	
9221	Jumper Wire/Staple	0322 179 00003	
9222	Jumper Wire/Staple	0322 179 00003	
9225	Jumper Wire/Staple	0322 179 00003	
9226	Jumper Wire/Staple	0322 179 00003	
9227	Jumper Wire/Staple	0322 179 00003	
9228	Jumper Wire/Staple	0322 179 00003	
9229	Jumper Wire/Staple	0322 179 00003	
9230	Jumper Wire/Staple	0322 179 00003	
9231	Jumper Wire/Staple	0322 179 00003	
9232	Jumper Wire/Staple	0322 179 00003	
9233	Jumper Wire/Staple	0322 179 00003	
9234	Jumper Wire/Staple	0322 179 00003	
9236	Jumper Wire/Staple	0322 179 00003	
9237	Jumper Wire/Staple	0322 179 00003	
9238	Jumper Wire/Staple	0322 179 00003	
9240	Jumper Wire/Staple	0322 179 00003	
9241	Jumper Wire/Staple	0322 179 00003	
9242	Jumper Wire/Staple	0322 179 00003	
9243	Jumper Wire/Staple	0322 179 00003	
9245	Jumper Wire/Staple	0322 179 00003	
9301	Jumper Wire/Staple	0322 179 00003	
9401	Jumper Wire/Staple	0322 179 00003	
9402	Jumper Wire/Staple	0322 179 00003	
9403	Jumper Wire/Staple	0322 179 00003	
9404	Jumper Wire/Staple	0322 179 00003	
9407	Jumper Wire/Staple	0322 179 00003	
9408	Jumper Wire/Staple	0322 179 00003	
9411	Jumper Wire/Staple	0322 179 00003	
9414	Jumper Wire/Staple	0322 179 00003	
9417	Jumper Wire/Staple	0322 179 00003	
9419	Jumper Wire/Staple	0322 179 00003	
9420	Jumper Wire/Staple	0322 179 00003	
9421	Jumper Wire/Staple	0322 179 00003	
9422	Jumper Wire/Staple	0322 179 00003	
9424	Jumper Wire/Staple	0322 179 00003	
9425	Jumper Wire/Staple	0322 179 00003	
9427	Jumper Wire/Staple	0322 179 00003	
9428	Jumper Wire/Staple	0322 179 00003	
9460	Jumper Wire/Staple	0322 179 00003	
9461	Jumper Wire/Staple	0322 179 00003	
9500	Jumper Wire/Staple	0322 179 00003	
9501	Jumper Wire/Staple	0322 179 00003	
9502	Jumper Wire/Staple	0322 179 00003	
9503	Jumper Wire/Staple	0322 179 00003	
9505	Jumper Wire/Staple	0322 179 00003	
9509	Jumper Wire/Staple	0322 179 00003	
9510	Jumper Wire/Staple	0322 179 00003	
9511	Jumper Wire/Staple	0322 179 00003	
9512	Jumper Wire/Staple	0322 179 00003	
9513	Jumper Wire/Staple	0322 179 00003	
9515	Jumper Wire/Staple	0322 179 00003	
9516	Jumper Wire/Staple	0322 179 00003	
9517	Jumper Wire/Staple	0322 179 00003	

S = Safety Part Be sure to use exact replacement part.

SC2927C121 (continued)

9518	Jumper Wire/Staple	0322 179 00003
9521	Jumper Wire/Staple	0322 179 00003
9526	Jumper Wire/Staple	0322 179 00003
9601	Jumper Wire/Staple	0322 179 00003
9602	Jumper Wire/Staple	0322 179 00003
9603	Jumper Wire/Staple	0322 179 00003
9604	Jumper Wire/Staple	0322 179 00003
9605	Jumper Wire/Staple	0322 179 00003
9606	Jumper Wire/Staple	0322 179 00003
9608	Jumper Wire/Staple	0322 179 00003
9609	Jumper Wire/Staple	0322 179 00003
9610	Jumper Wire/Staple	0322 179 00003
9611	Jumper Wire/Staple	0322 179 00003
9612	Jumper Wire/Staple	0322 179 00003
9613	Jumper Wire/Staple	0322 179 00003
9614	Jumper Wire/Staple	0322 179 00003
9615	Jumper Wire/Staple	0322 179 00003
9618	Jumper Wire/Staple	0322 179 00003
9621	Jumper Wire/Staple	0322 179 00003
9622	Jumper Wire/Staple	0322 179 00003
9624	Jumper Wire/Staple	0322 179 00003
9625	Jumper Wire/Staple	0322 179 00003
9626	Jumper Wire/Staple	0322 179 00003
9629	Jumper Wire/Staple	0322 179 00003
9631	Jumper Wire/Staple	0322 179 00003
9632	Jumper Wire/Staple	0322 179 00003
9637	Jumper Wire/Staple	0322 179 00003
9640	Jumper Wire/Staple	0322 179 00003
9642	Jumper Wire/Staple	0322 179 00003
9643	Jumper Wire/Staple	0322 179 00003
9644	Jumper Wire/Staple	0322 179 00003
9754	Jumper Wire/Staple	0322 179 00003
9788	Jumper Wire/Staple	0322 179 00003
9793	Jumper Wire/Staple	0322 179 00003
9800	Jumper Wire/Staple	0322 179 00003
9805	Jumper Wire/Staple	0322 179 00003
9806	Jumper Wire/Staple	0322 179 00003
9807	Jumper Wire/Staple	0322 179 00003
9810	Jumper Wire/Staple	0322 179 00003
9901	Jumper Wire/Staple	0322 179 00003
9904	Jumper Wire/Staple	0322 179 00003
9905	Jumper Wire/Staple	0322 179 00003
9906	Jumper Wire/Staple	0322 179 00003
9920	Jumper Wire/Staple	0322 179 00003
9933	Jumper Wire/Staple	0322 179 00003
9936	Jumper Wire/Staple	0322 179 00003
9940	Jumper Wire/Staple	0322 179 00003
9941	Jumper Wire/Staple	0322 179 00003
9942	Jumper Wire/Staple	0322 179 00003
9943	Jumper Wire/Staple	0322 179 00003
9944	Jumper Wire/Staple	0322 179 00003
9945	Jumper Wire/Staple	0322 179 00003
9946	Jumper Wire/Staple	0322 179 00003
9947	Jumper Wire/Staple	0322 179 00003
9948	Jumper Wire/Staple	0322 179 00003
9949	Jumper Wire/Staple	0322 179 00003
9950	Jumper Wire/Staple	0322 179 00003
9951	Jumper Wire/Staple	0322 179 00003
9952	Jumper Wire/Staple	0322 179 00003
9953	Jumper Wire/Staple	0322 179 00003
9955	Jumper Wire/Staple	0322 179 00003
9956	Jumper Wire/Staple	0322 179 00003
9957	Jumper Wire/Staple	0322 179 00003
9958	Jumper Wire/Staple	0322 179 00003
9959	Jumper Wire/Staple	0322 179 00003
9960	Jumper Wire/Staple	0322 179 00003
9962	Jumper Wire/Staple	0322 179 00003
9963	Jumper Wire/Staple	0322 179 00003
9964	Jumper Wire/Staple	0322 179 00003
9965	Jumper Wire/Staple	0322 179 00003
9966	Jumper Wire/Staple	0322 179 00003
9967	Jumper Wire/Staple	0322 179 00003
9968	Jumper Wire/Staple	0322 179 00003
9969	Jumper Wire/Staple	0322 179 00003
9970	Jumper Wire/Staple	0322 179 00003
9971	Jumper Wire/Staple	0322 179 00003
9972	Jumper Wire/Staple	0322 179 00003
9974	Jumper Wire/Staple	0322 179 00003
9975	Jumper Wire/Staple	0322 179 00003
9976	Jumper Wire/Staple	0322 179 00003
9977	Jumper Wire/Staple	0322 179 00003
9981	Jumper Wire/Staple	0322 179 00003
9982	Jumper Wire/Staple	0322 179 00003
9983	Jumper Wire/Staple	0322 179 00003
9984	Jumper Wire/Staple	0322 179 00003
9987	Jumper Wire/Staple	0322 179 00003
9989	Jumper Wire/Staple	0322 179 00003
9990	Jumper Wire/Staple	0322 179 00003
9991	Jumper Wire/Staple	0322 179 00003
9992	Jumper Wire/Staple	0322 179 00003
9993	Jumper Wire/Staple	0322 179 00003
CBA	00EMF893A002 Main Chassis Board Asm.	00EM F89 3A002

A10680 Channel One Card Parts

	A10680 Channel One Card Parts	
CBA	00A10680B002 Channel One Card Asm. .	00A1 068 0B002
C01	1000pF., 10%, 50V, Polyester	4835 121 47662
C02	0.1uF., 50V, Polyester	4835 121 47658
C03	1pF., 25%, 50V, Ceramic.	4835 122 47665
C04	1000pF., 10%, 50V, Polyester	4835 121 47662
C05	0.01uF., 10%, 50V, Polyester	4835 121 47657
C06	1000pF., 10%, 50V, Polyester	4835 121 47662
C07	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
C08	0.1uF., 50V, Polyester	4835 121 47658
C09	0.1uF., 50V, Polyester	4835 121 47658
C10	0.1uF., 50V, Polyester	4835 121 47658
C11	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
C12	0.1uF., 50V, Polyester	4835 121 47658
C13	47pF., 5%, 50V, Ceramic.	4835 122 47608
C14	12pF., 5%, 50V, Ceramic.	4835 122 47667
C15	4.7pF., 25%, 50V, Ceramic.	4835 122 47666
C16	4.7uF., 20%, 50V, Electrolytic . . .	4835 124 47506
C17	0.1uF., 50V, Polyester	4835 121 47658
C18	Cap, 100p, 5%, 50V, Ceramic.	2020 552 90603
C19	0.01uF., 10%, 50V, Polyester	4835 121 47657
C20	0.01uF., 10%, 50V, Polyester	4835 121 47657
C23	100uF., 25V, Electrolytic.	4835 124 47501
C24	0.1uF., 50V, Polyester	4835 121 47658
C25	0.01uF., 10%, 50V, Polyester	4835 121 47657
D1	Zener Diode, 8.2V, BZX79-C8V2. . . .	4835 130 37503
D2	Zener Diode, 8.2V, BZX79-C8V2. . . .	4835 130 37503
D3	Zener Diode, 8.2V, BZX79-C8V2. . . .	4835 130 37503
D4	Zener Diode, 16V, BZX79-C16.	3198 010 21690
IC1	IC,.	9339 954 00602
IC2	IC,.	4835 209 87081
IC3	IC,.	9334 536 00682
IC4	IC,.	3135 019 01011
IC5	IC,.	4835 209 17603
J1	Connector.	2422 026 04366
J2	Socket, Antenna, 1 Pin	2422 031 10792
J3	Connector, 32 Pin.	3135 010 03541
J7	6 Pin Board Connector.	2422 025 14552
L1	Peaking Coil, 1uH., 20%.	4835 157 67061
L2	Variable Coil.	4835 150 57092
L3	Variable Coil.	4835 150 57092
Q1	Transistor, BC547B	4835 130 47055
Q2	Transistor, BC547B	4835 130 47055
Q3	Transistor, BC547B	4835 130 47055
Q4	Transistor, BC547B	4835 130 47055
Q5	Transistor, BC557B	4835 130 47409
Q6	Transistor, BC557B	4835 130 47409
Q7	Transistor, BC547B	4835 130 47055
Q8	Transistor, BC547B	4835 130 47055
Q9	Transistor, BC547B	4835 130 47055
R01	3.3k, 5%, 1/2W, Metal Film	4835 116 57714
R02	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R03	1k, 5%, 1/2W, Metal Film	4835 116 57685
R04	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R05	1k, 5%, 1/2W, Metal Film	4835 116 57685
R06	1k, 5%, 1/2W, Metal Film	4835 116 57685
R07	220 ohm, 5%, 1/2W, Metal Film. . . .	4835 116 57705
R08	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R10	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R11	47k, 5%, 1/2W, Metal Film.	4835 116 57725
R12	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R13	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R14	100 ohm, 5%, 1/2W, Metal Film. . . .	4835 116 57684
R15	47k, 5%, 1/2W, Metal Film.	4835 116 57725
R16	47k, 5%, 1/2W, Metal Film.	4835 116 57725
R17	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R18	47k, 5%, 1/2W, Metal Film.	4835 116 57725
R19	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R20	24k, 5%, 1/4W, Carbon Film	4835 110 47219
R21	16k, 5%, 1/4W, Carbon Film	4835 110 47218
R22	4.7k, 5%, 1/2W, Metal Film	4835 116 57724
R23	270k, 5%, 1/4W, Carbon Film.	4835 110 47221
R24	47k, 5%, 1/2W, Metal Film.	4835 116 57725
R25	10k, 5%, 1/2W, Metal Film.	4835 116 57686
R26	47k, 5%, 1/2W, Metal Film.	4835 116 57725
R27	47k, 5%, 1/2W, Metal Film.	4835 116 57725
R28	100 ohm, 5%, 1/2W, Metal Film. . . .	4835 116 57684
R29	100 ohm, 5%, 1/2W, Metal Film. . . .	4835 116 57684
R30	100 ohm, 5%, 1/2W, Metal Film. . . .	4835 116 57684
Y1	Ceramic Resonator, 12MHz	4835 122 97101

A10777 Interface Module Parts

	A10777 Interface Module Parts	
CBA	00A10777A001 Interface Module Asm. .	00A1 077 7A001
BR711	Zero ohm,.	4835 111 27056
BR712	Zero ohm,.	4835 111 27056
BR713	Zero ohm,.	4835 111 27056
BR714	Zero ohm,.	4835 111 27056
BRS15	Zero ohm,.	4835 111 27056
BRS16	Zero ohm,.	4835 111 27056

S = Safety Part Be sure to use exact replacement part.

SC2927C121 (continued)

C702	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
C703	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
J0215	Connector, 2 Pin,.	2422 025 16343
J0237	Connector, 4 Pin	2422 025 12479
J0238	5 Pin Board Connector.	2422 025 16387
J0259	Connector, 3 Pin	2412 020 00725
J1215	Connector, 2 Pin,.	2422 025 16343
J1227	Connector, 4 Pin	2422 025 16385
J1238	Connector, 5 Pin	2422 025 12481
J1259	Connector, 3 Pin	2422 025 16383
J214	Connector, 3 Pin	2422 025 16382
J216	Connector, 4 Pin	2422 025 15847
J219	Connector, 5 Pin	2422 025 15848
J228	Connector, 3 Pin	2422 025 16407
J236	4 Pin Board Connector.	2422 025 16384
J775	Contact Pin.	2422 024 00626
J800	Connector, 32 Pin.	3135 010 03531
Q700	Transistor, NPN, BC847B.	4822 130 60511
Q701	Transistor, NPN, BC847B.	4822 130 60511
Q704	Transistor, PNP, BC857B.	5322 130 60508
Q705	Transistor, PNP, BC857B.	5322 130 60508
Q706	Transistor, NPN, BC847B.	4822 130 60511
Q707	Transistor, NPN, BC847B.	4822 130 60511
R700	10k, 5%, 1/10W, Metal Film	4835 111 37216
R701	47k, 5%, 1/10W, Metal Film	4835 111 37445
R702	75 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37276
R703	75 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37276
R711	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
R712	10k, 5%, 1/10W, Metal Film	4835 111 37216
R713	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
R714	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
R715	10k, 5%, 1/10W, Metal Film	4835 111 37216
R716	47k, 5%, 1/10W, Metal Film	4835 111 37445
R717	10k, 5%, 1/10W, Metal Film	4835 111 37216
R718	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
R719	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443
R720	Res, 1K, 2%, 0,25W	4822 051 10102
R721	75 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37276
R722	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231
Z700	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z701	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z702	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z703	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z704	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z705	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z706	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z707	Zener Diode, 8.2V, BZX284-C8	4835 130 37922

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Mains Cord	3135 010 07161
AC02	Clip, Anode Lead	3135 014 04471
AC03	Cabinet Back	3135 014 07911
AC04	Cabinet Front.	3135 017 04121
AC05	Chassis Guide.	3139 124 31381
AC06	Control Buttons.	3139 124 27351
S AC07	Convergence and Purity Assembly. . .	2422 549 43385
S AC08	CRT A68AHB82X.	9301 759 20405
S AC09	Coil, Degaussing	3121 218 62701
AC10	Holder, Degaussing (4 Used).	3135 013 01641
AC11	Light Guide.	3139 124 26461
AC14	Power Button	3139 124 26444
REMOTE	Remote Transmitter	3139 228 80572
AC16	Speaker, 16R, 1W5 (2 Used)	2422 264 00343
S AC18	Yoke	2422 549 43727
AC19	Yoke Wedge (3 used).	3135 013 00311
AC21	Batteries f/Remote Transmitter . . .	9299 000 13827
AC24	Spring	3139 121 26231

S = Safety Part Be sure to use exact replacement part.

SC2932C121 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts	
S 0127	3.15 Amp Fuse, ...	3122 358 72141
0152	Cable, DIP, 6 Pin, 400mm	3104 301 09421
0153	4 Pin Cable.	3104 301 09431
0212	Connector, 2 Pin	2422 025 15396
0213	Connector, 3 Pin	2412 020 00725
0214	Connector, 3 Pin	2422 025 16382
0215	Connector, 2 Pin,.	2422 025 16343
0216	Connector, 4 Pin	2422 025 15847
0219	Connector, 5 Pin	2422 025 15848
0219	5 Pin Board Connector.	2422 025 16387
0220	4 Pin Board Connector.	2422 025 04852
0224	1 Pin Board Connector.	2422 034 20021
0228	1 Pin Board Connector.	2422 034 20021
0234	Connector, 4 Pin	2422 025 12479
0236	4 Pin Board Connector.	2422 025 16384
0237	Connector, 4 Pin	2422 025 12479
0238	Connector, 5 Pin	2422 025 12481
0238	Connector, 5 Pin	2422 025 15848
S 0243	Connector, 6 Pin	2422 025 04854
0244	4 Pin Board Connector.	2422 025 04852
S 0245	Connector, 6 Pin	2422 025 04854
S 0254	CRT Socket (9 Pin)	2422 500 80022
0259	Connector, 3 Pin	2422 025 16383
0262	Connector, 4 Pin	2422 025 16385
0267	Connector, 3 Pin	2412 020 00725
1000	Tuner.	2422 542 90051
1003	45 MHz SAW, Filter,.	2422 549 42433
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807
1208	Crystal Resonator.	4835 242 77276
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10869
S 1572	1 Amp, Radial Fuse,.	4835 253 97162
S 1573	2.5 Amp Fuse, Radial,.	2422 086 10422
S 1580	Relay, 12V	2422 132 07317
1600	Switch, Tactile.	2422 128 02742
1601	Switch, Tactile.	2422 128 02742
1602	Switch, Tactile.	2422 128 02742
1603	Switch, Tactile.	2422 128 02742
1606	Switch, Tactile.	2422 128 02742
1660	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488
1822	Crystal Resonator, 18MHz432, 12 Pin, HC49/U A	2422 543 00842
2001	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2002	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2003	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2004	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2011	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2101	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2102	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2103	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2104	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2111	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2112	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2115	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2201	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2205	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2208	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2209	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2211	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2212	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2213	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2214	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2215	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 16654
2220	Cap, 18p, 5%, 50V, Ceramic	3198 016 01890
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2222	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2226	Cap, 33u, 20%, 25V, Electrolytic . .	2020 021 90124
2227	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2247	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2248	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2249	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2330	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2340	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320
S 2343	Cap, 3n3, 10%, 2KV, Ceramic.	2020 558 90529
2345	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2401	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2402	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2403	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2405	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2407	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2409	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2420	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2426	Cap, 100n, 10%, 63V, Metalized Polyester.	2222 370 75104
2428	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2429	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2430	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2431	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2437	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2438	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2448	Cap, 220p, 10%, 500V, Ceramic. . . .	3198 019 42210
2450	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91139
2451	Cap, 15n, 10%, 50V, Polyester. . . .	2020 300 90575
2451	0.012uF., 5%, 50V, Polyester	3198 014 01230
2451	0.01uF., 10%, 50V, Polyester, only 27	3198 138 20941
2456	Cap, 47n, 10%, 250V, Metalized Polyester.	2222 368 90176
2457	Cap, 360n, 5%, 250V, Metalized Polypropylene.	2222 479 90019
2458	Cap, 2u2, 20%, 100V, Electrolytic. .	2020 021 91331
2459	Cap, 680p, 10%, 500V, Ceramic. . . .	3198 019 46810
2461	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2462	Cap, 47n, 10%, 250V, Metalized Polyester.	2222 368 90176
S 2463	Cap, 1n2, 10%, 2KV, Ceramic.	2020 558 90488
2464	Cap, 2u2, 5%, 160V, Polypropylene. .	2222 479 90042
S 2465	Cap, 12n, 5%, 1600V, Polypropylene .	2222 375 90156
2467	Cap, 8n2, 10%, 400V, Polyester . . .	2222 347 51822
2468	Cap, 18n, 10%, 400V, Polyester . . .	2222 347 90222
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050
2470	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2472	Cap, 2u2, 20%, 50V, Electrolytic . .	2020 021 90552
2473	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2481	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2482	Cap, 68n, 10%, 250V, Polyester . . .	2222 347 90234
2484	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2485	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2486	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2487	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2488	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2489	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2490	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2491	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810
2500	0.47uF., 250V, Polyester	4835 121 47569
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
S 2507	Cap, 1n5, 10%, 1KV, Ceramic.	2020 558 90443
2508	Cap, 470u, 20%, 200V, Electrolytic .	2020 024 90647
S 2511	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
S 2518	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2530	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 021 91147
2531	Cap, 1n, 2%, 50V, Polypropylene. . .	2020 310 90049
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2540	Cap, 100u, 20%, 25V, Electrolytic. .	2020 021 90547
S 2545	1500pF., 250VAC, Ceramic	4835 122 47621
S 2550	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2551	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91358
2561	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
S 2562	Cap, 220p, 10%, 1KV, Ceramic	2020 558 90424
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2571	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91353
2572	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2575	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2586	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2604	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2613	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2615	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2619	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2622	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2629	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040

S = Safety Part Be sure to use exact replacement part.

SC2932C121 (continued)

2631	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3251	270k, 5%, 1/10W, Metal Film.	3198 021 52740
2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3252	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
2679	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3253	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
2681	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210		3257	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3258	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3259	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
2850	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810		3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
2851	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046
2852	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
2853	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046
2854	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
2855	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380		3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046
2856	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380	S	3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
2858	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790	S	3341	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483
2859	Cap, 15p, 5%, 50V, Ceramic	3198 016 01590	S	3342	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483
2860	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090		3343	1.5k, 20%, 1/2W, Carbon Composition.	4835 110 47034
2861	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
2862	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	S	3345	VDR, DC, 1mA, 50V, MAX 115V	2322 593 13507
2863	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090		3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
2864	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3401	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2865	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3402	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2866	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3403	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2867	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3405	2.2k, 1%, 0.6W, Metal Film	4835 116 57676
2868	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780		3406	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2869	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3407	2.2k, 1%, 0.6W, Metal Film	4835 116 57676
2870	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2871	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090		3409	1.5 ohm, 5%, 1/3W, Metal Film. . . .	4835 116 57664
2874	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790		3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2875	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790		3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2877	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3420	470k, 5%, 1/10W, Metal Film.	4835 111 37407
2882	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2883	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090		3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2884	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840
2887	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810		3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606
2888	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3425	68k, 5%, 1/10W, Metal Film	4835 111 37273
2889	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3426	39k, 5%, 1/10W, Metal Film	4835 111 27051
2891	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390		3428	22k, 5%, 1/10W, Metal Film	4835 111 37441
2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3429	27k, 5%, 1/10W, Metal Film	4835 111 37442
2952	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3431	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
2954	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3432	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
2955	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3436	Res, 1K, 2%, 0,25W	4822 051 10102
2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3437	10k, 5%, 1/10W, Metal Film	4835 111 37216
2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3438	33k, 1/4W, Carbon Film	4835 110 57375
2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
2960	Cap, 2u2, 20%, 25V, Electrolytic . .	3198 026 32220		3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090		3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090	S	3452	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63229
2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090	S	3454	Res, 33K, 5%, 1 1/3W, Metal Film . .	2322 194 63333
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3013	Zero ohm,.	4835 111 27056	S	3462	Res, 6K8, 5%, 5W, Metal Film	2322 257 41682
3014	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052		3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3015	22k, 5%, 1/10W, Metal Film	4835 111 37441	S	3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810		3467	Res, 14K, 1%, 3/5W, Metal Film . . .	2322 156 21403
3100	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510		3467	Res, 15K, 1%, 3/5W, Metal Film . . .	2322 156 21503
3101	220k, 5%, 1/10W, Metal Film.	4835 111 37235		3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3103	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3470	Res, 220K, 5%, 1/4W, Carbon Film . .	2120 101 74224
3104	10k, 5%, 1/10W, Metal Film	4835 111 37216		3472	Res, 56K, 5%, 1/6W, Carbon Film. . .	3198 011 05630
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510		3473	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3108	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3474	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3109	10k, 5%, 1/10W, Metal Film	4835 111 37216		3475	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3122	220k, 5%, 1/10W, Metal Film.	4835 111 37235		3477	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3123	75 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37276		3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3125	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890		3479	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198 011 03310
3145	Res, 1K, 2%, 0,25W	4822 051 10102		3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703
3155	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259		3481	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903
3201	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253		3482	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903
3203	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443		3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820		3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3205	Res, 1K, 2%, 0,25W	4822 051 10102	S	3485	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
3206	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	S	3486	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3487	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3209	22k, 5%, 1/10W, Metal Film	4835 111 37441	S	3488	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
3212	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253	S	3490	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3213	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	S	3491	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3215	22k, 5%, 1/10W, Metal Film	4835 111 37441	S	3492	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3216	Zero ohm,.	4835 111 27056		3495	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
3217	Res, 1M5, 5%, 1/8W, Metalized Glass.	2322 730 61155		3496	10k, 5%, 1/10W, Metal Film	4835 111 37216
3218	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3497	10k, 5%, 1/10W, Metal Film	4835 111 37216
3219	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3220	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225
3225	100k, 5%, 1/10W, Metal Film.	4835 111 37434		3503	10ohm, 120VAC, Positive Temperature C	
3228	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432			oefficient	4835 116 47001
3231	Zero ohm,.	4835 111 27056	S	3505	Surge Protector.	2422 549 43073
3232	Zero ohm,.	4835 111 27056	S	3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3233	Zero ohm,.	4835 111 27056	S	3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333
3243	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	S	3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102
3246	82k, 5%, 1/10W, Metal Film	4835 111 37277		3512	15k, 5%, 1/10W, Metal Film	4835 111 37458
3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184
3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204
3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340	S	3515	2.5 ohm, 20%, 3.6W, Negative Temperat	
3250	Zero ohm,.	4835 111 27056			ure Coefficient.	2122 612 00023

S = Safety Part Be sure to use exact replacement part.

SC2932C121 (continued)

3516	Res, 1K, 2%, 0,25W	4822 051 10102	
3517	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	
S 3518	Res, 0R22, 5%, 3W, Metal Film.	2120 106 90548	
3520	Res, 82K, 5%, 1/6W, Carbon Film.	3198 011 08230	
3521	330 ohm, 5%, 1/10W, Metal Film	4835 111 37443	
S 3525	33 ohm, 5%, 1/3W, Metal Film	4835 116 57665	
3528	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3529	Res, 68 ohm, 5%, 1/6W, Carbon Film	3198 011 06890	
3530	Res, 3K3, 5%, 1/6W, Carbon Film.	3198 011 03320	
3532	Res, 6K8, 5%, 1/6W, Carbon Film.	3198 011 06820	
3534	15k, 5%, 1/10W, Metal Film	4835 111 37458	
3536	Res, 18K, 5%, 1/6W, Carbon Film.	3198 011 01830	
3537	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030	
S 3542	4.7 Megohm, 5%, 1/2W, Metal Film	4835 116 57009	
3570	15k, 5%, 1/10W, Metal Film	4835 111 37458	
3571	Res, 150K, 1%, 3/5W, Metal Film.	2322 156 21504	
3573	Res, 2K, 1%, 1/10W, Metalized Glass.	2120 108 92657	
3574	33k, 5%, 1/10W, Metal Film	4835 111 37248	
3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3577	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030	
3578	Res, 1K, 2%, 0,25W	4822 051 10102	
3579	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451	
3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3592	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3594	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3595	68k, 5%, 1/6W, Carbon Film	4835 111 37205	
3596	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030	
3597	100 ohm, 5%, 1/10W, Metal Film	4835 111 37432	
3598	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3599	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3607	8.2k, 5%, 1/8W, Inline Package	4835 111 97046	
3608	2.2k, 5%, 1/8W, Inline Package	4835 111 97049	
3609	2.2k, 5%, Resistor Network	2120 108 93868	
3611	Res, 1K, 2%, 0,25W	4822 051 10102	
3612	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3613	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3615	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3617	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3619	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3629	470 ohm, 5%, 1/10W, Metal Film	4835 111 37259	
3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3631	27k, 5%, 1/10W, Metal Film	4835 111 37442	
S 3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63479	
3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210	
3634	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3635	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3636	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3637	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3653	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030	
3654	100 ohm, 5%, 1/10W, Metal Film	4835 111 37432	
3655	100 ohm, 5%, 1/10W, Metal Film	4835 111 37432	
3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3662	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3663	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3664	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3665	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3666	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376	
3667	27k, 5%, 1/10W, Metal Film	4835 111 37442	
3672	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3673	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3674	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231	
3675	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510	
3676	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510	
3677	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510	
3680	680 ohm, 5%, 1/10W, Metal Film	4835 111 37271	
3681	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3682	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3683	100 ohm, 5%, 1/10W, Metal Film	4835 111 37432	
3684	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3687	220 ohm, 5%, 1/10W, Metal Film	4835 111 37371	
3841	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3842	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3843	47k, 5%, 1/10W, Metal Film	4835 111 37445	
3844	470 ohm, 5%, 1/10W, Metal Film	4835 111 37259	
3845	470 ohm, 5%, 1/10W, Metal Film	4835 111 37259	
3850	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810	
3951	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3953	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272	
3954	1.5k, 5%, 1/10W, Metal Film.	4835 111 37437	
3955	Res, 4K7, 5%, 1/6W, Carbon Film.	3198 011 04720	
3956	1.5k, 5%, 1/10W, Metal Film.	4835 111 37437	
3957	Res, 4K7, 5%, 1/6W, Carbon Film.	3198 011 04720	
4001	Zero ohm,	4835 111 27056	
4002	Zero ohm,	4835 111 27056	
4004	Zero ohm,	4835 111 27056	
4007	Zero ohm,	4835 111 27056	
4009	Zero ohm,	4835 111 27056	
4010	Zero ohm,	4835 111 27056	
4011	Zero ohm,	4835 111 27056	
4012	Zero ohm,	4835 111 27056	
4013	Zero ohm,	4835 111 27056	
4020	Zero ohm,	4835 111 27056	
4051	Zero ohm,	4835 111 27056	
4100	Zero ohm,	4835 111 27056	
4101	Zero ohm,	4835 111 27056	
4102	Zero ohm,	4835 111 27056	
4103	Zero ohm,	4835 111 27056	
4143	Zero ohm,	4835 111 27056	
4144	Zero ohm,	4835 111 27056	
4203	Zero ohm,	4835 111 27056	
4207	Zero ohm,	4835 111 27056	
4212	Zero ohm,	4835 111 27056	
4214	Zero ohm,	4835 111 27056	
4215	Zero ohm,	4835 111 27056	
4216	Zero ohm,	4835 111 27056	
4410	Res, 1K, 2%, 0,25W	4822 051 10102	
4501	Zero ohm,	4835 111 27056	
4602	Zero ohm,	4835 111 27056	
4650	Zero ohm,	4835 111 27056	
4651	Zero ohm,	4835 111 27056	
4652	Zero ohm,	4835 111 27056	
4654	Zero ohm,	4835 111 27056	
4655	Zero ohm,	4835 111 27056	
4684	Zero ohm,	4835 111 27056	
4687	Zero ohm,	4835 111 27056	
4831	Zero ohm,	4835 111 27056	
4832	Zero ohm,	4835 111 27056	
4833	Zero ohm,	4835 111 27056	
4902	Zero ohm,	4835 111 27056	
4903	Zero ohm,	4835 111 27056	
4904	Zero ohm,	4835 111 27056	
4905	Zero ohm,	4835 111 27056	
4909	Zero ohm,	4835 111 27056	
4911	Zero ohm,	4835 111 27056	
4912	Zero ohm,	4835 111 27056	
4914	Zero ohm,	4835 111 27056	
4957	Zero ohm,	4835 111 27056	
4999	Zero ohm,	4835 111 27056	
5000	Coil, 5u6.	3198 018 25680	
5004	Coil, 820n	2422 535 97314	
5101	Coil, 5u6.	3198 018 15680	
5201	Coil, 22u.	3198 018 22290	
5202	Coil, 6u8.	3198 018 16880	
5342	22uH., 10%, Coil, Peaking.	4835 157 67069	
S 5445	Transformer, L.O.T., models ending in C101, C121, and C125	2422 531 02327	
S 5445	Transformer, L.O.T., models ending in C221 and C225.	3128 138 20941	
5451	Coil, 27u.	2422 535 96614	
5457	Coil	3128 138 53181	
5461	Transformer.	3128 138 33811	
5463	Coil, Choke.	3128 138 37021	
5471	Coil, 1m	2422 535 94652	
5480	Coil, 27u.	2422 535 97334	
5480	Coil, 39u.	2422 535 97336	
5480	Coil, 47u.	2422 535 97337	
5480	33uH., Peaking Coil, only in 25.	4835 157 58205	
S 5500	Filter, Mains, 5mH, 2A	2422 549 43432	
5516	100uH., Coil	4835 157 67078	
5518	Fixed, Inductor, 100MHz, 50R.	3198 018 90010	
5521	Coil, 2u2.	3198 018 12280	
5540	Coil, 4u7.	3198 018 14780	
S 5545	Transfomer,	2422 531 02314	
5551	27uH., 5%, Coil, Peaking	4835 157 67052	
5552	Fixed, Inductor, 100MHz, 50R.	3198 018 90010	
5572	100uH., Coil	4835 157 67078	
5573	100uH., Coil	4835 157 67078	
5575	100uH., Coil	4835 157 67078	
5576	100uH., Coil	4835 157 67078	
5577	Fixed, Inductor, 100MHz, 50R.	3198 018 90010	
5600	Coil, 8u2.	3198 018 18280	
5601	Coil, 8u2.	3198 018 18280	
5620	Coil, 6u8.	3198 018 16880	
5821	Coil, 100u	3198 018 21010	
5831	Coil, 12u.	3198 018 21290	
5832	Coil, 12u.	3198 018 21290	
5833	Coil, 12u.	3198 018 11290	
6008	Zener, 33 Volt BZX79-C33	4835 130 37904	
6113	Zener Diode, 6.8 volt.	9340 386 40115	
6125	Zener Diode, 6.8 volt.	9340 386 40115	
6211	Diode, 1N4148.	4835 130 37048	
6212	Diode, 1N4148.	4835 130 37048	
6213	Diode, 1N4148.	4835 130 37048	
6331	Diode.	4835 130 37294	
6333	Diode.	4835 130 37294	

S = Safety Part Be sure to use exact replacement part.

6335	Diode.	4835 130 37294
6401	Diode.	4835 130 37094
6402	Zener, 18 Volt, BZX79-C18.	4835 130 37908
6449	Diode, 1N4148.	4835 130 37048
6450	Diode, 1N4148.	4835 130 37048
6460	Diode, Rect, BY228/20	9336 215 80112
6461	Diode, Rect, BYW95C-20.	9336 215 90112
6463	Diode, 1N4148.	4835 130 37048
6465	Diode, BYD33J.	4835 130 37094
6466	Diode, BYD33J.	4835 130 37094
6470	Zener Diode, 9.1 volt.	9331 177 80133
6472	Diode, 1N4148.	4835 130 37048
6480	Diode, Zener	4835 130 37947
6481	Diode, 1N4148.	4835 130 37048
6485	Diode, BYD33J.	4835 130 37094
6486	Diode, EGP20DL-530	4835 130 37919
6487	Diode.	4835 130 37094
6488	Diode, Rect, BYV27-200.	9322 126 72673
6490	Diode, Rect, BYV27-200.	9322 126 72673
6505	Diode, Bridge Rect, GBU6JL-7002	9322 138 08667
6507	Diode, BYD33J.	4835 130 37094
6508	Diode, BYD33J.	4835 130 37094
6510	Zener Diode, 20 volt	9331 178 60133
6511	Diode, BYV95C.	4835 130 37052
6512	Diode, Rect, BY228/20	4822 130 41275
6513	Diode, Rect, BY228/20	4822 130 41275
6514	Zener, 18 Volt, BZX79-C18.	4835 130 37908
6540	Diode.	4835 130 37294
6550	Diode, Rect, BY229X-800	9340 380 30127
6560	Diode, EGP20DL-530	4835 130 37919
6570	Diode, EGP20DL-530	4835 130 37919
6582	Diode, EGP20DL-530	4835 130 37919
6584	Diode, 1N4148.	4835 130 37048
6585	Diode, 1N4148.	4835 130 37048
6590	Diode, EGP20DL-530	4835 130 37919
6591	Diode, BAS216.	4835 130 37905
6601	Diode, Zener	4835 130 37684
6602	Diode, 1N4148.	4835 130 37048
6603	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
6604	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
6605	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
6606	Zener, 4.7 Volt, BZX79-C4V7.	4835 130 37005
6607	Zener, 6.8 Volt, BZX79-C6V8.	4835 130 37945
6690	LED, LTL-307P.	4835 130 97096
6831	Diode, BAS216.	4835 130 37905
6951	Diode, BAS216.	4835 130 37905
6961	Diode, BAS216.	4835 130 37905
7134	Transistor, BC547B	4835 130 47055
7250	IC,	9352 620 27112
7251	IC, LM317T	9337 220 80682
7254	Transistor, NPN, BC847B.	4822 130 60511
7256	Transistor, NPN, BC847B.	4822 130 60511
7258	Transistor, NPN, BC847B.	4822 130 60511
7263	Transistor, PNP, BC857B.	5322 130 60508
7266	Transistor, NPN, BC847B.	4822 130 60511
7330	IC,	9352 184 10112
7401	IC,	4835 209 88531
7460	Transistor, NPN, BU1508DX.	9340 170 50127
7461	Transistor, NPN, BF819	9335 354 50127
7470	F.E.T., Power, STP16NE06FP	9322 123 96687
7480	IC,	9322 028 93682
7481	Transistor, BC557B	4835 130 47409
7482	Transistor, PNP, BC857B.	5322 130 60508
7518	STH8NA60FI SMPS FET	9322 068 92687
7518	STH10NC60FI SMPS FET.	9322 155 66687
7520	IC, MC44603A	4835 209 88537
7570	IC,	9337 711 00676
S 7581	Coupler, TCDT1101G	9338 431 30682
7590	Transistor, NPN, BC847B.	4822 130 60511
7591	Transistor, NPN, BC847B.	4822 130 60511
7592	Transistor, NPN, BC847B.	4822 130 60511
7600	IC, SAA5565-PS/M3/0195 L9 v3.2 (Commercial Models - Pro Plus Models).	9352 673 97112
7601	IC, ST24W16B6, commercial models only	9322 095 35682
7603	Transistor, NPN, BC337	9331 796 00126
7604	Transistor, NPN, BC847B.	4822 130 60511
7605	Transistor, NPN, BC847B.	4822 130 60511
7608	Transistor, NPN, BC847B.	4822 130 60511
7609	Transistor, NPN, BC847B.	4822 130 60511
7680	IR Receiver.	9322 127 53667
7833	IC,	9322 136 54682
7950	IC,	4835 209 88543
CBA	00EMF895A002 Main Chassis Board Asm.	00EM F89 5A002

A10757 L9 Audio Jack Panel Parts

	A10757 L9 Audio Jack Panel Parts	
CBA	00A10757A001 L9 Audio Jack Panel Asm.	00A1 075 7A001
C1	Cap, 2u2, 20%, 50V, Electrolytic	3198 028 52280
C2	Cap, 2u2, 20%, 50V, Electrolytic	3198 028 52280
J0214	Connector, 3 Pin	2422 025 16601
J0234	4 Pin Board Connector.	2422 025 15851
J100	Socket, Click, 4 Pin	2422 015 18711
J1214	Connector, 3 Pin	2422 025 16601
J1234	4 Pin Board Connector.	2422 025 12489
JP11	Socket, Cinch, 1 Pin	2422 026 04912
JP12	Socket, Cinch, 1 Pin	2422 026 04374
SW1	Switch	4835 277 27061

A10777 Interface Module Parts

	A10777 Interface Module Parts	
CBA	00A10777A001 Interface Module Asm.	00A1 077 7A001
BR711	Zero ohm,	4835 111 27056
BR712	Zero ohm,	4835 111 27056
BR713	Zero ohm,	4835 111 27056
BR714	Zero ohm,	4835 111 27056
BRS15	Zero ohm,	4835 111 27056
BRS16	Zero ohm,	4835 111 27056
C702	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
C703	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
J0215	Connector, 2 Pin,	2422 025 16343
J0237	Connector, 4 Pin	2422 025 12479
J0238	5 Pin Board Connector.	2422 025 16387
J0259	Connector, 3 Pin	2412 020 00725
J1215	Connector, 2 Pin,	2422 025 16343
J1227	Connector, 4 Pin	2422 025 16385
J1238	Connector, 5 Pin	2422 025 12481
J1259	Connector, 3 Pin	2422 025 16383
J214	Connector, 3 Pin	2422 025 16382
J216	Connector, 4 Pin	2422 025 15847
J219	Connector, 5 Pin	2422 025 15848
J228	Connector, 3 Pin	2422 025 16407
J236	4 Pin Board Connector.	2422 025 16384
J775	Contact Pin.	2422 024 00626
J800	Connector, 32 Pin.	3135 010 03531
Q700	Transistor, NPN, BC847B.	4822 130 60511
Q701	Transistor, NPN, BC847B.	4822 130 60511
Q704	Transistor, PNP, BC857B.	5322 130 60508
Q705	Transistor, PNP, BC857B.	5322 130 60508
Q706	Transistor, NPN, BC847B.	4822 130 60511
Q707	Transistor, NPN, BC847B.	4822 130 60511
R700	10k, 5%, 1/10W, Metal Film	4835 111 37216
R701	47k, 5%, 1/10W, Metal Film	4835 111 37445
R702	75 ohm, 5%, 1/10W, Metal Film.	4835 111 37276
R703	75 ohm, 5%, 1/10W, Metal Film.	4835 111 37276
R711	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
R712	10k, 5%, 1/10W, Metal Film	4835 111 37216
R713	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
R714	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
R715	10k, 5%, 1/10W, Metal Film	4835 111 37216
R716	47k, 5%, 1/10W, Metal Film	4835 111 37445
R717	10k, 5%, 1/10W, Metal Film	4835 111 37216
R718	100 ohm, 5%, 1/10W, Metal Film	4835 111 37432
R719	330 ohm, 5%, 1/10W, Metal Film	4835 111 37443
R720	Res, 1K, 2%, 0,25W	4822 051 10102
R721	75 ohm, 5%, 1/10W, Metal Film.	4835 111 37276
R722	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231
Z700	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z701	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z702	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z703	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z704	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z705	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z706	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z707	Zener Diode, 8.2V, BZX284-C8	4835 130 37922

A10791 Comb Filter Panel Parts

	A10791 Comb Filter Panel Parts	
CBA	00A10791A001 Comb Filter Panel Asm.	00A1 079 1A001
1000	8 Pin board Connector.	2422 025 12483
1001	Connector, 4 Pin	2422 025 12479
1102	Crystal, Resonator, 32KHz768	2422 543 00056
1254	9 Pin Board Connector.	2422 025 16265
2000	Cap, 100u, 20%, 10V, Electrolytic.	3198 025 11010
2001	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2002	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2003	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2004	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2011	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2012	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2013	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2014	Cap, 220n, +80/-20%, 25V, Ceramic.	3198 023 22240
2020	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2021	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2023	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2025	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2111	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
2113	Battery, 3 Volts	2422 526 01206
3012	220 ohm, 5%, 1/10W, Metal Film	4835 111 37371
3013	220 ohm, 5%, 1/10W, Metal Film	4835 111 37371
3020	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
3026	2.2 Megohm, 5%, 1/10W, Metal Film.	4835 111 27047
3027	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
3028	Zero ohm,	4835 111 27056
3110	10k, 5%, 1/10W, Metal Film	4835 111 37216

S = Safety Part Be sure to use exact replacement part.

SC2932C121 (continued)

3111	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3116	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
3117	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
3118	10k, 5%, 1/10W, Metal Film	4835 111 37216
3119	10k, 5%, 1/10W, Metal Film	4835 111 37216
5000	Coil, 10u.	3198 018 21090
5012	Coil, 15u.	2422 535 94296
5104	Coil, 6u8.	3198 018 26880
6110	Diode, BAS216.	4835 130 37905
7000	IC, SAA4961/V3/S1.	9352 609 51112
7012	Transistor, NPN, BC847B.	4822 130 60511
7110	IC,.	4835 209 17438
7111	IC,.	5322 209 61482
9001	Jumper Wire.	0322 179 00148

A10808 Pro Plus Interface Parts

	A10808 Pro Plus Interface Parts	
CBA	00A10808A001 Pro Plus Interface Asm.	00A1 080 8A001
BR711	Zero ohm,.	4835 111 27056
BR712	Zero ohm,.	4835 111 27056
BR713	Zero ohm,.	4835 111 27056
BR714	Zero ohm,.	4835 111 27056
BRS15	Zero ohm,.	4835 111 27056
BRS16	Zero ohm,.	4835 111 27056
C702	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
C703	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
J0237	Connector, 4 Pin	2422 025 12479
J0238	Connector, 5 Pin	2422 025 06353
J1215	Connector, 2 Pin,.	2422 025 16343
J1227	Connector, 4 Pin	2422 025 16385
J1237	Connector, 4 Pin	2422 025 12479
J1259	Connector, 3 Pin	2422 025 16383
J214	Connector, 3 Pin	2422 025 16382
J216	Connector, 4 Pin	2422 025 15847
J219	Connector, 5 Pin	2422 025 15848
J228	Connector, 3 Pin	2422 025 16407
J236	4 Pin Board Connector.	2422 025 12489
J775	Contact Pin.	2422 024 00626
J800	Connector, 32 Pin.	3135 010 03531
Q700	Transistor, NPN, BC847B.	4822 130 60511
Q701	Transistor, NPN, BC847B.	4822 130 60511
Q704	Transistor, PNP, BC857B.	5322 130 60508
Q705	Transistor, PNP, BC857B.	5322 130 60508
Q706	Transistor, NPN, BC847B.	4822 130 60511
Q707	Transistor, NPN, BC847B.	4822 130 60511
R700	10k, 5%, 1/10W, Metal Film	4835 111 37216
R701	47k, 5%, 1/10W, Metal Film	4835 111 37445
R702	75 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37276
R703	75 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37276
R711	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
R712	10k, 5%, 1/10W, Metal Film	4835 111 37216
R713	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
R714	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
R715	10k, 5%, 1/10W, Metal Film	4835 111 37216
R716	47k, 5%, 1/10W, Metal Film	4835 111 37445
R717	10k, 5%, 1/10W, Metal Film	4835 111 37216
R718	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
R719	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443
R720	Res, 1K, 2%, 0,25W	4822 051 10102
R721	75 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37276
R722	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231
Z700	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z701	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z702	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z703	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z704	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z705	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z706	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z707	Zener Diode, 8.2V, BZX284-C8	4835 130 37922

A10654A001 Scan Converter Jack Panel

	A10654A001 Scan Converter Jack Panel	
CBA	SCAN CONVERT JK PL	00A1 065 4A001
J1	CONNECTOR 25PIN.	0018 153 20025
J10	SKT MINI CIRC 4P	0018 169 70004
J6	JCK PHONO WHT.	0018 221 10003
J7	JCK PHONO WHT.	0018 221 10003
J8	JCK PHONO WHT.	0018 221 10003
J9	JCK PHONO WHT.	0018 221 10003
J4	JCK PHONO YLW SW	0018 221 11004
J5	JCK PHONO YLW SW	0018 221 11004
J11	SKT MIN CIRC RA SW	0018 227 10004
J13	PHONE JACK,6CIR.	0018 229 60006
J12	CON BM V DSUB 9P	3135 010 00451
J2	CON BM V DSUB 15P.	3135 010 00461
J3	CON BM V DSUB 15P.	3135 010 00461

313917853133 External Power Supply Module Parts

	313917853133 External Power Supply Mo dule Parts	
CBA	313917853133 External Power Supply Mo dule Asm..	3139 178 53133

C1	0.22uF.
C10	1uF., 50V
C100	22uF., 10V
C101	4.7uF., 10V
C102	33uF., 25V
C103	470pF.
C104	0.1uF.
C11	0.1uF.
C12	1uF., 50V
C13	1uF., 50V
C14	1uF., 50V
C15	0.1uF.
C16	0.1uF.
C17	0.1uF.
C18	0.1uF.
C19	0.1uF.
C2	0.22uF.
C20	0.1uF.
C21	0.1uF.
C22	1uF., 50V
C23	18pF.
C24	2.3-27pF.
C25	10pF.
C28	27pF.
C29	27pF.
C3	1uF., 50V
C30	0.1uF.
C32	0.1uF.
C33	33uF., 25V
C34	330uF., 40V
C35	22uF., 10V
C37	33uF., 25V
C38	22uF., 10V
C4	0.1uF.
C40	22uF., 10V
C41	0.1uF.
C42	4.7uF., 10V
C44	0.1uF.
C45	0.1uF.
C46	0.1uF.
C47	0.1uF.
C5	1uF., 50V
C51	470pF.
C52	220pF.
C53	220pF.
C54	470pF.
C55	470pF.
C56	470pF.
C57	470pF.
C58	1000pF.
C59	1000pF.
C6	1uF., 50V
C60	220pF.
C61	220pF.
C63	0.1uF.
C64	4.7uF., 10V
C65	0.1uF.
C66	4.7uF., 10V
C67	0.1uF.
C68	4.7uF., 10V
C69	0.1uF.
C7	0.1uF.
C70	0.1uF.
C71	0.1uF.
C72	0.1uF.
C73	4.7uF., 10V
C74	1000pF.
C75	0.1uF.
C76	0.1uF.
C77	0.1uF.
C78	4.7uF., 10V
C79	0.1uF.
C8	680pF.
C80	0.1uF.
C81	0.1uF.
C82	0.1uF.
C83	0.1uF.
C86	100pF.
C87	100pF.
C88	100pF.
C9	680pF.
C92	1000pF.
C93	1000pF.
C94	1000pF.
C95	1000pF.
C96	1000pF.
C97	4.7uF., 10V
C98	1000pF.
C99	22uF., 10V
D1	1N5818
D2	1N4001
FB1	FB 70@100MHz

S = Safety Part Be sure to use exact replacement part.

SC2932C121 (continued)

FB10	FB 70@100MHz
FB11	FB 70@100MHz
FB12	FB 70@100MHz
FB2	FB 70@100MHz
FB3	FB 70@100MHz
FB6	FB 70@100MHz
FB9	FB 70@100MHz
J1	4030 / 22-03-2251
J2	MOLEX 53394-3217
L1	100uH
L2	330uH
L3	100uH
R1	4.75k
R10	4.75k
R11	634 ohm
R12	1.00M
R13	221 ohm
R16	2.00k
R17	7.50k
R2	100k
R22	274k
R25	33.2 ohm
R28	221 ohm
R29	221 ohm
R3	4.75k
R31	1.50k
R34	1.50k
R35	1.50k
R4	4.75k
R40	100 ohm
R41	100 ohm
R42	100 ohm
R47	4.75k
R48	1.50k
R49	1.50k
R5	4.75k
R50	75.0 ohm
R51	221 ohm
R53	100 ohm
R54	100 ohm
R6	75.0 ohm
R7	75.0 ohm
R8	150 ohm
R9	4.75k
R99	1.00k
RP1	33 ohm
RP2	33 ohm
RP3	33 ohm
RP4	33 ohm
RP5	33 ohm
RP6	33 ohm
RP7	33 ohm
RP8	33 ohm
RP9	33 ohm
Ref.	Description
U1	TDA8440
U10	MIC2920A-3.3BS
U11	MIC2920A-5.0BS
U12	FS310
U2	MAX232CWE
U4	24C02N-10SC
U5	P87C528EBAA
U6	74HC4066
U7	LM2575T-ADJ
U8	74HC04
U9	SDRAM_1Mx16
Y1	14.31818MHz
Y2	16.620MHz

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	AC Power Cord.	3135 010 04321
AC02	Clip, Anode Lead	3135 014 04471
AC03	Cabinet, Back (ITV).	3135 014 06531
AC04	Cabinet Front.	3135 017 03901
AC05	Chassis Guide.	3139 124 31322
AC06	Control Buttons.	3139 124 26472
S AC08	CRT A80ECK272X56	9301 795 00428
S AC09	Coil, Degaussing	3121 218 62641
AC10	Holder, Degaussing (4 Used).	3135 013 01661
AC11	Light Guide.	3139 124 26461
AC12	Nameplate.	3135 015 03571
AC14	Power Button	3139 124 26444
REMOTE	Remote Transmitter	3135 017 02651
AC16	Speaker, 8W, 8 ohm (2 Used).	2422 264 00322
S AC20	AC Adaptor	3138 107 86530
AC21	Batteries for Remote Transmitter (3 P ACK)	3135 019 01211
AC24	Spring	3139 121 26231
AC26	Jack Panel, Plastic.	3135 014 09251
AC30	Bracket, EPS Module, (Horiz)	3135 014 09221

S = Safety Part Be sure to use exact replacement part.

SC2932C221 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts	
S 0127	3.15 Amp Fuse, ...	3122 358 72141
0152	Cable, DIP, 6 Pin, 400mm	3104 301 09421
0153	4 Pin Cable.	3104 301 09431
0212	Connector, 2 Pin	2422 025 15396
0213	Connector, 3 Pin	2412 020 00725
0214	Connector, 3 Pin	2422 025 16382
0215	Connector, 2 Pin,.	2422 025 16343
0216	Connector, 4 Pin	2422 025 15847
0219	Connector, 5 Pin	2422 025 15848
0219	5 Pin Board Connector.	2422 025 16387
0220	4 Pin Board Connector.	2422 025 04852
0224	1 Pin Board Connector.	2422 034 20021
0228	1 Pin Board Connector.	2422 034 20021
0234	Connector, 4 Pin	2422 025 12479
0236	4 Pin Board Connector.	2422 025 16384
0237	Connector, 4 Pin	2422 025 12479
0238	Connector, 5 Pin	2422 025 12481
0238	Connector, 5 Pin	2422 025 15848
S 0243	Connector, 6 Pin	2422 025 04854
0244	4 Pin Board Connector.	2422 025 04852
S 0245	Connector, 6 Pin	2422 025 04854
S 0254	CRT Socket (9 Pin)	2422 500 80022
0259	Connector, 3 Pin	2422 025 16383
0262	Connector, 4 Pin	2422 025 16385
0267	Connector, 3 Pin	2412 020 00725
1000	Tuner.	2422 542 90051
1003	45 MHz SAW, Filter,.	2422 549 42433
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807
1208	Crystal Resonator.	4835 242 77276
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10869
S 1572	1 Amp, Radial Fuse,.	4835 253 97162
S 1573	2.5 Amp Fuse, Radial,.	2422 086 10422
S 1580	Relay, 12V	2422 132 07317
1600	Switch, Tactile.	2422 128 02742
1601	Switch, Tactile.	2422 128 02742
1602	Switch, Tactile.	2422 128 02742
1603	Switch, Tactile.	2422 128 02742
1606	Switch, Tactile.	2422 128 02742
1660	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488
1822	Crystal Resonator, 18MHz432, 12 Pin, HC49/U A	2422 543 00842
2001	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2002	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2003	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2004	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2011	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2101	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2102	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2103	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2104	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2111	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2112	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2115	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2201	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2205	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2208	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2209	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2211	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2212	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2213	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2214	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2215	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 16654
2220	Cap, 18p, 5%, 50V, Ceramic	3198 016 01890
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2222	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2226	Cap, 33u, 20%, 25V, Electrolytic . .	2020 021 90124
2227	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2247	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2248	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2249	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2330	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2340	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320
S 2343	Cap, 3n3, 10%, 2KV, Ceramic.	2020 558 90529
2345	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2401	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2402	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2403	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2405	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2407	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2409	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2420	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2426	Cap, 100n, 10%, 63V, Metalized Polyester.	2222 370 75104
2428	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2429	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2430	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2431	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2437	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2438	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2448	Cap, 220p, 10%, 500V, Ceramic. . . .	3198 019 42210
2450	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91139
2451	Cap, 15n, 10%, 50V, Polyester. . . .	2020 300 90575
2451	0.012uF., 5%, 50V, Polyester	3198 014 01230
2451	0.01uF., 10%, 50V, Polyester, only 27	3198 138 20941
2456	Cap, 47n, 10%, 250V, Metalized Polyester.	2222 368 90176
2457	Cap, 360n, 5%, 250V, Metalized Polypropylene.	2222 479 90019
2458	Cap, 2u2, 20%, 100V, Electrolytic. .	2020 021 91331
2459	Cap, 680p, 10%, 500V, Ceramic. . . .	3198 019 46810
2461	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2462	Cap, 47n, 10%, 250V, Metalized Polyester.	2222 368 90176
S 2463	Cap, 1n2, 10%, 2KV, Ceramic.	2020 558 90488
2464	Cap, 2u2, 5%, 160V, Polypropylene. .	2222 479 90042
S 2465	Cap, 12n, 5%, 1600V, Polypropylene .	2222 375 90156
2467	Cap, 8n2, 10%, 400V, Polyester . . .	2222 347 51822
2468	Cap, 18n, 10%, 400V, Polyester . . .	2222 347 90222
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050
2470	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2472	Cap, 2u2, 20%, 50V, Electrolytic . .	2020 021 90552
2473	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2481	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2482	Cap, 68n, 10%, 250V, Polyester . . .	2222 347 90234
2484	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2485	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2486	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2487	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2488	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2489	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2490	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2491	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810
2500	0.47uF., 250V, Polyester	4835 121 47569
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
S 2507	Cap, 1n5, 10%, 1KV, Ceramic.	2020 558 90443
2508	Cap, 470u, 20%, 200V, Electrolytic .	2020 024 90647
S 2511	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
S 2518	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2530	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 021 91147
2531	Cap, 1n, 2%, 50V, Polypropylene. . .	2020 310 90049
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2540	Cap, 100u, 20%, 25V, Electrolytic. .	2020 021 90547
S 2545	1500pF., 250VAC, Ceramic	4835 122 47621
S 2550	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2551	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91358
2561	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
S 2562	Cap, 220p, 10%, 1KV, Ceramic	2020 558 90424
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2571	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91353
2572	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2575	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2586	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2604	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2613	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2615	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2619	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2622	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2629	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040

S = Safety Part Be sure to use exact replacement part.

SC2932C221 (continued)

2631	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3251	270k, 5%, 1/10W, Metal Film.	3198 021 52740
2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3252	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
2679	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3253	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
2681	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210		3257	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3258	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3259	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
2850	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810		3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
2851	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046
2852	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
2853	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046
2854	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
2855	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380		3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046
2856	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380	S	3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
2858	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790	S	3341	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483
2859	Cap, 15p, 5%, 50V, Ceramic	3198 016 01590	S	3342	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483
2860	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090		3343	1.5k, 20%, 1/2W, Carbon Composition.	4835 110 47034
2861	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
2862	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	S	3345	VDR, DC, 1mA, 50V, MAX 115V	2322 593 13507
2863	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090		3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
2864	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3401	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2865	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3402	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2866	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3403	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2867	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3405	2.2k, 1%, 0.6W, Metal Film	4835 116 57676
2868	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780		3406	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2869	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3407	2.2k, 1%, 0.6W, Metal Film	4835 116 57676
2870	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2871	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090		3409	1.5 ohm, 5%, 1/3W, Metal Film. . . .	4835 116 57664
2874	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790		3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2875	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790		3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2877	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3420	470k, 5%, 1/10W, Metal Film.	4835 111 37407
2882	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2883	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090		3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2884	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840
2887	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810		3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606
2888	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3425	68k, 5%, 1/10W, Metal Film	4835 111 37273
2889	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3426	39k, 5%, 1/10W, Metal Film	4835 111 27051
2891	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390		3428	22k, 5%, 1/10W, Metal Film	4835 111 37441
2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3429	27k, 5%, 1/10W, Metal Film	4835 111 37442
2952	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3431	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
2954	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3432	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
2955	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3436	Res, 1K, 2%, 0,25W	4822 051 10102
2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3437	10k, 5%, 1/10W, Metal Film	4835 111 37216
2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3438	33k, 1/4W, Carbon Film	4835 110 57375
2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
2960	Cap, 2u2, 20%, 25V, Electrolytic . .	3198 026 32220		3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090		3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090	S	3452	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63229
2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090	S	3454	Res, 33K, 5%, 1 1/3W, Metal Film . .	2322 194 63333
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3013	Zero ohm,.	4835 111 27056	S	3462	Res, 6K8, 5%, 5W, Metal Film	2322 257 41682
3014	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052		3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3015	22k, 5%, 1/10W, Metal Film	4835 111 37441	S	3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810		3467	Res, 14K, 1%, 3/5W, Metal Film . . .	2322 156 21403
3100	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510		3467	Res, 15K, 1%, 3/5W, Metal Film . . .	2322 156 21503
3101	220k, 5%, 1/10W, Metal Film.	4835 111 37235		3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3103	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3470	Res, 220K, 5%, 1/4W, Carbon Film . .	2120 101 74224
3104	10k, 5%, 1/10W, Metal Film	4835 111 37216		3472	Res, 56K, 5%, 1/6W, Carbon Film. . .	3198 011 05630
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510		3473	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3108	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3474	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3109	10k, 5%, 1/10W, Metal Film	4835 111 37216		3475	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3122	220k, 5%, 1/10W, Metal Film.	4835 111 37235		3477	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3123	75 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37276		3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3125	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890		3479	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198 011 03310
3145	Res, 1K, 2%, 0,25W	4822 051 10102		3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703
3155	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259		3481	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903
3201	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253		3482	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903
3203	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443		3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820		3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3205	Res, 1K, 2%, 0,25W	4822 051 10102	S	3485	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
3206	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	S	3486	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3487	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3209	22k, 5%, 1/10W, Metal Film	4835 111 37441	S	3488	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
3212	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253	S	3490	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3213	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	S	3491	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3215	22k, 5%, 1/10W, Metal Film	4835 111 37441	S	3492	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3216	Zero ohm,.	4835 111 27056		3495	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
3217	Res, 1M5, 5%, 1/8W, Metalized Glass.	2322 730 61155		3496	10k, 5%, 1/10W, Metal Film	4835 111 37216
3218	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3497	10k, 5%, 1/10W, Metal Film	4835 111 37216
3219	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3220	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225
3225	100k, 5%, 1/10W, Metal Film.	4835 111 37434		3503	10ohm, 120VAC, Positive Temperature C	
3228	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432			oefficient	4835 116 47001
3231	Zero ohm,.	4835 111 27056	S	3505	Surge Protector.	2422 549 43073
3232	Zero ohm,.	4835 111 27056	S	3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3233	Zero ohm,.	4835 111 27056	S	3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333
3243	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	S	3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102
3246	82k, 5%, 1/10W, Metal Film	4835 111 37277		3512	15k, 5%, 1/10W, Metal Film	4835 111 37458
3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184
3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204
3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340	S	3515	2.5 ohm, 20%, 3.6W, Negative Temperat	
3250	Zero ohm,.	4835 111 27056			ure Coefficient.	2122 612 00023

S = Safety Part Be sure to use exact replacement part.

SC2932C221 (continued)

3516	Res, 1K, 2%, 0,25W	4822 051 10102	
3517	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	
S 3518	Res, 0R22, 5%, 3W, Metal Film.	2120 106 90548	
3520	Res, 82K, 5%, 1/6W, Carbon Film.	3198 011 08230	
3521	330 ohm, 5%, 1/10W, Metal Film	4835 111 37443	
S 3525	33 ohm, 5%, 1/3W, Metal Film	4835 116 57665	
3528	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3529	Res, 68 ohm, 5%, 1/6W, Carbon Film	3198 011 06890	
3530	Res, 3K3, 5%, 1/6W, Carbon Film.	3198 011 03320	
3532	Res, 6K8, 5%, 1/6W, Carbon Film.	3198 011 06820	
3534	15k, 5%, 1/10W, Metal Film	4835 111 37458	
3536	Res, 18K, 5%, 1/6W, Carbon Film.	3198 011 01830	
3537	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030	
S 3542	4.7 Megohm, 5%, 1/2W, Metal Film	4835 116 57009	
3570	15k, 5%, 1/10W, Metal Film	4835 111 37458	
3571	Res, 150K, 1%, 3/5W, Metal Film.	2322 156 21504	
3573	Res, 2K, 1%, 1/10W, Metalized Glass.	2120 108 92657	
3574	33k, 5%, 1/10W, Metal Film	4835 111 37248	
3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3577	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030	
3578	Res, 1K, 2%, 0,25W	4822 051 10102	
3579	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451	
3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3592	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3594	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3595	68k, 5%, 1/6W, Carbon Film	4835 111 37205	
3596	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030	
3597	100 ohm, 5%, 1/10W, Metal Film	4835 111 37432	
3598	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3599	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3607	8.2k, 5%, 1/8W, Inline Package	4835 111 97046	
3608	2.2k, 5%, 1/8W, Inline Package	4835 111 97049	
3609	2.2k, 5%, Resistor Network	2120 108 93868	
3611	Res, 1K, 2%, 0,25W	4822 051 10102	
3612	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3613	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3615	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3617	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3619	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3629	470 ohm, 5%, 1/10W, Metal Film	4835 111 37259	
3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3631	27k, 5%, 1/10W, Metal Film	4835 111 37442	
S 3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63479	
3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210	
3634	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3635	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3636	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3637	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3653	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030	
3654	100 ohm, 5%, 1/10W, Metal Film	4835 111 37432	
3655	100 ohm, 5%, 1/10W, Metal Film	4835 111 37432	
3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3662	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3663	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3664	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3665	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3666	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376	
3667	27k, 5%, 1/10W, Metal Film	4835 111 37442	
3672	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3673	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3674	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231	
3675	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510	
3676	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510	
3677	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510	
3680	680 ohm, 5%, 1/10W, Metal Film	4835 111 37271	
3681	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3682	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3683	100 ohm, 5%, 1/10W, Metal Film	4835 111 37432	
3684	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3687	220 ohm, 5%, 1/10W, Metal Film	4835 111 37371	
3841	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3842	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3843	47k, 5%, 1/10W, Metal Film	4835 111 37445	
3844	470 ohm, 5%, 1/10W, Metal Film	4835 111 37259	
3845	470 ohm, 5%, 1/10W, Metal Film	4835 111 37259	
3850	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810	
3951	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3953	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272	
3954	1.5k, 5%, 1/10W, Metal Film.	4835 111 37437	
3955	Res, 4K7, 5%, 1/6W, Carbon Film.	3198 011 04720	
3956	1.5k, 5%, 1/10W, Metal Film.	4835 111 37437	
3957	Res, 4K7, 5%, 1/6W, Carbon Film.	3198 011 04720	
4001	Zero ohm,	4835 111 27056	
4002	Zero ohm,	4835 111 27056	
4004	Zero ohm,	4835 111 27056	
4007	Zero ohm,	4835 111 27056	
4009	Zero ohm,	4835 111 27056	
4010	Zero ohm,	4835 111 27056	
4011	Zero ohm,	4835 111 27056	
4012	Zero ohm,	4835 111 27056	
4013	Zero ohm,	4835 111 27056	
4020	Zero ohm,	4835 111 27056	
4051	Zero ohm,	4835 111 27056	
4100	Zero ohm,	4835 111 27056	
4101	Zero ohm,	4835 111 27056	
4102	Zero ohm,	4835 111 27056	
4103	Zero ohm,	4835 111 27056	
4143	Zero ohm,	4835 111 27056	
4144	Zero ohm,	4835 111 27056	
4203	Zero ohm,	4835 111 27056	
4207	Zero ohm,	4835 111 27056	
4212	Zero ohm,	4835 111 27056	
4214	Zero ohm,	4835 111 27056	
4215	Zero ohm,	4835 111 27056	
4216	Zero ohm,	4835 111 27056	
4410	Res, 1K, 2%, 0,25W	4822 051 10102	
4501	Zero ohm,	4835 111 27056	
4602	Zero ohm,	4835 111 27056	
4650	Zero ohm,	4835 111 27056	
4651	Zero ohm,	4835 111 27056	
4652	Zero ohm,	4835 111 27056	
4654	Zero ohm,	4835 111 27056	
4655	Zero ohm,	4835 111 27056	
4684	Zero ohm,	4835 111 27056	
4687	Zero ohm,	4835 111 27056	
4831	Zero ohm,	4835 111 27056	
4832	Zero ohm,	4835 111 27056	
4833	Zero ohm,	4835 111 27056	
4902	Zero ohm,	4835 111 27056	
4903	Zero ohm,	4835 111 27056	
4904	Zero ohm,	4835 111 27056	
4905	Zero ohm,	4835 111 27056	
4909	Zero ohm,	4835 111 27056	
4911	Zero ohm,	4835 111 27056	
4912	Zero ohm,	4835 111 27056	
4914	Zero ohm,	4835 111 27056	
4957	Zero ohm,	4835 111 27056	
4999	Zero ohm,	4835 111 27056	
5000	Coil, 5u6.	3198 018 25680	
5004	Coil, 820n	2422 535 97314	
5101	Coil, 5u6.	3198 018 15680	
5201	Coil, 22u.	3198 018 22290	
5202	Coil, 6u8.	3198 018 16880	
5342	22uH., 10%, Coil, Peaking.	4835 157 67069	
S 5445	Transformer, L.O.T., models ending in C101, C121, and C125	2422 531 02327	
S 5445	Transformer, L.O.T., models ending in C221 and C225.	3128 138 20941	
5451	Coil, 27u.	2422 535 96614	
5457	Coil	3128 138 53181	
5461	Transformer.	3128 138 33811	
5463	Coil, Choke.	3128 138 37021	
5471	Coil, 1m	2422 535 94652	
5480	Coil, 27u.	2422 535 97334	
5480	Coil, 39u.	2422 535 97336	
5480	Coil, 47u.	2422 535 97337	
5480	33uH., Peaking Coil, only in 25.	4835 157 58205	
S 5500	Filter, Mains, 5mH, 2A	2422 549 43432	
5516	100uH., Coil	4835 157 67078	
5518	Fixed, Inductor, 100MHz, 50R.	3198 018 90010	
5521	Coil, 2u2.	3198 018 12280	
5540	Coil, 4u7.	3198 018 14780	
S 5545	Transfomer,	2422 531 02314	
5551	27uH., 5%, Coil, Peaking	4835 157 67052	
5552	Fixed, Inductor, 100MHz, 50R.	3198 018 90010	
5572	100uH., Coil	4835 157 67078	
5573	100uH., Coil	4835 157 67078	
5575	100uH., Coil	4835 157 67078	
5576	100uH., Coil	4835 157 67078	
5577	Fixed, Inductor, 100MHz, 50R.	3198 018 90010	
5600	Coil, 8u2.	3198 018 18280	
5601	Coil, 8u2.	3198 018 18280	
5620	Coil, 6u8.	3198 018 16880	
5821	Coil, 100u	3198 018 21010	
5831	Coil, 12u.	3198 018 21290	
5832	Coil, 12u.	3198 018 21290	
5833	Coil, 12u.	3198 018 11290	
6008	Zener, 33 Volt BZX79-C33	4835 130 37904	
6113	Zener Diode, 6.8 volt.	9340 386 40115	
6125	Zener Diode, 6.8 volt.	9340 386 40115	
6211	Diode, 1N4148.	4835 130 37048	
6212	Diode, 1N4148.	4835 130 37048	
6213	Diode, 1N4148.	4835 130 37048	
6331	Diode.	4835 130 37294	
6333	Diode.	4835 130 37294	

S = Safety Part Be sure to use exact replacement part.

6335	Diode.	4835 130 37294
6401	Diode.	4835 130 37094
6402	Zener, 18 Volt, BZX79-C18.	4835 130 37908
6449	Diode, 1N4148.	4835 130 37048
6450	Diode, 1N4148.	4835 130 37048
6460	Diode, Rect, BY228/20	9336 215 80112
6461	Diode, Rect, BYW95C-20.	9336 215 90112
6463	Diode, 1N4148.	4835 130 37048
6465	Diode, BYD33J.	4835 130 37094
6466	Diode, BYD33J.	4835 130 37094
6470	Zener Diode, 9.1 volt.	9331 177 80133
6472	Diode, 1N4148.	4835 130 37048
6480	Diode, Zener	4835 130 37947
6481	Diode, 1N4148.	4835 130 37048
6485	Diode, BYD33J.	4835 130 37094
6486	Diode, EGP20DL-530	4835 130 37919
6487	Diode.	4835 130 37094
6488	Diode, Rect, BYV27-200.	9322 126 72673
6490	Diode, Rect, BYV27-200.	9322 126 72673
6505	Diode, Bridge Rect, GBU6JL-7002	9322 138 08667
6507	Diode, BYD33J.	4835 130 37094
6508	Diode, BYD33J.	4835 130 37094
6510	Zener Diode, 20 volt	9331 178 60133
6511	Diode, BYV95C.	4835 130 37052
6512	Diode, Rect, BY228/20	4822 130 41275
6513	Diode, Rect, BY228/20	4822 130 41275
6514	Zener, 18 Volt, BZX79-C18.	4835 130 37908
6540	Diode.	4835 130 37294
6550	Diode, Rect, BY229X-800	9340 380 30127
6560	Diode, EGP20DL-530	4835 130 37919
6570	Diode, EGP20DL-530	4835 130 37919
6582	Diode, EGP20DL-530	4835 130 37919
6584	Diode, 1N4148.	4835 130 37048
6585	Diode, 1N4148.	4835 130 37048
6590	Diode, EGP20DL-530	4835 130 37919
6591	Diode, BAS216.	4835 130 37905
6601	Diode, Zener	4835 130 37684
6602	Diode, 1N4148.	4835 130 37048
6603	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
6604	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
6605	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
6606	Zener, 4.7 Volt, BZX79-C4V7.	4835 130 37005
6607	Zener, 6.8 Volt, BZX79-C6V8.	4835 130 37945
6690	LED, LTL-307P.	4835 130 97096
6831	Diode, BAS216.	4835 130 37905
6951	Diode, BAS216.	4835 130 37905
6961	Diode, BAS216.	4835 130 37905
7134	Transistor, BC547B	4835 130 47055
7250	IC,	9352 620 27112
7251	IC, LM317T	9337 220 80682
7254	Transistor, NPN, BC847B.	4822 130 60511
7256	Transistor, NPN, BC847B.	4822 130 60511
7258	Transistor, NPN, BC847B.	4822 130 60511
7263	Transistor, PNP, BC857B.	5322 130 60508
7266	Transistor, NPN, BC847B.	4822 130 60511
7330	IC,	9352 184 10112
7401	IC,	4835 209 88531
7460	Transistor, NPN, BU1508DX.	9340 170 50127
7461	Transistor, NPN, BF819	9335 354 50127
7470	F.E.T., Power, STP16NE06FP	9322 123 96687
7480	IC,	9322 028 93682
7481	Transistor, BC557B	4835 130 47409
7482	Transistor, PNP, BC857B.	5322 130 60508
7518	STH8NA60FI SMPS FET	9322 068 92687
7518	STH10NC60FI SMPS FET.	9322 155 66687
7520	IC, MC44603A	4835 209 88537
7570	IC,	9337 711 00676
S 7581	Coupler, TCDT1101G	9338 431 30682
7590	Transistor, NPN, BC847B.	4822 130 60511
7591	Transistor, NPN, BC847B.	4822 130 60511
7592	Transistor, NPN, BC847B.	4822 130 60511
7600	IC, SAA5565-PS/M3/0195 L9 v3.2 (Commercial Models - Pro Plus Models).	9352 673 97112
7601	IC, ST24W16B6, commercial models only	9322 095 35682
7603	Transistor, NPN, BC337	9331 796 00126
7604	Transistor, NPN, BC847B.	4822 130 60511
7605	Transistor, NPN, BC847B.	4822 130 60511
7608	Transistor, NPN, BC847B.	4822 130 60511
7609	Transistor, NPN, BC847B.	4822 130 60511
7680	IR Receiver.	9322 127 53667
7833	IC,	9322 136 54682
7950	IC,	4835 209 88543
CBA	00EMF895A002 Main Chassis Board Asm.	00EM F89 5A002

A10757 L9 Audio Jack Panel Parts

	A10757 L9 Audio Jack Panel Parts	
CBA	00A10757A001 L9 Audio Jack Panel Asm.	00A1 075 7A001
C1	Cap, 2u2, 20%, 50V, Electrolytic	3198 028 52280
C2	Cap, 2u2, 20%, 50V, Electrolytic	3198 028 52280
J0214	Connector, 3 Pin	2422 025 16601
J0234	4 Pin Board Connector.	2422 025 15851
J100	Socket, Click, 4 Pin	2422 015 18711
J1214	Connector, 3 Pin	2422 025 16601
J1234	4 Pin Board Connector.	2422 025 12489
JP11	Socket, Cinch, 1 Pin	2422 026 04912
JP12	Socket, Cinch, 1 Pin	2422 026 04374
SW1	Switch	4835 277 27061

A10777 Interface Module Parts

	A10777 Interface Module Parts	
CBA	00A10777A001 Interface Module Asm.	00A1 077 7A001
BR711	Zero ohm,	4835 111 27056
BR712	Zero ohm,	4835 111 27056
BR713	Zero ohm,	4835 111 27056
BR714	Zero ohm,	4835 111 27056
BRS15	Zero ohm,	4835 111 27056
BRS16	Zero ohm,	4835 111 27056
C702	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
C703	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
J0215	Connector, 2 Pin,	2422 025 16343
J0237	Connector, 4 Pin	2422 025 12479
J0238	5 Pin Board Connector.	2422 025 16387
J0259	Connector, 3 Pin	2412 020 00725
J1215	Connector, 2 Pin,	2422 025 16343
J1227	Connector, 4 Pin	2422 025 16385
J1238	Connector, 5 Pin	2422 025 12481
J1259	Connector, 3 Pin	2422 025 16383
J214	Connector, 3 Pin	2422 025 16382
J216	Connector, 4 Pin	2422 025 15847
J219	Connector, 5 Pin	2422 025 15848
J228	Connector, 3 Pin	2422 025 16407
J236	4 Pin Board Connector.	2422 025 16384
J775	Contact Pin.	2422 024 00626
J800	Connector, 32 Pin.	3135 010 03531
Q700	Transistor, NPN, BC847B.	4822 130 60511
Q701	Transistor, NPN, BC847B.	4822 130 60511
Q704	Transistor, PNP, BC857B.	5322 130 60508
Q705	Transistor, PNP, BC857B.	5322 130 60508
Q706	Transistor, NPN, BC847B.	4822 130 60511
Q707	Transistor, NPN, BC847B.	4822 130 60511
R700	10k, 5%, 1/10W, Metal Film	4835 111 37216
R701	47k, 5%, 1/10W, Metal Film	4835 111 37445
R702	75 ohm, 5%, 1/10W, Metal Film.	4835 111 37276
R703	75 ohm, 5%, 1/10W, Metal Film.	4835 111 37276
R711	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
R712	10k, 5%, 1/10W, Metal Film	4835 111 37216
R713	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
R714	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
R715	10k, 5%, 1/10W, Metal Film	4835 111 37216
R716	47k, 5%, 1/10W, Metal Film	4835 111 37445
R717	10k, 5%, 1/10W, Metal Film	4835 111 37216
R718	100 ohm, 5%, 1/10W, Metal Film	4835 111 37432
R719	330 ohm, 5%, 1/10W, Metal Film	4835 111 37443
R720	Res, 1K, 2%, 0,25W	4822 051 10102
R721	75 ohm, 5%, 1/10W, Metal Film.	4835 111 37276
R722	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231
Z700	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z701	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z702	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z703	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z704	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z705	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z706	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z707	Zener Diode, 8.2V, BZX284-C8	4835 130 37922

A10791 Comb Filter Panel Parts

	A10791 Comb Filter Panel Parts	
CBA	00A10791A001 Comb Filter Panel Asm.	00A1 079 1A001
1000	8 Pin board Connector.	2422 025 12483
1001	Connector, 4 Pin	2422 025 12479
1102	Crystal, Resonator, 32KHz768	2422 543 00056
1254	9 Pin Board Connector.	2422 025 16265
2000	Cap, 100u, 20%, 10V, Electrolytic.	3198 025 11010
2001	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2002	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2003	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2004	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2011	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2012	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2013	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2014	Cap, 220n, +80/-20%, 25V, Ceramic.	3198 023 22240
2020	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2021	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2023	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2025	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2111	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
2113	Battery, 3 Volts	2422 526 01206
3012	220 ohm, 5%, 1/10W, Metal Film	4835 111 37371
3013	220 ohm, 5%, 1/10W, Metal Film	4835 111 37371
3020	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
3026	2.2 Megohm, 5%, 1/10W, Metal Film.	4835 111 27047
3027	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
3028	Zero ohm,	4835 111 27056
3110	10k, 5%, 1/10W, Metal Film	4835 111 37216

S = Safety Part Be sure to use exact replacement part.

SC2932C221 (continued)

3111	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3116	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
3117	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
3118	10k, 5%, 1/10W, Metal Film	4835 111 37216
3119	10k, 5%, 1/10W, Metal Film	4835 111 37216
5000	Coil, 10u.	3198 018 21090
5012	Coil, 15u.	2422 535 94296
5104	Coil, 6u8.	3198 018 26880
6110	Diode, BAS216.	4835 130 37905
7000	IC, SAA4961/V3/S1.	9352 609 51112
7012	Transistor, NPN, BC847B.	4822 130 60511
7110	IC,.	4835 209 17438
7111	IC,.	5322 209 61482
9001	Jumper Wire.	0322 179 00148

A10808 Pro Plus Interface Parts

	A10808 Pro Plus Interface Parts	
CBA	00A10808A001 Pro Plus Interface Asm.	00A1 080 8A001
BR711	Zero ohm,.	4835 111 27056
BR712	Zero ohm,.	4835 111 27056
BR713	Zero ohm,.	4835 111 27056
BR714	Zero ohm,.	4835 111 27056
BRS15	Zero ohm,.	4835 111 27056
BRS16	Zero ohm,.	4835 111 27056
C702	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
C703	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
J0237	Connector, 4 Pin	2422 025 12479
J0238	Connector, 5 Pin	2422 025 06353
J1215	Connector, 2 Pin,.	2422 025 16343
J1227	Connector, 4 Pin	2422 025 16385
J1237	Connector, 4 Pin	2422 025 12479
J1259	Connector, 3 Pin	2422 025 16383
J214	Connector, 3 Pin	2422 025 16382
J216	Connector, 4 Pin	2422 025 15847
J219	Connector, 5 Pin	2422 025 15848
J228	Connector, 3 Pin	2422 025 16407
J236	4 Pin Board Connector.	2422 025 12489
J775	Contact Pin.	2422 024 00626
J800	Connector, 32 Pin.	3135 010 03531
Q700	Transistor, NPN, BC847B.	4822 130 60511
Q701	Transistor, NPN, BC847B.	4822 130 60511
Q704	Transistor, PNP, BC857B.	5322 130 60508
Q705	Transistor, PNP, BC857B.	5322 130 60508
Q706	Transistor, NPN, BC847B.	4822 130 60511
Q707	Transistor, NPN, BC847B.	4822 130 60511
R700	10k, 5%, 1/10W, Metal Film	4835 111 37216
R701	47k, 5%, 1/10W, Metal Film	4835 111 37445
R702	75 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37276
R703	75 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37276
R711	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
R712	10k, 5%, 1/10W, Metal Film	4835 111 37216
R713	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
R714	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
R715	10k, 5%, 1/10W, Metal Film	4835 111 37216
R716	47k, 5%, 1/10W, Metal Film	4835 111 37445
R717	10k, 5%, 1/10W, Metal Film	4835 111 37216
R718	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
R719	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443
R720	Res, 1K, 2%, 0,25W	4822 051 10102
R721	75 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37276
R722	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231
Z700	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z701	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z702	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z703	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z704	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z705	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z706	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z707	Zener Diode, 8.2V, BZX284-C8	4835 130 37922

A10654A001 Scan Converter Jack Panel

	A10654A001 Scan Converter Jack Panel	
CBA	SCAN CONVERT JK PL	00A1 065 4A001
J1	CONNECTOR 25PIN.	0018 153 20025
J10	SKT MINI CIRC 4P	0018 169 70004
J6	JCK PHONO WHT.	0018 221 10003
J7	JCK PHONO WHT.	0018 221 10003
J8	JCK PHONO WHT.	0018 221 10003
J9	JCK PHONO WHT.	0018 221 10003
J4	JCK PHONO YLW SW	0018 221 11004
J5	JCK PHONO YLW SW	0018 221 11004
J11	SKT MIN CIRC RA SW	0018 227 10004
J13	PHONE JACK,6CIR.	0018 229 60006
J12	CON BM V DSUB 9P	3135 010 00451
J2	CON BM V DSUB 15P.	3135 010 00461
J3	CON BM V DSUB 15P.	3135 010 00461

313917853133 External Power Supply Module Parts

	313917853133 External Power Supply Mo dule Parts	
CBA	313917853133 External Power Supply Mo dule Asm..	3139 178 53133

C1	0.22uF.
C10	1uF., 50V
C100	22uF., 10V
C101	4.7uF., 10V
C102	33uF., 25V
C103	470pF.
C104	0.1uF.
C11	0.1uF.
C12	1uF., 50V
C13	1uF., 50V
C14	1uF., 50V
C15	0.1uF.
C16	0.1uF.
C17	0.1uF.
C18	0.1uF.
C19	0.1uF.
C2	0.22uF.
C20	0.1uF.
C21	0.1uF.
C22	1uF., 50V
C23	18pF.
C24	2.3-27pF.
C25	10pF.
C28	27pF.
C29	27pF.
C3	1uF., 50V
C30	0.1uF.
C32	0.1uF.
C33	33uF., 25V
C34	330uF., 40V
C35	22uF., 10V
C37	33uF., 25V
C38	22uF., 10V
C4	0.1uF.
C40	22uF., 10V
C41	0.1uF.
C42	4.7uF., 10V
C44	0.1uF.
C45	0.1uF.
C46	0.1uF.
C47	0.1uF.
C5	1uF., 50V
C51	470pF.
C52	220pF.
C53	220pF.
C54	470pF.
C55	470pF.
C56	470pF.
C57	470pF.
C58	1000pF.
C59	1000pF.
C6	1uF., 50V
C60	220pF.
C61	220pF.
C63	0.1uF.
C64	4.7uF., 10V
C65	0.1uF.
C66	4.7uF., 10V
C67	0.1uF.
C68	4.7uF., 10V
C69	0.1uF.
C7	0.1uF.
C70	0.1uF.
C71	0.1uF.
C72	0.1uF.
C73	4.7uF., 10V
C74	1000pF.
C75	0.1uF.
C76	0.1uF.
C77	0.1uF.
C78	4.7uF., 10V
C79	0.1uF.
C8	680pF.
C80	0.1uF.
C81	0.1uF.
C82	0.1uF.
C83	0.1uF.
C86	100pF.
C87	100pF.
C88	100pF.
C9	680pF.
C92	1000pF.
C93	1000pF.
C94	1000pF.
C95	1000pF.
C96	1000pF.
C97	4.7uF., 10V
C98	1000pF.
C99	22uF., 10V
D1	1N5818
D2	1N4001
FB1	FB 70@100MHz

S = Safety Part Be sure to use exact replacement part.

SC2932C221 (continued)

FB10	FB 70@100MHz
FB11	FB 70@100MHz
FB12	FB 70@100MHz
FB2	FB 70@100MHz
FB3	FB 70@100MHz
FB6	FB 70@100MHz
FB9	FB 70@100MHz
J1	4030 / 22-03-2251
J2	MOLEX 53394-3217
L1	100uH
L2	330uH
L3	100uH
R1	4.75k
R10	4.75k
R11	634 ohm
R12	1.00M
R13	221 ohm
R16	2.00k
R17	7.50k
R2	100k
R22	274k
R25	33.2 ohm
R28	221 ohm
R29	221 ohm
R3	4.75k
R31	1.50k
R34	1.50k
R35	1.50k
R4	4.75k
R40	100 ohm
R41	100 ohm
R42	100 ohm
R47	4.75k
R48	1.50k
R49	1.50k
R5	4.75k
R50	75.0 ohm
R51	221 ohm
R53	100 ohm
R54	100 ohm
R6	75.0 ohm
R7	75.0 ohm
R8	150 ohm
R9	4.75k
R99	1.00k
RP1	33 ohm
RP2	33 ohm
RP3	33 ohm
RP4	33 ohm
RP5	33 ohm
RP6	33 ohm
RP7	33 ohm
RP8	33 ohm
RP9	33 ohm
Ref.	Description
U1	TDA8440
U10	MIC2920A-3.3BS
U11	MIC2920A-5.0BS
U12	FS310
U2	MAX232CWE
U4	24C02N-10SC
U5	P87C528EBAA
U6	74HC4066
U7	LM2575T-ADJ
U8	74HC04
U9	SDRAM_1Mx16
Y1	14.31818MHz
Y2	16.620MHz

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	AC Power Cord.	3135 010 04321
AC02	Clip, Anode Lead	3135 014 04471
AC03	Cabinet, Back (ITV).	3135 014 06531
AC04	Cabinet Front.	3135 017 03901
AC05	Chassis Guide.	3139 124 31322
AC06	Control Buttons.	3139 124 26472
S AC08	CRT A80ECK272X56	9301 795 00428
S AC09	Coil, Degaussing	3121 218 62641
AC10	Holder, Degaussing (4 Used).	3135 013 01661
AC11	Light Guide.	3139 124 26461
AC12	Nameplate.	3135 015 03571
AC14	Power Button	3139 124 26444
REMOTE	Remote Transmitter	3135 017 02651
AC16	Speaker, 8W, 8 ohm (2 Used).	2422 264 00322
S AC20	AC Adaptor	3138 107 86530
AC21	Batteries for Remote Transmitter (3 P ACK)	3135 019 01211
AC24	Spring	3139 121 26231
AC26	Jack Panel, Plastic.	3135 014 09251
AC30	Bracket, EPS Module, (Horiz)	3135 014 09221

S = Safety Part Be sure to use exact replacement part.

SC3925C121 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts		
S 0127	3.15 Amp Fuse,	3122 358 72141	
0129	4 Pin Cable.	3104 301 09431	
0152	Cable, DIP, 6 Pin, 400mm	3104 301 09421	
0153	4 Pin Cable.	3104 301 09431	
0212	Connector, 2 Pin	2422 025 15396	
0214	Connector, 3 Pin	2422 025 16382	
0215	Connector, 2 Pin,	2422 025 16343	
0216	Connector, 4 Pin	2422 025 15847	
0219	Connector, 5 Pin	2422 025 15848	
0220	4 Pin Board Connector.	2422 025 04852	
0224	1 Pin Board Connector.	2422 034 20021	
0227	Connector, 4 Pin	2422 025 16385	
0228	1 Pin Board Connector.	2422 034 20021	
0234	Connector, 4 Pin	2422 025 15847	
0236	4 Pin Board Connector.	2422 025 16384	
0237	Connector, 4 Pin	2422 025 12479	
0238	5 Pin Board Connector.	2422 025 16387	
S 0243	Connector, 6 Pin	2422 025 04854	
0244	4 Pin Board Connector.	2422 025 04852	
S 0245	Connector, 6 Pin	2422 025 04854	
S 0254	CRT Socket (9 Pin)	2422 500 80022	
0259	Connector, 3 Pin	2422 025 16383	
0262	Connector, 4 Pin	2422 025 16385	
0267	Connector, 3 Pin	2412 020 00725	
1000	Tuner.	2422 542 90051	
1001	Filter	2422 549 42501	
1003	45 MHz SAW, Filter,	2422 549 42433	
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807	
1208	Crystal Resonator, 3.58MHz	2422 543 00832	
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10869	
S 1571	1 Amp, Radial Fuse,	4835 253 97162	
S 1572	1 Amp, Radial Fuse,	4835 253 97162	
S 1580	Relay, 12V	2422 132 07317	
1600	Switch, Tactile.	2422 128 02742	
1601	Switch, Tactile.	2422 128 02742	
1602	Switch, Tactile.	2422 128 02742	
1603	Switch, Tactile.	2422 128 02742	
1606	Switch, Tactile.	2422 128 02742	
1660	Crystal, Resonator, 12MHz, 20 Pin.	2422 543 00488	
1821	Ceramic Resonator.	4835 122 97102	
2001	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2003	Cap, 100u, 20%, 50V, Electrolytic.	3198 025 51010	
2004	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2006	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290	
2011	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090	
2013	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040	
2102	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2103	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2104	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2201	Cap, 220n, 10%, 50V, Polyester	3198 014 02240	
2202	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2203	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090	
2204	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2205	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040	
2206	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040	
2207	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010	
2208	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010	
2209	Cap, 470n, +80/-20%, 16V, Ceramic.	3198 017 24740	
2211	Cap, 470n, +80/-20%, 16V, Ceramic.	3198 017 24740	
2212	Cap, 470n, +80/-20%, 16V, Ceramic.	3198 017 24740	
2213	Cap, 470n, +80/-20%, 16V, Ceramic.	3198 017 24740	
2214	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2215	Cap, 2u2, 20%, 50V, Electrolytic	3198 025 52280	
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 16654	
2220	Cap, 18p, 5%, 50V, Ceramic	3198 016 01890	
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2222	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040	
2226	Cap, 33u, 20%, 25V, Electrolytic	2020 021 90124	
2227	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080	
2247	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2248	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2249	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2330	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177	
2340	Cap, 10u, 20%, 250V, Electrolytic.	2020 012 93495	
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320	
S 2343	Cap, 3n3, 10%, 2KV, Ceramic.	2020 558 90529	
2345	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020	
2401	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2402	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2404	Cap, 220n, 10%, 50V, Polyester	3198 014 02240	
2405	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2407	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2409	Cap, 220n, 10%, 50V, Polyester	3198 014 02240	
2420	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2426	Cap, 100n, 10%, 63V, Metalized Polyester	2222 370 75104	
2428	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220	
2429	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080	
2430	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090	
2431	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040	
2437	Cap, 220n, +80/-20%, 25V, Ceramic.	3198 023 22240	
2438	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050	
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2448	Cap, 220p, 10%, 500V, Ceramic.	3198 019 42210	
2450	Cap, 47u, 20%, 160v, Electrolytic.	2020 021 91139	
2451	Cap, 15n, 10%, 50V, Polyester.	2020 300 90575	
2451	0.01uF., 10%, 50V, Polyester, only 27	3198 138 20941	
2456	Cap, 47n, 10%, 250V, Metalized Polyester.	2222 368 90176	
2457	Cap, 390n, 5%, 250V, Metalized Polypropylene.	2222 479 90021	
2458	Cap, 10u, 20%, 100V, Electrolytic.	2020 021 90813	
2459	Cap, 680p, 10%, 500V, Ceramic.	3198 019 46810	
2461	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020	
2462	Cap, 47n, 10%, 250V, Metalized Polyester.	2222 368 90176	
2463	470pF., 10%, 2KV, Ceramic.	4835 122 47638	
S 2465	Cap, 10n, 5%, 1600V, Polypropylene	2222 375 90154	
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050	
2481	Cap, 470n, 10%, 50V, Polyester	3198 014 04740	
2482	Cap, 68n, 10%, 250V, Polyester	2222 347 90234	
2484	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2485	Cap, 4u7, 20%, 250V, Electrolytic.	2020 012 93282	
2486	Cap, 470u, 20%, 16V, Electrolytic.	3198 025 24710	
2487	Cap, 100u, 20%, 50V, Electrolytic.	3198 025 51010	
2488	Cap, 470u, 20%, 16V, Electrolytic.	3198 025 24710	
2489	Cap, 470u, 20%, 16V, Electrolytic.	3198 025 24710	
2490	Cap, 470p, 10%, 500V, Ceramic.	3198 019 44710	
2491	Cap, 470p, 10%, 500V, Ceramic.	3198 019 44710	
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810	
2500	0.47uF., 250V, Polyester	4835 121 47569	
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
S 2507	Cap, 1n5, 10%, 1KV, Ceramic.	2020 558 90443	
2508	Cap, 470u, 20%, 200V, Electrolytic	2020 024 90626	
S 2511	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020	
S 2518	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290	
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320	
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320	
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2529	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040	
2530	Cap, 1u, 20%, 50V, Electrolytic.	2020 021 91147	
2531	Cap, 1n, 2%, 50V, Polypropylene.	2020 310 90049	
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220	
2540	Cap, 100u, 20%, 25V, Electrolytic.	2020 021 90547	
S 2545	1500pF., 250VAC, Ceramic	4835 122 47622	
S 2550	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2551	Cap, 47u, 20%, 160v, Electrolytic.	2020 021 91358	
2561	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020	
S 2562	Cap, 220p, 10%, 1KV, Ceramic	2020 558 90424	
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020	
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020	
2572	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330	
2575	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040	
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820	
2577	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020	
2586	Cap, 220u, 20%, 25V, Electrolytic.	3198 025 32210	
2604	Cap, 22u, 20%, 50V, Electrolytic	3198 025 52290	
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2613	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2615	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040	
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2619	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080	
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2622	Cap, 220u, 20%, 25V, Electrolytic.	3198 025 32210	
2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890	
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2629	Cap, 22n, +80/-20%, 50V, Ceramic	3198 019 22230	
2630	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040	
2631	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050	
2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2679	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040	
2681	Cap, 220u, 20%, 25V, Electrolytic.	3198 025 32210	
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2821	Cap, 2u2, 20%, 50V, Electrolytic	3198 028 52280	
2823	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	

S = Safety Part Be sure to use exact replacement part.

SC3925C121 (continued)

2825	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080		3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046
2826	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090	S	3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
2827	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	S	3341	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483
2828	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	S	3342	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483
2829	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3343	1.5k, 20%, 1/2W, Carbon Composition.	4835 110 47034
2830	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280		3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
2831	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	S	3345	VDR, DC, 1mA, 50V, MAX 115V	2322 593 13507
2832	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280		3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
2833	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280		3401	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2834	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780		3402	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2835	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3403	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2836	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3405	Res, 1K8, 1%, 3/5W, Metal Film . . .	2322 156 21802
2837	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740		3406	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2838	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3407	Res, 1K8, 1%, 3/5W, Metal Film . . .	2322 156 21802
2839	Cap, 1u, 5%, 50V, Metalized Polyester	2020 308 90124		3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2840	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3409	1.5 ohm, 5%, 1/3W, Metal Film. . . .	4835 116 57664
2841	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2842	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3420	470k, 5%, 1/10W, Metal Film.	4835 111 37407
2844	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2845	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2913	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280		3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840
2914	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330		3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606
2915	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3425	150k, 5%, 1/10W, Metal Film.	4835 111 27045
2916	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648		3426	39k, 5%, 1/10W, Metal Film	4835 111 27051
2917	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3428	22k, 5%, 1/10W, Metal Film	4835 111 37441
2918	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330		3429	27k, 5%, 1/10W, Metal Film	4835 111 37442
2919	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3431	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
2920	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648		3432	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
2921	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3436	Res, 1K, 2%, 0,25W	4822 051 10102
2931	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280		3437	10k, 5%, 1/10W, Metal Film	4835 111 37216
2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3438	33k, 1/4W, Carbon Film	4835 110 57375
2952	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
2954	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3447	10k, 5%, 1/10W, Metal Film	4835 111 37216
2955	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	S	3452	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63229
2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	S	3453	Res, 4R7, 5%, 5W, Wire Wound	2322 251 41478
2960	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	S	3454	Res, 33K, 5%, 1 1/3W, Metal Film . .	2322 194 63333
2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090		3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090		3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090	S	3462	Res, 6K8, 5%, 5W, Metal Film	2322 257 41682
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3464	Res, 1K, 2%, 0,25W	4822 051 10102
3010	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610	S	3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
3013	Zero ohm,.	4835 111 27056		3466	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903
3014	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052		3467	Res, 14K, 1%, 3/5W, Metal Film . . .	2322 156 21403
3015	22k, 5%, 1/10W, Metal Film	4835 111 37441		3467	Res, 15K, 1%, 3/5W, Metal Film . . .	2322 156 21503
3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810		3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3021	Res, 1K, 2%, 0,25W	4822 051 10102		3469	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
3103	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3104	10k, 5%, 1/10W, Metal Film	4835 111 37216		3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703
3108	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3481	Res, 100K, 1%, 3/5W, Metal Film. . .	2322 156 21004
3109	10k, 5%, 1/10W, Metal Film	4835 111 37216		3482	Res, 32K4, 1%, 3/5W, Metal Film. . .	2322 156 23243
3123	75 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37276		3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3200	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3201	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253	S	3485	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
3203	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443	S	3486	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	S	3487	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3205	Res, 1K, 2%, 0,25W	4822 051 10102	S	3488	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
3206	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	S	3490	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3491	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3209	22k, 5%, 1/10W, Metal Film	4835 111 37441	S	3492	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3212	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253		3495	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272
3213	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3496	10k, 5%, 1/10W, Metal Film	4835 111 37216
3215	22k, 5%, 1/10W, Metal Film	4835 111 37441		3497	10k, 5%, 1/10W, Metal Film	4835 111 37216
3216	Zero ohm,.	4835 111 27056		3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3218	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225
3219	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3503	10ohm, 120VAC, Positive Temperature C	
3220	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432			oefficient	4835 116 47001
3225	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S	3505	Surge Protector.	2422 549 43073
3228	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3231	Zero ohm,.	4835 111 27056	S	3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333
3232	Zero ohm,.	4835 111 27056	S	3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102
3233	Zero ohm,.	4835 111 27056		3512	15k, 5%, 1/10W, Metal Film	4835 111 37458
3243	1.2k, 5%, 1/10W, Metal Film.	4835 111 27042		3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184
3246	82k, 5%, 1/10W, Metal Film	4835 111 37277		3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204
3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3515	2.5 ohm, 20%, 3.6W, Negative Temperat	
3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010			ure Coefficient.	2122 612 00023
3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340		3516	Res, 1K, 2%, 0,25W	4822 051 10102
3250	Zero ohm,.	4835 111 27056		3517	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3251	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S	3518	Res, 0R22, 5%, 3W, Metal Film. . . .	2120 106 90548
3252	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		3520	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3253	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		3521	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443
3257	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3525	33 ohm, 5%, 1/3W, Metal Film	4835 116 57665
3258	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3528	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3259	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3529	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3530	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3532	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3534	15k, 5%, 1/10W, Metal Film	4835 111 37458
3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3536	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3537	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030

S = Safety Part Be sure to use exact replacement part.

SC3925C121 (continued)

S 3542	4.7 Megohm, 5%, 1/2W, Metal Film . .	4835 116 57009
3570	15k, 5%, 1/10W, Metal Film	4835 111 37458
3571	Res, 150K, 1%, 3/5W, Metal Film. . .	2322 156 21504
3573	Res, 2K, 1%, 1/10W, Metalized Glass.	2120 108 92657
3574	33k, 5%, 1/10W, Metal Film	4835 111 37248
3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3577	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3578	Res, 1K, 2%, 0,25W	4822 051 10102
3579	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3592	10k, 5%, 1/10W, Metal Film	4835 111 37216
3594	22k, 5%, 1/10W, Metal Film	4835 111 37441
3595	68k, 5%, 1/6W, Carbon Film	4835 111 37205
3596	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3597	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
3598	10k, 5%, 1/10W, Metal Film	4835 111 37216
3599	22k, 5%, 1/10W, Metal Film	4835 111 37441
3607	8.2k, 5%, 1/8W, Inline Package . . .	4835 111 97046
3608	2.2k, 5%, 1/8W, Inline Package . . .	4835 111 97049
3609	2.2k, 5%, Resistor Network	2120 108 93868
3611	Res, 1K, 2%, 0,25W	4822 051 10102
3612	10k, 5%, 1/10W, Metal Film	4835 111 37216
3613	10k, 5%, 1/10W, Metal Film	4835 111 37216
3615	10k, 5%, 1/10W, Metal Film	4835 111 37216
3617	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3619	820 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37466
3629	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259
3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
3631	27k, 5%, 1/10W, Metal Film	4835 111 37442
S 3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63479
3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210
3634	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
3635	22k, 5%, 1/10W, Metal Film	4835 111 37441
3636	22k, 5%, 1/10W, Metal Film	4835 111 37441
3637	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
3649	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
3650	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3653	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3654	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
3655	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710
3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3662	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
3663	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
3664	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
3665	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
3666	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376
3667	27k, 5%, 1/10W, Metal Film	4835 111 37442
3672	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
3673	10k, 5%, 1/10W, Metal Film	4835 111 37216
3674	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259
3675	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3676	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3677	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3680	680 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37271
3681	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
3682	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
3683	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
3684	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
3685	220 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37371
3821	15k, 5%, 1/10W, Metal Film	4835 111 37458
3822	1.2k, 5%, 1/10W, Metal Film.	4835 111 27042
3823	100k, 5%, 1/10W, Metal Film.	4835 111 37434
3824	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
3825	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3826	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3827	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3828	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3829	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272
3830	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272
3831	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198 011 03310
3832	47 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37262
3908	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710
3909	Res, 1K, 2%, 0,25W	4822 051 10102
3910	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376
3911	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230
3912	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
3913	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3914	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820
3915	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231
3916	220 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37371
3917	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
3918	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3919	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376
3920	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231
3921	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230
3922	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820
3923	220 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37371
3924	39k, 5%, 1/10W, Metal Film	4835 111 27051
3925	39k, 5%, 1/10W, Metal Film	4835 111 27051
3926	39k, 5%, 1/10W, Metal Film	4835 111 27051
3929	39k, 5%, 1/10W, Metal Film	4835 111 27051
3930	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710
3931	Res, 1K, 2%, 0,25W	4822 051 10102
3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810
3951	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3953	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272
3955	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3957	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
4001	Zero ohm,.	4835 111 27056
4002	Zero ohm,.	4835 111 27056
4004	Zero ohm,.	4835 111 27056
4007	Zero ohm,.	4835 111 27056
4009	Zero ohm,.	4835 111 27056
4010	Zero ohm,.	4835 111 27056
4011	Zero ohm,.	4835 111 27056
4012	Zero ohm,.	4835 111 27056
4013	Zero ohm,.	4835 111 27056
4020	Zero ohm,.	4835 111 27056
4051	Zero ohm,.	4835 111 27056
4100	Zero ohm,.	4835 111 27056
4101	Zero ohm,.	4835 111 27056
4102	Zero ohm,.	4835 111 27056
4103	Zero ohm,.	4835 111 27056
4143	Zero ohm,.	4835 111 27056
4144	Zero ohm,.	4835 111 27056
4203	Zero ohm,.	4835 111 27056
4207	Zero ohm,.	4835 111 27056
4212	Zero ohm,.	4835 111 27056
4214	Zero ohm,.	4835 111 27056
4215	Zero ohm,.	4835 111 27056
4216	Zero ohm,.	4835 111 27056
4501	Zero ohm,.	4835 111 27056
4602	Zero ohm,.	4835 111 27056
4650	Zero ohm,.	4835 111 27056
4651	Zero ohm,.	4835 111 27056
4652	Zero ohm,.	4835 111 27056
4654	Zero ohm,.	4835 111 27056
4655	Zero ohm,.	4835 111 27056
4684	Zero ohm,.	4835 111 27056
4687	Zero ohm,.	4835 111 27056
4831	Zero ohm,.	4835 111 27056
4832	Zero ohm,.	4835 111 27056
4833	Zero ohm,.	4835 111 27056
4902	Zero ohm,.	4835 111 27056
4903	Zero ohm,.	4835 111 27056
4904	Zero ohm,.	4835 111 27056
4905	Zero ohm,.	4835 111 27056
4909	Zero ohm,.	4835 111 27056
4911	Zero ohm,.	4835 111 27056
4912	Zero ohm,.	4835 111 27056
4914	Zero ohm,.	4835 111 27056
4957	Zero ohm,.	4835 111 27056
4999	Zero ohm,.	4835 111 27056
5000	Coil, 5u6.	3198 018 25680
5004	Coil, 820n	2422 535 97314
5201	Coil, 22u.	3198 018 22290
5202	Coil, 6u8.	3198 018 16880
5342	Coil, 22u.	3198 018 22290
S 5445	Transformer, L.O.T., models ending in C101, C121, and C125	2422 531 02327
S 5445	Transformer, L.O.T., models ending in C221 and C225.	3128 138 20941
5451	Coil, 27u.	2422 535 96614
5457	Coil, Linear Correction.	3128 138 53241
5461	Transformer.	3128 138 33811
5480	Coil, 27u.	2422 535 97334
5480	Coil, 39u.	2422 535 97336
5480	Coil, 27u.	3198 018 22790
5480	33uH., Peaking Coil, only in 25. . .	4835 157 58205
S 5500	Filter, Mains, 5mH, 2A	2422 549 43432
5516	100uH., Coil	4835 157 67078
5518	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5521	Coil, 2u2.	3198 018 12280
5540	Coil, 4u7.	3198 018 14780
S 5545	Transfomer,.	2422 531 02314
5551	27uH., 5%, Coil, Peaking	4835 157 67052
5552	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5572	100uH., Coil	4835 157 67078
5573	100uH., Coil	4835 157 67078
5576	100uH., Coil	4835 157 67078
5577	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5600	Coil, 8u2.	3198 018 18280
5601	Coil, 8u2.	3198 018 18280
5620	Coil, 6u8.	3198 018 16880
5821	Coil, 100u	3198 018 21010
5822	Coil, 18u.	3198 018 21890

S = Safety Part Be sure to use exact replacement part.

SC3925C121 (continued)

6008	Zener, 33 Volt BZX79-C33	4835 130 37904
6113	Zener Diode, 6.8 volt.	9340 386 40115
6211	Diode, 1N4148.	4835 130 37048
6212	Diode, 1N4148.	4835 130 37048
6213	Diode, 1N4148.	4835 130 37048
6331	Diode.	4835 130 37294
6333	Diode.	4835 130 37294
6335	Diode.	4835 130 37294
6401	Diode.	4835 130 37094
6402	Zener, 33 Volt, BZX79-C33.	4835 130 37904
6403	Diode.	4835 130 37094
6404	Diode.	4835 130 37094
6449	Diode, 1N4148.	4835 130 37048
6450	Diode, 1N4148.	4835 130 37048
6460	Diode, Rect, BY228/20	9336 215 80112
6463	Diode, 1N4148.	4835 130 37048
6464	Zener Diode, 6.2 volt.	9337 242 70133
6465	Diode, BYD33J.	4835 130 37094
6466	Diode, BYD33J.	4835 130 37094
6480	Diode, Zener	4835 130 37947
6481	Diode, 1N4148.	4835 130 37048
6485	Diode, BYD33J.	4835 130 37094
6486	Diode, EGP20DL-530	4835 130 37919
6487	Diode.	4835 130 37094
6488	Diode, Rect, BYV27-200.	9322 126 72673
6490	Diode, Rect, BYV27-200.	9322 126 72673
6505	Diode, Bridge Rect, GBU6JL-7002 . .	9322 138 08667
6507	Diode, BYD33J.	4835 130 37094
6508	Diode, BYD33J.	4835 130 37094
6510	Zener Diode, 20 volt	9331 178 60133
6511	Diode, BYV95C.	4835 130 37052
6512	Diode, Rect, BY228/20	4822 130 41275
6513	Diode, Rect, BY228/20	4822 130 41275
6514	Zener, 18 Volt, BZX79-C18.	4835 130 37908
6540	Diode.	4835 130 37294
6550	Diode, Rect, BY229X-800	9340 380 30127
6560	Diode, EGP20DL-530	4835 130 37919
6580	Diode, Rect, SB140.	9339 577 60673
6584	Diode, 1N4148.	4835 130 37048
6585	Diode, 1N4148.	4835 130 37048
6591	Diode, BAS216.	4835 130 37905
6601	Diode, Zener	4835 130 37684
6602	Diode, 1N4148.	4835 130 37048
6603	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
6604	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
6605	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
6606	Zener, 4.7 Volt, BZX79-C4V7.	4835 130 37005
6607	Zener, 6.8 Volt, BZX79-C6V8.	4835 130 37945
6690	LED, LTL-307P.	4835 130 97096
6821	Zener Diode, 9.1 volt.	9331 177 80133
6822	Fixed Coil	4835 130 37048
6951	Diode, BAS216.	4835 130 37905
6961	Diode, BAS216.	4835 130 37905
7250	IC,.	9352 620 26112
7251	IC, LM317T	9337 220 80682
7254	Transistor, NPN, BC847B.	4822 130 60511
7256	Transistor, NPN, BC847B.	4822 130 60511
7258	Transistor, NPN, BC847B.	4822 130 60511
7263	Transistor, PNP, BC857B.	5322 130 60508
7266	Transistor, NPN, BC847B.	4822 130 60511
7330	IC,.	9352 184 10112
7401	IC,.	9322 121 47687
7460	Transistor, NPN, BU1508DX.	9340 170 50127
7461	Transistor, NPN, BF819	9335 354 50127
7462	Transistor, BC547B	4835 130 47055
7463	Transistor, BC557B	4835 130 47409
7480	IC,.	9322 028 93682
7481	Transistor, BC557B	4835 130 47409
7482	Transistor, PNP, BC857B.	5322 130 60508
7518	STH8NA60FI SMPS FET	9322 068 92687
7518	STH10NC60FI SMPS FET.	9322 155 66687
7520	IC, MC44603A	4835 209 88537
7570	IC,.	9337 711 00676
S 7581	Coupler, TCDT1101G	9338 431 30682
7590	Transistor, NPN, BC847B.	4822 130 60511
7591	Transistor, NPN, BC847B.	4822 130 60511
7592	Transistor, NPN, BC847B.	4822 130 60511
7600	IC, SAA5543-PS/M4/0167 L9 v3.2 (Commercial Models - NON Pro Plus)	9352 670 84112
7601	IC, ST24W16B6, commercial models only	9322 095 35682
7603	Transistor, NPN, BC337	9331 796 00126
7604	Transistor, NPN, BC847B.	4822 130 60511
7605	Transistor, NPN, BC847B.	4822 130 60511
7608	Transistor, NPN, BC847B.	4822 130 60511
7609	Transistor, NPN, BC847B.	4822 130 60511
7680	IR Receiver.	9322 127 53667
7821	IC,.	9352 374 70112
7822	IC, HEF4052BT.	9333 729 50653
7823	Transistor, NPN, BC337-25.	3198 020 43530
7904	Transistor, NPN, BC847B.	4822 130 60511
7905	Transistor, NPN, BC847B.	4822 130 60511
7906	Transistor, NPN, BC847B.	4822 130 60511
7908	Transistor, NPN, BC847B.	4822 130 60511
7909	Transistor, NPN, BC847B.	4822 130 60511
7910	Transistor, NPN, BC847B.	4822 130 60511
7951	IC,.	4822 209 13706
7953	IC,.	4835 209 88474
CBA	00EMF891A002 Main Chassis Board Asm.	00EM F89 1A002

A10777 Interface Module Parts

	A10777 Interface Module Parts	
CBA	00A10777A001 Interface Module Asm. .	00A1 077 7A001
BR711	Zero ohm,.	4835 111 27056
BR712	Zero ohm,.	4835 111 27056
BR713	Zero ohm,.	4835 111 27056
BR714	Zero ohm,.	4835 111 27056
BRS15	Zero ohm,.	4835 111 27056
BRS16	Zero ohm,.	4835 111 27056
C702	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
C703	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
J0215	Connector, 2 Pin,.	2422 025 16343
J0237	Connector, 4 Pin	2422 025 12479
J0238	5 Pin Board Connector.	2422 025 16387
J0259	Connector, 3 Pin	2412 020 00725
J1215	Connector, 2 Pin,.	2422 025 16343
J1227	Connector, 4 Pin	2422 025 16385
J1238	Connector, 5 Pin	2422 025 12481
J1259	Connector, 3 Pin	2422 025 16383
J214	Connector, 3 Pin	2422 025 16382
J216	Connector, 4 Pin	2422 025 15847
J219	Connector, 5 Pin	2422 025 15848
J228	Connector, 3 Pin	2422 025 16407
J236	4 Pin Board Connector.	2422 025 16384
J775	Contact Pin.	2422 024 00626
J800	Connector, 32 Pin.	3135 010 03531
Q700	Transistor, NPN, BC847B.	4822 130 60511
Q701	Transistor, NPN, BC847B.	4822 130 60511
Q704	Transistor, PNP, BC857B.	5322 130 60508
Q705	Transistor, PNP, BC857B.	5322 130 60508
Q706	Transistor, NPN, BC847B.	4822 130 60511
Q707	Transistor, NPN, BC847B.	4822 130 60511
R700	10k, 5%, 1/10W, Metal Film	4835 111 37216
R701	47k, 5%, 1/10W, Metal Film	4835 111 37445
R702	75 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37276
R703	75 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37276
R711	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
R712	10k, 5%, 1/10W, Metal Film	4835 111 37216
R713	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
R714	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
R715	10k, 5%, 1/10W, Metal Film	4835 111 37216
R716	47k, 5%, 1/10W, Metal Film	4835 111 37445
R717	10k, 5%, 1/10W, Metal Film	4835 111 37216
R718	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
R719	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443
R720	Res, 1K, 2%, 0,25W	4822 051 10102
R721	75 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37276
R722	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231
Z700	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z701	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z702	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z703	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z704	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z705	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z706	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z707	Zener Diode, 8.2V, BZX284-C8	4835 130 37922

A10797 ITV Scan 3 Card Parts

	A10797 ITV Scan 3 Card Parts	
CBA	A10797 ITV Scan 3 Card Panel Asm.. .	00A1 079 7A001
1001	Crystal, Resonator, 20M140	2422 543 01196
1002	Socket, 2 Pin, SVHS.	2422 033 00365
1004	Socket, Cinch, 6 Pin	2422 026 04827
1005	Crystal Resonator, 14M31818, 20P . .	2422 543 00904
1010	Connector, 32 Pin.	3135 010 03541
1011	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488
1012	Connector, 5 Pin	2422 025 12708
1013	Connector, 14 Pin.	2422 025 12486
2000	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2001	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2002	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2003	Cap, 15p, 5%, 50V, Ceramic	3198 016 01590
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2006	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2007	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2008	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2009	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2010	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2011	Cap, 270p, 5%, 50V, Ceramic.	3198 016 02710
2012	Cap, 15p, 5%, 50V, Ceramic	3198 016 01590
2013	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2014	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2015	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2016	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290

S = Safety Part Be sure to use exact replacement part.

SC3925C121 (continued)

2017	Cap, 10u, 20%, 25V, Electrolytic . .	2020 004 90288
2018	Cap, 270p, 5%, 50V, Ceramic.	3198 016 02710
2019	Cap, 15p, 5%, 50V, Ceramic	3198 016 01590
2020	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2021	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2022	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2023	Cap, 270p, 5%, 50V, Ceramic.	3198 016 02710
2024	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2025	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2026	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2059	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2060	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2061	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2062	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2063	Cap, 4u7, +80/-20%, 10V, Ceramic . .	2020 552 96305
2064	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2065	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2066	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2067	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2071	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2072	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2073	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2074	Cap, 4u7, 20%, 35V, Electrolytic . .	3198 030 74780
2075	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2076	Cap, 4u7, 20%, 35V, Electrolytic . .	3198 030 74780
2077	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2078	Cap, 4u7, 20%, 35V, Electrolytic . .	3198 030 74780
2079	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2080	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2081	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2082	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2083	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2084	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2085	Cap, 4u7, 20%, 35V, Electrolytic . .	3198 030 74780
2086	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2087	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2088	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2089	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2090	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2091	Cap, 4u7, 20%, 35V, Electrolytic . .	3198 030 74780
2092	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2093	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2094	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2095	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2096	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2097	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2098	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2099	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2100	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2101	Cap, 1u, 20%, 35V, Electrolytic. . .	2020 004 90282
2102	Cap, 1u, 20%, 35V, Electrolytic. . .	2020 004 90282
2103	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2104	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2105	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2106	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2107	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2108	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2109	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2110	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2111	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2112	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2113	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2114	Cap, 470u, 20%, 25V, Electrolytic. .	2020 012 93457
2115	Cap, 10u, 20%, 10V, Electrolytic . .	3198 032 34130
2116	Cap, 10u, 20%, 10V, Electrolytic . .	3198 032 34130
2118	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2119	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2120	Cap, 680p, 10%, 50V, Ceramic	3198 017 06810
2121	Cap, 680p, 10%, 50V, Ceramic	3198 017 06810
2122	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2123	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2124	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2125	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2126	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2127	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2129	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2130	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2131	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2132	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2134	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2135	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2136	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2137	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2139	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2140	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2141	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810
2142	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810
3001	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3002	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3003	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3004	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3005	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3006	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3007	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3008	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3009	Res, 13K, 5%, 1/8W, Metalized Glass.	2322 730 61133
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3012	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3015	Res, 13K, 5%, 1/8W, Metalized Glass.	2322 730 61133
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3017	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3018	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3019	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3020	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3021	Res, 13K, 5%, 1/8W, Metalized Glass.	2322 730 61133
3022	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3023	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3024	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3025	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3026	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3027	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3028	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3029	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3030	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3031	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3033	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3052	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3056	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3057	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3058	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3060	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3061	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3062	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3063	Res, 820 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 58210
3064	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3065	RST NETW SM ARV24 4X 33R PM5 R . . .	2350 035 10339
3066	RST NETW SM ARV24 4X 33R PM5 R . . .	2350 035 10339
3073	RST NETW SM ARV24 4X 33R PM5 R . . .	2350 035 10339
3074	RST NETW SM ARV24 4X 33R PM5 R . . .	2350 035 10339
3082	RST NETW SM ARV24 4X 33R PM5 R . . .	2350 035 10339
3085	RST NETW SM ARV24 4X 33R PM5 R . . .	2350 035 10339
3089	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3090	RST NETW SM ARV24 4X 33R PM5 R . . .	2350 035 10339
3091	RST NETW SM ARV24 4X 33R PM5 R . . .	2350 035 10339
3097	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3099	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3100	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3101	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3102	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3103	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3104	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3105	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3106	Res, 270 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52710
3107	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3108	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3109	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3110	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3111	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3112	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3113	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3114	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3116	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3117	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3118	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3119	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3120	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3121	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3122	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3124	Res, 910 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 69101

S = Safety Part Be sure to use exact replacement part.

SC3925C121 (continued)

3129	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3130	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3131	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3132	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3133	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3135	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3136	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3137	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3138	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3139	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3140	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3141	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3142	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3143	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
5001	Coil, 820n	3198 018 38270
5002	Coil, 1u2.	3198 018 31280
5003	Coil, 1u2.	3198 018 31280
5004	Coil, 1u2.	3198 018 31280
5010	Coil, 820n	3198 018 38270
5012	Coil, 820n	3198 018 38270
5014	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
5015	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5016	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5017	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5018	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5019	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5020	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5021	Coil, 82u.	2422 535 95408
5023	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5024	Coil, 1u8.	3198 018 31880
6001	Diode, Signal, BAV99	3198 010 10620
6002	Diode, Signal, BAV99	3198 010 10620
6003	Diode, Signal, BAV99	3198 010 10620
6004	Diode, Signal, BAV99	3198 010 10620
6005	Diode, Signal, BAV99	3198 010 10620
6006	Diode, Signal, BAV99	3198 010 10620
6009	Diode, Signal, BAV99	3198 010 10620
6010	Diode, Signal, BAV99	3198 010 10620
6011	Diode, Signal, BAS16WS	9322 031 99685
6012	Diode, Signal, BAS16WS	9322 031 99685
6013	Diode, Signal, BAS16WS	9322 031 99685
6014	Diode, Signal, BAS16WS	9322 031 99685
6015	Diode, Signal, BAS16WS	9322 031 99685
6016	Diode, Signal, BAS16WS	9322 031 99685
6017	Diode, Rect, MBRS140.	9322 070 26668
6018	Zener Diode, 6.8 volt.	9340 386 40115
7000	Transistor, FET Signal, BSN20. . . .	9340 125 00235
7001	IC, LM393D	9339 575 30668
7002	IC, LM393D	9339 575 30668
7003	Transistor, NPN, BC847B.	3198 010 42030
7004	Transistor, NPN, BC847B.	3198 010 42030
7005	Transistor, NPN, BC847B.	3198 010 42030
7006	Transistor, PNP, BC857B.	3198 010 42150
7007	Transistor, FET Signal, BSN20. . . .	9340 125 00235
7010	Transistor, FET Signal, BSN20. . . .	9340 125 00235
7011	IC, FS401AC.	9322 107 99671
7012	IC, HY57V161610DTC-10.	9322 161 58668
7013	Transistor, FET Signal, BSN20. . . .	9340 125 00235
7014	IC,.	3135 019 02151
7016	IC, 74HC4066D.	9337 144 20653
7018	IC, M24C04-WMN6.	9322 122 33668
7019	IC, TDA8440/C3	9338 180 70112
7020	Transistor, PNP, BC857B.	3198 010 42150
7021	Transistor, NPN, BC847B.	3198 010 42030
7022	IC, MC33269D-3.3	9322 106 88668
7023	IC, MC33269D-3.3	9322 106 88668
7024	IC, LM2596S-ADJ.	9322 130 86685
7028	Transistor, FET Signal, BSH103 . . .	9340 547 13215
7036	Transistor, FET Signal, BSH103 . . .	9340 547 13215
7037	Transistor, NPN, BC847B.	3198 010 42030

Scan 3 Card Assembly Parts

	Scan 3 Card Assembly Parts	
CBA	Scan 3 Card Asm.	3135 127 10141
1000	Connector, 15 Pin.	2422 025 16857
1001	Crystal, Resonator, 20M140	2422 543 01196
1002	Socket, 2 Pin, SVHS.	2422 033 00365
1004	Socket, Cinch, 6 Pin	2422 026 04827
1005	Crystal Resonator, 14M31818, 20P . .	2422 543 00904
1010	Connector, 32 Pin.	3135 010 03541
1011	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488
1012	Connector, 5 Pin	2422 025 12708
1013	Connector, 14 Pin.	2422 025 12486
2000	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2001	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2002	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2003	Cap, 15p, 5%, 50V, Ceramic	3198 016 01590
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2006	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2007	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2008	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2009	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2010	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2011	Cap, 270p, 5%, 50V, Ceramic.	3198 016 02710
2012	Cap, 15p, 5%, 50V, Ceramic	3198 016 01590
2013	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2014	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2015	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2016	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2017	Cap, 10u, 20%, 25V, Electrolytic . .	2020 004 90288
2018	Cap, 270p, 5%, 50V, Ceramic.	3198 016 02710
2019	Cap, 15p, 5%, 50V, Ceramic	3198 016 01590
2020	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2021	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2022	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2023	Cap, 270p, 5%, 50V, Ceramic.	3198 016 02710
2024	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2025	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2026	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2059	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2060	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2061	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2062	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2063	Cap, 4u7, +80/-20%, 10V, Ceramic . .	2020 552 96305
2064	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2065	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2066	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2067	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2071	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2072	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2073	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2074	Cap, 4u7, 20%, 35V, Electrolytic . .	3198 030 74780
2075	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2076	Cap, 4u7, 20%, 35V, Electrolytic . .	3198 030 74780
2077	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2078	Cap, 4u7, 20%, 35V, Electrolytic . .	3198 030 74780
2079	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2080	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2081	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2082	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2083	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2084	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2085	Cap, 4u7, 20%, 35V, Electrolytic . .	3198 030 74780
2086	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2087	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2088	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2089	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2090	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2091	Cap, 4u7, 20%, 35V, Electrolytic . .	3198 030 74780
2092	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2093	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2094	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2095	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2096	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2097	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2098	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2099	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2100	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2101	Cap, 1u, 20%, 35V, Electrolytic. . .	2020 004 90282
2102	Cap, 1u, 20%, 35V, Electrolytic. . .	2020 004 90282
2103	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2104	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2105	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2106	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2107	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2108	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2109	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2110	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2111	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2112	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2113	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2114	Cap, 470u, 20%, 25V, Electrolytic. .	2020 012 93457
2115	Cap, 10u, 20%, 10V, Electrolytic . .	3198 032 34130
2116	Cap, 10u, 20%, 10V, Electrolytic . .	3198 032 34130
2118	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2119	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2120	Cap, 680p, 10%, 50V, Ceramic	3198 017 06810
2121	Cap, 680p, 10%, 50V, Ceramic	3198 017 06810
2122	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2123	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2124	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2125	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2126	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2127	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2129	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2130	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2131	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2132	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2134	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040

S = Safety Part Be sure to use exact replacement part.

SC3925C121 (continued)

2135	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2136	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2137	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2139	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2140	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2141	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810
2142	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810
3001	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3002	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3003	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3004	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3005	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3006	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3007	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3008	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3009	Res, 13K, 5%, 1/8W, Metalized Glass.	2322 730 61133
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3012	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3015	Res, 13K, 5%, 1/8W, Metalized Glass.	2322 730 61133
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3017	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3018	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3019	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3020	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3021	Res, 13K, 5%, 1/8W, Metalized Glass.	2322 730 61133
3022	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3023	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3024	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3025	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3026	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3027	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3028	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3029	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3030	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3031	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3033	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3052	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3056	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3057	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3058	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3060	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3061	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3062	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3063	Res, 820 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 58210
3064	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3065	Resistor Network, 4X 33R, 5%	2350 035 10339
3066	Resistor Network, 4X 33R, 5%	2350 035 10339
3073	Resistor Network, 4X 33R, 5%	2350 035 10339
3074	Resistor Network, 4X 33R, 5%	2350 035 10339
3082	Resistor Network, 4X 33R, 5%	2350 035 10339
3085	Resistor Network, 4X 33R, 5%	2350 035 10339
3089	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3090	Resistor Network, 4X 33R, 5%	2350 035 10339
3091	Resistor Network, 4X 33R, 5%	2350 035 10339
3097	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3099	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3100	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3101	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3102	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3103	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3104	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3105	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3106	Res, 270 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52710
3107	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3108	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3109	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3110	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3111	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3112	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3113	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3114	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3116	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3117	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3118	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3119	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3120	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3121	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3122	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3124	Res, 910 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 69101
3129	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3130	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3131	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3132	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3133	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3135	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3136	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3137	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3138	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3139	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3140	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3141	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3142	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3143	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
5001	Coil, 820n	3198 018 38270
5002	Coil, 1u2.	3198 018 31280
5003	Coil, 1u2.	3198 018 31280
5004	Coil, 1u2.	3198 018 31280
5010	Coil, 820n	3198 018 38270
5012	Coil, 820n	3198 018 38270
5014	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
5015	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5016	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5017	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5018	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5019	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5020	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5021	Coil, 82u.	2422 535 95408
5023	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5024	Coil, 1u8.	3198 018 31880
6001	Diode, Signal, BAV99	3198 010 10620
6002	Diode, Signal, BAV99	3198 010 10620
6003	Diode, Signal, BAV99	3198 010 10620
6004	Diode, Signal, BAV99	3198 010 10620
6005	Diode, Signal, BAV99	3198 010 10620
6006	Diode, Signal, BAV99	3198 010 10620
6009	Diode, Signal, BAV99	3198 010 10620
6010	Diode, Signal, BAV99	3198 010 10620
6011	Diode, Signal, BAS16WS	9322 031 99685
6012	Diode, Signal, BAS16WS	9322 031 99685
6013	Diode, Signal, BAS16WS	9322 031 99685
6014	Diode, Signal, BAS16WS	9322 031 99685
6015	Diode, Signal, BAS16WS	9322 031 99685
6016	Diode, Signal, BAS16WS	9322 031 99685
6017	Diode, Rect, MBRS140.	9322 070 26668
6018	Zener Diode, 6.8 volt.	9340 386 40115
7000	Transistor, FET Signal, BSN20. . . .	9340 125 00235
7001	IC, LM393D	9339 575 30668
7002	IC, LM393D	9339 575 30668
7003	Transistor, NPN, BC847B.	3198 010 42030
7004	Transistor, NPN, BC847B.	3198 010 42030
7005	Transistor, NPN, BC847B.	3198 010 42030
7006	Transistor, PNP, BC857B.	3198 010 42150
7007	Transistor, FET Signal, BSN20. . . .	9340 125 00235
7010	Transistor, FET Signal, BSN20. . . .	9340 125 00235
7011	IC, FS401AC.	9322 107 99671
7012	IC, HY57V161610DTC-10.	9322 161 58668
7013	Transistor, FET Signal, BSN20. . . .	9340 125 00235
7014	IC, P87C51RD+4A.	3135 120 50111
7016	IC, 74HC4066D.	9337 144 20653
7018	IC, M24C04-WMN6.	9322 122 33668
7019	IC, TDA8440/C3	9338 180 70112
7020	Transistor, PNP, BC857B.	3198 010 42150
7021	Transistor, NPN, BC847B.	3198 010 42030
7022	IC, MC33269D-3.3	9322 106 88668
7023	IC, MC33269D-3.3	9322 106 88668
7024	IC, LM2596S-ADJ.	9322 130 86685
7028	Transistor, FET Signal, BSH103 . . .	9340 547 13215
7036	Transistor, FET Signal, BSH103 . . .	9340 547 13215
7037	Transistor, NPN, BC847B.	3198 010 42030

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Mains Cord	3135 010 07161
AC03	Cabinet Back	3135 014 09831
AC04	Cabinet Front.	3135 017 04111
AC05	Chassis Guide.	3139 124 31381
AC06	Customer Control Button.	3139 124 27471
S AC08	CRT A63AFW36X05.	9301 885 40458
S AC09	Coil, Degaussing	2422 549 44489

S = Safety Part Be sure to use exact replacement part.

SC3925C121 (continued)

AC10	Holder, Degaussing (4 Used).	3135 013 01641
AC11	Light Guide.	3139 124 26461
AC12	Nameplate.	3135 015 03571
AC13	Owner's Manual	3135 015 16031
AC13	DFU for SCAN 3 Card (Not Shown). . .	3135 015 21901
AC14	Power Button	3139 124 30891
REMOTE	Remote Transmitter	3135 017 02651
AC16	Speaker, 16R, 1W5 (2 Used)	2422 264 00343
AC21	Batteries for Remote Transmitter (3 P ACK)	3135 019 01211
AC23	Card Housing	3135 014 08741
AC30	Bracket, EPS Module, (ITV) (Not Shown	3119 107 17241
AC31	Extra Power Supply Module.	3139 178 53133
AC32	Cover, Scan III (Not Shown).	3135 014 10551
AC35	Scan 3 VGA Adaptor	3135 017 07401
AC36	VGA Extender Cable	3135 017 07411
AC37	RF to Phono Cable.	3135 010 08251
AC39	SP/LS Panel.	3139 178 08561

SC3925N121 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts		
S 0127	3.15 Amp Fuse,	3122 358 72141	
0129	4 Pin Cable.	3104 301 09431	
0152	Cable, DIP, 6 Pin, 400mm	3104 301 09421	
0153	4 Pin Cable.	3104 301 09431	
0212	Connector, 2 Pin	2422 025 15396	
0214	Connector, 3 Pin	2422 025 16382	
0215	Connector, 2 Pin,	2422 025 16343	
0216	Connector, 4 Pin	2422 025 15847	
0219	Connector, 5 Pin	2422 025 15848	
0220	4 Pin Board Connector.	2422 025 04852	
0224	1 Pin Board Connector.	2422 034 20021	
0227	Connector, 4 Pin	2422 025 16385	
0228	1 Pin Board Connector.	2422 034 20021	
0234	Connector, 4 Pin	2422 025 15847	
0236	4 Pin Board Connector.	2422 025 16384	
0237	Connector, 4 Pin	2422 025 12479	
0238	5 Pin Board Connector.	2422 025 16387	
S 0243	Connector, 6 Pin	2422 025 04854	
0244	4 Pin Board Connector.	2422 025 04852	
S 0245	Connector, 6 Pin	2422 025 04854	
S 0254	CRT Socket (9 Pin)	2422 500 80022	
0259	Connector, 3 Pin	2422 025 16383	
0262	Connector, 4 Pin	2422 025 16385	
0267	Connector, 3 Pin	2412 020 00725	
1000	Tuner.	2422 542 90051	
1001	Filter	2422 549 42501	
1003	45 MHz SAW, Filter,	2422 549 42433	
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807	
1208	Crystal Resonator, 3.58MHz	2422 543 00832	
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10869	
S 1571	1 Amp, Radial Fuse,	4835 253 97162	
S 1572	1 Amp, Radial Fuse,	4835 253 97162	
S 1580	Relay, 12V	2422 132 07317	
1600	Switch, Tactile.	2422 128 02742	
1601	Switch, Tactile.	2422 128 02742	
1602	Switch, Tactile.	2422 128 02742	
1603	Switch, Tactile.	2422 128 02742	
1606	Switch, Tactile.	2422 128 02742	
1660	Crystal, Resonator, 12MHz, 20 Pin.	2422 543 00488	
1821	Ceramic Resonator.	4835 122 97102	
2001	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2003	Cap, 100u, 20%, 50V, Electrolytic.	3198 025 51010	
2004	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2006	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290	
2011	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090	
2013	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040	
2102	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2103	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2104	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2201	Cap, 220n, 10%, 50V, Polyester	3198 014 02240	
2202	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2203	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090	
2204	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2205	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040	
2206	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040	
2207	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010	
2208	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010	
2209	Cap, 470n, +80/-20%, 16V, Ceramic.	3198 017 24740	
2211	Cap, 470n, +80/-20%, 16V, Ceramic.	3198 017 24740	
2212	Cap, 470n, +80/-20%, 16V, Ceramic.	3198 017 24740	
2213	Cap, 470n, +80/-20%, 16V, Ceramic.	3198 017 24740	
2214	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2215	Cap, 2u2, 20%, 50V, Electrolytic	3198 025 52280	
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 16654	
2220	Cap, 18p, 5%, 50V, Ceramic	3198 016 01890	
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2222	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040	
2226	Cap, 33u, 20%, 25V, Electrolytic	2020 021 90124	
2227	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080	
2247	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2248	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2249	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2330	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177	
2340	Cap, 10u, 20%, 250V, Electrolytic.	2020 012 93495	
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320	
S 2343	Cap, 3n3, 10%, 2KV, Ceramic.	2020 558 90529	
2345	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020	
2401	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2402	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2404	Cap, 220n, 10%, 50V, Polyester	3198 014 02240	
2405	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2407	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2409	Cap, 220n, 10%, 50V, Polyester	3198 014 02240	
2420	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2426	Cap, 100n, 10%, 63V, Metalized Polyester	2222 370 75104	
2428	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220	
2429	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080	
2430	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090	
2431	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040	
2437	Cap, 220n, +80/-20%, 25V, Ceramic.	3198 023 22240	
2438	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050	
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2448	Cap, 220p, 10%, 500V, Ceramic.	3198 019 42210	
2450	Cap, 47u, 20%, 160v, Electrolytic.	2020 021 91139	
2451	Cap, 15n, 10%, 50V, Polyester.	2020 300 90575	
2451	0.01uF., 10%, 50V, Polyester, only 27	3198 138 20941	
2456	Cap, 47n, 10%, 250V, Metalized Polyester.	2222 368 90176	
2457	Cap, 390n, 5%, 250V, Metalized Polypropylene.	2222 479 90021	
2458	Cap, 10u, 20%, 100V, Electrolytic.	2020 021 90813	
2459	Cap, 680p, 10%, 500V, Ceramic.	3198 019 46810	
2461	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020	
2462	Cap, 47n, 10%, 250V, Metalized Polyester.	2222 368 90176	
2463	470pF., 10%, 2KV, Ceramic.	4835 122 47638	
S 2465	Cap, 10n, 5%, 1600V, Polypropylene	2222 375 90154	
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050	
2481	Cap, 470n, 10%, 50V, Polyester	3198 014 04740	
2482	Cap, 68n, 10%, 250V, Polyester	2222 347 90234	
2484	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2485	Cap, 4u7, 20%, 250V, Electrolytic.	2020 012 93282	
2486	Cap, 470u, 20%, 16V, Electrolytic.	3198 025 24710	
2487	Cap, 100u, 20%, 50V, Electrolytic.	3198 025 51010	
2488	Cap, 470u, 20%, 16V, Electrolytic.	3198 025 24710	
2489	Cap, 470u, 20%, 16V, Electrolytic.	3198 025 24710	
2490	Cap, 470p, 10%, 500V, Ceramic.	3198 019 44710	
2491	Cap, 470p, 10%, 500V, Ceramic.	3198 019 44710	
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810	
2500	0.47uF., 250V, Polyester	4835 121 47569	
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
S 2507	Cap, 1n5, 10%, 1KV, Ceramic.	2020 558 90443	
2508	Cap, 470u, 20%, 200V, Electrolytic	2020 024 90626	
S 2511	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020	
S 2518	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290	
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320	
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320	
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2529	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040	
2530	Cap, 1u, 20%, 50V, Electrolytic.	2020 021 91147	
2531	Cap, 1n, 2%, 50V, Polypropylene.	2020 310 90049	
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220	
2540	Cap, 100u, 20%, 25V, Electrolytic.	2020 021 90547	
S 2545	1500pF., 250VAC, Ceramic	4835 122 47622	
S 2550	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2551	Cap, 47u, 20%, 160v, Electrolytic.	2020 021 91358	
2561	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020	
S 2562	Cap, 220p, 10%, 1KV, Ceramic	2020 558 90424	
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020	
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020	
2572	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330	
2575	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040	
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820	
2577	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020	
2586	Cap, 220u, 20%, 25V, Electrolytic.	3198 025 32210	
2604	Cap, 22u, 20%, 50V, Electrolytic	3198 025 52290	
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2613	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2615	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040	
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2619	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080	
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2622	Cap, 220u, 20%, 25V, Electrolytic.	3198 025 32210	
2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890	
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2629	Cap, 22n, +80/-20%, 50V, Ceramic	3198 019 22230	
2630	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040	
2631	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050	
2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2679	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040	
2681	Cap, 220u, 20%, 25V, Electrolytic.	3198 025 32210	
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2821	Cap, 2u2, 20%, 50V, Electrolytic	3198 028 52280	
2823	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	

S = Safety Part Be sure to use exact replacement part.

SC3925N121 (continued)

2825	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080		3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046
2826	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090	S	3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
2827	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	S	3341	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483
2828	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	S	3342	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483
2829	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3343	1.5k, 20%, 1/2W, Carbon Composition.	4835 110 47034
2830	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280		3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
2831	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	S	3345	VDR, DC, 1mA, 50V, MAX 115V	2322 593 13507
2832	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280		3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
2833	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280		3401	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2834	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780		3402	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2835	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3403	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2836	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3405	Res, 1K8, 1%, 3/5W, Metal Film . . .	2322 156 21802
2837	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740		3406	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2838	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3407	Res, 1K8, 1%, 3/5W, Metal Film . . .	2322 156 21802
2839	Cap, 1u, 5%, 50V, Metalized Polyester	2020 308 90124		3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2840	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3409	1.5 ohm, 5%, 1/3W, Metal Film. . . .	4835 116 57664
2841	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2842	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3420	470k, 5%, 1/10W, Metal Film.	4835 111 37407
2844	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2845	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2913	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280		3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840
2914	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330		3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606
2915	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3425	150k, 5%, 1/10W, Metal Film.	4835 111 27045
2916	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648		3426	39k, 5%, 1/10W, Metal Film	4835 111 27051
2917	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3428	22k, 5%, 1/10W, Metal Film	4835 111 37441
2918	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330		3429	27k, 5%, 1/10W, Metal Film	4835 111 37442
2919	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3431	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
2920	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648		3432	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
2921	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3436	Res, 1K, 2%, 0,25W	4822 051 10102
2931	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280		3437	10k, 5%, 1/10W, Metal Film	4835 111 37216
2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3438	33k, 1/4W, Carbon Film	4835 110 57375
2952	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
2954	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3447	10k, 5%, 1/10W, Metal Film	4835 111 37216
2955	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	S	3452	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63229
2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	S	3453	Res, 4R7, 5%, 5W, Wire Wound	2322 251 41478
2960	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	S	3454	Res, 33K, 5%, 1 1/3W, Metal Film . .	2322 194 63333
2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090		3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090		3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090	S	3462	Res, 6K8, 5%, 5W, Metal Film	2322 257 41682
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3464	Res, 1K, 2%, 0,25W	4822 051 10102
3010	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610	S	3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
3013	Zero ohm,.	4835 111 27056		3466	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903
3014	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052		3467	Res, 14K, 1%, 3/5W, Metal Film . . .	2322 156 21403
3015	22k, 5%, 1/10W, Metal Film	4835 111 37441		3467	Res, 15K, 1%, 3/5W, Metal Film . . .	2322 156 21503
3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810		3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3021	Res, 1K, 2%, 0,25W	4822 051 10102		3469	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
3103	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3104	10k, 5%, 1/10W, Metal Film	4835 111 37216		3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703
3108	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3481	Res, 100K, 1%, 3/5W, Metal Film. . .	2322 156 21004
3109	10k, 5%, 1/10W, Metal Film	4835 111 37216		3482	Res, 32K4, 1%, 3/5W, Metal Film. . .	2322 156 23243
3123	75 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37276		3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3200	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3201	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253	S	3485	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
3203	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443	S	3486	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	S	3487	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3205	Res, 1K, 2%, 0,25W	4822 051 10102	S	3488	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
3206	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	S	3490	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3491	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3209	22k, 5%, 1/10W, Metal Film	4835 111 37441	S	3492	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3212	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253		3495	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272
3213	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3496	10k, 5%, 1/10W, Metal Film	4835 111 37216
3215	22k, 5%, 1/10W, Metal Film	4835 111 37441		3497	10k, 5%, 1/10W, Metal Film	4835 111 37216
3216	Zero ohm,.	4835 111 27056		3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3218	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225
3219	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3503	10ohm, 120VAC, Positive Temperature C	
3220	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432			oefficient	4835 116 47001
3225	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S	3505	Surge Protector.	2422 549 43073
3228	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3231	Zero ohm,.	4835 111 27056	S	3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333
3232	Zero ohm,.	4835 111 27056	S	3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102
3233	Zero ohm,.	4835 111 27056		3512	15k, 5%, 1/10W, Metal Film	4835 111 37458
3243	1.2k, 5%, 1/10W, Metal Film.	4835 111 27042		3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184
3246	82k, 5%, 1/10W, Metal Film	4835 111 37277		3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204
3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3515	2.5 ohm, 20%, 3.6W, Negative Temperat	
3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010			ure Coefficient.	2122 612 00023
3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340		3516	Res, 1K, 2%, 0,25W	4822 051 10102
3250	Zero ohm,.	4835 111 27056		3517	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3251	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S	3518	Res, 0R22, 5%, 3W, Metal Film. . . .	2120 106 90548
3252	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		3520	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3253	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		3521	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443
3257	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3525	33 ohm, 5%, 1/3W, Metal Film	4835 116 57665
3258	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3528	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3259	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3529	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3530	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3532	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3534	15k, 5%, 1/10W, Metal Film	4835 111 37458
3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3536	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3537	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030

S = Safety Part Be sure to use exact replacement part.

SC3925N121 (continued)

S 3542	4.7 Megohm, 5%, 1/2W, Metal Film . .	4835 116 57009
3570	15k, 5%, 1/10W, Metal Film	4835 111 37458
3571	Res, 150K, 1%, 3/5W, Metal Film. . .	2322 156 21504
3573	Res, 2K, 1%, 1/10W, Metalized Glass.	2120 108 92657
3574	33k, 5%, 1/10W, Metal Film	4835 111 37248
3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3577	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3578	Res, 1K, 2%, 0,25W	4822 051 10102
3579	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3592	10k, 5%, 1/10W, Metal Film	4835 111 37216
3594	22k, 5%, 1/10W, Metal Film	4835 111 37441
3595	68k, 5%, 1/6W, Carbon Film	4835 111 37205
3596	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3597	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
3598	10k, 5%, 1/10W, Metal Film	4835 111 37216
3599	22k, 5%, 1/10W, Metal Film	4835 111 37441
3607	8.2k, 5%, 1/8W, Inline Package . . .	4835 111 97046
3608	2.2k, 5%, 1/8W, Inline Package . . .	4835 111 97049
3609	2.2k, 5%, Resistor Network	2120 108 93868
3611	Res, 1K, 2%, 0,25W	4822 051 10102
3612	10k, 5%, 1/10W, Metal Film	4835 111 37216
3613	10k, 5%, 1/10W, Metal Film	4835 111 37216
3615	10k, 5%, 1/10W, Metal Film	4835 111 37216
3617	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3619	820 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37466
3629	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259
3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
3631	27k, 5%, 1/10W, Metal Film	4835 111 37442
S 3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63479
3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210
3634	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
3635	22k, 5%, 1/10W, Metal Film	4835 111 37441
3636	22k, 5%, 1/10W, Metal Film	4835 111 37441
3637	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
3649	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
3650	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3653	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3654	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
3655	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710
3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3662	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
3663	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
3664	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
3665	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
3666	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376
3667	27k, 5%, 1/10W, Metal Film	4835 111 37442
3672	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
3673	10k, 5%, 1/10W, Metal Film	4835 111 37216
3674	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259
3675	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3676	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3677	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3680	680 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37271
3681	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
3682	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
3683	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
3684	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
3685	220 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37371
3821	15k, 5%, 1/10W, Metal Film	4835 111 37458
3822	1.2k, 5%, 1/10W, Metal Film.	4835 111 27042
3823	100k, 5%, 1/10W, Metal Film.	4835 111 37434
3824	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
3825	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3826	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3827	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3828	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3829	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272
3830	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272
3831	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198 011 03310
3832	47 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37262
3908	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710
3909	Res, 1K, 2%, 0,25W	4822 051 10102
3910	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376
3911	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230
3912	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
3913	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3914	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820
3915	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231
3916	220 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37371
3917	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
3918	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3919	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376
3920	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231
3921	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230
3922	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820
3923	220 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37371
3924	39k, 5%, 1/10W, Metal Film	4835 111 27051
3925	39k, 5%, 1/10W, Metal Film	4835 111 27051
3926	39k, 5%, 1/10W, Metal Film	4835 111 27051
3929	39k, 5%, 1/10W, Metal Film	4835 111 27051
3930	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710
3931	Res, 1K, 2%, 0,25W	4822 051 10102
3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810
3951	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3953	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272
3955	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3957	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
4001	Zero ohm,.	4835 111 27056
4002	Zero ohm,.	4835 111 27056
4004	Zero ohm,.	4835 111 27056
4007	Zero ohm,.	4835 111 27056
4009	Zero ohm,.	4835 111 27056
4010	Zero ohm,.	4835 111 27056
4011	Zero ohm,.	4835 111 27056
4012	Zero ohm,.	4835 111 27056
4013	Zero ohm,.	4835 111 27056
4020	Zero ohm,.	4835 111 27056
4051	Zero ohm,.	4835 111 27056
4100	Zero ohm,.	4835 111 27056
4101	Zero ohm,.	4835 111 27056
4102	Zero ohm,.	4835 111 27056
4103	Zero ohm,.	4835 111 27056
4143	Zero ohm,.	4835 111 27056
4144	Zero ohm,.	4835 111 27056
4203	Zero ohm,.	4835 111 27056
4207	Zero ohm,.	4835 111 27056
4212	Zero ohm,.	4835 111 27056
4214	Zero ohm,.	4835 111 27056
4215	Zero ohm,.	4835 111 27056
4216	Zero ohm,.	4835 111 27056
4501	Zero ohm,.	4835 111 27056
4602	Zero ohm,.	4835 111 27056
4650	Zero ohm,.	4835 111 27056
4651	Zero ohm,.	4835 111 27056
4652	Zero ohm,.	4835 111 27056
4654	Zero ohm,.	4835 111 27056
4655	Zero ohm,.	4835 111 27056
4684	Zero ohm,.	4835 111 27056
4687	Zero ohm,.	4835 111 27056
4831	Zero ohm,.	4835 111 27056
4832	Zero ohm,.	4835 111 27056
4833	Zero ohm,.	4835 111 27056
4902	Zero ohm,.	4835 111 27056
4903	Zero ohm,.	4835 111 27056
4904	Zero ohm,.	4835 111 27056
4905	Zero ohm,.	4835 111 27056
4909	Zero ohm,.	4835 111 27056
4911	Zero ohm,.	4835 111 27056
4912	Zero ohm,.	4835 111 27056
4914	Zero ohm,.	4835 111 27056
4957	Zero ohm,.	4835 111 27056
4999	Zero ohm,.	4835 111 27056
5000	Coil, 5u6.	3198 018 25680
5004	Coil, 820n	2422 535 97314
5201	Coil, 22u.	3198 018 22290
5202	Coil, 6u8.	3198 018 16880
5342	Coil, 22u.	3198 018 22290
S 5445	Transformer, L.O.T., models ending in C101, C121, and C125	2422 531 02327
S 5445	Transformer, L.O.T., models ending in C221 and C225.	3128 138 20941
5451	Coil, 27u.	2422 535 96614
5457	Coil, Linear Correction.	3128 138 53241
5461	Transformer.	3128 138 33811
5480	Coil, 27u.	2422 535 97334
5480	Coil, 39u.	2422 535 97336
5480	Coil, 27u.	3198 018 22790
5480	33uH., Peaking Coil, only in 25. . .	4835 157 58205
S 5500	Filter, Mains, 5mH, 2A	2422 549 43432
5516	100uH., Coil	4835 157 67078
5518	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5521	Coil, 2u2.	3198 018 12280
5540	Coil, 4u7.	3198 018 14780
S 5545	Transfomer,.	2422 531 02314
5551	27uH., 5%, Coil, Peaking	4835 157 67052
5552	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5572	100uH., Coil	4835 157 67078
5573	100uH., Coil	4835 157 67078
5576	100uH., Coil	4835 157 67078
5577	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5600	Coil, 8u2.	3198 018 18280
5601	Coil, 8u2.	3198 018 18280
5620	Coil, 6u8.	3198 018 16880
5821	Coil, 100u	3198 018 21010
5822	Coil, 18u.	3198 018 21890

S = Safety Part Be sure to use exact replacement part.

6008	Zener, 33 Volt BZX79-C33	4835 130 37904
6113	Zener Diode, 6.8 volt.	9340 386 40115
6211	Diode, 1N4148.	4835 130 37048
6212	Diode, 1N4148.	4835 130 37048
6213	Diode, 1N4148.	4835 130 37048
6331	Diode.	4835 130 37294
6333	Diode.	4835 130 37294
6335	Diode.	4835 130 37294
6401	Diode.	4835 130 37094
6402	Zener, 33 Volt, BZX79-C33.	4835 130 37904
6403	Diode.	4835 130 37094
6404	Diode.	4835 130 37094
6449	Diode, 1N4148.	4835 130 37048
6450	Diode, 1N4148.	4835 130 37048
6460	Diode, Rect, BY228/20	9336 215 80112
6463	Diode, 1N4148.	4835 130 37048
6464	Zener Diode, 6.2 volt.	9337 242 70133
6465	Diode, BYD33J.	4835 130 37094
6466	Diode, BYD33J.	4835 130 37094
6480	Diode, Zener	4835 130 37947
6481	Diode, 1N4148.	4835 130 37048
6485	Diode, BYD33J.	4835 130 37094
6486	Diode, EGP20DL-530	4835 130 37919
6487	Diode.	4835 130 37094
6488	Diode, Rect, BYV27-200.	9322 126 72673
6490	Diode, Rect, BYV27-200.	9322 126 72673
6505	Diode, Bridge Rect, GBU6JL-7002	9322 138 08667
6507	Diode, BYD33J.	4835 130 37094
6508	Diode, BYD33J.	4835 130 37094
6510	Zener Diode, 20 volt	9331 178 60133
6511	Diode, BYV95C.	4835 130 37052
6512	Diode, Rect, BY228/20	4822 130 41275
6513	Diode, Rect, BY228/20	4822 130 41275
6514	Zener, 18 Volt, BZX79-C18.	4835 130 37908
6540	Diode.	4835 130 37294
6550	Diode, Rect, BY229X-800	9340 380 30127
6560	Diode, EGP20DL-530	4835 130 37919
6580	Diode, Rect, SB140.	9339 577 60673
6584	Diode, 1N4148.	4835 130 37048
6585	Diode, 1N4148.	4835 130 37048
6591	Diode, BAS216.	4835 130 37905
6601	Diode, Zener	4835 130 37684
6602	Diode, 1N4148.	4835 130 37048
6603	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
6604	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
6605	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
6606	Zener, 4.7 Volt, BZX79-C4V7.	4835 130 37005
6607	Zener, 6.8 Volt, BZX79-C6V8.	4835 130 37945
6690	LED, LTL-307P.	4835 130 97096
6821	Zener Diode, 9.1 volt.	9331 177 80133
6822	Fixed Coil	4835 130 37048
6951	Diode, BAS216.	4835 130 37905
6961	Diode, BAS216.	4835 130 37905
7250	IC,.	9352 620 26112
7251	IC, LM317T	9337 220 80682
7254	Transistor, NPN, BC847B.	4822 130 60511
7256	Transistor, NPN, BC847B.	4822 130 60511
7258	Transistor, NPN, BC847B.	4822 130 60511
7263	Transistor, PNP, BC857B.	5322 130 60508
7266	Transistor, NPN, BC847B.	4822 130 60511
7330	IC,.	9352 184 10112
7401	IC,.	9322 121 47687
7460	Transistor, NPN, BU1508DX.	9340 170 50127
7461	Transistor, NPN, BF819	9335 354 50127
7462	Transistor, BC547B	4835 130 47055
7463	Transistor, BC557B	4835 130 47409
7480	IC,.	9322 028 93682
7481	Transistor, BC557B	4835 130 47409
7482	Transistor, PNP, BC857B.	5322 130 60508
7518	STH8NA60FI SMPS FET	9322 068 92687
7518	STH10NC60FI SMPS FET.	9322 155 66687
7520	IC, MC44603A	4835 209 88537
7570	IC,.	9337 711 00676
S 7581	Coupler, TCDT1101G	9338 431 30682
7590	Transistor, NPN, BC847B.	4822 130 60511
7591	Transistor, NPN, BC847B.	4822 130 60511
7592	Transistor, NPN, BC847B.	4822 130 60511
7600	IC, SAA5543-PS/M4/0167 L9 v3.2 (Commercial Models - NON Pro Plus)	9352 670 84112
7601	IC, ST24W16B6, commercial models only	9322 095 35682
7603	Transistor, NPN, BC337	9331 796 00126
7604	Transistor, NPN, BC847B.	4822 130 60511
7605	Transistor, NPN, BC847B.	4822 130 60511
7608	Transistor, NPN, BC847B.	4822 130 60511
7609	Transistor, NPN, BC847B.	4822 130 60511
7680	IR Receiver.	9322 127 53667
7821	IC,.	9352 374 70112
7822	IC, HEF4052BT.	9333 729 50653
7823	Transistor, NPN, BC337-25.	3198 020 43530
7904	Transistor, NPN, BC847B.	4822 130 60511
7905	Transistor, NPN, BC847B.	4822 130 60511
7906	Transistor, NPN, BC847B.	4822 130 60511
7908	Transistor, NPN, BC847B.	4822 130 60511
7909	Transistor, NPN, BC847B.	4822 130 60511
7910	Transistor, NPN, BC847B.	4822 130 60511
7951	IC,.	4822 209 13706
7953	IC,.	4835 209 88474
CBA	00EMF891A002 Main Chassis Board Asm.	00EM F89 1A002

Scan 3 Card Assembly Parts

	Scan 3 Card Assembly Parts	
CBA	Scan 3 Card Asm. (Part of Scan 3 Net 1 Card Assembly)	3135 127 10141
CBA	Scan 3 Net 1 Card Asm.	3135 127 10241
1000	Connector, 15 Pin.	2422 025 16857
1001	Crystal, Resonator, 20M140	2422 543 01196
1002	Socket, 2 Pin, SVHS.	2422 033 00365
1004	Socket, Cinch, 6 Pin	2422 026 04827
1005	Crystal Resonator, 14M31818, 20P	2422 543 00904
1010	Connector, 32 Pin.	3135 010 03541
1011	Crystal, Resonator, 12MHz, 20 Pin.	2422 543 00488
1012	Connector, 5 Pin	2422 025 12708
1013	Connector, 14 Pin.	2422 025 12486
2000	Cap, 1u, 20%, 50V, Electrolytic.	3198 030 81080
2001	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2002	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2003	Cap, 15p, 5%, 50V, Ceramic	3198 016 01590
2004	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2005	Cap, 1u, 20%, 50V, Electrolytic.	3198 030 81080
2006	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2007	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2008	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2009	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2010	Cap, 1u, 20%, 50V, Electrolytic.	3198 030 81080
2011	Cap, 270p, 5%, 50V, Ceramic.	3198 016 02710
2012	Cap, 15p, 5%, 50V, Ceramic	3198 016 01590
2013	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2014	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2015	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2016	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2017	Cap, 10u, 20%, 25V, Electrolytic	2020 004 90288
2018	Cap, 270p, 5%, 50V, Ceramic.	3198 016 02710
2019	Cap, 15p, 5%, 50V, Ceramic	3198 016 01590
2020	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2021	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2022	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2023	Cap, 270p, 5%, 50V, Ceramic.	3198 016 02710
2024	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2025	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2026	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2059	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2060	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2061	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2062	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2063	Cap, 4u7, +80/-20%, 10V, Ceramic	2020 552 96305
2064	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2065	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2066	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2067	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2071	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2072	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2073	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2074	Cap, 4u7, 20%, 35V, Electrolytic	3198 030 74780
2075	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2076	Cap, 4u7, 20%, 35V, Electrolytic	3198 030 74780
2077	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2078	Cap, 4u7, 20%, 35V, Electrolytic	3198 030 74780
2079	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2080	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2081	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2082	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2083	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2084	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2085	Cap, 4u7, 20%, 35V, Electrolytic	3198 030 74780
2086	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2087	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2088	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2089	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2090	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2091	Cap, 4u7, 20%, 35V, Electrolytic	3198 030 74780
2092	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2093	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2094	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2095	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2096	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2097	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2098	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2099	Cap, 470u, 20%, 16V, Electrolytic.	3198 025 24710
2100	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
2101	Cap, 1u, 20%, 35V, Electrolytic.	2020 004 90282
2102	Cap, 1u, 20%, 35V, Electrolytic.	2020 004 90282
2103	Cap, 1u, 20%, 50V, Electrolytic.	3198 030 81080

S = Safety Part Be sure to use exact replacement part.

SC3925N121 (continued)

2104	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2105	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2106	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2107	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2108	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2109	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2110	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2111	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2112	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2113	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2114	Cap, 470u, 20%, 25V, Electrolytic. .	2020 012 93457
2115	Cap, 10u, 20%, 10V, Electrolytic . .	3198 032 34130
2116	Cap, 10u, 20%, 10V, Electrolytic . .	3198 032 34130
2118	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2119	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2120	Cap, 680p, 10%, 50V, Ceramic	3198 017 06810
2121	Cap, 680p, 10%, 50V, Ceramic	3198 017 06810
2122	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2123	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2124	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2125	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2126	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2127	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2129	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2130	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2131	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2132	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2134	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2135	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2136	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2137	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2139	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2140	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2141	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810
2142	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810
3001	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3002	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3003	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3004	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3005	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3006	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3007	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3008	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3009	Res, 13K, 5%, 1/8W, Metalized Glass.	2322 730 61133
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3012	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3015	Res, 13K, 5%, 1/8W, Metalized Glass.	2322 730 61133
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3017	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3018	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3019	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3020	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3021	Res, 13K, 5%, 1/8W, Metalized Glass.	2322 730 61133
3022	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3023	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3024	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3025	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3026	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3027	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3028	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3029	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3030	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3031	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3033	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3052	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3056	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3057	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3058	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3060	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3061	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3062	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3063	Res, 820 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 58210
3064	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3065	Resistor Network, 4X 33R, 5%	2350 035 10339
3066	Resistor Network, 4X 33R, 5%	2350 035 10339
3073	Resistor Network, 4X 33R, 5%	2350 035 10339
3074	Resistor Network, 4X 33R, 5%	2350 035 10339
3082	Resistor Network, 4X 33R, 5%	2350 035 10339
3085	Resistor Network, 4X 33R, 5%	2350 035 10339
3089	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3090	Resistor Network, 4X 33R, 5%	2350 035 10339
3091	Resistor Network, 4X 33R, 5%	2350 035 10339
3097	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3099	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3100	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3101	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3102	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3103	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3104	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3105	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3106	Res, 270 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52710
3107	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3108	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3109	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3110	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3111	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3112	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3113	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3114	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3116	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3117	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3118	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3119	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3120	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3121	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3122	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3124	Res, 910 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 69101
3129	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3130	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3131	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3132	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3133	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3135	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3136	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3137	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3138	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3139	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3140	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3141	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3142	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3143	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
5001	Coil, 820n	3198 018 38270
5002	Coil, 1u2.	3198 018 31280
5003	Coil, 1u2.	3198 018 31280
5004	Coil, 1u2.	3198 018 31280
5010	Coil, 820n	3198 018 38270
5012	Coil, 820n	3198 018 38270
5014	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
5015	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5016	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5017	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5018	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5019	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5020	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5021	Coil, 82u.	2422 535 95408
5023	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5024	Coil, 1u8.	3198 018 31880
6001	Diode, Signal, BAV99	3198 010 10620
6002	Diode, Signal, BAV99	3198 010 10620
6003	Diode, Signal, BAV99	3198 010 10620
6004	Diode, Signal, BAV99	3198 010 10620
6005	Diode, Signal, BAV99	3198 010 10620
6006	Diode, Signal, BAV99	3198 010 10620
6009	Diode, Signal, BAV99	3198 010 10620
6010	Diode, Signal, BAV99	3198 010 10620
6011	Diode, Signal, BAS16WS	9322 031 99685
6012	Diode, Signal, BAS16WS	9322 031 99685
6013	Diode, Signal, BAS16WS	9322 031 99685
6014	Diode, Signal, BAS16WS	9322 031 99685
6015	Diode, Signal, BAS16WS	9322 031 99685
6016	Diode, Signal, BAS16WS	9322 031 99685
6017	Diode, Rect, MBRS140.	9322 070 26668
6018	Zener Diode, 6.8 volt.	9340 386 40115
7000	Transistor, FET Signal, BSN20. . . .	9340 125 00235
7001	IC, LM393D	9339 575 30668
7002	IC, LM393D	9339 575 30668
7003	Transistor, NPN, BC847B.	3198 010 42030
7004	Transistor, NPN, BC847B.	3198 010 42030
7005	Transistor, NPN, BC847B.	3198 010 42030

S = Safety Part Be sure to use exact replacement part.

SC3925N121 (continued)

7006	Transistor, PNP, BC857B.	3198 010 42150
7007	Transistor, FET Signal, BSN20. . . .	9340 125 00235
7010	Transistor, FET Signal, BSN20. . . .	9340 125 00235
7011	IC, FS401AC.	9322 107 99671
7012	IC, HY57V161610DTC-10.	9322 161 58668
7013	Transistor, FET Signal, BSN20. . . .	9340 125 00235
7014	IC, P87C51RD+4A.	3135 120 50111
7016	IC, 74HC4066D.	9337 144 20653
7018	IC, M24C04-WMN6.	9322 122 33668
7019	IC, TDA8440/C3	9338 180 70112
7020	Transistor, PNP, BC857B.	3198 010 42150
7021	Transistor, NPN, BC847B.	3198 010 42030
7022	IC, MC33269D-3.3	9322 106 88668
7023	IC, MC33269D-3.3	9322 106 88668
7024	IC, LM2596S-ADJ.	9322 130 86685
7028	Transistor, FET Signal, BSH103 . . .	9340 547 13215
7036	Transistor, FET Signal, BSH103 . . .	9340 547 13215
7037	Transistor, NPN, BC847B.	3198 010 42030

Net 1 Card Assembly Parts

	Net 1 Card Assembly Parts	
CBA	Net 1 Card (Part of Scan 3 Net 1 Card Assembly).	3135 127 10151
1000	Socket, Antenna, 1 Pin	2422 031 10792
1001	Socket, Cinch, 1 Pin	2422 026 05003
1002	Connector, 5 Pin	2422 025 12708
2000	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2001	Cap, 39p, 5%, 50V, Ceramic	3198 016 03990
2002	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2003	Cap, 39p, 5%, 50V, Ceramic	3198 016 03990
2004	Cap, 100n, 10%, 25V, Ceramic	2238 910 15649
2005	Cap, 270p, 5%, 50V, Ceramic.	3198 016 02710
2006	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2007	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390
2008	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2009	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2010	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2011	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2012	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2014	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2015	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
3000	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3002	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3003	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3004	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3005	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3006	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3008	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3009	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3011	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3012	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
5000	Coil, 150n	3198 018 31570
5001	Coil, 150n	3198 018 31570
5002	Coil, 680n	3198 018 36870
5003	Coil, 2u2.	2422 535 96509
5004	Coil, 10u.	3198 018 31090
5005	Coil, 22u.	3198 018 32290
5006	Coil, 4u7.	3198 018 34780
6000	Diode, Signal, BAS216.	9340 255 30115
6001	Diode, Signal, BAS216.	9340 255 30115
6002	Diode, Signal, BAS216.	9340 255 30115
7000	IC, NE592/N8	9337 334 80602
7001	Transistor, NPN, BC847B.	9335 895 90215

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Mains Cord	3135 010 07161
AC03	Cabinet Back	3135 014 09831
AC04	Cabinet Front.	3135 017 04111
AC05	Chassis Guide.	3139 124 31381
AC06	Customer Control Button.	3139 124 27471
S AC08	CRT A63AFW36X05.	9301 885 40458
S AC09	Coil, Degaussing	2422 549 44489
AC10	Holder, Degaussing (4 Used).	3135 013 01641
AC11	Light Guide.	3139 124 26461
AC12	Nameplate.	3135 015 03571
AC13	Owner's Manual	3135 015 16031
AC13	DFU for SCAN 3 Card (Not Shown). . .	3135 015 21901
AC14	Power Button	3139 124 30891
REMOTE	Remote Transmitter	3135 017 02651
AC16	Speaker, 16R, 1W5 (2 Used)	2422 264 00343
AC21	Batteries for Remote Transmitter (3 PACK)	3135 019 01211
AC23	Card Housing	3135 014 08741
AC30	Bracket, EPS Module, (ITV) (Not Shown	3119 107 17241
AC31	Extra Power Supply Module.	3139 178 53133
AC35	Scan 3 VGA Adaptor	3135 017 07401
AC38	Phono Cable.	3135 010 07451
AC39	SP/LS Panel.	3139 178 08561

S = Safety Part Be sure to use exact replacement part.

SC3927C121 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts	
0113	L9 SOPS HEATSINK	3139 121 62041
0119	DIODE HEATSINK L9.	3139 121 26691
0121	LINE HEATSINK (CINCH).	3139 121 61942
0123	L9L AUDIO HEATSINK (STERO)	3139 121 61952
S 0127	Holder, Fuse, 2 Pin.	3122 358 71251
0211	Connector, 2 Pin	2422 025 11196
0212	Connector, 2 Pin	2422 025 15396
0213	Connector, 2 Pin	2422 025 15395
0214	Connector, 3 Pin	2422 025 16382
0215	Connector, 2 Pin,.	2422 025 16343
0216	Connector, 4 Pin	2422 025 15847
0219	Connector, 5 Pin	2422 025 15848
0220	4 Pin Board Connector.	2422 025 04852
0221	Connector, 4 Pin	2422 025 15503
0222	Connector, 2 Pin	2422 025 10646
0224	1 Pin Board Connector.	2422 034 20021
0228	1 Pin Board Connector.	2422 034 20021
0234	Connector, 4 Pin	2422 025 15847
0236	4 Pin Board Connector.	2422 025 16384
0237	Connector, 4 Pin	2422 025 12479
0238	5 Pin Board Connector.	2422 025 16387
S 0243	Connector, 6 Pin	2422 025 04854
0244	4 Pin Board Connector.	2422 025 04852
S 0245	Connector, 6 Pin	2422 025 04854
S 0254	CRT Socket (9 Pin)	2422 500 80022
0259	Connector, 3 Pin	2422 025 16383
0262	Connector, 4 Pin	2422 025 16385
0267	Connector, 3 Pin	2412 020 00725
1000	Tuner, V+U PLL PH MN B.	2422 542 90069
1001	Filter	2422 549 42501
1003	45 MHz SAW, Filter,.	2422 549 42433
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807
1208	Crystal Resonator, 3.58MHz	2422 543 00832
S 1500	Fue, 4 A, 250V	2422 086 10905
S 1571	FUSE 1A 250V	2422 086 10779
S 1572	FUSE 1A 250V	2422 086 10779
S 1580	Relay, 12V, 5A G5PA-1.	2422 132 07444
1600	Switch, Tactile.	2422 128 02742
1601	Switch, Tactile.	2422 128 02742
1602	Switch, Tactile.	2422 128 02742
1603	Switch, Tactile.	2422 128 02742
1606	Switch, Tactile.	2422 128 02742
1660	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488
1703	L9 ITV SMARTPORT	3139 178 08561
1821	Ceramic Resonator, 514KHz5, CSB503F58	2422 540 98344
2001	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2002	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2003	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2004	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2011	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2102	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2103	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2104	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2201	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2202	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2203	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2204	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2205	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2208	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2209	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2211	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2212	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2213	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2214	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2215	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 16654
2220	Cap, 18p, 5%, 50V, Ceramic	3198 016 01890
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2222	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2226	Cap, 33u, 20%, 25V, Electrolytic . .	2020 021 90124
2227	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2247	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2248	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2249	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2330	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2340	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320
S 2343	Cap, 3n3, 10%, 2KV, Ceramic.	2020 558 90529
2345	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2401	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2402	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2404	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2405	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2407	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2409	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2420	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2426	Cap, 100n, 10%, 63V, Metalized Polyes ter.	2222 370 75104
2428	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2429	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2430	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2431	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2437	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2438	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2448	Cap, 33p, 5%, 500V, Ceramic.	2020 557 90192
2450	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91139
2451	Cap, 15n, 10%, 50V, Polyester. . . .	2020 300 90575
2456	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176
2457	Cap, 390n, 5%, 250V, Metalized Polypr opylene.	2222 479 90021
2458	Cap, 2u2, 20%, 100V, Electrolytic. .	2020 021 91331
2459	Cap, 680p, 10%, 500V, Ceramic. . . .	3198 019 46810
2461	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2462	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176
S 2463	Cap, 680p, 10%, 2KV, Ceramic	2020 558 90485
S 2465	Cap, 10n, 5%, 1600V, Polypropylene .	2222 375 90154
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050
2473	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2481	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2482	Cap, 68n, 10%, 250V, Polyester . . .	2222 347 90234
2484	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2485	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2486	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2487	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2488	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2489	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2490	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2491	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810
2499	Cap, 220n, 10%, 100V, Metalized Polye ster	2222 365 25224
2500	Cap, 470n, 20%, 275V, Polypropylene.	2222 336 29148
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2507	Cap, 1n5, 10%, 1KV, Ceramic.	3198 019 61520
2508	Cap, 470u, 20%, 200V, Electrolytic .	2020 024 90647
2511	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
2518	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2530	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 021 91147
2531	Cap, 1n, 2%, 50V, Polypropylene. . .	2020 310 90049
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2540	Cap, 100u, 20%, 25V, Electrolytic. .	2020 021 90547
S 2545	Cap, 1n5, 20%, v, Ceramic.	2020 554 90128
2550	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2551	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91358
2561	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2562	Cap, 220p, 10%, 1KV, Ceramic	3198 019 62210
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2572	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2575	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2577	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2586	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2604	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2613	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2615	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2619	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2622	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2629	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040

S = Safety Part Be sure to use exact replacement part.

SC3927C121 (continued)

2631	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3246	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230	
2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
2679	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
2681	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210		3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340	
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3250	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
2821	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280		3251	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040	
2823	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230		3252	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720		3253	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	
2825	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080		3257	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
2826	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090		3258	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
2827	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3259	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
2828	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
2829	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	3198 013 01020	
2830	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280		3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
2831	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	3198 013 01020	
2832	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280		3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
2833	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280		3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	3198 013 01020	
2834	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780	S	3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109	
2835	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	S	3341	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108	
2836	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	S	3342	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108	
2837	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740		3343	Res, 1K5, 20%, 1/2W, Carbon Film . .	3198 013 01520	
2838	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290	
2839	Cap, 1u, 10%, 50V, Polyester	3198 014 01050		3345	VDR DC 1MA/50V S MAX 110V A . . .	2122 550 00152	
2840	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290	
2841	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3401	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380	
2842	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3402	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380	
2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3403	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380	
2844	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3405	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002	
2845	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3406	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
2913	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280		3407	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002	
2914	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330		3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
2915	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3409	Res, 1R5, 5%, 1/3W, Metal Film . . .	2306 204 03158	
2916	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648		3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210	
2917	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210	
2918	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330		3420	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740	
2919	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220	
2920	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648		3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220	
2921	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840	
2931	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280		3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606	
2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3425	Res, 120K, 5%, 1/10W, Metalized Glass	2120 108 91716	
2952	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3426	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930	
2954	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3428	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	
2955	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3429	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730	
2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3431	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	
2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3432	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3433	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
2960	Cap, 220u, 20%, 50V, Electrolytic. .	3198 026 52210		3436	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090		3437	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090		3438	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330	
2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090		3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920	
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3447	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220	
3010	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610		3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320	
3013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	S	3452	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	3198 012 32290	
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	S	3453	Res, 4R7, 5%, 5W, Wire Wound	2322 251 41478	
3015	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	S	3454	Res, 33K, 5%, 1 1/3W, Metal Film . .	2322 194 63333	
3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810		3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
3021	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020		3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
3103	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220	S	3462	Res, 6K8, 5%, 5W, Metal Film	2322 257 41682	
3104	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030		3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790	
3108	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3464	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3109	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	S	3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109	
3123	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590		3466	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903	
				3467	Res, 15K, 1%, 3/5W, Metal Film . . .	2322 156 21503	
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010		3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
3201	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910		3469	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	
				3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240	
3203	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310		3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703	
				3481	Res, 35K7, 1%, 3/5W, Metal Film. . .	2322 156 23573	
3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820		3482	Res, 56K, 1%, 3/5W, Metal Film . . .	2322 156 25603	
3205	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020		3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230	
3206	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610		3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
			S	3486	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108	
3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3487	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108	
3209	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	S	3488	Res, 4R7, 5%, 1/2W, Metal Film . . .	2306 207 03478	
3212	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910	S	3490	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108	
			S	3491	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108	
3213	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610	S	3492	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108	
				3495	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820	
3215	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230		3496	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3216	Res, Zero ohm, 'Chip' Jumper	3198 021 90020		3497	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3217	Res, 1M5, 5%, 1/8W, Metalized Glass.	2322 730 61155		3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	3198 013 04710	
3218	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	S	3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225	
3219	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610	S	3503	PTC, DC, 120V,P3020 B.	2120 661 00025	
			S	3505	Surge Protector.	2422 549 43073	
3220	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	S	3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223	
3225	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040	S	3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333	
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	S	3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102	
3231	Res, Zero ohm, 'Chip' Jumper	3198 021 90020		3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530	
3232	Res, Zero ohm, 'Chip' Jumper	3198 021 90020		3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184	
3233	Res, Zero ohm, 'Chip' Jumper	3198 021 90020		3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204	
3243	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220	S	3515	2.5 ohm, 20%, 3.6W, Negative Temperat ure Coefficient.	2122 612 00023	

S = Safety Part Be sure to use exact replacement part.

SC3927C121 (continued)

3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3517	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
S 3518	Res, 0R22, 5%, 2 1/2W, Metal Film. .	3198 012 32270	
3520	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230	
3521	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310	
S 3525	Res, 47 ohm, 5%, 1/3W, Metal Film. .	2306 204 03479	
3528	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3529	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890	
3530	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320	
3532	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3534	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530	
3536	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830	
3537	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
S 3542	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475	
3570	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530	
3571	Res, 150K, 1%, 3/5W, Metal Film. . .	2322 156 21504	
3573	Res, 2K, 1%, 1/8W, Metalized Glass .	2322 734 62002	
3574	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330	
3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3577	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3578	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3579	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002	
3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3592	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3594	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	
3595	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830	
3596	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3597	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3598	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3599	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	
3607	RST NETW RGLE 10X 8K2 PM5 B . . .	2120 108 93916	
3608	RST NETW RGLE 6X 2K2 PM5 B . . .	2120 108 93913	
3609	RST NETW RGLE 7X 2K2 PM5 B . . .	2120 108 93915	
3611	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3612	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3613	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3615	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3616	Jumper Wire/Staple	0322 179 00003	
3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3619	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3629	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710	
3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3631	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730	
S 3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790	
3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210	
3634	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	
3635	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	
3636	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	
3637	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3649	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3650	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3654	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3655	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3662	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3663	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220	
3664	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220	
3665	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3666	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620	
3667	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730	
3672	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3673	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3674	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710	
3675	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3676	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3677	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3680	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810	
3681	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3682	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220	
3683	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3684	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	
3687	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210	
3821	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530	
3822	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220	
3823	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040	
3824	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	
3825	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3826	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3827	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3828	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3829	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820	
3830	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820	
3831	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198 011 03310	
3832	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790	
3908	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3909	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3910	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620	
3911	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230	
3912	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3913	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3914	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	
3915	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820	
3916	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210	
3917	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3918	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3919	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620	
3920	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820	
3921	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230	
3922	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	
3923	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210	
3924	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930	
3925	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930	
3926	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930	
3929	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930	
3930	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3931	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810	
3951	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	
3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3953	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3955	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
3957	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4004	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4011	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4012	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4020	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4051	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4100	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4102	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4144	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4203	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4207	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4212	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4215	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4216	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4465	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4501	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4650	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4651	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4654	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4655	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4833	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4911	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4912	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4914	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4957	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4999	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
5000	Coil, 5u6.	3198 018 25680	
5004	Coil, 820n	2422 535 97314	
5201	Coil, 22u.	3198 018 22290	
5202	Coil, 6u8.	3198 018 16880	
5342	Coil, 22u.	3198 018 22290	
S 5445	Transformer, L.O.T., models ending in C101, C121, and C125	2422 531 02327	
5451	Coil, 27u.	2422 535 96614	
5457	Coil, Linear Correction.	3128 138 53241	
5461	Transformer.	3128 138 33811	
5480	Coil, 27u.	2422 535 97334	
S 5500	Filter, Mains, 5mH, 2A	2422 549 43432	
5516	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5518	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5521	Coil, 2u2.	3198 018 12280	
5540	Coil, 4u7.	3198 018 14780	
S 5545	Transfomer,.	2422 531 02314	
5551	Coil, 27u.	2422 535 95366	
5552	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	

S = Safety Part Be sure to use exact replacement part.

SC3927C121 (continued)

5572	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	7609	Transistor, NPN, BC847B.	3198 010 42030
5573	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	7680	IR Receiver.	9322 127 53667
5576	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	7821	IC,.	9352 374 70112
5577	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	7822	IC, HEF4052BT.	9333 729 50653
5600	Coil, 8u2.	3198 018 18280	7823	Transistor, NPN, BC337-25.	3198 020 43530
5601	Coil, 8u2.	3198 018 18280	7904	Transistor, NPN, BC847B.	3198 010 42030
5620	Coil, 6u8.	3198 018 16880	7905	Transistor, NPN, BC847B.	3198 010 42030
5821	Coil, 100u	3198 018 21010	7906	Transistor, NPN, BC847B.	3198 010 42030
5822	Coil, 18u.	3198 018 21890	7908	Transistor, NPN, BC847B.	3198 010 42030
6008	Zener Diode, 33 volt	3198 010 23390	7909	Transistor, NPN, BC847B.	3198 010 42030
6113	Zener Diode, 6.8 volt.	9340 386 40115	7910	Transistor, NPN, BC847B.	3198 010 42030
6211	Diode, Signal, 1N4148.	3198 010 10010	7951	IC,.	9351 861 60112
6212	Diode, Signal, 1N4148.	3198 010 10010	9001	Jumper Wire/Staple	0322 179 00003
6213	Diode, Signal, 1N4148.	3198 010 10010	9003	Jumper Wire/Staple	0322 179 00003
6331	Diode, Signal, BAV21	3198 010 10070	9005	Jumper Wire/Staple	0322 179 00003
6333	Diode, Signal, BAV21	3198 010 10070	9011	Jumper Wire/Staple	0322 179 00003
6335	Diode, Signal, BAV21	3198 010 10070	9012	Jumper Wire/Staple	0322 179 00003
6401	Diode, Rect, BYD33D	9337 234 00133	9105	Jumper Wire/Staple	0322 179 00003
6402	Zener Diode, 33 volt	3198 010 23390	9126	Jumper Wire/Staple	0322 179 00003
6403	Diode, Rect, BYD33D	9337 234 00133	9132	Jumper Wire/Staple	0322 179 00003
6404	Zener Diode, 75 volt	9331 180 00133	9140	Jumper Wire/Staple	0322 179 00003
6449	Diode, Signal, 1N4148.	3198 010 10010	9141	Jumper Wire/Staple	0322 179 00003
6450	Diode, Signal, 1N4148.	3198 010 10010	9200	Jumper Wire/Staple	0322 179 00003
6460	Diode, Rect, BY228/20	9336 215 80112	9202	Jumper Wire/Staple	0322 179 00003
6463	Diode, Signal, 1N4148.	3198 010 10010	9203	Jumper Wire/Staple	0322 179 00003
6464	Zener Diode, 6.2 volt.	9331 668 30133	9204	Jumper Wire/Staple	0322 179 00003
6465	Diode, Rect, BYD33J	9337 234 20133	9205	Jumper Wire/Staple	0322 179 00003
6466	Diode, Rect, BYD33J	9337 234 20133	9206	Jumper Wire/Staple	0322 179 00003
6480	Zener Diode, 27 volt	3198 010 22790	9207	Jumper Wire/Staple	0322 179 00003
6481	Diode, Signal, 1N4148.	3198 010 10010	9208	Jumper Wire/Staple	0322 179 00003
6485	Diode, Rect, BYD33J	9337 234 20133	9209	Jumper Wire/Staple	0322 179 00003
6486	Diode, Rect, EGP20DL-5300	9322 100 13682	9210	Jumper Wire/Staple	0322 179 00003
6487	Diode, Rect, BYD33D	9337 234 00133	9211	Jumper Wire/Staple	0322 179 00003
6488	Diode, Rect, BYV27-200.	9322 126 72673	9214	Jumper Wire/Staple	0322 179 00003
6490	Diode, Rect, BYV27-200.	9322 126 72673	9215	Jumper Wire/Staple	0322 179 00003
6505	Diode, Bridge Rect, GBU6JL-7002 . .	9322 138 08667	9216	Jumper Wire/Staple	0322 179 00003
6507	Diode, Rect, BYD33J	9337 234 20133	9217	Jumper Wire/Staple	0322 179 00003
6508	Diode, Rect, BYD33J	9337 234 20133	9218	Jumper Wire/Staple	0322 179 00003
6510	Zener Diode, 20 volt	9331 178 60133	9220	Jumper Wire/Staple	0322 179 00003
6511	Diode, Rect, BYV95C	9335 001 80133	9221	Jumper Wire/Staple	0322 179 00003
6512	Diode, Rect, 1N5062	3198 010 10120	9222	Jumper Wire/Staple	0322 179 00003
6513	Diode, Rect, 1N5062	3198 010 10120	9225	Jumper Wire/Staple	0322 179 00003
6514	Zener Diode, 18 volt	3198 010 21890	9226	Jumper Wire/Staple	0322 179 00003
6540	Diode, Signal, BAV21	3198 010 10070	9227	Jumper Wire/Staple	0322 179 00003
6550	Diode, Rect, BY229X-800	9340 380 30127	9228	Jumper Wire/Staple	0322 179 00003
6560	Diode, Rect, EGP20DL-5300	9322 100 13682	9229	Jumper Wire/Staple	0322 179 00003
6580	Diode, Rect, SB140.	9339 577 60673	9230	Jumper Wire/Staple	0322 179 00003
6584	Diode, Signal, 1N4148.	3198 010 10010	9231	Jumper Wire/Staple	0322 179 00003
6585	Diode, Signal, 1N4148.	3198 010 10010	9232	Jumper Wire/Staple	0322 179 00003
6591	Diode, Signal, BAS16WS	9322 031 99685	9233	Jumper Wire/Staple	0322 179 00003
6601	Zener Diode, 3.9 volt.	3198 010 23980	9234	Jumper Wire/Staple	0322 179 00003
6602	Diode, Signal, 1N4148.	3198 010 10010	9236	Jumper Wire/Staple	0322 179 00003
6603	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610	9237	Jumper Wire/Staple	0322 179 00003
6604	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610	9238	Jumper Wire/Staple	0322 179 00003
6605	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610	9240	Jumper Wire/Staple	0322 179 00003
6606	Zener Diode, 4.7 volt.	3198 010 24780	9241	Jumper Wire/Staple	0322 179 00003
6607	Zener Diode, 6.8 volt.	3198 010 26880	9242	Jumper Wire/Staple	0322 179 00003
6690	LED VS LTL-307P (LITO) B . . .	9322 033 95682	9243	Jumper Wire/Staple	0322 179 00003
6821	Zener Diode, 9.1 volt.	9331 177 80133	9245	Jumper Wire/Staple	0322 179 00003
6822	Diode, Signal, 1N4148.	3198 010 10010	9301	Jumper Wire/Staple	0322 179 00003
6951	Diode, Signal, BAS16WS	9322 031 99685	9401	Jumper Wire/Staple	0322 179 00003
6961	Diode, Signal, BAS16WS	9322 031 99685	9402	Jumper Wire/Staple	0322 179 00003
7250	IC,.	9352 620 26112	9403	Jumper Wire/Staple	0322 179 00003
7251	IC, LM317T	9337 220 80682	9404	Jumper Wire/Staple	0322 179 00003
7254	Transistor, NPN, BC847B.	3198 010 42030	9407	Jumper Wire/Staple	0322 179 00003
7256	Transistor, NPN, BC847B.	3198 010 42030	9408	Jumper Wire/Staple	0322 179 00003
7258	Transistor, NPN, BC847B.	3198 010 42030	9411	Jumper Wire/Staple	0322 179 00003
7263	Transistor, PNP, BC857B.	3198 010 42150	9414	Jumper Wire/Staple	0322 179 00003
7266	Transistor, NPN, BC847B.	3198 010 42030	9417	Jumper Wire/Staple	0322 179 00003
7330	IC, TDA6107Q/N2.	9352 576 50112	9419	Jumper Wire/Staple	0322 179 00003
7401	IC,.	9322 121 47687	9420	Jumper Wire/Staple	0322 179 00003
7460	Transistor, NPN, BU1508DX.	9340 170 50127	9421	Jumper Wire/Staple	0322 179 00003
7461	Transistor, NPN, BF819	9335 354 50127	9422	Jumper Wire/Staple	0322 179 00003
7462	Transistor, NPN, BC547B.	3198 020 40030	9424	Jumper Wire/Staple	0322 179 00003
7463	Transistor, PNP, BC557B.	3198 020 40110	9425	Jumper Wire/Staple	0322 179 00003
7480	IC,.	9322 028 93682	9427	Jumper Wire/Staple	0322 179 00003
7481	Transistor, PNP, BC557B.	3198 020 40110	9428	Jumper Wire/Staple	0322 179 00003
7482	Transistor, PNP, BC857B.	3198 010 42150	9460	Jumper Wire/Staple	0322 179 00003
7518	STH10NC60FI SMPS FET.	9322 155 66687	9461	Jumper Wire/Staple	0322 179 00003
7520	IC,.	9322 108 36682	9500	Jumper Wire/Staple	0322 179 00003
7570	IC,.	9337 711 00676	9501	Jumper Wire/Staple	0322 179 00003
S 7581	Coupler, TCDT1101G	9338 431 30682	9502	Jumper Wire/Staple	0322 179 00003
7590	Transistor, NPN, BC847B.	3198 010 42030	9503	Jumper Wire/Staple	0322 179 00003
7591	Transistor, NPN, BC847B.	3198 010 42030	9505	Jumper Wire/Staple	0322 179 00003
7592	Transistor, NPN, BC847B.	3198 010 42030	9509	Jumper Wire/Staple	0322 179 00003
7600	IC, SAA5543-PS/M4/0167 L9 v3.2 (Comme rcial Models - NON Pro Plus)	9352 670 84112	9510	Jumper Wire/Staple	0322 179 00003
7601	IC, ST24W16B6, commercial models only	9322 095 35682	9511	Jumper Wire/Staple	0322 179 00003
7603	Transistor, NPN, BC337	9331 796 00126	9512	Jumper Wire/Staple	0322 179 00003
7604	Transistor, NPN, BC847B.	3198 010 42030	9513	Jumper Wire/Staple	0322 179 00003
7605	Transistor, NPN, BC847B.	3198 010 42030	9515	Jumper Wire/Staple	0322 179 00003
7608	Transistor, NPN, BC847B.	3198 010 42030	9516	Jumper Wire/Staple	0322 179 00003
			9517	Jumper Wire/Staple	0322 179 00003

S = Safety Part Be sure to use exact replacement part.

SC3927C121 (continued)

9518	Jumper Wire/Staple	0322 179 00003
9521	Jumper Wire/Staple	0322 179 00003
9526	Jumper Wire/Staple	0322 179 00003
9601	Jumper Wire/Staple	0322 179 00003
9602	Jumper Wire/Staple	0322 179 00003
9603	Jumper Wire/Staple	0322 179 00003
9604	Jumper Wire/Staple	0322 179 00003
9605	Jumper Wire/Staple	0322 179 00003
9606	Jumper Wire/Staple	0322 179 00003
9608	Jumper Wire/Staple	0322 179 00003
9609	Jumper Wire/Staple	0322 179 00003
9610	Jumper Wire/Staple	0322 179 00003
9611	Jumper Wire/Staple	0322 179 00003
9612	Jumper Wire/Staple	0322 179 00003
9613	Jumper Wire/Staple	0322 179 00003
9614	Jumper Wire/Staple	0322 179 00003
9615	Jumper Wire/Staple	0322 179 00003
9618	Jumper Wire/Staple	0322 179 00003
9621	Jumper Wire/Staple	0322 179 00003
9622	Jumper Wire/Staple	0322 179 00003
9624	Jumper Wire/Staple	0322 179 00003
9625	Jumper Wire/Staple	0322 179 00003
9626	Jumper Wire/Staple	0322 179 00003
9629	Jumper Wire/Staple	0322 179 00003
9631	Jumper Wire/Staple	0322 179 00003
9632	Jumper Wire/Staple	0322 179 00003
9637	Jumper Wire/Staple	0322 179 00003
9640	Jumper Wire/Staple	0322 179 00003
9642	Jumper Wire/Staple	0322 179 00003
9643	Jumper Wire/Staple	0322 179 00003
9644	Jumper Wire/Staple	0322 179 00003
9754	Jumper Wire/Staple	0322 179 00003
9788	Jumper Wire/Staple	0322 179 00003
9793	Jumper Wire/Staple	0322 179 00003
9800	Jumper Wire/Staple	0322 179 00003
9805	Jumper Wire/Staple	0322 179 00003
9806	Jumper Wire/Staple	0322 179 00003
9807	Jumper Wire/Staple	0322 179 00003
9810	Jumper Wire/Staple	0322 179 00003
9901	Jumper Wire/Staple	0322 179 00003
9904	Jumper Wire/Staple	0322 179 00003
9905	Jumper Wire/Staple	0322 179 00003
9906	Jumper Wire/Staple	0322 179 00003
9920	Jumper Wire/Staple	0322 179 00003
9933	Jumper Wire/Staple	0322 179 00003
9936	Jumper Wire/Staple	0322 179 00003
9940	Jumper Wire/Staple	0322 179 00003
9941	Jumper Wire/Staple	0322 179 00003
9942	Jumper Wire/Staple	0322 179 00003
9943	Jumper Wire/Staple	0322 179 00003
9944	Jumper Wire/Staple	0322 179 00003
9945	Jumper Wire/Staple	0322 179 00003
9946	Jumper Wire/Staple	0322 179 00003
9947	Jumper Wire/Staple	0322 179 00003
9948	Jumper Wire/Staple	0322 179 00003
9949	Jumper Wire/Staple	0322 179 00003
9950	Jumper Wire/Staple	0322 179 00003
9951	Jumper Wire/Staple	0322 179 00003
9952	Jumper Wire/Staple	0322 179 00003
9953	Jumper Wire/Staple	0322 179 00003
9955	Jumper Wire/Staple	0322 179 00003
9956	Jumper Wire/Staple	0322 179 00003
9957	Jumper Wire/Staple	0322 179 00003
9958	Jumper Wire/Staple	0322 179 00003
9959	Jumper Wire/Staple	0322 179 00003
9960	Jumper Wire/Staple	0322 179 00003
9962	Jumper Wire/Staple	0322 179 00003
9963	Jumper Wire/Staple	0322 179 00003
9964	Jumper Wire/Staple	0322 179 00003
9965	Jumper Wire/Staple	0322 179 00003
9966	Jumper Wire/Staple	0322 179 00003
9967	Jumper Wire/Staple	0322 179 00003
9968	Jumper Wire/Staple	0322 179 00003
9969	Jumper Wire/Staple	0322 179 00003
9970	Jumper Wire/Staple	0322 179 00003
9971	Jumper Wire/Staple	0322 179 00003
9972	Jumper Wire/Staple	0322 179 00003
9974	Jumper Wire/Staple	0322 179 00003
9975	Jumper Wire/Staple	0322 179 00003
9976	Jumper Wire/Staple	0322 179 00003
9977	Jumper Wire/Staple	0322 179 00003
9981	Jumper Wire/Staple	0322 179 00003
9982	Jumper Wire/Staple	0322 179 00003
9983	Jumper Wire/Staple	0322 179 00003
9984	Jumper Wire/Staple	0322 179 00003
9987	Jumper Wire/Staple	0322 179 00003
9989	Jumper Wire/Staple	0322 179 00003
9990	Jumper Wire/Staple	0322 179 00003
9991	Jumper Wire/Staple	0322 179 00003
9992	Jumper Wire/Staple	0322 179 00003
9993	Jumper Wire/Staple	0322 179 00003
CBA	00EMF893A002 Main Chassis Board Asm.	00EM F89 3A002

S = Safety Part Be sure to use exact replacement part.

A10777 Interface Module Parts

	A10777 Interface Module Parts	
CBA	00A10777A001 Interface Module Asm. .	00A1 077 7A001
BR711	Zero ohm,.	4835 111 27056
BR712	Zero ohm,.	4835 111 27056
BR713	Zero ohm,.	4835 111 27056
BR714	Zero ohm,.	4835 111 27056
BRS15	Zero ohm,.	4835 111 27056
BRS16	Zero ohm,.	4835 111 27056
C702	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
C703	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
J0215	Connector, 2 Pin,.	2422 025 16343
J0237	Connector, 4 Pin	2422 025 12479
J0238	5 Pin Board Connector.	2422 025 16387
J0259	Connector, 3 Pin	2412 020 00725
J1215	Connector, 2 Pin,.	2422 025 16343
J1227	Connector, 4 Pin	2422 025 16385
J1238	Connector, 5 Pin	2422 025 12481
J1259	Connector, 3 Pin	2422 025 16383
J214	Connector, 3 Pin	2422 025 16382
J216	Connector, 4 Pin	2422 025 15847
J219	Connector, 5 Pin	2422 025 15848
J228	Connector, 3 Pin	2422 025 16407
J236	4 Pin Board Connector.	2422 025 16384
J775	Contact Pin.	2422 024 00626
J800	Connector, 32 Pin.	3135 010 03531
Q700	Transistor, NPN, BC847B.	4822 130 60511
Q701	Transistor, NPN, BC847B.	4822 130 60511
Q704	Transistor, PNP, BC857B.	5322 130 60508
Q705	Transistor, PNP, BC857B.	5322 130 60508
Q706	Transistor, NPN, BC847B.	4822 130 60511
Q707	Transistor, NPN, BC847B.	4822 130 60511
R700	10k, 5%, 1/10W, Metal Film	4835 111 37216
R701	47k, 5%, 1/10W, Metal Film	4835 111 37445
R702	75 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37276
R703	75 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37276
R711	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
R712	10k, 5%, 1/10W, Metal Film	4835 111 37216
R713	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
R714	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
R715	10k, 5%, 1/10W, Metal Film	4835 111 37216
R716	47k, 5%, 1/10W, Metal Film	4835 111 37445
R717	10k, 5%, 1/10W, Metal Film	4835 111 37216
R718	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
R719	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443
R720	Res, 1K, 2%, 0,25W	4822 051 10102
R721	75 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37276
R722	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231
Z700	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z701	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z702	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z703	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z704	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z705	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z706	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z707	Zener Diode, 8.2V, BZX284-C8	4835 130 37922

A10797 ITV Scan 3 Card Parts

	A10797 ITV Scan 3 Card Parts	
CBA	A10797 ITV Scan 3 Card Panel Asm.. .	00A1 079 7A001
1001	Crystal, Resonator, 20M140	2422 543 01196
1002	Socket, 2 Pin, SVHS.	2422 033 00365
1004	Socket, Cinch, 6 Pin	2422 026 04827
1005	Crystal Resonator, 14M31818, 20P . .	2422 543 00904
1010	Connector, 32 Pin.	3135 010 03541
1011	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488
1012	Connector, 5 Pin	2422 025 12708
1013	Connector, 14 Pin.	2422 025 12486
2000	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2001	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2002	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2003	Cap, 15p, 5%, 50V, Ceramic	3198 016 01590
2004	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2005	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2006	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2007	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2008	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2009	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2010	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2011	Cap, 270p, 5%, 50V, Ceramic.	3198 016 02710
2012	Cap, 15p, 5%, 50V, Ceramic	3198 016 01590
2013	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2014	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510
2015	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2016	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2017	Cap, 10u, 20%, 25V, Electrolytic . .	2020 004 90288
2018	Cap, 270p, 5%, 50V, Ceramic.	3198 016 02710
2019	Cap, 15p, 5%, 50V, Ceramic	3198 016 01590
2020	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2021	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2022	Cap, 150p, 5%, 50V, Ceramic.	3198 016 01510

SC3927C121 (continued)

2023	Cap, 270p, 5%, 50V, Ceramic.	3198 016 02710
2024	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2025	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2026	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2059	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2060	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2061	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2062	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2063	Cap, 4u7, +80/-20%, 10V, Ceramic . .	2020 552 96305
2064	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2065	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2066	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2067	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2068	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2070	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2071	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2072	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2073	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2074	Cap, 4u7, 20%, 35V, Electrolytic . .	3198 030 74780
2075	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2076	Cap, 4u7, 20%, 35V, Electrolytic . .	3198 030 74780
2077	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2078	Cap, 4u7, 20%, 35V, Electrolytic . .	3198 030 74780
2079	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2080	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2081	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2082	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2083	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2084	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2085	Cap, 4u7, 20%, 35V, Electrolytic . .	3198 030 74780
2086	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2087	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2088	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2089	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2090	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2091	Cap, 4u7, 20%, 35V, Electrolytic . .	3198 030 74780
2092	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2093	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2094	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2095	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2096	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2097	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2098	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2099	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2100	Cap, 47u, 20%, 25V, Electrolytic . .	3198 025 34790
2101	Cap, 1u, 20%, 35V, Electrolytic. . .	2020 004 90282
2102	Cap, 1u, 20%, 35V, Electrolytic. . .	2020 004 90282
2103	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2104	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2105	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2106	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2107	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2108	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2109	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2110	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2111	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2112	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2113	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 030 81080
2114	Cap, 470u, 20%, 25V, Electrolytic. .	2020 012 93457
2115	Cap, 10u, 20%, 10V, Electrolytic . .	3198 032 34130
2116	Cap, 10u, 20%, 10V, Electrolytic . .	3198 032 34130
2118	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2119	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2120	Cap, 680p, 10%, 50V, Ceramic	3198 017 06810
2121	Cap, 680p, 10%, 50V, Ceramic	3198 017 06810
2122	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2123	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2124	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2125	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2126	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2127	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2129	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2130	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2131	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2132	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2134	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2135	Cap, 100n, 10%, 16V, Ceramic	3198 017 01040
2136	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2137	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2139	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2140	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2141	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810
2142	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810
3001	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3002	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3003	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3004	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3005	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3006	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3007	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3008	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3009	Res, 13K, 5%, 1/8W, Metalized Glass.	2322 730 61133
3010	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3011	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3012	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3013	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3014	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3015	Res, 13K, 5%, 1/8W, Metalized Glass.	2322 730 61133
3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3017	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3018	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3019	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3020	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
3021	Res, 13K, 5%, 1/8W, Metalized Glass.	2322 730 61133
3022	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3023	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610
3024	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3025	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3026	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3027	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3028	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3029	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3030	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3031	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3033	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3049	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3052	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3053	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3056	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3057	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3058	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910
3059	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3060	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3061	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3062	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3063	Res, 820 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 58210
3064	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3065	RST NETW SM ARV24 4X 33R PM5 R . . .	2350 035 10339
3066	RST NETW SM ARV24 4X 33R PM5 R . . .	2350 035 10339
3073	RST NETW SM ARV24 4X 33R PM5 R . . .	2350 035 10339
3074	RST NETW SM ARV24 4X 33R PM5 R . . .	2350 035 10339
3082	RST NETW SM ARV24 4X 33R PM5 R . . .	2350 035 10339
3085	RST NETW SM ARV24 4X 33R PM5 R . . .	2350 035 10339
3089	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3090	RST NETW SM ARV24 4X 33R PM5 R . . .	2350 035 10339
3091	RST NETW SM ARV24 4X 33R PM5 R . . .	2350 035 10339
3097	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3099	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3100	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3101	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3102	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3103	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3104	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3105	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3106	Res, 270 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52710
3107	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3108	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3109	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3110	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3111	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3112	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3113	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3114	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3116	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3117	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3118	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3119	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3120	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3121	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3122	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3124	Res, 910 ohm, 1%, 1/8W, Metalized Gla ss.	2322 734 69101
3129	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3130	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3131	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3132	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3133	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040

S = Safety Part Be sure to use exact replacement part.

SC3927C121 (continued)

3135	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3136	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3137	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3138	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3139	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3140	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3141	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3142	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3143	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
5001	Coil, 820n	3198 018 38270
5002	Coil, 1u2.	3198 018 31280
5003	Coil, 1u2.	3198 018 31280
5004	Coil, 1u2.	3198 018 31280
5010	Coil, 820n	3198 018 38270
5012	Coil, 820n	3198 018 38270
5014	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
5015	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5016	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5017	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5018	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5019	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5020	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5021	Coil, 82u.	2422 535 95408
5023	Inductor, Fixed, 100MHz, 30 ohm. . .	3198 018 90060
5024	Coil, 1u8.	3198 018 31880
6001	Diode, Signal, BAV99	3198 010 10620
6002	Diode, Signal, BAV99	3198 010 10620
6003	Diode, Signal, BAV99	3198 010 10620
6004	Diode, Signal, BAV99	3198 010 10620
6005	Diode, Signal, BAV99	3198 010 10620
6006	Diode, Signal, BAV99	3198 010 10620
6009	Diode, Signal, BAV99	3198 010 10620
6010	Diode, Signal, BAV99	3198 010 10620
6011	Diode, Signal, BAS16WS	9322 031 99685
6012	Diode, Signal, BAS16WS	9322 031 99685
6013	Diode, Signal, BAS16WS	9322 031 99685
6014	Diode, Signal, BAS16WS	9322 031 99685
6015	Diode, Signal, BAS16WS	9322 031 99685
6016	Diode, Signal, BAS16WS	9322 031 99685
6017	Diode, Rect, MBRS140.	9322 070 26668
6018	Zener Diode, 6.8 volt.	9340 386 40115
7000	Transistor, FET Signal, BSN20. . . .	9340 125 00235
7001	IC, LM393D	9339 575 30668
7002	IC, LM393D	9339 575 30668
7003	Transistor, NPN, BC847B.	3198 010 42030
7004	Transistor, NPN, BC847B.	3198 010 42030
7005	Transistor, NPN, BC847B.	3198 010 42030
7006	Transistor, PNP, BC857B.	3198 010 42150
7007	Transistor, FET Signal, BSN20. . . .	9340 125 00235
7010	Transistor, FET Signal, BSN20. . . .	9340 125 00235
7011	IC, FS401AC.	9322 107 99671
7012	IC, HY57V161610DTC-10.	9322 161 58668
7013	Transistor, FET Signal, BSN20. . . .	9340 125 00235
7014	IC,.	3135 019 02151
7016	IC, 74HC4066D.	9337 144 20653
7018	IC, M24C04-WMN6.	9322 122 33668
7019	IC, TDA8440/C3	9338 180 70112
7020	Transistor, PNP, BC857B.	3198 010 42150
7021	Transistor, NPN, BC847B.	3198 010 42030
7022	IC, MC33269D-3.3	9322 106 88668
7023	IC, MC33269D-3.3	9322 106 88668
7024	IC, LM2596S-ADJ.	9322 130 86685
7028	Transistor, FET Signal, BSH103 . . .	9340 547 13215
7036	Transistor, FET Signal, BSH103 . . .	9340 547 13215
7037	Transistor, NPN, BC847B.	3198 010 42030

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	AC Power Cord.	3135 010 08051
AC02	Clip, Anode Lead	3135 014 04471
AC03	Cabinet Back	3135 014 07921
AC04	Cabinet Front.	3135 017 04121
AC05	Chassis Guide.	3139 124 31381
AC06	Control Buttons.	3139 124 27351
S AC07	Convergence and Purity Assembly. . .	2422 549 43385
S AC08	CRT A68AJB82X.	9301 787 60472
S AC09	Coil, Degaussing	2422 549 43967
AC10	Holder, Degaussing (4 Used).	3135 013 01641
AC11	Light Guide.	3139 124 26461
AC12	Nameplate.	3135 015 03571
AC13	DFU for SCAN 3 Card (Not Shown). . .	3135 015 21901
AC14	Power Button	3139 124 26753
REMOTE	Remote Transmitter	3135 017 02651
AC16	Speaker, 16R, 1W5 (2 Used)	2422 264 00343
S AC18	Yoke	3313 203 01242
AC19	Yoke Wedge (3 used).	3135 013 00311
AC21	Batteries for Remote Transmitter (3 P ACK)	3135 019 01211
AC24	Spring	3139 121 26231

S = Safety Part Be sure to use exact replacement part.

SC3932C121 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts	
S 0127	3.15 Amp Fuse, ...	3122 358 72141
0152	Cable, DIP, 6 Pin, 400mm	3104 301 09421
0153	4 Pin Cable.	3104 301 09431
0212	Connector, 2 Pin	2422 025 15396
0213	Connector, 3 Pin	2412 020 00725
0214	Connector, 3 Pin	2422 025 16382
0215	Connector, 2 Pin,.	2422 025 16343
0216	Connector, 4 Pin	2422 025 15847
0219	Connector, 5 Pin	2422 025 15848
0219	5 Pin Board Connector.	2422 025 16387
0220	4 Pin Board Connector.	2422 025 04852
0224	1 Pin Board Connector.	2422 034 20021
0228	1 Pin Board Connector.	2422 034 20021
0234	Connector, 4 Pin	2422 025 12479
0236	4 Pin Board Connector.	2422 025 16384
0237	Connector, 4 Pin	2422 025 12479
0238	Connector, 5 Pin	2422 025 12481
0238	Connector, 5 Pin	2422 025 15848
S 0243	Connector, 6 Pin	2422 025 04854
0244	4 Pin Board Connector.	2422 025 04852
S 0245	Connector, 6 Pin	2422 025 04854
S 0254	CRT Socket (9 Pin)	2422 500 80022
0259	Connector, 3 Pin	2422 025 16383
0262	Connector, 4 Pin	2422 025 16385
0267	Connector, 3 Pin	2412 020 00725
1000	Tuner.	2422 542 90051
1003	45 MHz SAW, Filter,.	2422 549 42433
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807
1208	Crystal Resonator.	4835 242 77276
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10869
S 1572	1 Amp, Radial Fuse,.	4835 253 97162
S 1573	2.5 Amp Fuse, Radial,.	2422 086 10422
S 1580	Relay, 12V	2422 132 07317
1600	Switch, Tactile.	2422 128 02742
1601	Switch, Tactile.	2422 128 02742
1602	Switch, Tactile.	2422 128 02742
1603	Switch, Tactile.	2422 128 02742
1606	Switch, Tactile.	2422 128 02742
1660	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488
1822	Crystal Resonator, 18MHz432, 12 Pin, HC49/U A	2422 543 00842
2001	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2002	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2003	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2004	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2011	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2101	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2102	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2103	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2104	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2111	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2112	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2115	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2201	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2205	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2208	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2209	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2211	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2212	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2213	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2214	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2215	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 16654
2220	Cap, 18p, 5%, 50V, Ceramic	3198 016 01890
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2222	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2226	Cap, 33u, 20%, 25V, Electrolytic . .	2020 021 90124
2227	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2247	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2248	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2249	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2330	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2340	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320
S 2343	Cap, 3n3, 10%, 2KV, Ceramic.	2020 558 90529
2345	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2401	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2402	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2403	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2405	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2407	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2409	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2420	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2426	Cap, 100n, 10%, 63V, Metalized Polyester.	2222 370 75104
2428	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2429	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2430	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2431	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2437	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2438	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2448	Cap, 220p, 10%, 500V, Ceramic. . . .	3198 019 42210
2450	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91139
2451	Cap, 15n, 10%, 50V, Polyester. . . .	2020 300 90575
2451	0.012uF., 5%, 50V, Polyester	3198 014 01230
2451	0.01uF., 10%, 50V, Polyester, only 27	3198 138 20941
2456	Cap, 47n, 10%, 250V, Metalized Polyester.	2222 368 90176
2457	Cap, 360n, 5%, 250V, Metalized Polypropylene.	2222 479 90019
2458	Cap, 2u2, 20%, 100V, Electrolytic. .	2020 021 91331
2459	Cap, 680p, 10%, 500V, Ceramic. . . .	3198 019 46810
2461	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2462	Cap, 47n, 10%, 250V, Metalized Polyester.	2222 368 90176
S 2463	Cap, 1n2, 10%, 2KV, Ceramic.	2020 558 90488
2464	Cap, 2u2, 5%, 160V, Polypropylene. .	2222 479 90042
S 2465	Cap, 12n, 5%, 1600V, Polypropylene .	2222 375 90156
2467	Cap, 8n2, 10%, 400V, Polyester . . .	2222 347 51822
2468	Cap, 18n, 10%, 400V, Polyester . . .	2222 347 90222
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050
2470	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2472	Cap, 2u2, 20%, 50V, Electrolytic . .	2020 021 90552
2473	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2481	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2482	Cap, 68n, 10%, 250V, Polyester . . .	2222 347 90234
2484	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2485	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2486	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2487	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2488	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2489	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2490	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2491	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810
2500	0.47uF., 250V, Polyester	4835 121 47569
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
S 2507	Cap, 1n5, 10%, 1KV, Ceramic.	2020 558 90443
2508	Cap, 470u, 20%, 200V, Electrolytic .	2020 024 90647
S 2511	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
S 2518	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2530	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 021 91147
2531	Cap, 1n, 2%, 50V, Polypropylene. . .	2020 310 90049
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2540	Cap, 100u, 20%, 25V, Electrolytic. .	2020 021 90547
S 2545	1500pF., 250VAC, Ceramic	4835 122 47621
S 2550	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2551	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91358
2561	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
S 2562	Cap, 220p, 10%, 1KV, Ceramic	2020 558 90424
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2571	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91353
2572	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2575	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2586	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2604	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2613	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2615	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2619	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2622	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2629	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040

S = Safety Part Be sure to use exact replacement part.

SC3932C121 (continued)

2631	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3251	270k, 5%, 1/10W, Metal Film.	3198 021 52740
2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3252	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
2679	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3253	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
2681	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210		3257	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3258	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3259	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
2850	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810		3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
2851	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046
2852	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
2853	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046
2854	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
2855	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380		3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046
2856	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380	S	3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
2858	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790	S	3341	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483
2859	Cap, 15p, 5%, 50V, Ceramic	3198 016 01590	S	3342	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483
2860	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090		3343	1.5k, 20%, 1/2W, Carbon Composition.	4835 110 47034
2861	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
2862	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	S	3345	VDR, DC, 1mA, 50V, MAX 115V	2322 593 13507
2863	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090		3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
2864	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3401	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2865	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3402	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2866	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3403	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2867	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3405	2.2k, 1%, 0.6W, Metal Film	4835 116 57676
2868	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780		3406	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2869	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3407	2.2k, 1%, 0.6W, Metal Film	4835 116 57676
2870	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2871	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090		3409	1.5 ohm, 5%, 1/3W, Metal Film. . . .	4835 116 57664
2874	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790		3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2875	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790		3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2877	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3420	470k, 5%, 1/10W, Metal Film.	4835 111 37407
2882	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2883	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090		3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2884	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840
2887	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810		3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606
2888	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3425	68k, 5%, 1/10W, Metal Film	4835 111 37273
2889	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3426	39k, 5%, 1/10W, Metal Film	4835 111 27051
2891	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390		3428	22k, 5%, 1/10W, Metal Film	4835 111 37441
2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3429	27k, 5%, 1/10W, Metal Film	4835 111 37442
2952	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3431	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
2954	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3432	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
2955	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3436	Res, 1K, 2%, 0,25W	4822 051 10102
2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3437	10k, 5%, 1/10W, Metal Film	4835 111 37216
2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3438	33k, 1/4W, Carbon Film	4835 110 57375
2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
2960	Cap, 2u2, 20%, 25V, Electrolytic . .	3198 026 32220		3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090		3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090	S	3452	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63229
2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090	S	3454	Res, 33K, 5%, 1 1/3W, Metal Film . .	2322 194 63333
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3013	Zero ohm,.	4835 111 27056	S	3462	Res, 6K8, 5%, 5W, Metal Film	2322 257 41682
3014	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052		3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3015	22k, 5%, 1/10W, Metal Film	4835 111 37441	S	3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810		3467	Res, 14K, 1%, 3/5W, Metal Film . . .	2322 156 21403
3100	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510		3467	Res, 15K, 1%, 3/5W, Metal Film . . .	2322 156 21503
3101	220k, 5%, 1/10W, Metal Film.	4835 111 37235		3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3103	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3470	Res, 220K, 5%, 1/4W, Carbon Film . .	2120 101 74224
3104	10k, 5%, 1/10W, Metal Film	4835 111 37216		3472	Res, 56K, 5%, 1/6W, Carbon Film. . .	3198 011 05630
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510		3473	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3108	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3474	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3109	10k, 5%, 1/10W, Metal Film	4835 111 37216		3475	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3122	220k, 5%, 1/10W, Metal Film.	4835 111 37235		3477	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3123	75 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37276		3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3125	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890		3479	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198 011 03310
3145	Res, 1K, 2%, 0,25W	4822 051 10102		3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703
3155	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259		3481	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903
3201	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253		3482	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903
3203	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443		3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820		3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3205	Res, 1K, 2%, 0,25W	4822 051 10102	S	3485	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
3206	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	S	3486	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3487	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3209	22k, 5%, 1/10W, Metal Film	4835 111 37441	S	3488	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
3212	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253	S	3490	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3213	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	S	3491	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3215	22k, 5%, 1/10W, Metal Film	4835 111 37441	S	3492	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3216	Zero ohm,.	4835 111 27056		3495	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
3217	Res, 1M5, 5%, 1/8W, Metalized Glass.	2322 730 61155		3496	10k, 5%, 1/10W, Metal Film	4835 111 37216
3218	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3497	10k, 5%, 1/10W, Metal Film	4835 111 37216
3219	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3220	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225
3225	100k, 5%, 1/10W, Metal Film.	4835 111 37434		3503	10ohm, 120VAC, Positive Temperature C	
3228	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432			oefficient	4835 116 47001
3231	Zero ohm,.	4835 111 27056	S	3505	Surge Protector.	2422 549 43073
3232	Zero ohm,.	4835 111 27056	S	3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3233	Zero ohm,.	4835 111 27056	S	3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333
3243	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	S	3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102
3246	82k, 5%, 1/10W, Metal Film	4835 111 37277		3512	15k, 5%, 1/10W, Metal Film	4835 111 37458
3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184
3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204
3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340	S	3515	2.5 ohm, 20%, 3.6W, Negative Temperat	
3250	Zero ohm,.	4835 111 27056			ure Coefficient.	2122 612 00023

S = Safety Part Be sure to use exact replacement part.

SC3932C121 (continued)

3516	Res, 1K, 2%, 0,25W	4822 051 10102	
3517	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
S 3518	Res, 0R22, 5%, 3W, Metal Film. . . .	2120 106 90548	
3520	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230	
3521	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443	
S 3525	33 ohm, 5%, 1/3W, Metal Film	4835 116 57665	
3528	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3529	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890	
3530	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320	
3532	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3534	15k, 5%, 1/10W, Metal Film	4835 111 37458	
3536	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830	
3537	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
S 3542	4.7 Megohm, 5%, 1/2W, Metal Film . .	4835 116 57009	
3570	15k, 5%, 1/10W, Metal Film	4835 111 37458	
3571	Res, 150K, 1%, 3/5W, Metal Film. . .	2322 156 21504	
3573	Res, 2K, 1%, 1/10W, Metalized Glass.	2120 108 92657	
3574	33k, 5%, 1/10W, Metal Film	4835 111 37248	
3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3577	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3578	Res, 1K, 2%, 0,25W	4822 051 10102	
3579	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451	
3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3592	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3594	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3595	68k, 5%, 1/6W, Carbon Film	4835 111 37205	
3596	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3597	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3598	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3599	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3607	8.2k, 5%, 1/8W, Inline Package . . .	4835 111 97046	
3608	2.2k, 5%, 1/8W, Inline Package . . .	4835 111 97049	
3609	2.2k, 5%, Resistor Network	2120 108 93868	
3611	Res, 1K, 2%, 0,25W	4822 051 10102	
3612	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3613	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3615	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3617	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3619	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3629	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259	
3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3631	27k, 5%, 1/10W, Metal Film	4835 111 37442	
S 3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63479	
3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210	
3634	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3635	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3636	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3637	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3653	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3654	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3655	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3662	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3663	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3664	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3665	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3666	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376	
3667	27k, 5%, 1/10W, Metal Film	4835 111 37442	
3672	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3673	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3674	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231	
3675	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510	
3676	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510	
3677	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510	
3680	680 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37271	
3681	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3682	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3683	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3684	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3687	220 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37371	
3841	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3842	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3843	47k, 5%, 1/10W, Metal Film	4835 111 37445	
3844	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259	
3845	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259	
3850	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810	
3951	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3953	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272	
3954	1.5k, 5%, 1/10W, Metal Film.	4835 111 37437	
3955	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
3956	1.5k, 5%, 1/10W, Metal Film.	4835 111 37437	
3957	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
4001	Zero ohm,.	4835 111 27056	
4002	Zero ohm,.	4835 111 27056	
4004	Zero ohm,.	4835 111 27056	
4007	Zero ohm,.	4835 111 27056	
4009	Zero ohm,.	4835 111 27056	
4010	Zero ohm,.	4835 111 27056	
4011	Zero ohm,.	4835 111 27056	
4012	Zero ohm,.	4835 111 27056	
4013	Zero ohm,.	4835 111 27056	
4020	Zero ohm,.	4835 111 27056	
4051	Zero ohm,.	4835 111 27056	
4100	Zero ohm,.	4835 111 27056	
4101	Zero ohm,.	4835 111 27056	
4102	Zero ohm,.	4835 111 27056	
4103	Zero ohm,.	4835 111 27056	
4143	Zero ohm,.	4835 111 27056	
4144	Zero ohm,.	4835 111 27056	
4203	Zero ohm,.	4835 111 27056	
4207	Zero ohm,.	4835 111 27056	
4212	Zero ohm,.	4835 111 27056	
4214	Zero ohm,.	4835 111 27056	
4215	Zero ohm,.	4835 111 27056	
4216	Zero ohm,.	4835 111 27056	
4410	Res, 1K, 2%, 0,25W	4822 051 10102	
4501	Zero ohm,.	4835 111 27056	
4602	Zero ohm,.	4835 111 27056	
4650	Zero ohm,.	4835 111 27056	
4651	Zero ohm,.	4835 111 27056	
4652	Zero ohm,.	4835 111 27056	
4654	Zero ohm,.	4835 111 27056	
4655	Zero ohm,.	4835 111 27056	
4684	Zero ohm,.	4835 111 27056	
4687	Zero ohm,.	4835 111 27056	
4831	Zero ohm,.	4835 111 27056	
4832	Zero ohm,.	4835 111 27056	
4833	Zero ohm,.	4835 111 27056	
4902	Zero ohm,.	4835 111 27056	
4903	Zero ohm,.	4835 111 27056	
4904	Zero ohm,.	4835 111 27056	
4905	Zero ohm,.	4835 111 27056	
4909	Zero ohm,.	4835 111 27056	
4911	Zero ohm,.	4835 111 27056	
4912	Zero ohm,.	4835 111 27056	
4914	Zero ohm,.	4835 111 27056	
4957	Zero ohm,.	4835 111 27056	
4999	Zero ohm,.	4835 111 27056	
5000	Coil, 5u6.	3198 018 25680	
5004	Coil, 820n	2422 535 97314	
5101	Coil, 5u6.	3198 018 15680	
5201	Coil, 22u.	3198 018 22290	
5202	Coil, 6u8.	3198 018 16880	
5342	22uH., 10%, Coil, Peaking.	4835 157 67069	
S 5445	Transformer, L.O.T., models ending in C101, C121, and C125	2422 531 02327	
S 5445	Transformer, L.O.T., models ending in C221 and C225.	3128 138 20941	
5451	Coil, 27u.	2422 535 96614	
5457	Coil	3128 138 53181	
5461	Transformer.	3128 138 33811	
5463	Coil, Choke.	3128 138 37021	
5471	Coil, 1m	2422 535 94652	
5480	Coil, 27u.	2422 535 97334	
5480	Coil, 39u.	2422 535 97336	
5480	Coil, 47u.	2422 535 97337	
5480	33uH., Peaking Coil, only in 25. . .	4835 157 58205	
S 5500	Filter, Mains, 5mH, 2A	2422 549 43432	
5516	100uH., Coil	4835 157 67078	
5518	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5521	Coil, 2u2.	3198 018 12280	
5540	Coil, 4u7.	3198 018 14780	
S 5545	Transfomer,.	2422 531 02314	
5551	27uH., 5%, Coil, Peaking	4835 157 67052	
5552	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5572	100uH., Coil	4835 157 67078	
5573	100uH., Coil	4835 157 67078	
5575	100uH., Coil	4835 157 67078	
5576	100uH., Coil	4835 157 67078	
5577	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5600	Coil, 8u2.	3198 018 18280	
5601	Coil, 8u2.	3198 018 18280	
5620	Coil, 6u8.	3198 018 16880	
5821	Coil, 100u	3198 018 21010	
5831	Coil, 12u.	3198 018 21290	
5832	Coil, 12u.	3198 018 21290	
5833	Coil, 12u.	3198 018 11290	
6008	Zener, 33 Volt BZX79-C33	4835 130 37904	
6113	Zener Diode, 6.8 volt.	9340 386 40115	
6125	Zener Diode, 6.8 volt.	9340 386 40115	
6211	Diode, 1N4148.	4835 130 37048	
6212	Diode, 1N4148.	4835 130 37048	
6213	Diode, 1N4148.	4835 130 37048	
6331	Diode.	4835 130 37294	
6333	Diode.	4835 130 37294	

S = Safety Part Be sure to use exact replacement part.

SC3932C121 (continued)

6335	Diode.	4835 130 37294
6401	Diode.	4835 130 37094
6402	Zener, 18 Volt, BZX79-C18.	4835 130 37908
6449	Diode, 1N4148.	4835 130 37048
6450	Diode, 1N4148.	4835 130 37048
6460	Diode, Rect, BY228/20	9336 215 80112
6461	Diode, Rect, BYW95C-20.	9336 215 90112
6463	Diode, 1N4148.	4835 130 37048
6465	Diode, BYD33J.	4835 130 37094
6466	Diode, BYD33J.	4835 130 37094
6470	Zener Diode, 9.1 volt.	9331 177 80133
6472	Diode, 1N4148.	4835 130 37048
6480	Diode, Zener	4835 130 37947
6481	Diode, 1N4148.	4835 130 37048
6485	Diode, BYD33J.	4835 130 37094
6486	Diode, EGP20DL-530	4835 130 37919
6487	Diode.	4835 130 37094
6488	Diode, Rect, BYV27-200.	9322 126 72673
6490	Diode, Rect, BYV27-200.	9322 126 72673
6505	Diode, Bridge Rect, GBU6JL-7002	9322 138 08667
6507	Diode, BYD33J.	4835 130 37094
6508	Diode, BYD33J.	4835 130 37094
6510	Zener Diode, 20 volt	9331 178 60133
6511	Diode, BYV95C.	4835 130 37052
6512	Diode, Rect, BY228/20	4822 130 41275
6513	Diode, Rect, BY228/20	4822 130 41275
6514	Zener, 18 Volt, BZX79-C18.	4835 130 37908
6540	Diode.	4835 130 37294
6550	Diode, Rect, BY229X-800	9340 380 30127
6560	Diode, EGP20DL-530	4835 130 37919
6570	Diode, EGP20DL-530	4835 130 37919
6582	Diode, EGP20DL-530	4835 130 37919
6584	Diode, 1N4148.	4835 130 37048
6585	Diode, 1N4148.	4835 130 37048
6590	Diode, EGP20DL-530	4835 130 37919
6591	Diode, BAS216.	4835 130 37905
6601	Diode, Zener	4835 130 37684
6602	Diode, 1N4148.	4835 130 37048
6603	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
6604	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
6605	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
6606	Zener, 4.7 Volt, BZX79-C4V7.	4835 130 37005
6607	Zener, 6.8 Volt, BZX79-C6V8.	4835 130 37945
6690	LED, LTL-307P.	4835 130 97096
6831	Diode, BAS216.	4835 130 37905
6951	Diode, BAS216.	4835 130 37905
6961	Diode, BAS216.	4835 130 37905
7134	Transistor, BC547B	4835 130 47055
7250	IC,.	9352 620 27112
7251	IC, LM317T	9337 220 80682
7254	Transistor, NPN, BC847B.	4822 130 60511
7256	Transistor, NPN, BC847B.	4822 130 60511
7258	Transistor, NPN, BC847B.	4822 130 60511
7263	Transistor, PNP, BC857B.	5322 130 60508
7266	Transistor, NPN, BC847B.	4822 130 60511
7330	IC,.	9352 184 10112
7401	IC,.	4835 209 88531
7460	Transistor, NPN, BU1508DX.	9340 170 50127
7461	Transistor, NPN, BF819	9335 354 50127
7470	F.E.T., Power, STP16NE06FP	9322 123 96687
7480	IC,.	9322 028 93682
7481	Transistor, BC557B	4835 130 47409
7482	Transistor, PNP, BC857B.	5322 130 60508
7518	STH8NA60FI SMPS FET	9322 068 92687
7518	STH10NC60FI SMPS FET.	9322 155 66687
7520	IC, MC44603A	4835 209 88537
7570	IC,.	9337 711 00676
S 7581	Coupler, TCDT1101G	9338 431 30682
7590	Transistor, NPN, BC847B.	4822 130 60511
7591	Transistor, NPN, BC847B.	4822 130 60511
7592	Transistor, NPN, BC847B.	4822 130 60511
7600	IC, SAA5565-PS/M3/0195 L9 v3.2 (Commercial Models - Pro Plus Models).	9352 673 97112
7601	IC, ST24W16B6, commercial models only	9322 095 35682
7603	Transistor, NPN, BC337	9331 796 00126
7604	Transistor, NPN, BC847B.	4822 130 60511
7605	Transistor, NPN, BC847B.	4822 130 60511
7608	Transistor, NPN, BC847B.	4822 130 60511
7609	Transistor, NPN, BC847B.	4822 130 60511
7680	IR Receiver.	9322 127 53667
7833	IC,.	9322 136 54682
7950	IC,.	4835 209 88543
CBA	00EMF895A002 Main Chassis Board Asm.	00EM F89 5A002

A10757 L9 Audio Jack Panel Parts

	A10757 L9 Audio Jack Panel Parts	
CBA	00A10757A001 L9 Audio Jack Panel Asm.	00A1 075 7A001
C1	Cap, 2u2, 20%, 50V, Electrolytic	3198 028 52280
C2	Cap, 2u2, 20%, 50V, Electrolytic	3198 028 52280
J0214	Connector, 3 Pin	2422 025 16601
J0234	4 Pin Board Connector.	2422 025 15851
J100	Socket, Click, 4 Pin	2422 015 18711
J1214	Connector, 3 Pin	2422 025 16601
J1234	4 Pin Board Connector.	2422 025 12489
JP11	Socket, Cinch, 1 Pin	2422 026 04912
JP12	Socket, Cinch, 1 Pin	2422 026 04374
SW1	Switch	4835 277 27061

A10758 Provideo Card Parts

	A10758 Provideo Card Parts	
CBA	00A10758A001 Provideo Card Asm	00A1 075 8A001
C1	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
C11	Cap, 10n, +80/-20%, 50V, Ceramic	3198 019 21030
C12	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
C13	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010
C2	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
C3	Cap, 470n, 20%, 50V, Electrolytic.	3198 025 54770
C4	Cap, 470n, 20%, 50V, Electrolytic.	3198 025 54770
C5	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080
C6	Cap, 470n, 20%, 50V, Electrolytic.	3198 025 54770
C7	Cap, 470n, 20%, 50V, Electrolytic.	3198 025 54770
IC1	IC,.	4835 209 88606
JC1	10 Pin Board Connector	2422 025 16203
JC2	Connector, 32 Pin.	3135 010 03541
JC3	6 Pin Board Connector.	2422 025 15797
JU1	Jumper	2422 025 16391
Q1	Transistor, BC547B	4835 130 47055
Q2	Transistor, BC557B	4835 130 47409
Q3	Transistor, BC547B	4835 130 47055
Q4	Transistor, BC547B	4835 130 47055
R10	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
R11	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
R12	Res, 1 ohm, 5%, 1/3W, Metal Film	2322 205 33108
R13	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
R14	Res, 47K, 5%, 1/6W, Carbon Film.	3198 011 04730
R15	Res, 47K, 5%, 1/6W, Carbon Film.	3198 011 04730
R17	Res, 75 ohm, 5%, 1/6W, Carbon Film	3198 011 07590
R4	2.2k, 5%, 1/3W, Metal Film	4835 116 57784
R6	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
R7	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
R8	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
R9	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
S SJ1	Mini Connector	4835 265 97421
Z1	Zener Diode, 8.2V, BZX79-C8V2.	4835 130 37503
Z2	Zener Diode, 8.2V, BZX79-C8V2.	4835 130 37503
Z3	Zener Diode, 8.2V, BZX79-C8V2.	4835 130 37503
Z4	Zener Diode, 5.6V, BZX79-C5V6.	4835 130 37007

A10759 Provideo Jack Panel Parts

	A10759 Provideo Jack Panel Parts	
CBA	00A10759A001 Provideo Jack Panel Asm.	00A1 075 9A001
C1	Cap, 220n, 10%, 50V, Polyester	3198 014 02240
C2	Cap, 220n, 10%, 50V, Polyester	3198 014 02240
C3	Cap, 220n, 10%, 50V, Polyester	3198 014 02240
JP1	10 Pin Board Connector	2422 025 16204
JP10	Connector, Video Monitor Out	4835 265 97413
JP2	Connector, RCA Jack, White	2422 026 04983
JP3	Connector, RCA Jack, Red	2422 026 04982
JP4	Connector, RCA Jack, Red	2422 026 04982
JP5	Connector, RCA Jack, White	2422 026 04983
JP6	Connector, CVBS In	4835 265 97413
JP7	Connector, CVBS Out.	4835 265 97413
JP8	Connector, Y/C In.	4835 265 97411
JP9	Connector, Y/C Out	4835 265 97412
R1	Res, 75 ohm, 5%, 1/6W, Carbon Film	3198 011 07590
R2	Res, 75 ohm, 5%, 1/6W, Carbon Film	3198 011 07590
R3	Res, 75 ohm, 5%, 1/6W, Carbon Film	3198 011 07590

A10791 Comb Filter Panel Parts

	A10791 Comb Filter Panel Parts	
CBA	00A10791A001 Comb Filter Panel Asm..	00A1 079 1A001
1000	8 Pin board Connector.	2422 025 12483
1001	Connector, 4 Pin	2422 025 12479
1102	Crystal, Resonator, 32KHz768	2422 543 00056
1254	9 Pin Board Connector.	2422 025 16265
2000	Cap, 100u, 20%, 10V, Electrolytic.	3198 025 11010
2001	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2002	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2003	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2004	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2011	Cap, 100n, 10%, 50V, Polyester	3198 014 01040
2012	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
2013	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2014	Cap, 220n, +80/-20%, 25V, Ceramic.	3198 023 22240
2020	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2021	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2023	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2025	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040
2111	Cap, 47u, 20%, 25V, Electrolytic	3198 025 34790
2113	Battery, 3 Volts	2422 526 01206
3012	220 ohm, 5%, 1/10W, Metal Film	4835 111 37371
3013	220 ohm, 5%, 1/10W, Metal Film	4835 111 37371
3020	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
3026	2.2 Megohm, 5%, 1/10W, Metal Film.	4835 111 27047

S = Safety Part Be sure to use exact replacement part.

SC3932C121 (continued)

3027	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
3028	Zero ohm,.	4835 111 27056
3110	10k, 5%, 1/10W, Metal Film	4835 111 37216
3111	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3116	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
3117	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
3118	10k, 5%, 1/10W, Metal Film	4835 111 37216
3119	10k, 5%, 1/10W, Metal Film	4835 111 37216
5000	Coil, 10u.	3198 018 21090
5012	Coil, 15u.	2422 535 94296
5104	Coil, 6u8.	3198 018 26880
6110	Diode, BAS216.	4835 130 37905
7000	IC, SAA4961/V3/S1.	9352 609 51112
7012	Transistor, NPN, BC847B.	4822 130 60511
7110	IC,.	4835 209 17438
7111	IC,.	5322 209 61482
9001	Jumper Wire.	0322 179 00148

A10808 Pro Plus Interface Parts

	A10808 Pro Plus Interface Parts	
CBA	00A10808A001 Pro Plus Interface Asm.	00A1 080 8A001
BR711	Zero ohm,.	4835 111 27056
BR712	Zero ohm,.	4835 111 27056
BR713	Zero ohm,.	4835 111 27056
BR714	Zero ohm,.	4835 111 27056
BRS15	Zero ohm,.	4835 111 27056
BRS16	Zero ohm,.	4835 111 27056
C702	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
C703	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
J0237	Connector, 4 Pin	2422 025 12479
J0238	Connector, 5 Pin	2422 025 06353
J1215	Connector, 2 Pin,.	2422 025 16343
J1227	Connector, 4 Pin	2422 025 16385
J1237	Connector, 4 Pin	2422 025 12479
J1259	Connector, 3 Pin	2422 025 16383
J214	Connector, 3 Pin	2422 025 16382
J216	Connector, 4 Pin	2422 025 15847
J219	Connector, 5 Pin	2422 025 15848
J228	Connector, 3 Pin	2422 025 16407
J236	4 Pin Board Connector.	2422 025 12489
J775	Contact Pin.	2422 024 00626
J800	Connector, 32 Pin.	3135 010 03531
Q700	Transistor, NPN, BC847B.	4822 130 60511
Q701	Transistor, NPN, BC847B.	4822 130 60511
Q704	Transistor, PNP, BC857B.	5322 130 60508
Q705	Transistor, PNP, BC857B.	5322 130 60508
Q706	Transistor, NPN, BC847B.	4822 130 60511
Q707	Transistor, NPN, BC847B.	4822 130 60511
R700	10k, 5%, 1/10W, Metal Film	4835 111 37216
R701	47k, 5%, 1/10W, Metal Film	4835 111 37445
R702	75 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37276
R703	75 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37276
R711	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
R712	10k, 5%, 1/10W, Metal Film	4835 111 37216
R713	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
R714	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
R715	10k, 5%, 1/10W, Metal Film	4835 111 37216
R716	47k, 5%, 1/10W, Metal Film	4835 111 37445
R717	10k, 5%, 1/10W, Metal Film	4835 111 37216
R718	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
R719	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443
R720	Res, 1K, 2%, 0,25W	4822 051 10102
R721	75 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37276
R722	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231
Z700	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z701	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z702	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z703	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z704	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z705	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z706	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z707	Zener Diode, 8.2V, BZX284-C8	4835 130 37922

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	AC Power Cord.	3135 010 04321
AC02	Clip, Anode Lead	3135 014 04471
AC03	Cabinet, Back (ITV).	3135 014 06531
AC04	Cabinet Front.	3135 017 03901
AC05	L9L CHASSIS TRAY-32V	3139 124 31323
AC06	Control Buttons.	3139 124 26472
S AC08	CRT A80ECK272X56	9301 795 00428
S AC09	Coil, Degaussing	2422 549 43977
AC10	Holder, Degaussing (4 Used).	3135 013 01661
AC11	Light Guide.	3139 124 26461
AC12	Nameplate.	3135 015 03571
AC12	Nameplate (Canada)	3135 015 04391
AC13	Owner's Manual	3135 015 20911
AC14	Power Button	3139 124 26444
REMOTE	Remote Transmitter	3135 017 02651
AC16	Speaker, 5W, 16 ohm (2 Used)	2422 264 00333
AC21	Batteries for Remote Transmitter (3 P ACK)	3135 019 01211
AC24	Spring	3139 121 26231
AC32	Cover, Scan III (Not Shown).	3135 014 10551
AC33	Jack Panel, Plastic.	3135 014 11021

S = Safety Part Be sure to use exact replacement part.

TC9225C121 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts		
S 0127	3.15 Amp Fuse,	3122 358 72141	
0129	4 Pin Cable.	3104 301 09431	
0152	Cable, DIP, 6 Pin, 400mm	3104 301 09421	
0153	4 Pin Cable.	3104 301 09431	
0212	Connector, 2 Pin	2422 025 15396	
0214	Connector, 3 Pin	2422 025 16382	
0215	Connector, 2 Pin,	2422 025 16343	
0216	Connector, 4 Pin	2422 025 15847	
0219	Connector, 5 Pin	2422 025 15848	
0220	4 Pin Board Connector.	2422 025 04852	
0224	1 Pin Board Connector.	2422 034 20021	
0227	Connector, 4 Pin	2422 025 16385	
0228	1 Pin Board Connector.	2422 034 20021	
0234	Connector, 4 Pin	2422 025 15847	
0236	4 Pin Board Connector.	2422 025 16384	
0237	Connector, 4 Pin	2422 025 12479	
0238	5 Pin Board Connector.	2422 025 16387	
S 0243	Connector, 6 Pin	2422 025 04854	
0244	4 Pin Board Connector.	2422 025 04852	
S 0245	Connector, 6 Pin	2422 025 04854	
S 0254	CRT Socket (9 Pin)	2422 500 80022	
0259	Connector, 3 Pin	2422 025 16383	
0262	Connector, 4 Pin	2422 025 16385	
0267	Connector, 3 Pin	2412 020 00725	
1000	Tuner.	2422 542 90051	
1001	Filter	2422 549 42501	
1003	45 MHz SAW, Filter,	2422 549 42433	
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807	
1208	Crystal Resonator, 3.58MHz	2422 543 00832	
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10869	
S 1571	1 Amp, Radial Fuse,	4835 253 97162	
S 1572	1 Amp, Radial Fuse,	4835 253 97162	
S 1580	Relay, 12V	2422 132 07317	
1600	Switch, Tactile.	2422 128 02742	
1601	Switch, Tactile.	2422 128 02742	
1602	Switch, Tactile.	2422 128 02742	
1603	Switch, Tactile.	2422 128 02742	
1606	Switch, Tactile.	2422 128 02742	
1660	Crystal, Resonator, 12MHz, 20 Pin.	2422 543 00488	
1821	Ceramic Resonator.	4835 122 97102	
2001	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2003	Cap, 100u, 20%, 50V, Electrolytic.	3198 025 51010	
2004	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2006	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290	
2011	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090	
2013	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040	
2102	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2103	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2104	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2201	Cap, 220n, 10%, 50V, Polyester	3198 014 02240	
2202	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2203	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090	
2204	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2205	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040	
2206	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040	
2207	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010	
2208	Cap, 100u, 20%, 25V, Electrolytic.	3198 025 31010	
2209	Cap, 470n, +80/-20%, 16V, Ceramic.	3198 017 24740	
2211	Cap, 470n, +80/-20%, 16V, Ceramic.	3198 017 24740	
2212	Cap, 470n, +80/-20%, 16V, Ceramic.	3198 017 24740	
2213	Cap, 470n, +80/-20%, 16V, Ceramic.	3198 017 24740	
2214	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2215	Cap, 2u2, 20%, 50V, Electrolytic	3198 025 52280	
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 16654	
2220	Cap, 18p, 5%, 50V, Ceramic	3198 016 01890	
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2222	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040	
2226	Cap, 33u, 20%, 25V, Electrolytic	2020 021 90124	
2227	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080	
2247	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2248	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2249	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2330	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177	
2340	Cap, 10u, 20%, 250V, Electrolytic.	2020 012 93495	
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320	
S 2343	Cap, 3n3, 10%, 2KV, Ceramic.	2020 558 90529	
2345	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020	
2401	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2402	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2404	Cap, 220n, 10%, 50V, Polyester	3198 014 02240	
2405	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2407	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2409	Cap, 220n, 10%, 50V, Polyester	3198 014 02240	
2420	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2426	Cap, 100n, 10%, 63V, Metalized Polyester	2222 370 75104	
2428	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220	
2429	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080	
2430	Cap, 10u, 20%, 50V, Electrolytic	3198 025 51090	
2431	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040	
2437	Cap, 220n, +80/-20%, 25V, Ceramic.	3198 023 22240	
2438	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050	
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2448	Cap, 220p, 10%, 500V, Ceramic.	3198 019 42210	
2450	Cap, 47u, 20%, 160v, Electrolytic.	2020 021 91139	
2451	Cap, 15n, 10%, 50V, Polyester.	2020 300 90575	
2451	0.01uF., 10%, 50V, Polyester, only 27	3198 138 20941	
2456	Cap, 47n, 10%, 250V, Metalized Polyester.	2222 368 90176	
2457	Cap, 390n, 5%, 250V, Metalized Polypropylene.	2222 479 90021	
2458	Cap, 10u, 20%, 100V, Electrolytic.	2020 021 90813	
2459	Cap, 680p, 10%, 500V, Ceramic.	3198 019 46810	
2461	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020	
2462	Cap, 47n, 10%, 250V, Metalized Polyester.	2222 368 90176	
2463	470pF., 10%, 2KV, Ceramic.	4835 122 47638	
S 2465	Cap, 10n, 5%, 1600V, Polypropylene	2222 375 90154	
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050	
2481	Cap, 470n, 10%, 50V, Polyester	3198 014 04740	
2482	Cap, 68n, 10%, 250V, Polyester	2222 347 90234	
2484	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2485	Cap, 4u7, 20%, 250V, Electrolytic.	2020 012 93282	
2486	Cap, 470u, 20%, 16V, Electrolytic.	3198 025 24710	
2487	Cap, 100u, 20%, 50V, Electrolytic.	3198 025 51010	
2488	Cap, 470u, 20%, 16V, Electrolytic.	3198 025 24710	
2489	Cap, 470u, 20%, 16V, Electrolytic.	3198 025 24710	
2490	Cap, 470p, 10%, 500V, Ceramic.	3198 019 44710	
2491	Cap, 470p, 10%, 500V, Ceramic.	3198 019 44710	
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810	
2500	0.47uF., 250V, Polyester	4835 121 47569	
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
S 2507	Cap, 1n5, 10%, 1KV, Ceramic.	2020 558 90443	
2508	Cap, 470u, 20%, 200V, Electrolytic	2020 024 90626	
S 2511	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020	
S 2518	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290	
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320	
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320	
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2529	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040	
2530	Cap, 1u, 20%, 50V, Electrolytic.	2020 021 91147	
2531	Cap, 1n, 2%, 50V, Polypropylene.	2020 310 90049	
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220	
2540	Cap, 100u, 20%, 25V, Electrolytic.	2020 021 90547	
S 2545	1500pF., 250VAC, Ceramic	4835 122 47622	
S 2550	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2551	Cap, 47u, 20%, 160v, Electrolytic.	2020 021 91358	
2561	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020	
S 2562	Cap, 220p, 10%, 1KV, Ceramic	2020 558 90424	
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020	
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020	
2572	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330	
2575	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040	
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820	
2577	Cap, 1000u, 20%, 16V, Electrolytic	3198 026 21020	
2586	Cap, 220u, 20%, 25V, Electrolytic.	3198 025 32210	
2604	Cap, 22u, 20%, 50V, Electrolytic	3198 025 52290	
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2613	Cap, 100n, 10%, 50V, Polyester	3198 014 01040	
2615	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040	
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2619	Cap, 1u, 20%, 50V, Electrolytic.	3198 025 51080	
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2622	Cap, 220u, 20%, 25V, Electrolytic.	3198 025 32210	
2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890	
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2629	Cap, 22n, +80/-20%, 50V, Ceramic	3198 019 22230	
2630	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040	
2631	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050	
2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2679	Cap, 100n, +80/-20%, 25V, Ceramic.	3198 023 21040	
2681	Cap, 220u, 20%, 25V, Electrolytic.	3198 025 32210	
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2821	Cap, 2u2, 20%, 50V, Electrolytic	3198 028 52280	
2823	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	

S = Safety Part Be sure to use exact replacement part.

TC9225C121 (continued)

2825	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080		3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046
2826	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090	S	3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
2827	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	S	3341	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483
2828	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	S	3342	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483
2829	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3343	1.5k, 20%, 1/2W, Carbon Composition.	4835 110 47034
2830	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280		3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
2831	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	S	3345	VDR, DC, 1mA, 50V, MAX 115V	2322 593 13507
2832	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280		3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
2833	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280		3401	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2834	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780		3402	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2835	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3403	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2836	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3405	Res, 1K8, 1%, 3/5W, Metal Film . . .	2322 156 21802
2837	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740		3406	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2838	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3407	Res, 1K8, 1%, 3/5W, Metal Film . . .	2322 156 21802
2839	Cap, 1u, 5%, 50V, Metalized Polyester	2020 308 90124		3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2840	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3409	1.5 ohm, 5%, 1/3W, Metal Film. . . .	4835 116 57664
2841	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2842	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3420	470k, 5%, 1/10W, Metal Film.	4835 111 37407
2844	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2845	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2913	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280		3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840
2914	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330		3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606
2915	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3425	150k, 5%, 1/10W, Metal Film.	4835 111 27045
2916	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648		3426	39k, 5%, 1/10W, Metal Film	4835 111 27051
2917	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3428	22k, 5%, 1/10W, Metal Film	4835 111 37441
2918	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330		3429	27k, 5%, 1/10W, Metal Film	4835 111 37442
2919	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3431	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
2920	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648		3432	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
2921	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3436	Res, 1K, 2%, 0,25W	4822 051 10102
2931	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280		3437	10k, 5%, 1/10W, Metal Film	4835 111 37216
2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3438	33k, 1/4W, Carbon Film	4835 110 57375
2952	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
2954	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3447	10k, 5%, 1/10W, Metal Film	4835 111 37216
2955	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	S	3452	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63229
2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	S	3453	Res, 4R7, 5%, 5W, Wire Wound	2322 251 41478
2960	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	S	3454	Res, 33K, 5%, 1 1/3W, Metal Film . .	2322 194 63333
2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090		3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090		3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090	S	3462	Res, 6K8, 5%, 5W, Metal Film	2322 257 41682
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3464	Res, 1K, 2%, 0,25W	4822 051 10102
3010	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610	S	3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
3013	Zero ohm,.	4835 111 27056		3466	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903
3014	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052		3467	Res, 14K, 1%, 3/5W, Metal Film . . .	2322 156 21403
3015	22k, 5%, 1/10W, Metal Film	4835 111 37441		3467	Res, 15K, 1%, 3/5W, Metal Film . . .	2322 156 21503
3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810		3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3021	Res, 1K, 2%, 0,25W	4822 051 10102		3469	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
3103	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3104	10k, 5%, 1/10W, Metal Film	4835 111 37216		3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703
3108	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3481	Res, 100K, 1%, 3/5W, Metal Film. . .	2322 156 21004
3109	10k, 5%, 1/10W, Metal Film	4835 111 37216		3482	Res, 32K4, 1%, 3/5W, Metal Film. . .	2322 156 23243
3123	75 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37276		3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3200	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3201	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253	S	3485	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
3203	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443	S	3486	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	S	3487	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3205	Res, 1K, 2%, 0,25W	4822 051 10102	S	3488	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
3206	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	S	3490	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3491	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3209	22k, 5%, 1/10W, Metal Film	4835 111 37441	S	3492	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3212	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253		3495	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272
3213	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3496	10k, 5%, 1/10W, Metal Film	4835 111 37216
3215	22k, 5%, 1/10W, Metal Film	4835 111 37441		3497	10k, 5%, 1/10W, Metal Film	4835 111 37216
3216	Zero ohm,.	4835 111 27056		3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3218	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225
3219	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3503	10ohm, 120VAC, Positive Temperature C	
3220	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432			oefficient	4835 116 47001
3225	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S	3505	Surge Protector.	2422 549 43073
3228	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3231	Zero ohm,.	4835 111 27056	S	3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333
3232	Zero ohm,.	4835 111 27056	S	3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102
3233	Zero ohm,.	4835 111 27056		3512	15k, 5%, 1/10W, Metal Film	4835 111 37458
3243	1.2k, 5%, 1/10W, Metal Film.	4835 111 27042		3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184
3246	82k, 5%, 1/10W, Metal Film	4835 111 37277		3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204
3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3515	2.5 ohm, 20%, 3.6W, Negative Temperat	
3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010			ure Coefficient.	2122 612 00023
3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340		3516	Res, 1K, 2%, 0,25W	4822 051 10102
3250	Zero ohm,.	4835 111 27056		3517	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3251	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S	3518	Res, 0R22, 5%, 3W, Metal Film. . . .	2120 106 90548
3252	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		3520	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3253	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		3521	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443
3257	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3525	33 ohm, 5%, 1/3W, Metal Film	4835 116 57665
3258	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3528	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3259	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3529	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3530	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3532	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3534	15k, 5%, 1/10W, Metal Film	4835 111 37458
3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3536	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3537	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030

S = Safety Part Be sure to use exact replacement part.

TC9225C121 (continued)

S 3542	4.7 Megohm, 5%, 1/2W, Metal Film . .	4835 116 57009	
3570	15k, 5%, 1/10W, Metal Film	4835 111 37458	
3571	Res, 150K, 1%, 3/5W, Metal Film. . .	2322 156 21504	
3573	Res, 2K, 1%, 1/10W, Metalized Glass.	2120 108 92657	
3574	33k, 5%, 1/10W, Metal Film	4835 111 37248	
3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3577	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3578	Res, 1K, 2%, 0,25W	4822 051 10102	
3579	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451	
3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3592	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3594	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3595	68k, 5%, 1/6W, Carbon Film	4835 111 37205	
3596	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3597	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3598	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3599	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3607	8.2k, 5%, 1/8W, Inline Package . . .	4835 111 97046	
3608	2.2k, 5%, 1/8W, Inline Package . . .	4835 111 97049	
3609	2.2k, 5%, Resistor Network	2120 108 93868	
3611	Res, 1K, 2%, 0,25W	4822 051 10102	
3612	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3613	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3615	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3617	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3619	820 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37466	
3629	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259	
3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3631	27k, 5%, 1/10W, Metal Film	4835 111 37442	
S 3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63479	
3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210	
3634	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3635	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3636	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3637	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3649	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3650	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3653	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3654	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3655	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3662	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3663	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3664	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3665	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3666	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376	
3667	27k, 5%, 1/10W, Metal Film	4835 111 37442	
3672	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3673	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3674	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259	
3675	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3676	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3677	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3680	680 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37271	
3681	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3682	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3683	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3684	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3685	220 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37371	
3821	15k, 5%, 1/10W, Metal Film	4835 111 37458	
3822	1.2k, 5%, 1/10W, Metal Film.	4835 111 27042	
3823	100k, 5%, 1/10W, Metal Film.	4835 111 37434	
3824	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3825	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3826	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3827	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3828	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3829	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272	
3830	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272	
3831	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198 011 03310	
3832	47 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37262	
3908	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3909	Res, 1K, 2%, 0,25W	4822 051 10102	
3910	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376	
3911	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230	
3912	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3913	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3914	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	
3915	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231	
3916	220 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37371	
3917	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3918	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3919	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376	
3920	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231	
3921	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230	
3922	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	
3923	220 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37371	
3924	39k, 5%, 1/10W, Metal Film	4835 111 27051	
3925	39k, 5%, 1/10W, Metal Film	4835 111 27051	
3926	39k, 5%, 1/10W, Metal Film	4835 111 27051	
3929	39k, 5%, 1/10W, Metal Film	4835 111 27051	
3930	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3931	Res, 1K, 2%, 0,25W	4822 051 10102	
3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810	
3951	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3953	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272	
3955	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
3957	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
4001	Zero ohm,.	4835 111 27056	
4002	Zero ohm,.	4835 111 27056	
4004	Zero ohm,.	4835 111 27056	
4007	Zero ohm,.	4835 111 27056	
4009	Zero ohm,.	4835 111 27056	
4010	Zero ohm,.	4835 111 27056	
4011	Zero ohm,.	4835 111 27056	
4012	Zero ohm,.	4835 111 27056	
4013	Zero ohm,.	4835 111 27056	
4020	Zero ohm,.	4835 111 27056	
4051	Zero ohm,.	4835 111 27056	
4100	Zero ohm,.	4835 111 27056	
4101	Zero ohm,.	4835 111 27056	
4102	Zero ohm,.	4835 111 27056	
4103	Zero ohm,.	4835 111 27056	
4143	Zero ohm,.	4835 111 27056	
4144	Zero ohm,.	4835 111 27056	
4203	Zero ohm,.	4835 111 27056	
4207	Zero ohm,.	4835 111 27056	
4212	Zero ohm,.	4835 111 27056	
4214	Zero ohm,.	4835 111 27056	
4215	Zero ohm,.	4835 111 27056	
4216	Zero ohm,.	4835 111 27056	
4501	Zero ohm,.	4835 111 27056	
4602	Zero ohm,.	4835 111 27056	
4650	Zero ohm,.	4835 111 27056	
4651	Zero ohm,.	4835 111 27056	
4652	Zero ohm,.	4835 111 27056	
4654	Zero ohm,.	4835 111 27056	
4655	Zero ohm,.	4835 111 27056	
4684	Zero ohm,.	4835 111 27056	
4687	Zero ohm,.	4835 111 27056	
4831	Zero ohm,.	4835 111 27056	
4832	Zero ohm,.	4835 111 27056	
4833	Zero ohm,.	4835 111 27056	
4902	Zero ohm,.	4835 111 27056	
4903	Zero ohm,.	4835 111 27056	
4904	Zero ohm,.	4835 111 27056	
4905	Zero ohm,.	4835 111 27056	
4909	Zero ohm,.	4835 111 27056	
4911	Zero ohm,.	4835 111 27056	
4912	Zero ohm,.	4835 111 27056	
4914	Zero ohm,.	4835 111 27056	
4957	Zero ohm,.	4835 111 27056	
4999	Zero ohm,.	4835 111 27056	
5000	Coil, 5u6.	3198 018 25680	
5004	Coil, 820n	2422 535 97314	
5201	Coil, 22u.	3198 018 22290	
5202	Coil, 6u8.	3198 018 16880	
5342	Coil, 22u.	3198 018 22290	
S 5445	Transformer, L.O.T., models ending in C101, C121, and C125	2422 531 02327	
S 5445	Transformer, L.O.T., models ending in C221 and C225.	3128 138 20941	
5451	Coil, 27u.	2422 535 96614	
5457	Coil, Linear Correction.	3128 138 53241	
5461	Transformer.	3128 138 33811	
5480	Coil, 27u.	2422 535 97334	
5480	Coil, 39u.	2422 535 97336	
5480	Coil, 27u.	3198 018 22790	
5480	33uH., Peaking Coil, only in 25. . .	4835 157 58205	
S 5500	Filter, Mains, 5mH, 2A	2422 549 43432	
5516	100uH., Coil	4835 157 67078	
5518	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5521	Coil, 2u2.	3198 018 12280	
5540	Coil, 4u7.	3198 018 14780	
S 5545	Transfomer,.	2422 531 02314	
5551	27uH., 5%, Coil, Peaking	4835 157 67052	
5552	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5572	100uH., Coil	4835 157 67078	
5573	100uH., Coil	4835 157 67078	
5576	100uH., Coil	4835 157 67078	
5577	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5600	Coil, 8u2.	3198 018 18280	
5601	Coil, 8u2.	3198 018 18280	
5620	Coil, 6u8.	3198 018 16880	
5821	Coil, 100u	3198 018 21010	
5822	Coil, 18u.	3198 018 21890	

S = Safety Part Be sure to use exact replacement part.

TC9225C121 (continued)

6008	Zener, 33 Volt BZX79-C33	4835 130 37904
6113	Zener Diode, 6.8 volt.	9340 386 40115
6211	Diode, 1N4148.	4835 130 37048
6212	Diode, 1N4148.	4835 130 37048
6213	Diode, 1N4148.	4835 130 37048
6331	Diode.	4835 130 37294
6333	Diode.	4835 130 37294
6335	Diode.	4835 130 37294
6401	Diode.	4835 130 37094
6402	Zener, 33 Volt, BZX79-C33.	4835 130 37904
6403	Diode.	4835 130 37094
6404	Diode.	4835 130 37094
6449	Diode, 1N4148.	4835 130 37048
6450	Diode, 1N4148.	4835 130 37048
6460	Diode, Rect, BY228/20	9336 215 80112
6463	Diode, 1N4148.	4835 130 37048
6464	Zener Diode, 6.2 volt.	9337 242 70133
6465	Diode, BYD33J.	4835 130 37094
6466	Diode, BYD33J.	4835 130 37094
6480	Diode, Zener	4835 130 37947
6481	Diode, 1N4148.	4835 130 37048
6485	Diode, BYD33J.	4835 130 37094
6486	Diode, EGP20DL-530	4835 130 37919
6487	Diode.	4835 130 37094
6488	Diode, Rect, BYV27-200.	9322 126 72673
6490	Diode, Rect, BYV27-200.	9322 126 72673
6505	Diode, Bridge Rect, GBU6JL-7002	9322 138 08667
6507	Diode, BYD33J.	4835 130 37094
6508	Diode, BYD33J.	4835 130 37094
6510	Zener Diode, 20 volt	9331 178 60133
6511	Diode, BYV95C.	4835 130 37052
6512	Diode, Rect, BY228/20	4822 130 41275
6513	Diode, Rect, BY228/20	4822 130 41275
6514	Zener, 18 Volt, BZX79-C18.	4835 130 37908
6540	Diode.	4835 130 37294
6550	Diode, Rect, BY229X-800	9340 380 30127
6560	Diode, EGP20DL-530	4835 130 37919
6580	Diode, Rect, SB140.	9339 577 60673
6584	Diode, 1N4148.	4835 130 37048
6585	Diode, 1N4148.	4835 130 37048
6591	Diode, BAS216.	4835 130 37905
6601	Diode, Zener	4835 130 37684
6602	Diode, 1N4148.	4835 130 37048
6603	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
6604	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
6605	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
6606	Zener, 4.7 Volt, BZX79-C4V7.	4835 130 37005
6607	Zener, 6.8 Volt, BZX79-C6V8.	4835 130 37945
6690	LED, LTL-307P.	4835 130 97096
6821	Zener Diode, 9.1 volt.	9331 177 80133
6822	Fixed Coil	4835 130 37048
6951	Diode, BAS216.	4835 130 37905
6961	Diode, BAS216.	4835 130 37905
7250	IC,.	9352 620 26112
7251	IC, LM317T	9337 220 80682
7254	Transistor, NPN, BC847B.	4822 130 60511
7256	Transistor, NPN, BC847B.	4822 130 60511
7258	Transistor, NPN, BC847B.	4822 130 60511
7263	Transistor, PNP, BC857B.	5322 130 60508
7266	Transistor, NPN, BC847B.	4822 130 60511
7330	IC,.	9352 184 10112
7401	IC,.	9322 121 47687
7460	Transistor, NPN, BU1508DX.	9340 170 50127
7461	Transistor, NPN, BF819	9335 354 50127
7462	Transistor, BC547B	4835 130 47055
7463	Transistor, BC557B	4835 130 47409
7480	IC,.	9322 028 93682
7481	Transistor, BC557B	4835 130 47409
7482	Transistor, PNP, BC857B.	5322 130 60508
7518	STH8NA60FI SMPS FET	9322 068 92687
7518	STH10NC60FI SMPS FET.	9322 155 66687
7520	IC, MC44603A	4835 209 88537
7570	IC,.	9337 711 00676
S 7581	Coupler, TCDT1101G	9338 431 30682
7590	Transistor, NPN, BC847B.	4822 130 60511
7591	Transistor, NPN, BC847B.	4822 130 60511
7592	Transistor, NPN, BC847B.	4822 130 60511
7600	IC, SAA5543-PS/M4/0167 L9 v3.2 (Commercial Models - NON Pro Plus)	9352 670 84112
7601	IC, ST24W16B6, commercial models only	9322 095 35682
7603	Transistor, NPN, BC337	9331 796 00126
7604	Transistor, NPN, BC847B.	4822 130 60511
7605	Transistor, NPN, BC847B.	4822 130 60511
7608	Transistor, NPN, BC847B.	4822 130 60511
7609	Transistor, NPN, BC847B.	4822 130 60511
7680	IR Receiver.	9322 127 53667
7821	IC,.	9352 374 70112
7822	IC, HEF4052BT.	9333 729 50653
7823	Transistor, NPN, BC337-25.	3198 020 43530
7904	Transistor, NPN, BC847B.	4822 130 60511
7905	Transistor, NPN, BC847B.	4822 130 60511
7906	Transistor, NPN, BC847B.	4822 130 60511
7908	Transistor, NPN, BC847B.	4822 130 60511
7909	Transistor, NPN, BC847B.	4822 130 60511
7910	Transistor, NPN, BC847B.	4822 130 60511
7951	IC,.	4822 209 13706
7953	IC,.	4835 209 88474
CBA	00EMF891A002 Main Chassis Board Asm.	00EM F89 1A002

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Mains Cord	3135 010 07161
S AC02	Anode Clip	4835 256 97264
AC03	Cabinet Back	3135 014 07981
AC04	Cabinet Front.	3135 017 04111
AC05	Chassis Guide.	3139 124 31381
AC06	Customer Control Button.	3139 124 27471
S AC07	Convergence and Purity Assembly.	2422 549 43385
S AC08	CRT A63AFW36X (C121 Version)	9301 763 20443
S AC09	Coil, Degaussing	3121 218 62961
AC11	Light Guide.	3139 124 26461
AC12	Nameplate.	4835 459 17545
AC14	Power Button	3139 124 26452
AC16	Speaker, 5W, 16 ohm (2 Used)	2422 264 00333
S AC18	Yoke	3313 203 00121
AC19	Yoke Wedge (3 Used).	4835 535 27001
AC22	Card Do Cover.	4835 432 17929
AC23	Card Housing	3135 014 08741
AC24	Spring	3139 121 26231
AC25	Owner's Manual	3135 015 16031
AC29	Vent Cover	3135 013 03371

S = Safety Part Be sure to use exact replacement part.

TC9225C221 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts	
S 0127	3.15 Amp Fuse, ...	3122 358 72141
0129	4 Pin Cable.	3104 301 09431
0152	Cable, DIP, 6 Pin, 400mm	3104 301 09421
0153	4 Pin Cable.	3104 301 09431
0212	Connector, 2 Pin	2422 025 15396
0214	Connector, 3 Pin	2422 025 16382
0215	Connector, 2 Pin,.	2422 025 16343
0216	Connector, 4 Pin	2422 025 15847
0219	Connector, 5 Pin	2422 025 15848
0220	4 Pin Board Connector.	2422 025 04852
0224	1 Pin Board Connector.	2422 034 20021
0227	Connector, 4 Pin	2422 025 16385
0228	1 Pin Board Connector.	2422 034 20021
0234	Connector, 4 Pin	2422 025 15847
0236	4 Pin Board Connector.	2422 025 16384
0237	Connector, 4 Pin	2422 025 12479
0238	5 Pin Board Connector.	2422 025 16387
S 0243	Connector, 6 Pin	2422 025 04854
0244	4 Pin Board Connector.	2422 025 04852
S 0245	Connector, 6 Pin	2422 025 04854
S 0254	CRT Socket (9 Pin)	2422 500 80022
0259	Connector, 3 Pin	2422 025 16383
0262	Connector, 4 Pin	2422 025 16385
0267	Connector, 3 Pin	2412 020 00725
1000	Tuner.	2422 542 90051
1001	Filter	2422 549 42501
1003	45 MHz SAW, Filter,.	2422 549 42433
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807
1208	Crystal Resonator, 3.58MHz	2422 543 00832
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10869
S 1571	1 Amp, Radial Fuse,.	4835 253 97162
S 1572	1 Amp, Radial Fuse,.	4835 253 97162
S 1580	Relay, 12V	2422 132 07317
1600	Switch, Tactile.	2422 128 02742
1601	Switch, Tactile.	2422 128 02742
1602	Switch, Tactile.	2422 128 02742
1603	Switch, Tactile.	2422 128 02742
1606	Switch, Tactile.	2422 128 02742
1660	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488
1821	Ceramic Resonator.	4835 122 97102
2001	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2003	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2004	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2011	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2102	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2103	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2104	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2201	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2202	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2203	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2204	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2205	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2208	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2209	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2211	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2212	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2213	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2214	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2215	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 16654
2220	Cap, 18p, 5%, 50V, Ceramic	3198 016 01890
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2222	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2226	Cap, 33u, 20%, 25V, Electrolytic . .	2020 021 90124
2227	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2247	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2248	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2249	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2330	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2340	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320
S 2343	Cap, 3n3, 10%, 2KV, Ceramic.	2020 558 90529
2345	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2401	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2402	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2404	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2405	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2407	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2409	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2420	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2426	Cap, 100n, 10%, 63V, Metalized Polyes ter.	2222 370 75104
2428	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2429	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2430	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2431	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2437	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2438	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2448	Cap, 220p, 10%, 500V, Ceramic. . . .	3198 019 42210
2450	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91139
2451	Cap, 15n, 10%, 50V, Polyester. . . .	2020 300 90575
2451	0.01uF., 10%, 50V, Polyester, only 27	3198 138 20941
2456	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176
2457	Cap, 390n, 5%, 250V, Metalized Polypr opylene.	2222 479 90021
2458	Cap, 10u, 20%, 100V, Electrolytic. .	2020 021 90813
2459	Cap, 680p, 10%, 500V, Ceramic. . . .	3198 019 46810
2461	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2462	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176
2463	470pF., 10%, 2KV, Ceramic.	4835 122 47638
S 2465	Cap, 10n, 5%, 1600V, Polypropylene .	2222 375 90154
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050
2481	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2482	Cap, 68n, 10%, 250V, Polyester . . .	2222 347 90234
2484	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2485	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93282
2486	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2487	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2488	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2489	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2490	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2491	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810
2500	0.47uF., 250V, Polyester	4835 121 47569
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
S 2507	Cap, 1n5, 10%, 1KV, Ceramic.	2020 558 90443
2508	Cap, 470u, 20%, 200V, Electrolytic .	2020 024 90626
S 2511	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
S 2518	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2530	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 021 91147
2531	Cap, 1n, 2%, 50V, Polypropylene. . .	2020 310 90049
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2540	Cap, 100u, 20%, 25V, Electrolytic. .	2020 021 90547
S 2545	1500pF., 250VAC, Ceramic	4835 122 47622
S 2550	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2551	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91358
2561	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
S 2562	Cap, 220p, 10%, 1KV, Ceramic	2020 558 90424
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2572	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2575	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2577	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2586	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2604	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2613	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2615	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2619	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2622	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2629	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2679	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2681	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2821	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280
2823	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720

S = Safety Part Be sure to use exact replacement part.

TC9225C221 (continued)

2825	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080		3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046
2826	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090	S	3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
2827	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	S	3341	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483
2828	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	S	3342	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483
2829	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3343	1.5k, 20%, 1/2W, Carbon Composition.	4835 110 47034
2830	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280		3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
2831	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	S	3345	VDR, DC, 1mA, 50V, MAX 115V	2322 593 13507
2832	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280		3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
2833	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280		3401	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2834	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780		3402	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2835	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3403	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2836	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3405	Res, 1K8, 1%, 3/5W, Metal Film . . .	2322 156 21802
2837	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740		3406	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2838	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3407	Res, 1K8, 1%, 3/5W, Metal Film . . .	2322 156 21802
2839	Cap, 1u, 5%, 50V, Metalized Polyester	2020 308 90124		3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2840	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3409	1.5 ohm, 5%, 1/3W, Metal Film. . . .	4835 116 57664
2841	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2842	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3420	470k, 5%, 1/10W, Metal Film.	4835 111 37407
2844	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2845	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2913	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280		3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840
2914	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330		3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606
2915	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3425	150k, 5%, 1/10W, Metal Film.	4835 111 27045
2916	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648		3426	39k, 5%, 1/10W, Metal Film	4835 111 27051
2917	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3428	22k, 5%, 1/10W, Metal Film	4835 111 37441
2918	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330		3429	27k, 5%, 1/10W, Metal Film	4835 111 37442
2919	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3431	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
2920	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648		3432	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
2921	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3436	Res, 1K, 2%, 0,25W	4822 051 10102
2931	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280		3437	10k, 5%, 1/10W, Metal Film	4835 111 37216
2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3438	33k, 1/4W, Carbon Film	4835 110 57375
2952	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
2954	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3447	10k, 5%, 1/10W, Metal Film	4835 111 37216
2955	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	S	3452	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63229
2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	S	3453	Res, 4R7, 5%, 5W, Wire Wound	2322 251 41478
2960	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	S	3454	Res, 33K, 5%, 1 1/3W, Metal Film . .	2322 194 63333
2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090		3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090		3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090	S	3462	Res, 6K8, 5%, 5W, Metal Film	2322 257 41682
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3464	Res, 1K, 2%, 0,25W	4822 051 10102
3010	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610	S	3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
3013	Zero ohm,.	4835 111 27056		3466	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903
3014	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052		3467	Res, 14K, 1%, 3/5W, Metal Film . . .	2322 156 21403
3015	22k, 5%, 1/10W, Metal Film	4835 111 37441		3467	Res, 15K, 1%, 3/5W, Metal Film . . .	2322 156 21503
3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810		3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3021	Res, 1K, 2%, 0,25W	4822 051 10102		3469	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
3103	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3104	10k, 5%, 1/10W, Metal Film	4835 111 37216		3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703
3108	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3481	Res, 100K, 1%, 3/5W, Metal Film. . .	2322 156 21004
3109	10k, 5%, 1/10W, Metal Film	4835 111 37216		3482	Res, 32K4, 1%, 3/5W, Metal Film. . .	2322 156 23243
3123	75 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37276		3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3200	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3201	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253	S	3485	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
3203	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443	S	3486	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	S	3487	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3205	Res, 1K, 2%, 0,25W	4822 051 10102	S	3488	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
3206	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	S	3490	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3491	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3209	22k, 5%, 1/10W, Metal Film	4835 111 37441	S	3492	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3212	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253		3495	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272
3213	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3496	10k, 5%, 1/10W, Metal Film	4835 111 37216
3215	22k, 5%, 1/10W, Metal Film	4835 111 37441		3497	10k, 5%, 1/10W, Metal Film	4835 111 37216
3216	Zero ohm,.	4835 111 27056		3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3218	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225
3219	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3503	10ohm, 120VAC, Positive Temperature C	
3220	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432			oefficient	4835 116 47001
3225	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S	3505	Surge Protector.	2422 549 43073
3228	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3231	Zero ohm,.	4835 111 27056	S	3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333
3232	Zero ohm,.	4835 111 27056	S	3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102
3233	Zero ohm,.	4835 111 27056		3512	15k, 5%, 1/10W, Metal Film	4835 111 37458
3243	1.2k, 5%, 1/10W, Metal Film.	4835 111 27042		3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184
3246	82k, 5%, 1/10W, Metal Film	4835 111 37277		3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204
3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3515	2.5 ohm, 20%, 3.6W, Negative Temperat	
3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010			ure Coefficient.	2122 612 00023
3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340		3516	Res, 1K, 2%, 0,25W	4822 051 10102
3250	Zero ohm,.	4835 111 27056		3517	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3251	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S	3518	Res, 0R22, 5%, 3W, Metal Film. . . .	2120 106 90548
3252	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		3520	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3253	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		3521	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443
3257	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3525	33 ohm, 5%, 1/3W, Metal Film	4835 116 57665
3258	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3528	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3259	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3529	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3530	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3532	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3534	15k, 5%, 1/10W, Metal Film	4835 111 37458
3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3536	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3537	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030

S = Safety Part Be sure to use exact replacement part.

TC9225C221 (continued)

S 3542	4.7 Megohm, 5%, 1/2W, Metal Film . .	4835 116 57009	
3570	15k, 5%, 1/10W, Metal Film	4835 111 37458	
3571	Res, 150K, 1%, 3/5W, Metal Film. . .	2322 156 21504	
3573	Res, 2K, 1%, 1/10W, Metalized Glass.	2120 108 92657	
3574	33k, 5%, 1/10W, Metal Film	4835 111 37248	
3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3577	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3578	Res, 1K, 2%, 0,25W	4822 051 10102	
3579	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451	
3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3592	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3594	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3595	68k, 5%, 1/6W, Carbon Film	4835 111 37205	
3596	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3597	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3598	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3599	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3607	8.2k, 5%, 1/8W, Inline Package . . .	4835 111 97046	
3608	2.2k, 5%, 1/8W, Inline Package . . .	4835 111 97049	
3609	2.2k, 5%, Resistor Network	2120 108 93868	
3611	Res, 1K, 2%, 0,25W	4822 051 10102	
3612	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3613	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3615	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3617	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3619	820 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37466	
3629	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259	
3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3631	27k, 5%, 1/10W, Metal Film	4835 111 37442	
S 3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63479	
3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210	
3634	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3635	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3636	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3637	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3649	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3650	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3653	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3654	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3655	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3662	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3663	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3664	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3665	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3666	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376	
3667	27k, 5%, 1/10W, Metal Film	4835 111 37442	
3672	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3673	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3674	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259	
3675	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3676	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3677	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3680	680 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37271	
3681	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3682	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3683	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3684	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3685	220 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37371	
3821	15k, 5%, 1/10W, Metal Film	4835 111 37458	
3822	1.2k, 5%, 1/10W, Metal Film.	4835 111 27042	
3823	100k, 5%, 1/10W, Metal Film.	4835 111 37434	
3824	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3825	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3826	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3827	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3828	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3829	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272	
3830	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272	
3831	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198 011 03310	
3832	47 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37262	
3908	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3909	Res, 1K, 2%, 0,25W	4822 051 10102	
3910	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376	
3911	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230	
3912	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3913	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3914	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	
3915	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231	
3916	220 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37371	
3917	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3918	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3919	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376	
3920	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231	
3921	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230	
3922	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	
3923	220 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37371	
3924	39k, 5%, 1/10W, Metal Film	4835 111 27051	
3925	39k, 5%, 1/10W, Metal Film	4835 111 27051	
3926	39k, 5%, 1/10W, Metal Film	4835 111 27051	
3929	39k, 5%, 1/10W, Metal Film	4835 111 27051	
3930	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3931	Res, 1K, 2%, 0,25W	4822 051 10102	
3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810	
3951	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3953	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272	
3955	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
3957	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
4001	Zero ohm,.	4835 111 27056	
4002	Zero ohm,.	4835 111 27056	
4004	Zero ohm,.	4835 111 27056	
4007	Zero ohm,.	4835 111 27056	
4009	Zero ohm,.	4835 111 27056	
4010	Zero ohm,.	4835 111 27056	
4011	Zero ohm,.	4835 111 27056	
4012	Zero ohm,.	4835 111 27056	
4013	Zero ohm,.	4835 111 27056	
4020	Zero ohm,.	4835 111 27056	
4051	Zero ohm,.	4835 111 27056	
4100	Zero ohm,.	4835 111 27056	
4101	Zero ohm,.	4835 111 27056	
4102	Zero ohm,.	4835 111 27056	
4103	Zero ohm,.	4835 111 27056	
4143	Zero ohm,.	4835 111 27056	
4144	Zero ohm,.	4835 111 27056	
4203	Zero ohm,.	4835 111 27056	
4207	Zero ohm,.	4835 111 27056	
4212	Zero ohm,.	4835 111 27056	
4214	Zero ohm,.	4835 111 27056	
4215	Zero ohm,.	4835 111 27056	
4216	Zero ohm,.	4835 111 27056	
4501	Zero ohm,.	4835 111 27056	
4602	Zero ohm,.	4835 111 27056	
4650	Zero ohm,.	4835 111 27056	
4651	Zero ohm,.	4835 111 27056	
4652	Zero ohm,.	4835 111 27056	
4654	Zero ohm,.	4835 111 27056	
4655	Zero ohm,.	4835 111 27056	
4684	Zero ohm,.	4835 111 27056	
4687	Zero ohm,.	4835 111 27056	
4831	Zero ohm,.	4835 111 27056	
4832	Zero ohm,.	4835 111 27056	
4833	Zero ohm,.	4835 111 27056	
4902	Zero ohm,.	4835 111 27056	
4903	Zero ohm,.	4835 111 27056	
4904	Zero ohm,.	4835 111 27056	
4905	Zero ohm,.	4835 111 27056	
4909	Zero ohm,.	4835 111 27056	
4911	Zero ohm,.	4835 111 27056	
4912	Zero ohm,.	4835 111 27056	
4914	Zero ohm,.	4835 111 27056	
4957	Zero ohm,.	4835 111 27056	
4999	Zero ohm,.	4835 111 27056	
5000	Coil, 5u6.	3198 018 25680	
5004	Coil, 820n	2422 535 97314	
5201	Coil, 22u.	3198 018 22290	
5202	Coil, 6u8.	3198 018 16880	
5342	Coil, 22u.	3198 018 22290	
S 5445	Transformer, L.O.T., models ending in C101, C121, and C125	2422 531 02327	
S 5445	Transformer, L.O.T., models ending in C221 and C225.	3128 138 20941	
5451	Coil, 27u.	2422 535 96614	
5457	Coil, Linear Correction.	3128 138 53241	
5461	Transformer.	3128 138 33811	
5480	Coil, 27u.	2422 535 97334	
5480	Coil, 39u.	2422 535 97336	
5480	Coil, 27u.	3198 018 22790	
5480	33uH., Peaking Coil, only in 25. . .	4835 157 58205	
S 5500	Filter, Mains, 5mH, 2A	2422 549 43432	
5516	100uH., Coil	4835 157 67078	
5518	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5521	Coil, 2u2.	3198 018 12280	
5540	Coil, 4u7.	3198 018 14780	
S 5545	Transfomer,.	2422 531 02314	
5551	27uH., 5%, Coil, Peaking	4835 157 67052	
5552	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5572	100uH., Coil	4835 157 67078	
5573	100uH., Coil	4835 157 67078	
5576	100uH., Coil	4835 157 67078	
5577	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5600	Coil, 8u2.	3198 018 18280	
5601	Coil, 8u2.	3198 018 18280	
5620	Coil, 6u8.	3198 018 16880	
5821	Coil, 100u	3198 018 21010	
5822	Coil, 18u.	3198 018 21890	

S = Safety Part Be sure to use exact replacement part.

TC9225C221 (continued)

6008	Zener, 33 Volt BZX79-C33	4835 130 37904
6113	Zener Diode, 6.8 volt.	9340 386 40115
6211	Diode, 1N4148.	4835 130 37048
6212	Diode, 1N4148.	4835 130 37048
6213	Diode, 1N4148.	4835 130 37048
6331	Diode.	4835 130 37294
6333	Diode.	4835 130 37294
6335	Diode.	4835 130 37294
6401	Diode.	4835 130 37094
6402	Zener, 33 Volt, BZX79-C33.	4835 130 37904
6403	Diode.	4835 130 37094
6404	Diode.	4835 130 37094
6449	Diode, 1N4148.	4835 130 37048
6450	Diode, 1N4148.	4835 130 37048
6460	Diode, Rect, BY228/20	9336 215 80112
6463	Diode, 1N4148.	4835 130 37048
6464	Zener Diode, 6.2 volt.	9337 242 70133
6465	Diode, BYD33J.	4835 130 37094
6466	Diode, BYD33J.	4835 130 37094
6480	Diode, Zener	4835 130 37947
6481	Diode, 1N4148.	4835 130 37048
6485	Diode, BYD33J.	4835 130 37094
6486	Diode, EGP20DL-530	4835 130 37919
6487	Diode.	4835 130 37094
6488	Diode, Rect, BYV27-200.	9322 126 72673
6490	Diode, Rect, BYV27-200.	9322 126 72673
6505	Diode, Bridge Rect, GBU6JL-7002	9322 138 08667
6507	Diode, BYD33J.	4835 130 37094
6508	Diode, BYD33J.	4835 130 37094
6510	Zener Diode, 20 volt	9331 178 60133
6511	Diode, BYV95C.	4835 130 37052
6512	Diode, Rect, BY228/20	4822 130 41275
6513	Diode, Rect, BY228/20	4822 130 41275
6514	Zener, 18 Volt, BZX79-C18.	4835 130 37908
6540	Diode.	4835 130 37294
6550	Diode, Rect, BY229X-800	9340 380 30127
6560	Diode, EGP20DL-530	4835 130 37919
6580	Diode, Rect, SB140.	9339 577 60673
6584	Diode, 1N4148.	4835 130 37048
6585	Diode, 1N4148.	4835 130 37048
6591	Diode, BAS216.	4835 130 37905
6601	Diode, Zener	4835 130 37684
6602	Diode, 1N4148.	4835 130 37048
6603	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
6604	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
6605	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
6606	Zener, 4.7 Volt, BZX79-C4V7.	4835 130 37005
6607	Zener, 6.8 Volt, BZX79-C6V8.	4835 130 37945
6690	LED, LTL-307P.	4835 130 97096
6821	Zener Diode, 9.1 volt.	9331 177 80133
6822	Fixed Coil	4835 130 37048
6951	Diode, BAS216.	4835 130 37905
6961	Diode, BAS216.	4835 130 37905
7250	IC,.	9352 620 26112
7251	IC, LM317T	9337 220 80682
7254	Transistor, NPN, BC847B.	4822 130 60511
7256	Transistor, NPN, BC847B.	4822 130 60511
7258	Transistor, NPN, BC847B.	4822 130 60511
7263	Transistor, PNP, BC857B.	5322 130 60508
7266	Transistor, NPN, BC847B.	4822 130 60511
7330	IC,.	9352 184 10112
7401	IC,.	9322 121 47687
7460	Transistor, NPN, BU1508DX.	9340 170 50127
7461	Transistor, NPN, BF819	9335 354 50127
7462	Transistor, BC547B	4835 130 47055
7463	Transistor, BC557B	4835 130 47409
7480	IC,.	9322 028 93682
7481	Transistor, BC557B	4835 130 47409
7482	Transistor, PNP, BC857B.	5322 130 60508
7518	STH8NA60FI SMPS FET	9322 068 92687
7518	STH10NC60FI SMPS FET.	9322 155 66687
7520	IC, MC44603A	4835 209 88537
7570	IC,.	9337 711 00676
S 7581	Coupler, TCDT1101G	9338 431 30682
7590	Transistor, NPN, BC847B.	4822 130 60511
7591	Transistor, NPN, BC847B.	4822 130 60511
7592	Transistor, NPN, BC847B.	4822 130 60511
7600	IC, SAA5543-PS/M4/0167 L9 v3.2 (Commercial Models - NON Pro Plus)	9352 670 84112
7601	IC, ST24W16B6, commercial models only	9322 095 35682
7603	Transistor, NPN, BC337	9331 796 00126
7604	Transistor, NPN, BC847B.	4822 130 60511
7605	Transistor, NPN, BC847B.	4822 130 60511
7608	Transistor, NPN, BC847B.	4822 130 60511
7609	Transistor, NPN, BC847B.	4822 130 60511
7680	IR Receiver.	9322 127 53667
7821	IC,.	9352 374 70112
7822	IC, HEF4052BT.	9333 729 50653
7823	Transistor, NPN, BC337-25.	3198 020 43530
7904	Transistor, NPN, BC847B.	4822 130 60511
7905	Transistor, NPN, BC847B.	4822 130 60511
7906	Transistor, NPN, BC847B.	4822 130 60511
7908	Transistor, NPN, BC847B.	4822 130 60511
7909	Transistor, NPN, BC847B.	4822 130 60511
7910	Transistor, NPN, BC847B.	4822 130 60511
7951	IC,.	4822 209 13706
7953	IC,.	4835 209 88474
CBA	00EMF891A002 Main Chassis Board Asm.	00EM F89 1A002

A10777 Interface Module Parts

	A10777 Interface Module Parts	
CBA	00A10777A001 Interface Module Asm.	00A1 077 7A001
BR711	Zero ohm,.	4835 111 27056
BR712	Zero ohm,.	4835 111 27056
BR713	Zero ohm,.	4835 111 27056
BR714	Zero ohm,.	4835 111 27056
BRS15	Zero ohm,.	4835 111 27056
BRS16	Zero ohm,.	4835 111 27056
C702	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
C703	Cap, 1u, +80/-20%, 16V, Ceramic.	3198 017 21050
J0215	Connector, 2 Pin,.	2422 025 16343
J0237	Connector, 4 Pin	2422 025 12479
J0238	5 Pin Board Connector.	2422 025 16387
J0259	Connector, 3 Pin	2412 020 00725
J1215	Connector, 2 Pin,.	2422 025 16343
J1227	Connector, 4 Pin	2422 025 16385
J1238	Connector, 5 Pin	2422 025 12481
J1259	Connector, 3 Pin	2422 025 16383
J214	Connector, 3 Pin	2422 025 16382
J216	Connector, 4 Pin	2422 025 15847
J219	Connector, 5 Pin	2422 025 15848
J228	Connector, 3 Pin	2422 025 16407
J236	4 Pin Board Connector.	2422 025 16384
J775	Contact Pin.	2422 024 00626
J800	Connector, 32 Pin.	3135 010 03531
Q700	Transistor, NPN, BC847B.	4822 130 60511
Q701	Transistor, NPN, BC847B.	4822 130 60511
Q704	Transistor, PNP, BC857B.	5322 130 60508
Q705	Transistor, PNP, BC857B.	5322 130 60508
Q706	Transistor, NPN, BC847B.	4822 130 60511
Q707	Transistor, NPN, BC847B.	4822 130 60511
R700	10k, 5%, 1/10W, Metal Film	4835 111 37216
R701	47k, 5%, 1/10W, Metal Film	4835 111 37445
R702	75 ohm, 5%, 1/10W, Metal Film.	4835 111 37276
R703	75 ohm, 5%, 1/10W, Metal Film.	4835 111 37276
R711	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
R712	10k, 5%, 1/10W, Metal Film	4835 111 37216
R713	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
R714	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
R715	10k, 5%, 1/10W, Metal Film	4835 111 37216
R716	47k, 5%, 1/10W, Metal Film	4835 111 37445
R717	10k, 5%, 1/10W, Metal Film	4835 111 37216
R718	100 ohm, 5%, 1/10W, Metal Film	4835 111 37432
R719	330 ohm, 5%, 1/10W, Metal Film	4835 111 37443
R720	Res, 1K, 2%, 0,25W	4822 051 10102
R721	75 ohm, 5%, 1/10W, Metal Film.	4835 111 37276
R722	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231
Z700	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z701	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z702	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z703	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z704	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z705	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z706	Zener Diode, 8.2V, BZX284-C8	4835 130 37922
Z707	Zener Diode, 8.2V, BZX284-C8	4835 130 37922

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Mains Cord	3135 010 07161
AC02	Clip, Anode Lead	3135 014 04471
AC03	Cabinet Back	3135 014 09831
AC04	Cabinet Front.	3135 017 04111
AC05	Chassis Guide.	3139 124 31381
AC06	Customer Control Button.	3139 124 27471
S AC07	Convergence and Purity Assembly.	2422 549 43385
S AC08	CRT A63AFW36X (C121 Version)	9301 763 20443
S AC09	Coil, Degaussing	2422 549 44489
AC10	Holder, Degaussing (4 Used).	3135 013 01641
AC11	Light Guide.	3139 124 26461
AC14	Power Button	3139 124 26452
AC16	Speaker, 5W, 16 ohm (2 Used)	2422 264 00333
S AC18	Yoke	3313 203 00121
AC19	Yoke Wedge (3 used).	3135 013 00311
AC24	Spring	3139 121 26231

S = Safety Part Be sure to use exact replacement part.

TL9125C121 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts	
S 0127	3.15 Amp Fuse, ...	3122 358 72141
0152	Cable, DIP, 6 Pin, 400mm	3104 301 09421
0153	4 Pin Cable.	3104 301 09431
0212	Connector, 2 Pin	2422 025 15396
0215	Connector, 2 Pin,.	2422 025 16343
0220	4 Pin Board Connector.	2422 025 04852
0224	1 Pin Board Connector.	2422 034 20021
0228	1 Pin Board Connector.	2422 034 20021
0238	Connector, 5 Pin	2422 025 12481
S 0243	Connector, 6 Pin	2422 025 04854
0244	4 Pin Board Connector.	2422 025 04852
S 0245	Connector, 6 Pin	2422 025 04854
S 0254	CRT Socket (9 Pin)	2422 500 80022
0259	Connector, 3 Pin	2412 020 00725
0267	Connector, 3 Pin	2412 020 00725
1000	Tuner.	2422 542 90057
1001	Filter	2422 549 42501
1003	45 MHz SAW, Filter,.	2422 549 42433
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807
1208	Crystal Resonator, 3.58MHz	2422 543 00832
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10869
S 1571	1 Amp, Radial Fuse,.	4835 253 97162
S 1572	1 Amp, Radial Fuse,.	4835 253 97162
S 1580	Relay, 12V	2422 132 07317
1600	Switch, Tactile.	2422 128 02742
1601	Switch, Tactile.	2422 128 02742
1602	Switch, Tactile.	2422 128 02742
1603	Switch, Tactile.	2422 128 02742
1606	Switch, Tactile.	2422 128 02742
1660	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488
2001	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2002	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2003	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2004	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2011	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2201	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2202	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2203	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2204	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2205	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2208	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2209	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2211	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2212	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2213	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2214	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2215	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 16654
2220	Cap, 18p, 5%, 50V, Ceramic	3198 016 01890
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2222	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2226	Cap, 33u, 20%, 25V, Electrolytic . .	2020 021 90124
2227	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2247	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2248	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2249	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2330	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2340	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320
S 2343	Cap, 3n3, 10%, 2KV, Ceramic.	2020 558 90529
2345	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2401	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2402	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2404	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2405	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2407	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2409	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2420	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2426	Cap, 100n, 10%, 63V, Metalized Polyes ter.	2222 370 75104
2428	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2429	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2430	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2431	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2437	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2437	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2438	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2448	Cap, 220p, 10%, 500V, Ceramic. . . .	3198 019 42210
2450	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91139
2451	Cap, 15n, 10%, 50V, Polyester. . . .	2020 300 90575
2451	0.01uF., 10%, 50V, Polyester, only 27	3198 138 20941
2456	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176
2457	Cap, 390n, 5%, 250V, Metalized Polypr opylene.	2222 479 90021
2458	Cap, 10u, 20%, 100V, Electrolytic. .	2020 021 90813
2459	Cap, 680p, 10%, 500V, Ceramic. . . .	3198 019 46810
2461	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2462	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176
2463	470pF., 10%, 2KV, Ceramic.	4835 122 47638
S 2465	Cap, 10n, 5%, 1600V, Polypropylene .	2222 375 90154
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050
2481	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2482	Cap, 68n, 10%, 250V, Polyester . . .	2222 347 90234
2484	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2485	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93282
2486	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2487	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2488	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2489	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2490	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2491	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810
2500	0.47uF., 250V, Polyester	4835 121 47569
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
S 2507	Cap, 1n5, 10%, 1KV, Ceramic.	2020 558 90443
2508	Cap, 470u, 20%, 200V, Electrolytic .	2020 024 90626
S 2511	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
S 2518	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2530	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 021 91147
2531	Cap, 1n, 2%, 50V, Polypropylene. . .	2020 310 90049
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2540	Cap, 100u, 20%, 25V, Electrolytic. .	2020 021 90547
S 2545	1500pF., 250VAC, Ceramic	4835 122 47622
S 2550	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2551	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91358
2561	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
S 2562	Cap, 220p, 10%, 1KV, Ceramic	2020 558 90424
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2572	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2575	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2577	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2586	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2604	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2613	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2615	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2619	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2622	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2629	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2679	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2681	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2913	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2914	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2915	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2916	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648
2917	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090
2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010

S = Safety Part Be sure to use exact replacement part.

TL9125C121 (continued)

	3010	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610		3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
	3013	Zero ohm,.	4835 111 27056		3469	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
	3014	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052		3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
	3015	22k, 5%, 1/10W, Metal Film	4835 111 37441		3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703
	3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810		3481	Res, 100K, 1%, 3/5W, Metal Film. . .	2322 156 21004
	3021	Res, 1K, 2%, 0,25W	4822 051 10102		3482	Res, 32K4, 1%, 3/5W, Metal Film. . .	2322 156 23243
	3200	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
	3201	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253		3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3203	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443	S	3485	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
	3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	S	3486	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3205	Res, 1K, 2%, 0,25W	4822 051 10102	S	3487	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3206	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	S	3488	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
	3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3490	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3209	22k, 5%, 1/10W, Metal Film	4835 111 37441	S	3491	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3212	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253	S	3492	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3213	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3495	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272
	3215	22k, 5%, 1/10W, Metal Film	4835 111 37441		3496	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3216	Zero ohm,.	4835 111 27056		3497	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3218	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
	3219	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	S	3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225
	3220	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3503	10ohm, 120VAC, Positive Temperature C	
	3225	100k, 5%, 1/10W, Metal Film.	4835 111 37434			oefficient	4835 116 47001
	3228	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3505	Surge Protector.	2422 549 43073
	3231	Zero ohm,.	4835 111 27056	S	3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
	3232	Zero ohm,.	4835 111 27056	S	3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333
	3233	Zero ohm,.	4835 111 27056	S	3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102
	3243	1.2k, 5%, 1/10W, Metal Film.	4835 111 27042		3512	15k, 5%, 1/10W, Metal Film	4835 111 37458
	3243	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052		3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184
	3246	82k, 5%, 1/10W, Metal Film	4835 111 37277		3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204
	3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3515	2.5 ohm, 20%, 3.6W, Negative Temperat	
	3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010			ure Coefficient.	2122 612 00023
	3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340		3516	Res, 1K, 2%, 0,25W	4822 051 10102
	3250	Zero ohm,.	4835 111 27056		3517	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
	3251	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S	3518	Res, 0R22, 5%, 3W, Metal Film. . . .	2120 106 90548
	3252	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		3520	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
	3253	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		3521	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443
	3257	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3525	33 ohm, 5%, 1/3W, Metal Film	4835 116 57665
	3258	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3528	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3259	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3529	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3530	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
	3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3532	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3534	15k, 5%, 1/10W, Metal Film	4835 111 37458
	3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3536	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3537	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046	S	3542	4.7 Megohm, 5%, 1/2W, Metal Film . .	4835 116 57009
S	3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109		3570	15k, 5%, 1/10W, Metal Film	4835 111 37458
S	3341	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483		3571	Res, 150K, 1%, 3/5W, Metal Film. . .	2322 156 21504
S	3342	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483		3573	Res, 2K, 1%, 1/10W, Metalized Glass.	2120 108 92657
	3343	1.5k, 20%, 1/2W, Carbon Composition.	4835 110 47034		3574	33k, 5%, 1/10W, Metal Film	4835 111 37248
	3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290		3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
S	3345	VDR, DC, 1mA, 50V, MAX 115V	2322 593 13507		3577	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290		3578	Res, 1K, 2%, 0,25W	4822 051 10102
	3401	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380		3579	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
	3402	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380		3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3403	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380		3592	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3405	Res, 1K8, 1%, 3/5W, Metal Film . . .	2322 156 21802		3594	22k, 5%, 1/10W, Metal Film	4835 111 37441
	3406	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020		3595	68k, 5%, 1/6W, Carbon Film	4835 111 37205
	3407	Res, 1K8, 1%, 3/5W, Metal Film . . .	2322 156 21802		3596	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020		3597	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
	3409	1.5 ohm, 5%, 1/3W, Metal Film. . . .	4835 116 57664		3598	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210		3599	22k, 5%, 1/10W, Metal Film	4835 111 37441
	3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210		3607	8.2k, 5%, 1/8W, Inline Package . . .	4835 111 97046
	3420	470k, 5%, 1/10W, Metal Film.	4835 111 37407		3608	2.2k, 5%, 1/8W, Inline Package . . .	4835 111 97049
	3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220		3609	2.2k, 5%, Resistor Network	2120 108 93868
	3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220		3611	Res, 1K, 2%, 0,25W	4822 051 10102
	3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840		3612	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606		3613	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3425	150k, 5%, 1/10W, Metal Film.	4835 111 27045		3615	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3426	39k, 5%, 1/10W, Metal Film	4835 111 27051		3617	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
	3428	22k, 5%, 1/10W, Metal Film	4835 111 37441		3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3429	27k, 5%, 1/10W, Metal Film	4835 111 37442		3619	820 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37466
	3431	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247		3629	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259
	3432	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
	3436	Res, 1K, 2%, 0,25W	4822 051 10102		3631	27k, 5%, 1/10W, Metal Film	4835 111 37442
	3437	10k, 5%, 1/10W, Metal Film	4835 111 37216	S	3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63479
	3438	33k, 1/4W, Carbon Film	4835 110 57375		3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210
	3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920		3634	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
	3447	10k, 5%, 1/10W, Metal Film	4835 111 37216		3635	22k, 5%, 1/10W, Metal Film	4835 111 37441
	3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3636	22k, 5%, 1/10W, Metal Film	4835 111 37441
	3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320		3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
S	3452	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63229		3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
S	3453	Res, 4R7, 5%, 5W, Wire Wound	2322 251 41478		3653	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
S	3454	Res, 33K, 5%, 1 1/3W, Metal Film . .	2322 194 63333		3654	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
	3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020		3655	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
	3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720		3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710
S	3462	Res, 6K8, 5%, 5W, Metal Film	2322 257 41682		3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790		3662	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
	3464	Res, 1K, 2%, 0,25W	4822 051 10102		3663	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
S	3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109		3664	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
	3466	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903		3665	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
	3467	Res, 14K, 1%, 3/5W, Metal Film . . .	2322 156 21403		3666	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376
	3467	Res, 15K, 1%, 3/5W, Metal Film . . .	2322 156 21503		3667	27k, 5%, 1/10W, Metal Film	4835 111 37442

S = Safety Part Be sure to use exact replacement part.

TL9125C121 (continued)

3672	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3673	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3674	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259	
3675	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3676	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3677	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3680	680 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37271	
3681	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3682	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3683	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3684	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3685	220 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37371	
3908	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3909	Res, 1K, 2%, 0,25W	4822 051 10102	
3910	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376	
3911	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230	
3912	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3913	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3914	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	
3915	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231	
3916	220 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37371	
3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810	
3951	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3953	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272	
3955	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
4001	Zero ohm,.	4835 111 27056	
4002	Zero ohm,.	4835 111 27056	
4004	Zero ohm,.	4835 111 27056	
4007	Zero ohm,.	4835 111 27056	
4009	Zero ohm,.	4835 111 27056	
4010	Zero ohm,.	4835 111 27056	
4011	Zero ohm,.	4835 111 27056	
4012	Zero ohm,.	4835 111 27056	
4013	Zero ohm,.	4835 111 27056	
4020	Zero ohm,.	4835 111 27056	
4051	Zero ohm,.	4835 111 27056	
4100	Zero ohm,.	4835 111 27056	
4101	Zero ohm,.	4835 111 27056	
4102	Zero ohm,.	4835 111 27056	
4103	Zero ohm,.	4835 111 27056	
4143	Zero ohm,.	4835 111 27056	
4144	Zero ohm,.	4835 111 27056	
4203	Zero ohm,.	4835 111 27056	
4207	Zero ohm,.	4835 111 27056	
4212	Zero ohm,.	4835 111 27056	
4214	Zero ohm,.	4835 111 27056	
4215	Zero ohm,.	4835 111 27056	
4216	Zero ohm,.	4835 111 27056	
4501	Zero ohm,.	4835 111 27056	
4602	Zero ohm,.	4835 111 27056	
4650	Zero ohm,.	4835 111 27056	
4651	Zero ohm,.	4835 111 27056	
4652	Zero ohm,.	4835 111 27056	
4654	Zero ohm,.	4835 111 27056	
4655	Zero ohm,.	4835 111 27056	
4684	Zero ohm,.	4835 111 27056	
4687	Zero ohm,.	4835 111 27056	
4831	Zero ohm,.	4835 111 27056	
4832	Zero ohm,.	4835 111 27056	
4833	Zero ohm,.	4835 111 27056	
4902	Zero ohm,.	4835 111 27056	
4903	Zero ohm,.	4835 111 27056	
4904	Zero ohm,.	4835 111 27056	
4905	Zero ohm,.	4835 111 27056	
4909	Zero ohm,.	4835 111 27056	
4911	Zero ohm,.	4835 111 27056	
4912	Zero ohm,.	4835 111 27056	
4914	Zero ohm,.	4835 111 27056	
4957	Zero ohm,.	4835 111 27056	
4999	Zero ohm,.	4835 111 27056	
5000	Coil, 5u6.	3198 018 25680	
5004	Coil, 820n	2422 535 97314	
5201	Coil, 22u.	3198 018 22290	
5202	Coil, 6u8.	3198 018 16880	
S 5445	Transformer, L.O.T., models ending in C101, C121, and C125	2422 531 02327	
S 5445	Transformer, L.O.T., models ending in C221 and C225.	3128 138 20941	
5451	Coil, 27u.	2422 535 96614	
5457	Coil, Linear Correction.	3128 138 53241	
5461	Transformer.	3128 138 33811	
5480	Coil, 27u.	2422 535 97334	
5480	Coil, 39u.	2422 535 97336	
5480	33uH., Peaking Coil, only in 25. . .	4835 157 58205	
S 5500	Filter, Mains, 5mH, 2A	2422 549 43432	
5516	100uH., Coil	4835 157 67078	
5518	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5521	Coil, 2u2.	3198 018 12280	
5540	Coil, 4u7.	3198 018 14780	
S 5545	Transfomer,.	2422 531 02314	
5551	27uH., 5%, Coil, Peaking	4835 157 67052	
5552	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5572	100uH., Coil	4835 157 67078	
5573	100uH., Coil	4835 157 67078	
5576	100uH., Coil	4835 157 67078	
5577	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5600	Coil, 8u2.	3198 018 18280	
5601	Coil, 8u2.	3198 018 18280	
5620	Coil, 6u8.	3198 018 16880	
5821	Coil, 100u	3198 018 21010	
6008	Zener, 33 Volt BZX79-C33	4835 130 37904	
6211	Diode, 1N4148.	4835 130 37048	
6212	Diode, 1N4148.	4835 130 37048	
6213	Diode, 1N4148.	4835 130 37048	
6331	Diode.	4835 130 37294	
6333	Diode.	4835 130 37294	
6335	Diode.	4835 130 37294	
6401	Diode.	4835 130 37094	
6402	Zener, 33 Volt, BZX79-C33.	4835 130 37904	
6403	Diode.	4835 130 37094	
6404	Diode.	4835 130 37094	
6449	Diode, 1N4148.	4835 130 37048	
6450	Diode, 1N4148.	4835 130 37048	
6460	Diode, Rect, BY228/20	9336 215 80112	
6463	Diode, 1N4148.	4835 130 37048	
6464	Zener, 6.2 Volt, BZX79-B6V2.	4835 130 37948	
6465	Diode, BYD33J.	4835 130 37094	
6466	Diode, BYD33J.	4835 130 37094	
6480	Diode, Zener	4835 130 37947	
6481	Diode, 1N4148.	4835 130 37048	
6485	Diode, BYD33J.	4835 130 37094	
6486	Diode, EGP20DL-530	4835 130 37919	
6487	Diode.	4835 130 37094	
6488	Diode, Rect, BYV27-200.	9322 126 72673	
6490	Diode, Rect, BYV27-200.	9322 126 72673	
6505	Diode, Bridge Rect, GBU6JL-7002 . .	9322 138 08667	
6507	Diode, BYD33J.	4835 130 37094	
6508	Diode, BYD33J.	4835 130 37094	
6510	Zener Diode, 20 volt	9331 178 60133	
6511	Diode, BYV95C.	4835 130 37052	
6512	Diode, Rect, BY228/20	4822 130 41275	
6513	Diode, Rect, BY228/20	4822 130 41275	
6514	Zener, 18 Volt, BZX79-C18.	4835 130 37908	
6540	Diode.	4835 130 37294	
6550	Diode, Rect, BY229X-800	9340 380 30127	
6560	Diode, EGP20DL-530	4835 130 37919	
6580	Diode, Rect, BYV27-200.	9322 126 72673	
6584	Diode, 1N4148.	4835 130 37048	
6585	Diode, 1N4148.	4835 130 37048	
6591	Diode, BAS216.	4835 130 37905	
6601	Diode, Zener	4835 130 37684	
6602	Diode, 1N4148.	4835 130 37048	
6603	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610	
6604	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610	
6605	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610	
6606	Zener, 4.7 Volt, BZX79-C4V7.	4835 130 37005	
6607	Zener, 6.8 Volt, BZX79-C6V8.	4835 130 37945	
6690	LED, LTL-307P.	4835 130 97096	
6951	Diode, BAS216.	4835 130 37905	
6961	Diode, BAS216.	4835 130 37905	
7250	IC,.	9352 620 26112	
7251	IC, LM317T	9337 220 80682	
7254	Transistor, NPN, BC847B.	4822 130 60511	
7256	Transistor, NPN, BC847B.	4822 130 60511	
7258	Transistor, NPN, BC847B.	4822 130 60511	
7263	Transistor, PNP, BC857B.	5322 130 60508	
7266	Transistor, NPN, BC847B.	4822 130 60511	
7330	IC,.	9352 184 10112	
7401	IC,.	9322 121 47687	
7460	Transistor, NPN, BU1508DX.	9340 170 50127	
7461	Transistor, NPN, BF819	9335 354 50127	
7462	Transistor, BC547B	4835 130 47055	
7463	Transistor, BC557B	4835 130 47409	
7480	IC,.	9322 028 93682	
7481	Transistor, BC557B	4835 130 47409	
7482	Transistor, PNP, BC857B.	5322 130 60508	
7518	STH8NA60FI SMPS FET	9322 068 92687	
7518	STH10NC60FI SMPS FET.	9322 155 66687	
7520	IC, MC44603A	4835 209 88537	
7570	IC,.	9337 711 00676	
S 7581	Coupler, TCDT1101G	9338 431 30682	
7590	Transistor, NPN, BC847B.	4822 130 60511	
7591	Transistor, NPN, BC847B.	4822 130 60511	
7592	Transistor, NPN, BC847B.	4822 130 60511	
7600	IC, SAA5543-PS/M4/0167 L9 v3.2 (Comme rcial Models - NON Pro Plus)	9352 670 84112	
7600	IC, SAA5565-PS/M3/0195 L9 v3.2 (Comme rcial Models - Pro Plus Models). . .	9352 673 97112	
7601	IC, ST24W16B6, commercial models only	9322 095 35682	
7603	Transistor, NPN, BC337	9331 796 00126	

S = Safety Part Be sure to use exact replacement part.

TL9125C121 (continued)

7604	Transistor, NPN, BC847B.	4822 130 60511
7605	Transistor, NPN, BC847B.	4822 130 60511
7608	Transistor, NPN, BC847B.	4822 130 60511
7609	Transistor, NPN, BC847B.	4822 130 60511
7680	IR Receiver.	9322 127 53667
7904	Transistor, NPN, BC847B.	4822 130 60511
7954	IC,.	4835 209 88542
CBA	00EMF892A102 Main Chassis Board Asm.	00EM F89 2A102

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Mains Cord	3135 010 07161
S AC02	Anode Clip	4835 256 97264
AC03	Cabinet Back	3135 014 07961
AC04	Cabinet Front.	3135 017 04101
AC05	Chassis Guide.	3139 124 31381
AC06	Control Buttons.	3139 124 27351
S AC07	Convergence and Purity Assembly. . .	2422 549 43385
S AC08	CRT A63AFW36X (C121 Version)	9301 763 20443
S AC09	Coil, Degaussing	3121 218 62961
AC11	Light Guide.	3139 124 26461
AC12	Nameplate.	4835 459 17545
AC14	Power Button	3139 124 26444
REMOTE	Remote Transmitter	3139 228 80572
AC16	Speaker, 16R, 1W5 (2 Used)	2422 264 00343
S AC18	Yoke (C121 Version).	3321 203 00121
AC19	Yoke Wedge (3 Used).	4835 535 27001
AC21	Batteries f/Remote Transmitter . . .	9299 000 13827
AC24	Spring	3139 121 26231
AC25	Owner's Manual	3135 015 16021
AC29	Vent Cover	3135 013 03371

TL9125C221 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts	
S 0127	3.15 Amp Fuse, ...	3122 358 72141
0152	Cable, DIP, 6 Pin, 400mm	3104 301 09421
0153	4 Pin Cable.	3104 301 09431
0212	Connector, 2 Pin	2422 025 15396
0215	Connector, 2 Pin,.	2422 025 16343
0220	4 Pin Board Connector.	2422 025 04852
0224	1 Pin Board Connector.	2422 034 20021
0228	1 Pin Board Connector.	2422 034 20021
0238	Connector, 5 Pin	2422 025 12481
S 0243	Connector, 6 Pin	2422 025 04854
0244	4 Pin Board Connector.	2422 025 04852
S 0245	Connector, 6 Pin	2422 025 04854
S 0254	CRT Socket (9 Pin)	2422 500 80022
0259	Connector, 3 Pin	2412 020 00725
0267	Connector, 3 Pin	2412 020 00725
1000	Tuner.	2422 542 90057
1001	Filter	2422 549 42501
1003	45 MHz SAW, Filter,.	2422 549 42433
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807
1208	Crystal Resonator, 3.58MHz	2422 543 00832
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10869
S 1571	1 Amp, Radial Fuse,.	4835 253 97162
S 1572	1 Amp, Radial Fuse,.	4835 253 97162
S 1580	Relay, 12V	2422 132 07317
1600	Switch, Tactile.	2422 128 02742
1601	Switch, Tactile.	2422 128 02742
1602	Switch, Tactile.	2422 128 02742
1603	Switch, Tactile.	2422 128 02742
1606	Switch, Tactile.	2422 128 02742
1660	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488
2001	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2002	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2003	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2004	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2011	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2201	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2202	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2203	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2204	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2205	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2208	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2209	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2211	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2212	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2213	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2214	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2215	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 16654
2220	Cap, 18p, 5%, 50V, Ceramic	3198 016 01890
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2222	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2226	Cap, 33u, 20%, 25V, Electrolytic . .	2020 021 90124
2227	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2247	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2248	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2249	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2330	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2340	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320
S 2343	Cap, 3n3, 10%, 2KV, Ceramic.	2020 558 90529
2345	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2401	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2402	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2404	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2405	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2407	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2409	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2420	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2426	Cap, 100n, 10%, 63V, Metalized Polyes ter.	2222 370 75104
2428	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2429	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2430	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2431	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2437	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2437	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2438	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2448	Cap, 220p, 10%, 500V, Ceramic. . . .	3198 019 42210
2450	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91139
2451	Cap, 15n, 10%, 50V, Polyester. . . .	2020 300 90575
2451	0.01uF., 10%, 50V, Polyester, only 27	3198 138 20941
2456	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176
2457	Cap, 390n, 5%, 250V, Metalized Polypr opylene.	2222 479 90021
2458	Cap, 10u, 20%, 100V, Electrolytic. .	2020 021 90813
2459	Cap, 680p, 10%, 500V, Ceramic. . . .	3198 019 46810
2461	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2462	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176
2463	470pF., 10%, 2KV, Ceramic.	4835 122 47638
S 2465	Cap, 10n, 5%, 1600V, Polypropylene .	2222 375 90154
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050
2481	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2482	Cap, 68n, 10%, 250V, Polyester . . .	2222 347 90234
2484	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2485	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93282
2486	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2487	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2488	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2489	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2490	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2491	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810
2500	0.47uF., 250V, Polyester	4835 121 47569
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
S 2507	Cap, 1n5, 10%, 1KV, Ceramic.	2020 558 90443
2508	Cap, 470u, 20%, 200V, Electrolytic .	2020 024 90626
S 2511	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
S 2518	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2530	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 021 91147
2531	Cap, 1n, 2%, 50V, Polypropylene. . .	2020 310 90049
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2540	Cap, 100u, 20%, 25V, Electrolytic. .	2020 021 90547
S 2545	1500pF., 250VAC, Ceramic	4835 122 47622
S 2550	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2551	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91358
2561	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
S 2562	Cap, 220p, 10%, 1KV, Ceramic	2020 558 90424
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2572	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2575	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2577	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2586	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2604	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2613	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2615	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2619	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2622	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2629	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2679	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2681	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2913	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2914	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2915	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2916	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648
2917	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090
2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010

S = Safety Part Be sure to use exact replacement part.

TL9125C221 (continued)

3010	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610	
3013	Zero ohm,.	4835 111 27056	
3014	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3015	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810	
3021	Res, 1K, 2%, 0,25W	4822 051 10102	
3200	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	
3201	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253	
3203	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443	
3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	
3205	Res, 1K, 2%, 0,25W	4822 051 10102	
3206	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	
3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3209	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3212	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253	
3213	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	
3215	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3216	Zero ohm,.	4835 111 27056	
3218	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3219	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	
3220	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3225	100k, 5%, 1/10W, Metal Film.	4835 111 37434	
3228	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3231	Zero ohm,.	4835 111 27056	
3232	Zero ohm,.	4835 111 27056	
3233	Zero ohm,.	4835 111 27056	
3243	1.2k, 5%, 1/10W, Metal Film.	4835 111 27042	
3243	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3246	82k, 5%, 1/10W, Metal Film	4835 111 37277	
3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340	
3250	Zero ohm,.	4835 111 27056	
3251	100k, 5%, 1/10W, Metal Film.	4835 111 37434	
3252	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3253	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3257	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3258	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3259	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046	
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046	
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046	
S 3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109	
S 3341	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483	
S 3342	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483	
3343	1.5k, 20%, 1/2W, Carbon Composition.	4835 110 47034	
3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290	
S 3345	VDR, DC, 1mA, 50V, MAX 115V	2322 593 13507	
3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290	
3401	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380	
3402	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380	
3403	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380	
3405	Res, 1K8, 1%, 3/5W, Metal Film . . .	2322 156 21802	
3406	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
3407	Res, 1K8, 1%, 3/5W, Metal Film . . .	2322 156 21802	
3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
3409	1.5 ohm, 5%, 1/3W, Metal Film. . . .	4835 116 57664	
3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210	
3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210	
3420	470k, 5%, 1/10W, Metal Film.	4835 111 37407	
3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220	
3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220	
3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840	
3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606	
3425	150k, 5%, 1/10W, Metal Film.	4835 111 27045	
3426	39k, 5%, 1/10W, Metal Film	4835 111 27051	
3428	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3429	27k, 5%, 1/10W, Metal Film	4835 111 37442	
3431	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3432	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3436	Res, 1K, 2%, 0,25W	4822 051 10102	
3437	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3438	33k, 1/4W, Carbon Film	4835 110 57375	
3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920	
3447	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220	
3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320	
S 3452	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63229	
S 3453	Res, 4R7, 5%, 5W, Wire Wound	2322 251 41478	
S 3454	Res, 33K, 5%, 1 1/3W, Metal Film . .	2322 194 63333	
3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
S 3462	Res, 6K8, 5%, 5W, Metal Film	2322 257 41682	
3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790	
3464	Res, 1K, 2%, 0,25W	4822 051 10102	
S 3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109	
3466	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903	
3467	Res, 14K, 1%, 3/5W, Metal Film . . .	2322 156 21403	
3467	Res, 15K, 1%, 3/5W, Metal Film . . .	2322 156 21503	
3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
3469	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240	
3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703	
3481	Res, 100K, 1%, 3/5W, Metal Film. . .	2322 156 21004	
3482	Res, 32K4, 1%, 3/5W, Metal Film. . .	2322 156 23243	
3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230	
3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
S 3485	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023	
S 3486	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012	
S 3487	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012	
S 3488	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023	
S 3490	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012	
S 3491	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012	
S 3492	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012	
3495	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272	
3496	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3497	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019	
S 3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225	
3503	10ohm, 120VAC, Positive Temperature C oefficient	4835 116 47001	
S 3505	Surge Protector.	2422 549 43073	
S 3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223	
S 3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333	
S 3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102	
3512	15k, 5%, 1/10W, Metal Film	4835 111 37458	
3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184	
3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204	
S 3515	2.5 ohm, 20%, 3.6W, Negative Temperat ure Coefficient.	2122 612 00023	
3516	Res, 1K, 2%, 0,25W	4822 051 10102	
3517	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
S 3518	Res, 0R22, 5%, 3W, Metal Film. . . .	2120 106 90548	
3520	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230	
3521	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443	
S 3525	33 ohm, 5%, 1/3W, Metal Film	4835 116 57665	
3528	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3529	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890	
3530	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320	
3532	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3534	15k, 5%, 1/10W, Metal Film	4835 111 37458	
3536	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830	
3537	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
S 3542	4.7 Megohm, 5%, 1/2W, Metal Film . .	4835 116 57009	
3570	15k, 5%, 1/10W, Metal Film	4835 111 37458	
3571	Res, 150K, 1%, 3/5W, Metal Film. . .	2322 156 21504	
3573	Res, 2K, 1%, 1/10W, Metalized Glass.	2120 108 92657	
3574	33k, 5%, 1/10W, Metal Film	4835 111 37248	
3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3577	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3578	Res, 1K, 2%, 0,25W	4822 051 10102	
3579	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451	
3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3592	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3594	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3595	68k, 5%, 1/6W, Carbon Film	4835 111 37205	
3596	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3597	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3598	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3599	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3607	8.2k, 5%, 1/8W, Inline Package . . .	4835 111 97046	
3608	2.2k, 5%, 1/8W, Inline Package . . .	4835 111 97049	
3609	2.2k, 5%, Resistor Network	2120 108 93868	
3611	Res, 1K, 2%, 0,25W	4822 051 10102	
3612	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3613	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3615	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3617	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3619	820 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37466	
3629	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259	
3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3631	27k, 5%, 1/10W, Metal Film	4835 111 37442	
S 3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63479	
3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210	
3634	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3635	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3636	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3653	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3654	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3655	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3662	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3663	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3664	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3665	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3666	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376	
3667	27k, 5%, 1/10W, Metal Film	4835 111 37442	

S = Safety Part Be sure to use exact replacement part.

TL9125C221 (continued)

3672	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3673	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3674	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259	
3675	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3676	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3677	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3680	680 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37271	
3681	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3682	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3683	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3684	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3685	220 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37371	
3908	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3909	Res, 1K, 2%, 0,25W	4822 051 10102	
3910	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376	
3911	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230	
3912	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3913	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3914	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	
3915	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231	
3916	220 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37371	
3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810	
3951	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3953	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272	
3955	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
4001	Zero ohm,.	4835 111 27056	
4002	Zero ohm,.	4835 111 27056	
4004	Zero ohm,.	4835 111 27056	
4007	Zero ohm,.	4835 111 27056	
4009	Zero ohm,.	4835 111 27056	
4010	Zero ohm,.	4835 111 27056	
4011	Zero ohm,.	4835 111 27056	
4012	Zero ohm,.	4835 111 27056	
4013	Zero ohm,.	4835 111 27056	
4020	Zero ohm,.	4835 111 27056	
4051	Zero ohm,.	4835 111 27056	
4100	Zero ohm,.	4835 111 27056	
4101	Zero ohm,.	4835 111 27056	
4102	Zero ohm,.	4835 111 27056	
4103	Zero ohm,.	4835 111 27056	
4143	Zero ohm,.	4835 111 27056	
4144	Zero ohm,.	4835 111 27056	
4203	Zero ohm,.	4835 111 27056	
4207	Zero ohm,.	4835 111 27056	
4212	Zero ohm,.	4835 111 27056	
4214	Zero ohm,.	4835 111 27056	
4215	Zero ohm,.	4835 111 27056	
4216	Zero ohm,.	4835 111 27056	
4501	Zero ohm,.	4835 111 27056	
4602	Zero ohm,.	4835 111 27056	
4650	Zero ohm,.	4835 111 27056	
4651	Zero ohm,.	4835 111 27056	
4652	Zero ohm,.	4835 111 27056	
4654	Zero ohm,.	4835 111 27056	
4655	Zero ohm,.	4835 111 27056	
4684	Zero ohm,.	4835 111 27056	
4687	Zero ohm,.	4835 111 27056	
4831	Zero ohm,.	4835 111 27056	
4832	Zero ohm,.	4835 111 27056	
4833	Zero ohm,.	4835 111 27056	
4902	Zero ohm,.	4835 111 27056	
4903	Zero ohm,.	4835 111 27056	
4904	Zero ohm,.	4835 111 27056	
4905	Zero ohm,.	4835 111 27056	
4909	Zero ohm,.	4835 111 27056	
4911	Zero ohm,.	4835 111 27056	
4912	Zero ohm,.	4835 111 27056	
4914	Zero ohm,.	4835 111 27056	
4957	Zero ohm,.	4835 111 27056	
4999	Zero ohm,.	4835 111 27056	
5000	Coil, 5u6.	3198 018 25680	
5004	Coil, 820n	2422 535 97314	
5201	Coil, 22u.	3198 018 22290	
5202	Coil, 6u8.	3198 018 16880	
S 5445	Transformer, L.O.T., models ending in C101, C121, and C125	2422 531 02327	
S 5445	Transformer, L.O.T., models ending in C221 and C225.	3128 138 20941	
5451	Coil, 27u.	2422 535 96614	
5457	Coil, Linear Correction.	3128 138 53241	
5461	Transformer.	3128 138 33811	
5480	Coil, 27u.	2422 535 97334	
5480	Coil, 39u.	2422 535 97336	
5480	33uH., Peaking Coil, only in 25. . .	4835 157 58205	
S 5500	Filter, Mains, 5mH, 2A	2422 549 43432	
5516	100uH., Coil	4835 157 67078	
5518	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5521	Coil, 2u2.	3198 018 12280	
5540	Coil, 4u7.	3198 018 14780	
S 5545	Transfomer,.	2422 531 02314	
5551	27uH., 5%, Coil, Peaking	4835 157 67052	
5552	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5572	100uH., Coil	4835 157 67078	
5573	100uH., Coil	4835 157 67078	
5576	100uH., Coil	4835 157 67078	
5577	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5600	Coil, 8u2.	3198 018 18280	
5601	Coil, 8u2.	3198 018 18280	
5620	Coil, 6u8.	3198 018 16880	
5821	Coil, 100u	3198 018 21010	
6008	Zener, 33 Volt BZX79-C33	4835 130 37904	
6211	Diode, 1N4148.	4835 130 37048	
6212	Diode, 1N4148.	4835 130 37048	
6213	Diode, 1N4148.	4835 130 37048	
6331	Diode.	4835 130 37294	
6333	Diode.	4835 130 37294	
6335	Diode.	4835 130 37294	
6401	Diode.	4835 130 37094	
6402	Zener, 33 Volt, BZX79-C33.	4835 130 37904	
6403	Diode.	4835 130 37094	
6404	Diode.	4835 130 37094	
6449	Diode, 1N4148.	4835 130 37048	
6450	Diode, 1N4148.	4835 130 37048	
6460	Diode, Rect, BY228/20	9336 215 80112	
6463	Diode, 1N4148.	4835 130 37048	
6464	Zener, 6.2 Volt, BZX79-B6V2.	4835 130 37948	
6465	Diode, BYD33J.	4835 130 37094	
6466	Diode, BYD33J.	4835 130 37094	
6480	Diode, Zener	4835 130 37947	
6481	Diode, 1N4148.	4835 130 37048	
6485	Diode, BYD33J.	4835 130 37094	
6486	Diode, EGP20DL-530	4835 130 37919	
6487	Diode.	4835 130 37094	
6488	Diode, Rect, BYV27-200.	9322 126 72673	
6490	Diode, Rect, BYV27-200.	9322 126 72673	
6505	Diode, Bridge Rect, GBU6JL-7002 . .	9322 138 08667	
6507	Diode, BYD33J.	4835 130 37094	
6508	Diode, BYD33J.	4835 130 37094	
6510	Zener Diode, 20 volt	9331 178 60133	
6511	Diode, BYV95C.	4835 130 37052	
6512	Diode, Rect, BY228/20	4822 130 41275	
6513	Diode, Rect, BY228/20	4822 130 41275	
6514	Zener, 18 Volt, BZX79-C18.	4835 130 37908	
6540	Diode.	4835 130 37294	
6550	Diode, Rect, BY229X-800	9340 380 30127	
6560	Diode, EGP20DL-530	4835 130 37919	
6580	Diode, Rect, BYV27-200.	9322 126 72673	
6584	Diode, 1N4148.	4835 130 37048	
6585	Diode, 1N4148.	4835 130 37048	
6591	Diode, BAS216.	4835 130 37905	
6601	Diode, Zener	4835 130 37684	
6602	Diode, 1N4148.	4835 130 37048	
6603	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610	
6604	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610	
6605	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610	
6606	Zener, 4.7 Volt, BZX79-C4V7.	4835 130 37005	
6607	Zener, 6.8 Volt, BZX79-C6V8.	4835 130 37945	
6690	LED, LTL-307P.	4835 130 97096	
6951	Diode, BAS216.	4835 130 37905	
6961	Diode, BAS216.	4835 130 37905	
7250	IC,.	9352 620 26112	
7251	IC, LM317T	9337 220 80682	
7254	Transistor, NPN, BC847B.	4822 130 60511	
7256	Transistor, NPN, BC847B.	4822 130 60511	
7258	Transistor, NPN, BC847B.	4822 130 60511	
7263	Transistor, PNP, BC857B.	5322 130 60508	
7266	Transistor, NPN, BC847B.	4822 130 60511	
7330	IC,.	9352 184 10112	
7401	IC,.	9322 121 47687	
7460	Transistor, NPN, BU1508DX.	9340 170 50127	
7461	Transistor, NPN, BF819	9335 354 50127	
7462	Transistor, BC547B	4835 130 47055	
7463	Transistor, BC557B	4835 130 47409	
7480	IC,.	9322 028 93682	
7481	Transistor, BC557B	4835 130 47409	
7482	Transistor, PNP, BC857B.	5322 130 60508	
7518	STH8NA60FI SMPS FET	9322 068 92687	
7518	STH10NC60FI SMPS FET.	9322 155 66687	
7520	IC, MC44603A	4835 209 88537	
7570	IC,.	9337 711 00676	
S 7581	Coupler, TCDT1101G	9338 431 30682	
7590	Transistor, NPN, BC847B.	4822 130 60511	
7591	Transistor, NPN, BC847B.	4822 130 60511	
7592	Transistor, NPN, BC847B.	4822 130 60511	
7600	IC, SAA5543-PS/M4/0167 L9 v3.2 (Comme rcial Models - NON Pro Plus)	9352 670 84112	
7600	IC, SAA5565-PS/M3/0195 L9 v3.2 (Comme rcial Models - Pro Plus Models). . .	9352 673 97112	
7601	IC, ST24W16B6, commercial models only	9322 095 35682	
7603	Transistor, NPN, BC337	9331 796 00126	

S = Safety Part Be sure to use exact replacement part.

TL9125C221 (continued)

7604	Transistor, NPN, BC847B.	4822 130 60511
7605	Transistor, NPN, BC847B.	4822 130 60511
7608	Transistor, NPN, BC847B.	4822 130 60511
7609	Transistor, NPN, BC847B.	4822 130 60511
7680	IR Receiver.	9322 127 53667
7904	Transistor, NPN, BC847B.	4822 130 60511
7954	IC,.	4835 209 88542
CBA	00EMF892A102 Main Chassis Board Asm.	00EM F89 2A102

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Mains Cord	3135 010 07161
S AC02	Anode Clip	4835 256 97264
AC03	Cabinet Back	3135 014 07961
AC04	Cabinet Front.	3135 017 04101
AC05	Chassis Guide.	3139 124 31381
AC06	Control Buttons.	3139 124 27351
S AC07	Convergence and Purity Assembly. . .	2422 549 43385
S AC08	CRT A63AFW36X (C121 Version)	9301 763 20443
S AC09	Coil, Degaussing	3121 218 62961
AC11	Light Guide.	3139 124 26461
AC12	Nameplate.	4835 459 17545
AC14	Power Button	3139 124 26444
REMOTE	Remote Transmitter	3139 228 80572
AC16	Speaker, 16R, 1W5 (2 Used)	2422 264 00343
S AC18	Yoke (C121 Version).	3321 203 00121
AC19	Yoke Wedge (3 Used).	4835 535 27001
AC21	Batteries f/Remote Transmitter . . .	9299 000 13827
AC24	Spring	3139 121 26231
AC25	Owner's Manual	3135 015 16021
AC29	Vent Cover	3135 013 03371

TL9127C101 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts		
S 0127	3.15 Amp Fuse, ...	3122 358 72141	
0152	Cable, DIP, 6 Pin, 400mm	3104 301 09421	
0153	4 Pin Cable.	3104 301 09431	
0212	Connector, 2 Pin	2422 025 15396	
0215	Connector, 2 Pin,.	2422 025 16343	
0220	4 Pin Board Connector.	2422 025 04852	
0224	1 Pin Board Connector.	2422 034 20021	
0228	1 Pin Board Connector.	2422 034 20021	
0234	Connector, 4 Pin	2422 025 15847	
0238	Connector, 5 Pin	2422 025 12481	
S 0243	Connector, 6 Pin	2422 025 04854	
0244	4 Pin Board Connector.	2422 025 04852	
S 0245	Connector, 6 Pin	2422 025 04854	
S 0254	CRT Socket (9 Pin)	2422 500 80022	
0259	Connector, 3 Pin	2412 020 00725	
0267	Connector, 3 Pin	2412 020 00725	
1000	Tuner.	2422 542 90057	
1001	Filter	2422 549 42501	
1003	45 MHz SAW, Filter,.	2422 549 42433	
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807	
1208	Crystal Resonator.	4835 242 77276	
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10869	
S 1571	1 Amp, Radial Fuse,.	4835 253 97162	
S 1572	1 Amp, Radial Fuse,.	4835 253 97162	
S 1580	Relay, 12V	2422 132 07317	
1600	Switch, Tactile.	2422 128 02742	
1601	Switch, Tactile.	2422 128 02742	
1602	Switch, Tactile.	2422 128 02742	
1603	Switch, Tactile.	2422 128 02742	
1606	Switch, Tactile.	2422 128 02742	
1660	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488	
1821	Ceramic Resonator.	4835 122 97102	
2001	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2002	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2003	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2004	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2006	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290	
2011	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2102	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2103	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2104	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2201	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2202	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2203	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2204	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2205	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2207	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2208	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2209	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2211	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2212	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2213	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2214	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2215	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280	
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 16654	
2220	Cap, 18p, 5%, 50V, Ceramic	3198 016 01890	
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2222	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2226	Cap, 33u, 20%, 25V, Electrolytic . .	2020 021 90124	
2227	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2247	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2248	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2249	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2330	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177	
2340	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495	
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320	
S 2343	Cap, 3n3, 10%, 2KV, Ceramic.	2020 558 90529	
2345	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020	
2401	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2402	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2404	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2405	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2407	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2409	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2420	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2426	Cap, 100n, 10%, 63V, Metalized Polyes ter.	2222 370 75104	
2428	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220	
2429	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2430	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2431	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2437	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2438	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2448	Cap, 220p, 10%, 500V, Ceramic. . . .	3198 019 42210	
2450	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91139	
2451	Cap, 15n, 10%, 50V, Polyester. . . .	2020 300 90575	
2451	0.01uF., 10%, 50V, Polyester, only 27	3198 138 20941	
2456	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176	
2457	Cap, 390n, 5%, 250V, Metalized Polypr opylene.	2222 479 90021	
2458	Cap, 2u2, 20%, 100V, Electrolytic. .	2020 021 91331	
2459	Cap, 680p, 10%, 500V, Ceramic. . . .	3198 019 46810	
2461	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020	
2462	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176	
2463	680pF., 10%, 2KV, Ceramic.	4835 122 47584	
S 2465	Cap, 10n, 5%, 1600V, Polypropylene .	2222 375 90154	
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050	
2473	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790	
2481	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740	
2482	Cap, 68n, 10%, 250V, Polyester . . .	2222 347 90234	
2484	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2485	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293	
2486	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2487	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2488	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2489	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2490	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710	
2491	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710	
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810	
2500	0.47uF., 250V, Polyester	4835 121 47569	
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
S 2507	Cap, 1n5, 10%, 1KV, Ceramic.	2020 558 90443	
2508	Cap, 470u, 20%, 200V, Electrolytic .	2020 024 90647	
S 2511	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020	
S 2518	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290	
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320	
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320	
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2530	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 021 91147	
2531	Cap, 1n, 2%, 50V, Polypropylene. . .	2020 310 90049	
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220	
2540	Cap, 100u, 20%, 25V, Electrolytic. .	2020 021 90547	
S 2545	1500pF., 250VAC, Ceramic	4835 122 47621	
S 2550	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2551	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91358	
2561	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020	
S 2562	Cap, 220p, 10%, 1KV, Ceramic	2020 558 90424	
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020	
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020	
2572	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330	
2575	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820	
2577	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020	
2586	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2604	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290	
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2613	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2615	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2619	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2622	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890	
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2629	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230	
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2631	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2679	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2681	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2821	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280	
2823	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2825	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2826	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090	
2827	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2828	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2829	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	
2830	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280	

S = Safety Part Be sure to use exact replacement part.

TL9127C101 (continued)

2831	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
2832	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280	S	3345	VDR, DC, 1mA, 50V, MAX 115V	2322 593 13507
2833	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280		3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
2834	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780		3401	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2835	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3402	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2836	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3403	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2837	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740		3405	Res, 1K8, 1%, 3/5W, Metal Film . . .	2322 156 21802
2838	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3406	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2839	Cap, 1u, 5%, 50V, Metalized Polyester	2020 308 90124		3407	Res, 1K8, 1%, 3/5W, Metal Film . . .	2322 156 21802
2840	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2841	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3409	1.5 ohm, 5%, 1/3W, Metal Film. . . .	4835 116 57664
2842	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2844	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3420	470k, 5%, 1/10W, Metal Film.	4835 111 37407
2845	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2913	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280		3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2914	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330		3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840
2915	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606
2916	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648		3425	Res, 120K, 5%, 1/10W, Metalized Glass	2120 108 91716
2917	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3426	39k, 5%, 1/10W, Metal Film	4835 111 27051
2918	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330		3428	22k, 5%, 1/10W, Metal Film	4835 111 37441
2919	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3429	27k, 5%, 1/10W, Metal Film	4835 111 37442
2920	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648		3431	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
2921	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3432	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
2931	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280		3436	Res, 1K, 2%, 0,25W	4822 051 10102
2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3437	10k, 5%, 1/10W, Metal Film	4835 111 37216
2952	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3438	33k, 1/4W, Carbon Film	4835 110 57375
2954	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
2955	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3447	10k, 5%, 1/10W, Metal Film	4835 111 37216
2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	S	3452	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63229
2960	Cap, 220u, 20%, 50V, Electrolytic. .	3198 026 52210	S	3453	Res, 4R7, 5%, 5W, Wire Wound	2322 251 41478
2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090	S	3454	Res, 33K, 5%, 1 1/3W, Metal Film . .	2322 194 63333
2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090		3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090		3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3462	Res, 6K8, 5%, 5W, Metal Film	2322 257 41682
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3010	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610		3464	Res, 1K, 2%, 0,25W	4822 051 10102
3013	Zero ohm,.	4835 111 27056	S	3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
3014	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052		3466	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903
3015	22k, 5%, 1/10W, Metal Film	4835 111 37441		3467	Res, 14K, 1%, 3/5W, Metal Film . . .	2322 156 21403
3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810		3467	Res, 15K, 1%, 3/5W, Metal Film . . .	2322 156 21503
3021	Res, 1K, 2%, 0,25W	4822 051 10102		3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3103	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3469	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
3104	10k, 5%, 1/10W, Metal Film	4835 111 37216		3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3108	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703
3109	10k, 5%, 1/10W, Metal Film	4835 111 37216		3481	Res, 35K7, 1%, 3/5W, Metal Film. . .	2322 156 23573
3123	75 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37276		3482	Res, 56K, 1%, 3/5W, Metal Film . . .	2322 156 25603
3200	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3201	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253		3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3203	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443	S	3485	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	S	3486	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3205	Res, 1K, 2%, 0,25W	4822 051 10102	S	3487	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3206	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	S	3488	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3490	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3209	22k, 5%, 1/10W, Metal Film	4835 111 37441	S	3491	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3212	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253	S	3492	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3213	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3495	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272
3215	22k, 5%, 1/10W, Metal Film	4835 111 37441		3496	10k, 5%, 1/10W, Metal Film	4835 111 37216
3216	Zero ohm,.	4835 111 27056		3497	10k, 5%, 1/10W, Metal Film	4835 111 37216
3217	Res, 1M5, 5%, 1/8W, Metalized Glass.	2322 730 61155		3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3218	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225
3219	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3503	10ohm, 120VAC, Positive Temperature C	
3220	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432			oefficient	4835 116 47001
3225	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S	3505	Surge Protector.	2422 549 43073
3228	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3231	Zero ohm,.	4835 111 27056	S	3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333
3232	Zero ohm,.	4835 111 27056	S	3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102
3233	Zero ohm,.	4835 111 27056		3512	15k, 5%, 1/10W, Metal Film	4835 111 37458
3243	1.2k, 5%, 1/10W, Metal Film.	4835 111 27042		3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184
3246	82k, 5%, 1/10W, Metal Film	4835 111 37277		3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204
3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3515	2.5 ohm, 20%, 3.6W, Negative Temperat	
3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010			ure Coefficient.	2122 612 00023
3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340		3516	Res, 1K, 2%, 0,25W	4822 051 10102
3250	Zero ohm,.	4835 111 27056		3517	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3251	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S	3518	Res, 0R22, 5%, 3W, Metal Film. . . .	2120 106 90548
3252	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		3520	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3253	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		3521	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443
3257	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3525	33 ohm, 5%, 1/3W, Metal Film	4835 116 57665
3258	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3528	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3259	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3529	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3530	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3532	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3534	15k, 5%, 1/10W, Metal Film	4835 111 37458
3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3536	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3537	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046	S	3542	4.7 Megohm, 5%, 1/2W, Metal Film . .	4835 116 57009
S 3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109		3570	15k, 5%, 1/10W, Metal Film	4835 111 37458
S 3341	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483		3571	Res, 150K, 1%, 3/5W, Metal Film. . .	2322 156 21504
S 3342	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483		3573	Res, 2K, 1%, 1/10W, Metalized Glass.	2120 108 92657
3343	1.5k, 20%, 1/2W, Carbon Composition.	4835 110 47034		3574	33k, 5%, 1/10W, Metal Film	4835 111 37248

S = Safety Part Be sure to use exact replacement part.

TL9127C101 (continued)

3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3577	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3578	Res, 1K, 2%, 0,25W	4822 051 10102	
3579	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451	
3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3592	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3594	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3595	68k, 5%, 1/6W, Carbon Film	4835 111 37205	
3596	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3597	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3598	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3599	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3607	8.2k, 5%, 1/8W, Inline Package . . .	4835 111 97046	
3608	2.2k, 5%, 1/8W, Inline Package . . .	4835 111 97049	
3609	2.2k, 5%, Resistor Network	2120 108 93868	
3611	Res, 1K, 2%, 0,25W	4822 051 10102	
3612	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3613	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3615	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3617	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3619	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3629	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259	
3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3631	27k, 5%, 1/10W, Metal Film	4835 111 37442	
S 3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63479	
3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210	
3634	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3635	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3636	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3637	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3653	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3654	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3655	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3662	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3663	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3664	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3665	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3666	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376	
3667	27k, 5%, 1/10W, Metal Film	4835 111 37442	
3672	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3673	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3674	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259	
3675	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3676	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3677	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3680	680 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37271	
3681	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3682	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3683	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3684	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3685	220 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37371	
3821	15k, 5%, 1/10W, Metal Film	4835 111 37458	
3822	1.2k, 5%, 1/10W, Metal Film.	4835 111 27042	
3823	100k, 5%, 1/10W, Metal Film.	4835 111 37434	
3824	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3825	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3826	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3827	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3828	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3829	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272	
3830	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272	
3831	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198 011 03310	
3832	47 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37262	
3908	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3909	Res, 1K, 2%, 0,25W	4822 051 10102	
3910	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376	
3911	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230	
3913	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3914	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	
3915	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231	
3916	220 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37371	
3918	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3919	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376	
3920	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231	
3921	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230	
3922	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	
3923	220 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37371	
3924	39k, 5%, 1/10W, Metal Film	4835 111 27051	
3925	39k, 5%, 1/10W, Metal Film	4835 111 27051	
3926	39k, 5%, 1/10W, Metal Film	4835 111 27051	
3929	39k, 5%, 1/10W, Metal Film	4835 111 27051	
3930	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3931	Res, 1K, 2%, 0,25W	4822 051 10102	
3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810	
3951	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3953	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3955	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
3957	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
4001	Zero ohm,.	4835 111 27056	
4002	Zero ohm,.	4835 111 27056	
4004	Zero ohm,.	4835 111 27056	
4007	Zero ohm,.	4835 111 27056	
4009	Zero ohm,.	4835 111 27056	
4010	Zero ohm,.	4835 111 27056	
4011	Zero ohm,.	4835 111 27056	
4012	Zero ohm,.	4835 111 27056	
4013	Zero ohm,.	4835 111 27056	
4020	Zero ohm,.	4835 111 27056	
4051	Zero ohm,.	4835 111 27056	
4100	Zero ohm,.	4835 111 27056	
4101	Zero ohm,.	4835 111 27056	
4102	Zero ohm,.	4835 111 27056	
4103	Zero ohm,.	4835 111 27056	
4143	Zero ohm,.	4835 111 27056	
4144	Zero ohm,.	4835 111 27056	
4203	Zero ohm,.	4835 111 27056	
4207	Zero ohm,.	4835 111 27056	
4212	Zero ohm,.	4835 111 27056	
4214	Zero ohm,.	4835 111 27056	
4215	Zero ohm,.	4835 111 27056	
4216	Zero ohm,.	4835 111 27056	
4501	Zero ohm,.	4835 111 27056	
4602	Zero ohm,.	4835 111 27056	
4650	Zero ohm,.	4835 111 27056	
4651	Zero ohm,.	4835 111 27056	
4652	Zero ohm,.	4835 111 27056	
4654	Zero ohm,.	4835 111 27056	
4655	Zero ohm,.	4835 111 27056	
4684	Zero ohm,.	4835 111 27056	
4687	Zero ohm,.	4835 111 27056	
4831	Zero ohm,.	4835 111 27056	
4832	Zero ohm,.	4835 111 27056	
4833	Zero ohm,.	4835 111 27056	
4902	Zero ohm,.	4835 111 27056	
4903	Zero ohm,.	4835 111 27056	
4904	Zero ohm,.	4835 111 27056	
4905	Zero ohm,.	4835 111 27056	
4909	Zero ohm,.	4835 111 27056	
4911	Zero ohm,.	4835 111 27056	
4912	Zero ohm,.	4835 111 27056	
4914	Zero ohm,.	4835 111 27056	
4957	Zero ohm,.	4835 111 27056	
4999	Zero ohm,.	4835 111 27056	
5000	Coil, 5u6.	3198 018 25680	
5004	Coil, 820n	2422 535 97314	
5201	Coil, 22u.	3198 018 22290	
5202	Coil, 6u8.	3198 018 16880	
5342	22uH., 10%, Coil, Peaking.	4835 157 67069	
S 5445	Transformer, L.O.T., models ending in C101, C121, and C125	2422 531 02327	
S 5445	Transformer, L.O.T., models ending in C221 and C225.	3128 138 20941	
5451	Coil, 27u.	2422 535 96614	
5457	Coil, Linear Correction.	3128 138 53241	
5461	Transformer.	3128 138 33811	
5480	Coil, 27u.	2422 535 97334	
5480	Coil, 39u.	2422 535 97336	
5480	33uH., Peaking Coil, only in 25. . .	4835 157 58205	
S 5500	Filter, Mains, 5mH, 2A	2422 549 43432	
5516	100uH., Coil	4835 157 67078	
5518	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5521	Coil, 2u2.	3198 018 12280	
5540	Coil, 4u7.	3198 018 14780	
S 5545	Transfomer,.	2422 531 02314	
5551	27uH., 5%, Coil, Peaking	4835 157 67052	
5552	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5572	100uH., Coil	4835 157 67078	
5573	100uH., Coil	4835 157 67078	
5576	100uH., Coil	4835 157 67078	
5577	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5600	Coil, 8u2.	3198 018 18280	
5601	Coil, 8u2.	3198 018 18280	
5620	Coil, 6u8.	3198 018 16880	
5821	Coil, 100u	3198 018 21010	
5822	Coil, 18u.	3198 018 21890	
6008	Zener, 33 Volt BZX79-C33	4835 130 37904	
6113	Zener Diode, 6.8 volt.	9340 386 40115	
6211	Diode, 1N4148.	4835 130 37048	
6212	Diode, 1N4148.	4835 130 37048	
6213	Diode, 1N4148.	4835 130 37048	
6331	Diode.	4835 130 37294	
6333	Diode.	4835 130 37294	
6335	Diode.	4835 130 37294	
6401	Diode.	4835 130 37094	
6402	Zener, 33 Volt, BZX79-C33.	4835 130 37904	

S = Safety Part Be sure to use exact replacement part.

TL9127C101 (continued)

6403	Diode.	4835 130 37094	
6404	Diode.	4835 130 37094	
6449	Diode, 1N4148.	4835 130 37048	
6450	Diode, 1N4148.	4835 130 37048	
6460	Diode, Rect, BY228/20	9336 215 80112	
6463	Diode, 1N4148.	4835 130 37048	
6464	Zener Diode, 6.2 volt.	9337 242 70133	
6465	Diode, BYD33J.	4835 130 37094	
6466	Diode, BYD33J.	4835 130 37094	
6480	Diode, Zener	4835 130 37947	
6481	Diode, 1N4148.	4835 130 37048	
6485	Diode, BYD33J.	4835 130 37094	
6486	Diode, EGP20DL-530	4835 130 37919	
6487	Diode.	4835 130 37094	
6488	Diode, Rect, BYV27-200.	9322 126 72673	
6490	Diode, Rect, BYV27-200.	9322 126 72673	
6505	Diode, Bridge Rect, GBU6JL-7002	9322 138 08667	
6507	Diode, BYD33J.	4835 130 37094	
6508	Diode, BYD33J.	4835 130 37094	
6510	Zener Diode, 20 volt	9331 178 60133	
6511	Diode, BYV95C.	4835 130 37052	
6512	Diode, Rect, BY228/20	4822 130 41275	
6513	Diode, Rect, BY228/20	4822 130 41275	
6514	Zener, 18 Volt, BZX79-C18.	4835 130 37908	
6540	Diode.	4835 130 37294	
6550	Diode, Rect, BY229X-800	9340 380 30127	
6560	Diode, EGP20DL-530	4835 130 37919	
6580	Diode, Rect, SB140.	9339 577 60673	
6584	Diode, 1N4148.	4835 130 37048	
6585	Diode, 1N4148.	4835 130 37048	
6591	Diode, BAS216.	4835 130 37905	
6601	Diode, Zener	4835 130 37684	
6602	Diode, 1N4148.	4835 130 37048	
6603	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610	
6604	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610	
6605	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610	
6606	Zener, 4.7 Volt, BZX79-C4V7.	4835 130 37005	
6607	Zener, 6.8 Volt, BZX79-C6V8.	4835 130 37945	
6690	LED, LTL-307P.	4835 130 97096	
6821	Zener Diode, 9.1 volt.	9331 177 80133	
6822	Fixed Coil	4835 130 37048	
6951	Diode, BAS216.	4835 130 37905	
6961	Diode, BAS216.	4835 130 37905	
7250	IC,.	9352 620 26112	
7251	IC, LM317T	9337 220 80682	
7254	Transistor, NPN, BC847B.	4822 130 60511	
7256	Transistor, NPN, BC847B.	4822 130 60511	
7258	Transistor, NPN, BC847B.	4822 130 60511	
7263	Transistor, PNP, BC857B.	5322 130 60508	
7266	Transistor, NPN, BC847B.	4822 130 60511	
7330	IC,.	9352 184 10112	
7401	IC,.	9322 121 47687	
7460	Transistor, NPN, BU1508DX.	9340 170 50127	
7461	Transistor, NPN, BF819	9335 354 50127	
7462	Transistor, BC547B	4835 130 47055	
7463	Transistor, BC557B	4835 130 47409	
7480	IC,.	9322 028 93682	
7481	Transistor, BC557B	4835 130 47409	
7482	Transistor, PNP, BC857B.	5322 130 60508	
7518	STH8NA60FI SMPS FET	9322 068 92687	
7518	STH10NC60FI SMPS FET.	9322 155 66687	
7520	IC, MC44603A	4835 209 88537	
7570	IC,.	9337 711 00676	
S 7581	Coupler, TCDT1101G	9338 431 30682	
7590	Transistor, NPN, BC847B.	4822 130 60511	
7591	Transistor, NPN, BC847B.	4822 130 60511	
7592	Transistor, NPN, BC847B.	4822 130 60511	
7600	IC, SAA5543-PS/M4/0167 L9 v3.2 (Commercial Models - NON Pro Plus)	9352 670 84112	
7600	IC, SAA5565-PS/M3/0195 L9 v3.2 (Commercial Models - Pro Plus Models).	9352 673 97112	
7601	IC, ST24W16B6, commercial models only	9322 095 35682	
7603	Transistor, NPN, BC337	9331 796 00126	
7604	Transistor, NPN, BC847B.	4822 130 60511	
7605	Transistor, NPN, BC847B.	4822 130 60511	
7608	Transistor, NPN, BC847B.	4822 130 60511	
7609	Transistor, NPN, BC847B.	4822 130 60511	
7680	IR Receiver.	9322 127 53667	
7821	IC,.	9352 374 70112	
7822	IC, HEF4052BT.	9333 729 50653	
7823	Transistor, NPN, BC337-25.	3198 020 43530	
7904	Transistor, NPN, BC847B.	4822 130 60511	
7908	Transistor, NPN, BC847B.	4822 130 60511	
7951	IC,.	4822 209 13706	
CBA	00EMF892A102 Main Chassis Board Asm.	00EM F89 2A102	

Cabinet & Accessory Parts

	Cabinet & Accessory Parts		
S AC01	Mains Cord	3135 010 07161	
S AC02	Anode Clip	4835 256 97264	
AC03	Cabinet Back	3135 014 07911	
AC04	Cabinet Front.	3135 017 04121	
AC05	Chassis Guide.	3139 124 31381	
AC06	Control Buttons.	3139 124 27351	
S AC07	Convergence and Purity Assembly.	2422 549 43385	
S AC08	CRT A68AJB82X.	4835 131 27167	
S AC09	Coil, Degaussing	3121 218 62701	
AC11	Light Guide.	3139 124 26461	
AC12	Nameplate.	4835 459 17545	
AC14	Power Button	3139 124 26444	
REMOTE	Remote Transmitter	3139 228 80572	
AC16	Speaker, 16R, 1W5 (2 Used)	2422 264 00343	
S AC18	Yoke	3313 203 01242	
AC19	Yoke Wedge (3 Used).	4835 535 27006	
AC21	Batteries f/Remote Transmitter	9299 000 13827	
AC24	Spring	3139 121 26231	
AC25	Owner's Manual	3135 015 16021	

S = Safety Part Be sure to use exact replacement part.

TL9127C121 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts		
S 0127	3.15 Amp Fuse, ...	3122 358 72141	
0152	Cable, DIP, 6 Pin, 400mm	3104 301 09421	
0153	4 Pin Cable.	3104 301 09431	
0212	Connector, 2 Pin	2422 025 15396	
0215	Connector, 2 Pin,.	2422 025 16343	
0220	4 Pin Board Connector.	2422 025 04852	
0224	1 Pin Board Connector.	2422 034 20021	
0228	1 Pin Board Connector.	2422 034 20021	
0234	Connector, 4 Pin	2422 025 15847	
0238	Connector, 5 Pin	2422 025 12481	
S 0243	Connector, 6 Pin	2422 025 04854	
0244	4 Pin Board Connector.	2422 025 04852	
S 0245	Connector, 6 Pin	2422 025 04854	
S 0254	CRT Socket (9 Pin)	2422 500 80022	
0259	Connector, 3 Pin	2412 020 00725	
0267	Connector, 3 Pin	2412 020 00725	
1000	Tuner.	2422 542 90057	
1001	Filter	2422 549 42501	
1003	45 MHz SAW, Filter,.	2422 549 42433	
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807	
1208	Crystal Resonator.	4835 242 77276	
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10869	
S 1571	1 Amp, Radial Fuse,.	4835 253 97162	
S 1572	1 Amp, Radial Fuse,.	4835 253 97162	
S 1580	Relay, 12V	2422 132 07317	
1600	Switch, Tactile.	2422 128 02742	
1601	Switch, Tactile.	2422 128 02742	
1602	Switch, Tactile.	2422 128 02742	
1603	Switch, Tactile.	2422 128 02742	
1606	Switch, Tactile.	2422 128 02742	
1660	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488	
1821	Ceramic Resonator.	4835 122 97102	
2001	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2002	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2003	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2004	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2006	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290	
2011	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2102	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2103	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2104	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2201	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2202	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2203	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2204	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2205	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2207	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2208	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2209	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2211	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2212	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2213	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2214	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2215	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280	
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 16654	
2220	Cap, 18p, 5%, 50V, Ceramic	3198 016 01890	
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2222	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2226	Cap, 33u, 20%, 25V, Electrolytic . .	2020 021 90124	
2227	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2247	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2248	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2249	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2330	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177	
2340	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495	
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320	
S 2343	Cap, 3n3, 10%, 2KV, Ceramic.	2020 558 90529	
2345	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020	
2401	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2402	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2404	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2405	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2407	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2409	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2420	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2426	Cap, 100n, 10%, 63V, Metalized Polyes ter.	2222 370 75104	
2428	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220	
2429	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2430	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2431	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2437	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2438	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2448	Cap, 220p, 10%, 500V, Ceramic. . . .	3198 019 42210	
2450	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91139	
2451	Cap, 15n, 10%, 50V, Polyester. . . .	2020 300 90575	
2451	0.01uF., 10%, 50V, Polyester, only 27	3198 138 20941	
2456	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176	
2457	Cap, 390n, 5%, 250V, Metalized Polypr opylene.	2222 479 90021	
2458	Cap, 2u2, 20%, 100V, Electrolytic. .	2020 021 91331	
2459	Cap, 680p, 10%, 500V, Ceramic. . . .	3198 019 46810	
2461	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020	
2462	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176	
2463	680pF., 10%, 2KV, Ceramic.	4835 122 47584	
S 2465	Cap, 10n, 5%, 1600V, Polypropylene .	2222 375 90154	
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050	
2473	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790	
2481	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740	
2482	Cap, 68n, 10%, 250V, Polyester . . .	2222 347 90234	
2484	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2485	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293	
2486	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2487	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2488	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2489	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2490	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710	
2491	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710	
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810	
2500	0.47uF., 250V, Polyester	4835 121 47569	
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
S 2507	Cap, 1n5, 10%, 1KV, Ceramic.	2020 558 90443	
2508	Cap, 470u, 20%, 200V, Electrolytic .	2020 024 90647	
S 2511	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020	
S 2518	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290	
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320	
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320	
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2530	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 021 91147	
2531	Cap, 1n, 2%, 50V, Polypropylene. . .	2020 310 90049	
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220	
2540	Cap, 100u, 20%, 25V, Electrolytic. .	2020 021 90547	
S 2545	1500pF., 250VAC, Ceramic	4835 122 47621	
S 2550	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2551	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91358	
2561	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020	
S 2562	Cap, 220p, 10%, 1KV, Ceramic	2020 558 90424	
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020	
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020	
2572	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330	
2575	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820	
2577	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020	
2586	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2604	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290	
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2613	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2615	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2619	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2622	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890	
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2629	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230	
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2631	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2679	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2681	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2821	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280	
2823	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2825	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2826	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090	
2827	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2828	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2829	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	
2830	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280	

S = Safety Part Be sure to use exact replacement part.

TL9127C121 (continued)

2831	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
2832	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280	S	3345	VDR, DC, 1mA, 50V, MAX 115V	2322 593 13507
2833	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280		3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
2834	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780		3401	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2835	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3402	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2836	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3403	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2837	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740		3405	Res, 1K8, 1%, 3/5W, Metal Film . . .	2322 156 21802
2838	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3406	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2839	Cap, 1u, 5%, 50V, Metalized Polyester	2020 308 90124		3407	Res, 1K8, 1%, 3/5W, Metal Film . . .	2322 156 21802
2840	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2841	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3409	1.5 ohm, 5%, 1/3W, Metal Film. . . .	4835 116 57664
2842	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2844	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3420	470k, 5%, 1/10W, Metal Film.	4835 111 37407
2845	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2913	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280		3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2914	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330		3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840
2915	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606
2916	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648		3425	Res, 120K, 5%, 1/10W, Metalized Glass	2120 108 91716
2917	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3426	39k, 5%, 1/10W, Metal Film	4835 111 27051
2918	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330		3428	22k, 5%, 1/10W, Metal Film	4835 111 37441
2919	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3429	27k, 5%, 1/10W, Metal Film	4835 111 37442
2920	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648		3431	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
2921	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3432	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
2931	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280		3436	Res, 1K, 2%, 0,25W	4822 051 10102
2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3437	10k, 5%, 1/10W, Metal Film	4835 111 37216
2952	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3438	33k, 1/4W, Carbon Film	4835 110 57375
2954	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
2955	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3447	10k, 5%, 1/10W, Metal Film	4835 111 37216
2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	S	3452	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63229
2960	Cap, 220u, 20%, 50V, Electrolytic. .	3198 026 52210	S	3453	Res, 4R7, 5%, 5W, Wire Wound	2322 251 41478
2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090	S	3454	Res, 33K, 5%, 1 1/3W, Metal Film . .	2322 194 63333
2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090		3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090		3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3462	Res, 6K8, 5%, 5W, Metal Film	2322 257 41682
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3010	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610		3464	Res, 1K, 2%, 0,25W	4822 051 10102
3013	Zero ohm,.	4835 111 27056	S	3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
3014	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052		3466	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903
3015	22k, 5%, 1/10W, Metal Film	4835 111 37441		3467	Res, 14K, 1%, 3/5W, Metal Film . . .	2322 156 21403
3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810		3467	Res, 15K, 1%, 3/5W, Metal Film . . .	2322 156 21503
3021	Res, 1K, 2%, 0,25W	4822 051 10102		3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3103	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3469	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
3104	10k, 5%, 1/10W, Metal Film	4835 111 37216		3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3108	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703
3109	10k, 5%, 1/10W, Metal Film	4835 111 37216		3481	Res, 35K7, 1%, 3/5W, Metal Film. . .	2322 156 23573
3123	75 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37276		3482	Res, 56K, 1%, 3/5W, Metal Film . . .	2322 156 25603
3200	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3201	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253		3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3203	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443	S	3485	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	S	3486	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3205	Res, 1K, 2%, 0,25W	4822 051 10102	S	3487	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3206	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	S	3488	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3490	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3209	22k, 5%, 1/10W, Metal Film	4835 111 37441	S	3491	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3212	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253	S	3492	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3213	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3495	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272
3215	22k, 5%, 1/10W, Metal Film	4835 111 37441		3496	10k, 5%, 1/10W, Metal Film	4835 111 37216
3216	Zero ohm,.	4835 111 27056		3497	10k, 5%, 1/10W, Metal Film	4835 111 37216
3217	Res, 1M5, 5%, 1/8W, Metalized Glass.	2322 730 61155		3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3218	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225
3219	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3503	10ohm, 120VAC, Positive Temperature C	
3220	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432			oefficient	4835 116 47001
3225	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S	3505	Surge Protector.	2422 549 43073
3228	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3231	Zero ohm,.	4835 111 27056	S	3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333
3232	Zero ohm,.	4835 111 27056	S	3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102
3233	Zero ohm,.	4835 111 27056		3512	15k, 5%, 1/10W, Metal Film	4835 111 37458
3243	1.2k, 5%, 1/10W, Metal Film.	4835 111 27042		3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184
3246	82k, 5%, 1/10W, Metal Film	4835 111 37277		3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204
3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3515	2.5 ohm, 20%, 3.6W, Negative Temperat	
3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010			ure Coefficient.	2122 612 00023
3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340		3516	Res, 1K, 2%, 0,25W	4822 051 10102
3250	Zero ohm,.	4835 111 27056		3517	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3251	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S	3518	Res, 0R22, 5%, 3W, Metal Film. . . .	2120 106 90548
3252	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		3520	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3253	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		3521	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443
3257	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3525	33 ohm, 5%, 1/3W, Metal Film	4835 116 57665
3258	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3528	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3259	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3529	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3530	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3532	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3534	15k, 5%, 1/10W, Metal Film	4835 111 37458
3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3536	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3537	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046	S	3542	4.7 Megohm, 5%, 1/2W, Metal Film . .	4835 116 57009
S 3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109		3570	15k, 5%, 1/10W, Metal Film	4835 111 37458
S 3341	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483		3571	Res, 150K, 1%, 3/5W, Metal Film. . .	2322 156 21504
S 3342	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483		3573	Res, 2K, 1%, 1/10W, Metalized Glass.	2120 108 92657
3343	1.5k, 20%, 1/2W, Carbon Composition.	4835 110 47034		3574	33k, 5%, 1/10W, Metal Film	4835 111 37248

S = Safety Part Be sure to use exact replacement part.

TL9127C121 (continued)

3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3577	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3578	Res, 1K, 2%, 0,25W	4822 051 10102	
3579	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451	
3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3592	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3594	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3595	68k, 5%, 1/6W, Carbon Film	4835 111 37205	
3596	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3597	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3598	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3599	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3607	8.2k, 5%, 1/8W, Inline Package . . .	4835 111 97046	
3608	2.2k, 5%, 1/8W, Inline Package . . .	4835 111 97049	
3609	2.2k, 5%, Resistor Network	2120 108 93868	
3611	Res, 1K, 2%, 0,25W	4822 051 10102	
3612	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3613	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3615	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3617	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3619	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3629	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259	
3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3631	27k, 5%, 1/10W, Metal Film	4835 111 37442	
S 3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63479	
3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210	
3634	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3635	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3636	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3637	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3653	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3654	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3655	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3662	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3663	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3664	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3665	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3666	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376	
3667	27k, 5%, 1/10W, Metal Film	4835 111 37442	
3672	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3673	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3674	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259	
3675	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3676	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3677	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3680	680 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37271	
3681	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3682	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3683	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3684	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3685	220 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37371	
3821	15k, 5%, 1/10W, Metal Film	4835 111 37458	
3822	1.2k, 5%, 1/10W, Metal Film.	4835 111 27042	
3823	100k, 5%, 1/10W, Metal Film.	4835 111 37434	
3824	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3825	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3826	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3827	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3828	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3829	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272	
3830	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272	
3831	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198 011 03310	
3832	47 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37262	
3908	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3909	Res, 1K, 2%, 0,25W	4822 051 10102	
3910	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376	
3911	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230	
3913	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3914	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	
3915	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231	
3916	220 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37371	
3918	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3919	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376	
3920	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231	
3921	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230	
3922	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	
3923	220 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37371	
3924	39k, 5%, 1/10W, Metal Film	4835 111 27051	
3925	39k, 5%, 1/10W, Metal Film	4835 111 27051	
3926	39k, 5%, 1/10W, Metal Film	4835 111 27051	
3929	39k, 5%, 1/10W, Metal Film	4835 111 27051	
3930	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3931	Res, 1K, 2%, 0,25W	4822 051 10102	
3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810	
3951	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3953	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3955	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
3957	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
4001	Zero ohm,.	4835 111 27056	
4002	Zero ohm,.	4835 111 27056	
4004	Zero ohm,.	4835 111 27056	
4007	Zero ohm,.	4835 111 27056	
4009	Zero ohm,.	4835 111 27056	
4010	Zero ohm,.	4835 111 27056	
4011	Zero ohm,.	4835 111 27056	
4012	Zero ohm,.	4835 111 27056	
4013	Zero ohm,.	4835 111 27056	
4020	Zero ohm,.	4835 111 27056	
4051	Zero ohm,.	4835 111 27056	
4100	Zero ohm,.	4835 111 27056	
4101	Zero ohm,.	4835 111 27056	
4102	Zero ohm,.	4835 111 27056	
4103	Zero ohm,.	4835 111 27056	
4143	Zero ohm,.	4835 111 27056	
4144	Zero ohm,.	4835 111 27056	
4203	Zero ohm,.	4835 111 27056	
4207	Zero ohm,.	4835 111 27056	
4212	Zero ohm,.	4835 111 27056	
4214	Zero ohm,.	4835 111 27056	
4215	Zero ohm,.	4835 111 27056	
4216	Zero ohm,.	4835 111 27056	
4501	Zero ohm,.	4835 111 27056	
4602	Zero ohm,.	4835 111 27056	
4650	Zero ohm,.	4835 111 27056	
4651	Zero ohm,.	4835 111 27056	
4652	Zero ohm,.	4835 111 27056	
4654	Zero ohm,.	4835 111 27056	
4655	Zero ohm,.	4835 111 27056	
4684	Zero ohm,.	4835 111 27056	
4687	Zero ohm,.	4835 111 27056	
4831	Zero ohm,.	4835 111 27056	
4832	Zero ohm,.	4835 111 27056	
4833	Zero ohm,.	4835 111 27056	
4902	Zero ohm,.	4835 111 27056	
4903	Zero ohm,.	4835 111 27056	
4904	Zero ohm,.	4835 111 27056	
4905	Zero ohm,.	4835 111 27056	
4909	Zero ohm,.	4835 111 27056	
4911	Zero ohm,.	4835 111 27056	
4912	Zero ohm,.	4835 111 27056	
4914	Zero ohm,.	4835 111 27056	
4957	Zero ohm,.	4835 111 27056	
4999	Zero ohm,.	4835 111 27056	
5000	Coil, 5u6.	3198 018 25680	
5004	Coil, 820n	2422 535 97314	
5201	Coil, 22u.	3198 018 22290	
5202	Coil, 6u8.	3198 018 16880	
5342	22uH., 10%, Coil, Peaking.	4835 157 67069	
S 5445	Transformer, L.O.T., models ending in C101, C121, and C125	2422 531 02327	
S 5445	Transformer, L.O.T., models ending in C221 and C225.	3128 138 20941	
5451	Coil, 27u.	2422 535 96614	
5457	Coil, Linear Correction.	3128 138 53241	
5461	Transformer.	3128 138 33811	
5480	Coil, 27u.	2422 535 97334	
5480	Coil, 39u.	2422 535 97336	
5480	33uH., Peaking Coil, only in 25. . .	4835 157 58205	
S 5500	Filter, Mains, 5mH, 2A	2422 549 43432	
5516	100uH., Coil	4835 157 67078	
5518	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5521	Coil, 2u2.	3198 018 12280	
5540	Coil, 4u7.	3198 018 14780	
S 5545	Transfomer,.	2422 531 02314	
5551	27uH., 5%, Coil, Peaking	4835 157 67052	
5552	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5572	100uH., Coil	4835 157 67078	
5573	100uH., Coil	4835 157 67078	
5576	100uH., Coil	4835 157 67078	
5577	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5600	Coil, 8u2.	3198 018 18280	
5601	Coil, 8u2.	3198 018 18280	
5620	Coil, 6u8.	3198 018 16880	
5821	Coil, 100u	3198 018 21010	
5822	Coil, 18u.	3198 018 21890	
6008	Zener, 33 Volt BZX79-C33	4835 130 37904	
6113	Zener Diode, 6.8 volt.	9340 386 40115	
6211	Diode, 1N4148.	4835 130 37048	
6212	Diode, 1N4148.	4835 130 37048	
6213	Diode, 1N4148.	4835 130 37048	
6331	Diode.	4835 130 37294	
6333	Diode.	4835 130 37294	
6335	Diode.	4835 130 37294	
6401	Diode.	4835 130 37094	
6402	Zener, 33 Volt, BZX79-C33.	4835 130 37904	

S = Safety Part Be sure to use exact replacement part.

TL9127C121 (continued)

6403	Diode.	4835 130 37094	
6404	Diode.	4835 130 37094	
6449	Diode, 1N4148.	4835 130 37048	
6450	Diode, 1N4148.	4835 130 37048	
6460	Diode, Rect, BY228/20	9336 215 80112	
6463	Diode, 1N4148.	4835 130 37048	
6464	Zener Diode, 6.2 volt.	9337 242 70133	
6465	Diode, BYD33J.	4835 130 37094	
6466	Diode, BYD33J.	4835 130 37094	
6480	Diode, Zener	4835 130 37947	
6481	Diode, 1N4148.	4835 130 37048	
6485	Diode, BYD33J.	4835 130 37094	
6486	Diode, EGP20DL-530	4835 130 37919	
6487	Diode.	4835 130 37094	
6488	Diode, Rect, BYV27-200.	9322 126 72673	
6490	Diode, Rect, BYV27-200.	9322 126 72673	
6505	Diode, Bridge Rect, GBU6JL-7002	9322 138 08667	
6507	Diode, BYD33J.	4835 130 37094	
6508	Diode, BYD33J.	4835 130 37094	
6510	Zener Diode, 20 volt	9331 178 60133	
6511	Diode, BYV95C.	4835 130 37052	
6512	Diode, Rect, BY228/20	4822 130 41275	
6513	Diode, Rect, BY228/20	4822 130 41275	
6514	Zener, 18 Volt, BZX79-C18.	4835 130 37908	
6540	Diode.	4835 130 37294	
6550	Diode, Rect, BY229X-800	9340 380 30127	
6560	Diode, EGP20DL-530	4835 130 37919	
6580	Diode, Rect, SB140.	9339 577 60673	
6584	Diode, 1N4148.	4835 130 37048	
6585	Diode, 1N4148.	4835 130 37048	
6591	Diode, BAS216.	4835 130 37905	
6601	Diode, Zener	4835 130 37684	
6602	Diode, 1N4148.	4835 130 37048	
6603	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610	
6604	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610	
6605	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610	
6606	Zener, 4.7 Volt, BZX79-C4V7.	4835 130 37005	
6607	Zener, 6.8 Volt, BZX79-C6V8.	4835 130 37945	
6690	LED, LTL-307P.	4835 130 97096	
6821	Zener Diode, 9.1 volt.	9331 177 80133	
6822	Fixed Coil	4835 130 37048	
6951	Diode, BAS216.	4835 130 37905	
6961	Diode, BAS216.	4835 130 37905	
7250	IC,.	9352 620 26112	
7251	IC, LM317T	9337 220 80682	
7254	Transistor, NPN, BC847B.	4822 130 60511	
7256	Transistor, NPN, BC847B.	4822 130 60511	
7258	Transistor, NPN, BC847B.	4822 130 60511	
7263	Transistor, PNP, BC857B.	5322 130 60508	
7266	Transistor, NPN, BC847B.	4822 130 60511	
7330	IC,.	9352 184 10112	
7401	IC,.	9322 121 47687	
7460	Transistor, NPN, BU1508DX.	9340 170 50127	
7461	Transistor, NPN, BF819	9335 354 50127	
7462	Transistor, BC547B	4835 130 47055	
7463	Transistor, BC557B	4835 130 47409	
7480	IC,.	9322 028 93682	
7481	Transistor, BC557B	4835 130 47409	
7482	Transistor, PNP, BC857B.	5322 130 60508	
7518	STH8NA60FI SMPS FET	9322 068 92687	
7518	STH10NC60FI SMPS FET.	9322 155 66687	
7520	IC, MC44603A	4835 209 88537	
7570	IC,.	9337 711 00676	
S 7581	Coupler, TCDT1101G	9338 431 30682	
7590	Transistor, NPN, BC847B.	4822 130 60511	
7591	Transistor, NPN, BC847B.	4822 130 60511	
7592	Transistor, NPN, BC847B.	4822 130 60511	
7600	IC, SAA5543-PS/M4/0167 L9 v3.2 (Commercial Models - NON Pro Plus)	9352 670 84112	
7600	IC, SAA5565-PS/M3/0195 L9 v3.2 (Commercial Models - Pro Plus Models).	9352 673 97112	
7601	IC, ST24W16B6, commercial models only	9322 095 35682	
7603	Transistor, NPN, BC337	9331 796 00126	
7604	Transistor, NPN, BC847B.	4822 130 60511	
7605	Transistor, NPN, BC847B.	4822 130 60511	
7608	Transistor, NPN, BC847B.	4822 130 60511	
7609	Transistor, NPN, BC847B.	4822 130 60511	
7680	IR Receiver.	9322 127 53667	
7821	IC,.	9352 374 70112	
7822	IC, HEF4052BT.	9333 729 50653	
7823	Transistor, NPN, BC337-25.	3198 020 43530	
7904	Transistor, NPN, BC847B.	4822 130 60511	
7908	Transistor, NPN, BC847B.	4822 130 60511	
7951	IC,.	4822 209 13706	
CBA	00EMF892A102 Main Chassis Board Asm.	00EM F89 2A102	

Cabinet & Accessory Parts

	Cabinet & Accessory Parts		
S AC01	Mains Cord	3135 010 07161	
S AC02	Anode Clip	4835 256 97264	
AC03	Cabinet Back	3135 014 07911	
AC04	Cabinet Front.	3135 017 04121	
AC05	Chassis Guide.	3139 124 31381	
AC06	Control Buttons.	3139 124 27351	
S AC07	Convergence and Purity Assembly.	2422 549 43385	
S AC08	CRT A68AJB82X.	4835 131 27167	
S AC09	Coil, Degaussing	3121 218 62701	
AC11	Light Guide.	3139 124 26461	
AC12	Nameplate.	4835 459 17545	
AC14	Power Button	3139 124 26444	
REMOTE	Remote Transmitter	3139 228 80572	
AC16	Speaker, 16R, 1W5 (2 Used)	2422 264 00343	
S AC18	Yoke	3313 203 01242	
AC19	Yoke Wedge (3 Used).	4835 535 27006	
AC21	Batteries f/Remote Transmitter	9299 000 13827	
AC24	Spring	3139 121 26231	
AC25	Owner's Manual	3135 015 16021	

S = Safety Part Be sure to use exact replacement part.

TL9127C221 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts		
S 0127	3.15 Amp Fuse, ...	3122 358 72141	
0152	Cable, DIP, 6 Pin, 400mm	3104 301 09421	
0153	4 Pin Cable.	3104 301 09431	
0212	Connector, 2 Pin	2422 025 15396	
0215	Connector, 2 Pin,.	2422 025 16343	
0220	4 Pin Board Connector.	2422 025 04852	
0224	1 Pin Board Connector.	2422 034 20021	
0228	1 Pin Board Connector.	2422 034 20021	
0234	Connector, 4 Pin	2422 025 15847	
0238	Connector, 5 Pin	2422 025 12481	
S 0243	Connector, 6 Pin	2422 025 04854	
0244	4 Pin Board Connector.	2422 025 04852	
S 0245	Connector, 6 Pin	2422 025 04854	
S 0254	CRT Socket (9 Pin)	2422 500 80022	
0259	Connector, 3 Pin	2412 020 00725	
0267	Connector, 3 Pin	2412 020 00725	
1000	Tuner.	2422 542 90057	
1001	Filter	2422 549 42501	
1003	45 MHz SAW, Filter,.	2422 549 42433	
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807	
1208	Crystal Resonator.	4835 242 77276	
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10869	
S 1571	1 Amp, Radial Fuse,.	4835 253 97162	
S 1572	1 Amp, Radial Fuse,.	4835 253 97162	
S 1580	Relay, 12V	2422 132 07317	
1600	Switch, Tactile.	2422 128 02742	
1601	Switch, Tactile.	2422 128 02742	
1602	Switch, Tactile.	2422 128 02742	
1603	Switch, Tactile.	2422 128 02742	
1606	Switch, Tactile.	2422 128 02742	
1660	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488	
1821	Ceramic Resonator.	4835 122 97102	
2001	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2002	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2003	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2004	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2006	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290	
2011	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2102	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2103	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2104	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2201	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2202	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2203	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2204	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2205	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2207	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2208	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2209	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2211	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2212	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2213	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2214	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2215	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280	
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 16654	
2220	Cap, 18p, 5%, 50V, Ceramic	3198 016 01890	
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2222	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2226	Cap, 33u, 20%, 25V, Electrolytic . .	2020 021 90124	
2227	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2247	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2248	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2249	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2330	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177	
2340	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495	
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320	
S 2343	Cap, 3n3, 10%, 2KV, Ceramic.	2020 558 90529	
2345	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020	
2401	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2402	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2404	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2405	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2407	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2409	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2420	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2426	Cap, 100n, 10%, 63V, Metalized Polyes ter.	2222 370 75104	
2428	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220	
2429	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2430	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2431	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2437	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2438	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2448	Cap, 220p, 10%, 500V, Ceramic. . . .	3198 019 42210	
2450	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91139	
2451	Cap, 15n, 10%, 50V, Polyester. . . .	2020 300 90575	
2451	0.01uF., 10%, 50V, Polyester, only 27	3198 138 20941	
2456	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176	
2457	Cap, 390n, 5%, 250V, Metalized Polypr opylene.	2222 479 90021	
2458	Cap, 2u2, 20%, 100V, Electrolytic. .	2020 021 91331	
2459	Cap, 680p, 10%, 500V, Ceramic. . . .	3198 019 46810	
2461	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020	
2462	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176	
2463	680pF., 10%, 2KV, Ceramic.	4835 122 47584	
S 2465	Cap, 10n, 5%, 1600V, Polypropylene .	2222 375 90154	
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050	
2473	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790	
2481	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740	
2482	Cap, 68n, 10%, 250V, Polyester . . .	2222 347 90234	
2484	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2485	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293	
2486	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2487	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2488	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2489	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2490	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710	
2491	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710	
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810	
2500	0.47uF., 250V, Polyester	4835 121 47569	
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
S 2507	Cap, 1n5, 10%, 1KV, Ceramic.	2020 558 90443	
2508	Cap, 470u, 20%, 200V, Electrolytic .	2020 024 90647	
S 2511	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020	
S 2518	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290	
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320	
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320	
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2530	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 021 91147	
2531	Cap, 1n, 2%, 50V, Polypropylene. . .	2020 310 90049	
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220	
2540	Cap, 100u, 20%, 25V, Electrolytic. .	2020 021 90547	
S 2545	1500pF., 250VAC, Ceramic	4835 122 47621	
S 2550	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2551	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91358	
2561	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020	
S 2562	Cap, 220p, 10%, 1KV, Ceramic	2020 558 90424	
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020	
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020	
2572	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330	
2575	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820	
2577	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020	
2586	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2604	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290	
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2613	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2615	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2619	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2622	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890	
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2629	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230	
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2631	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2679	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2681	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2821	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280	
2823	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2825	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2826	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090	
2827	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2828	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2829	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	
2830	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280	

S = Safety Part Be sure to use exact replacement part.

TL9127C221 (continued)

2831	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
2832	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280	S	3345	VDR, DC, 1mA, 50V, MAX 115V	2322 593 13507
2833	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280		3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
2834	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780		3401	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2835	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3402	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2836	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3403	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2837	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740		3405	Res, 1K8, 1%, 3/5W, Metal Film . . .	2322 156 21802
2838	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3406	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2839	Cap, 1u, 5%, 50V, Metalized Polyester	2020 308 90124		3407	Res, 1K8, 1%, 3/5W, Metal Film . . .	2322 156 21802
2840	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2841	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3409	1.5 ohm, 5%, 1/3W, Metal Film. . . .	4835 116 57664
2842	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2844	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3420	470k, 5%, 1/10W, Metal Film.	4835 111 37407
2845	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2913	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280		3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2914	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330		3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840
2915	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606
2916	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648		3425	Res, 120K, 5%, 1/10W, Metalized Glass	2120 108 91716
2917	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3426	39k, 5%, 1/10W, Metal Film	4835 111 27051
2918	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330		3428	22k, 5%, 1/10W, Metal Film	4835 111 37441
2919	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3429	27k, 5%, 1/10W, Metal Film	4835 111 37442
2920	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648		3431	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
2921	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3432	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
2931	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280		3436	Res, 1K, 2%, 0,25W	4822 051 10102
2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3437	10k, 5%, 1/10W, Metal Film	4835 111 37216
2952	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3438	33k, 1/4W, Carbon Film	4835 110 57375
2954	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
2955	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3447	10k, 5%, 1/10W, Metal Film	4835 111 37216
2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	S	3452	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63229
2960	Cap, 220u, 20%, 50V, Electrolytic. .	3198 026 52210	S	3453	Res, 4R7, 5%, 5W, Wire Wound	2322 251 41478
2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090	S	3454	Res, 33K, 5%, 1 1/3W, Metal Film . .	2322 194 63333
2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090		3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090		3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3462	Res, 6K8, 5%, 5W, Metal Film	2322 257 41682
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3010	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610		3464	Res, 1K, 2%, 0,25W	4822 051 10102
3013	Zero ohm,.	4835 111 27056	S	3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
3014	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052		3466	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903
3015	22k, 5%, 1/10W, Metal Film	4835 111 37441		3467	Res, 14K, 1%, 3/5W, Metal Film . . .	2322 156 21403
3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810		3467	Res, 15K, 1%, 3/5W, Metal Film . . .	2322 156 21503
3021	Res, 1K, 2%, 0,25W	4822 051 10102		3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3103	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3469	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
3104	10k, 5%, 1/10W, Metal Film	4835 111 37216		3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3108	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703
3109	10k, 5%, 1/10W, Metal Film	4835 111 37216		3481	Res, 35K7, 1%, 3/5W, Metal Film. . .	2322 156 23573
3123	75 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37276		3482	Res, 56K, 1%, 3/5W, Metal Film . . .	2322 156 25603
3200	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3201	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253		3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3203	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443	S	3485	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	S	3486	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3205	Res, 1K, 2%, 0,25W	4822 051 10102	S	3487	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3206	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	S	3488	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3490	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3209	22k, 5%, 1/10W, Metal Film	4835 111 37441	S	3491	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3212	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253	S	3492	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3213	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3495	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272
3215	22k, 5%, 1/10W, Metal Film	4835 111 37441		3496	10k, 5%, 1/10W, Metal Film	4835 111 37216
3216	Zero ohm,.	4835 111 27056		3497	10k, 5%, 1/10W, Metal Film	4835 111 37216
3217	Res, 1M5, 5%, 1/8W, Metalized Glass.	2322 730 61155		3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3218	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225
3219	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3503	10ohm, 120VAC, Positive Temperature C	
3220	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432			oefficient	4835 116 47001
3225	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S	3505	Surge Protector.	2422 549 43073
3228	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3231	Zero ohm,.	4835 111 27056	S	3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333
3232	Zero ohm,.	4835 111 27056	S	3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102
3233	Zero ohm,.	4835 111 27056		3512	15k, 5%, 1/10W, Metal Film	4835 111 37458
3243	1.2k, 5%, 1/10W, Metal Film.	4835 111 27042		3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184
3246	82k, 5%, 1/10W, Metal Film	4835 111 37277		3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204
3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3515	2.5 ohm, 20%, 3.6W, Negative Temperat	
3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010			ure Coefficient.	2122 612 00023
3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340		3516	Res, 1K, 2%, 0,25W	4822 051 10102
3250	Zero ohm,.	4835 111 27056		3517	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3251	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S	3518	Res, 0R22, 5%, 3W, Metal Film. . . .	2120 106 90548
3252	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		3520	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3253	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		3521	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443
3257	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3525	33 ohm, 5%, 1/3W, Metal Film	4835 116 57665
3258	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3528	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3259	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3529	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3530	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3532	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3534	15k, 5%, 1/10W, Metal Film	4835 111 37458
3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3536	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3537	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046	S	3542	4.7 Megohm, 5%, 1/2W, Metal Film . .	4835 116 57009
S 3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109		3570	15k, 5%, 1/10W, Metal Film	4835 111 37458
S 3341	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483		3571	Res, 150K, 1%, 3/5W, Metal Film. . .	2322 156 21504
S 3342	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483		3573	Res, 2K, 1%, 1/10W, Metalized Glass.	2120 108 92657
3343	1.5k, 20%, 1/2W, Carbon Composition.	4835 110 47034		3574	33k, 5%, 1/10W, Metal Film	4835 111 37248

S = Safety Part Be sure to use exact replacement part.

TL9127C221 (continued)

3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3577	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3578	Res, 1K, 2%, 0,25W	4822 051 10102	
3579	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451	
3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3592	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3594	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3595	68k, 5%, 1/6W, Carbon Film	4835 111 37205	
3596	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3597	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3598	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3599	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3607	8.2k, 5%, 1/8W, Inline Package . . .	4835 111 97046	
3608	2.2k, 5%, 1/8W, Inline Package . . .	4835 111 97049	
3609	2.2k, 5%, Resistor Network	2120 108 93868	
3611	Res, 1K, 2%, 0,25W	4822 051 10102	
3612	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3613	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3615	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3617	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3619	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3629	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259	
3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3631	27k, 5%, 1/10W, Metal Film	4835 111 37442	
S 3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63479	
3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210	
3634	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3635	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3636	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3637	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3653	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3654	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3655	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3662	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3663	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3664	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3665	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3666	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376	
3667	27k, 5%, 1/10W, Metal Film	4835 111 37442	
3672	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3673	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3674	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259	
3675	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3676	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3677	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3680	680 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37271	
3681	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3682	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3683	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3684	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3685	220 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37371	
3821	15k, 5%, 1/10W, Metal Film	4835 111 37458	
3822	1.2k, 5%, 1/10W, Metal Film.	4835 111 27042	
3823	100k, 5%, 1/10W, Metal Film.	4835 111 37434	
3824	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3825	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3826	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3827	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3828	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3829	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272	
3830	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272	
3831	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198 011 03310	
3832	47 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37262	
3908	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3909	Res, 1K, 2%, 0,25W	4822 051 10102	
3910	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376	
3911	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230	
3913	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3914	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	
3915	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231	
3916	220 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37371	
3918	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3919	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376	
3920	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231	
3921	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230	
3922	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	
3923	220 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37371	
3924	39k, 5%, 1/10W, Metal Film	4835 111 27051	
3925	39k, 5%, 1/10W, Metal Film	4835 111 27051	
3926	39k, 5%, 1/10W, Metal Film	4835 111 27051	
3929	39k, 5%, 1/10W, Metal Film	4835 111 27051	
3930	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3931	Res, 1K, 2%, 0,25W	4822 051 10102	
3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810	
3951	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3953	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3955	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
3957	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
4001	Zero ohm,.	4835 111 27056	
4002	Zero ohm,.	4835 111 27056	
4004	Zero ohm,.	4835 111 27056	
4007	Zero ohm,.	4835 111 27056	
4009	Zero ohm,.	4835 111 27056	
4010	Zero ohm,.	4835 111 27056	
4011	Zero ohm,.	4835 111 27056	
4012	Zero ohm,.	4835 111 27056	
4013	Zero ohm,.	4835 111 27056	
4020	Zero ohm,.	4835 111 27056	
4051	Zero ohm,.	4835 111 27056	
4100	Zero ohm,.	4835 111 27056	
4101	Zero ohm,.	4835 111 27056	
4102	Zero ohm,.	4835 111 27056	
4103	Zero ohm,.	4835 111 27056	
4143	Zero ohm,.	4835 111 27056	
4144	Zero ohm,.	4835 111 27056	
4203	Zero ohm,.	4835 111 27056	
4207	Zero ohm,.	4835 111 27056	
4212	Zero ohm,.	4835 111 27056	
4214	Zero ohm,.	4835 111 27056	
4215	Zero ohm,.	4835 111 27056	
4216	Zero ohm,.	4835 111 27056	
4501	Zero ohm,.	4835 111 27056	
4602	Zero ohm,.	4835 111 27056	
4650	Zero ohm,.	4835 111 27056	
4651	Zero ohm,.	4835 111 27056	
4652	Zero ohm,.	4835 111 27056	
4654	Zero ohm,.	4835 111 27056	
4655	Zero ohm,.	4835 111 27056	
4684	Zero ohm,.	4835 111 27056	
4687	Zero ohm,.	4835 111 27056	
4831	Zero ohm,.	4835 111 27056	
4832	Zero ohm,.	4835 111 27056	
4833	Zero ohm,.	4835 111 27056	
4902	Zero ohm,.	4835 111 27056	
4903	Zero ohm,.	4835 111 27056	
4904	Zero ohm,.	4835 111 27056	
4905	Zero ohm,.	4835 111 27056	
4909	Zero ohm,.	4835 111 27056	
4911	Zero ohm,.	4835 111 27056	
4912	Zero ohm,.	4835 111 27056	
4914	Zero ohm,.	4835 111 27056	
4957	Zero ohm,.	4835 111 27056	
4999	Zero ohm,.	4835 111 27056	
5000	Coil, 5u6.	3198 018 25680	
5004	Coil, 820n	2422 535 97314	
5201	Coil, 22u.	3198 018 22290	
5202	Coil, 6u8.	3198 018 16880	
5342	22uH., 10%, Coil, Peaking.	4835 157 67069	
S 5445	Transformer, L.O.T., models ending in C101, C121, and C125	2422 531 02327	
S 5445	Transformer, L.O.T., models ending in C221 and C225.	3128 138 20941	
5451	Coil, 27u.	2422 535 96614	
5457	Coil, Linear Correction.	3128 138 53241	
5461	Transformer.	3128 138 33811	
5480	Coil, 27u.	2422 535 97334	
5480	Coil, 39u.	2422 535 97336	
5480	33uH., Peaking Coil, only in 25. . .	4835 157 58205	
S 5500	Filter, Mains, 5mH, 2A	2422 549 43432	
5516	100uH., Coil	4835 157 67078	
5518	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5521	Coil, 2u2.	3198 018 12280	
5540	Coil, 4u7.	3198 018 14780	
S 5545	Transfomer,.	2422 531 02314	
5551	27uH., 5%, Coil, Peaking	4835 157 67052	
5552	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5572	100uH., Coil	4835 157 67078	
5573	100uH., Coil	4835 157 67078	
5576	100uH., Coil	4835 157 67078	
5577	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5600	Coil, 8u2.	3198 018 18280	
5601	Coil, 8u2.	3198 018 18280	
5620	Coil, 6u8.	3198 018 16880	
5821	Coil, 100u	3198 018 21010	
5822	Coil, 18u.	3198 018 21890	
6008	Zener, 33 Volt BZX79-C33	4835 130 37904	
6113	Zener Diode, 6.8 volt.	9340 386 40115	
6211	Diode, 1N4148.	4835 130 37048	
6212	Diode, 1N4148.	4835 130 37048	
6213	Diode, 1N4148.	4835 130 37048	
6331	Diode.	4835 130 37294	
6333	Diode.	4835 130 37294	
6335	Diode.	4835 130 37294	
6401	Diode.	4835 130 37094	
6402	Zener, 33 Volt, BZX79-C33.	4835 130 37904	

S = Safety Part Be sure to use exact replacement part.

TL9127C221 (continued)

6403	Diode.	4835 130 37094	
6404	Diode.	4835 130 37094	
6449	Diode, 1N4148.	4835 130 37048	
6450	Diode, 1N4148.	4835 130 37048	
6460	Diode, Rect, BY228/20	9336 215 80112	
6463	Diode, 1N4148.	4835 130 37048	
6464	Zener Diode, 6.2 volt.	9337 242 70133	
6465	Diode, BYD33J.	4835 130 37094	
6466	Diode, BYD33J.	4835 130 37094	
6480	Diode, Zener	4835 130 37947	
6481	Diode, 1N4148.	4835 130 37048	
6485	Diode, BYD33J.	4835 130 37094	
6486	Diode, EGP20DL-530	4835 130 37919	
6487	Diode.	4835 130 37094	
6488	Diode, Rect, BYV27-200.	9322 126 72673	
6490	Diode, Rect, BYV27-200.	9322 126 72673	
6505	Diode, Bridge Rect, GBU6JL-7002	9322 138 08667	
6507	Diode, BYD33J.	4835 130 37094	
6508	Diode, BYD33J.	4835 130 37094	
6510	Zener Diode, 20 volt	9331 178 60133	
6511	Diode, BYV95C.	4835 130 37052	
6512	Diode, Rect, BY228/20	4822 130 41275	
6513	Diode, Rect, BY228/20	4822 130 41275	
6514	Zener, 18 Volt, BZX79-C18.	4835 130 37908	
6540	Diode.	4835 130 37294	
6550	Diode, Rect, BY229X-800	9340 380 30127	
6560	Diode, EGP20DL-530	4835 130 37919	
6580	Diode, Rect, SB140.	9339 577 60673	
6584	Diode, 1N4148.	4835 130 37048	
6585	Diode, 1N4148.	4835 130 37048	
6591	Diode, BAS216.	4835 130 37905	
6601	Diode, Zener	4835 130 37684	
6602	Diode, 1N4148.	4835 130 37048	
6603	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610	
6604	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610	
6605	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610	
6606	Zener, 4.7 Volt, BZX79-C4V7.	4835 130 37005	
6607	Zener, 6.8 Volt, BZX79-C6V8.	4835 130 37945	
6690	LED, LTL-307P.	4835 130 97096	
6821	Zener Diode, 9.1 volt.	9331 177 80133	
6822	Fixed Coil	4835 130 37048	
6951	Diode, BAS216.	4835 130 37905	
6961	Diode, BAS216.	4835 130 37905	
7250	IC,.	9352 620 26112	
7251	IC, LM317T	9337 220 80682	
7254	Transistor, NPN, BC847B.	4822 130 60511	
7256	Transistor, NPN, BC847B.	4822 130 60511	
7258	Transistor, NPN, BC847B.	4822 130 60511	
7263	Transistor, PNP, BC857B.	5322 130 60508	
7266	Transistor, NPN, BC847B.	4822 130 60511	
7330	IC,.	9352 184 10112	
7401	IC,.	9322 121 47687	
7460	Transistor, NPN, BU1508DX.	9340 170 50127	
7461	Transistor, NPN, BF819	9335 354 50127	
7462	Transistor, BC547B	4835 130 47055	
7463	Transistor, BC557B	4835 130 47409	
7480	IC,.	9322 028 93682	
7481	Transistor, BC557B	4835 130 47409	
7482	Transistor, PNP, BC857B.	5322 130 60508	
7518	STH8NA60FI SMPS FET	9322 068 92687	
7518	STH10NC60FI SMPS FET.	9322 155 66687	
7520	IC, MC44603A	4835 209 88537	
7570	IC,.	9337 711 00676	
S 7581	Coupler, TCDT1101G	9338 431 30682	
7590	Transistor, NPN, BC847B.	4822 130 60511	
7591	Transistor, NPN, BC847B.	4822 130 60511	
7592	Transistor, NPN, BC847B.	4822 130 60511	
7600	IC, SAA5543-PS/M4/0167 L9 v3.2 (Commercial Models - NON Pro Plus)	9352 670 84112	
7600	IC, SAA5565-PS/M3/0195 L9 v3.2 (Commercial Models - Pro Plus Models).	9352 673 97112	
7601	IC, ST24W16B6, commercial models only	9322 095 35682	
7603	Transistor, NPN, BC337	9331 796 00126	
7604	Transistor, NPN, BC847B.	4822 130 60511	
7605	Transistor, NPN, BC847B.	4822 130 60511	
7608	Transistor, NPN, BC847B.	4822 130 60511	
7609	Transistor, NPN, BC847B.	4822 130 60511	
7680	IR Receiver.	9322 127 53667	
7821	IC,.	9352 374 70112	
7822	IC, HEF4052BT.	9333 729 50653	
7823	Transistor, NPN, BC337-25.	3198 020 43530	
7904	Transistor, NPN, BC847B.	4822 130 60511	
7908	Transistor, NPN, BC847B.	4822 130 60511	
7951	IC,.	4822 209 13706	
CBA	00EMF892A102 Main Chassis Board Asm.	00EM F89 2A102	

Cabinet & Accessory Parts

	Cabinet & Accessory Parts		
S AC01	Mains Cord	3135 010 07161	
AC02	Clip, Anode Lead	3135 014 04471	
AC03	Cabinet Back	3135 014 07911	
AC04	Cabinet Front.	3135 017 04121	
AC05	Chassis Guide.	3139 124 31381	
AC06	Control Buttons.	3139 124 27351	
S AC07	Convergence and Purity Assembly.	2422 549 43385	
S AC08	CRT A68AHB82X.	9301 759 20405	
S AC09	Coil, Degaussing	3121 218 62701	
AC10	Holder, Degaussing (4 Used).	3135 013 01641	
AC11	Light Guide.	3139 124 26461	
AC12	Nameplate.	3135 015 03561	
AC13	Owner's Manual	3135 015 16021	
AC14	Power Button	3139 124 26444	
REMOTE	Remote Transmitter	3139 228 80572	
AC16	Speaker, 16R, 1W5 (2 Used)	2422 264 00343	
S AC18	Yoke	2422 549 43727	
AC19	Yoke Wedge (3 used).	3135 013 00311	
AC21	Batteries f/Remote Transmitter	9299 000 13827	
AC24	Spring	3139 121 26231	

S = Safety Part Be sure to use exact replacement part.

TR2503C101 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts	
S 0127	3.15 Amp Fuse, ...	3122 358 72141
0152	Cable, DIP, 6 Pin, 400mm	3104 301 09421
0153	4 Pin Cable.	3104 301 09431
0212	Connector, 2 Pin	2422 025 15396
0215	Connector, 2 Pin	2412 020 00724
0220	4 Pin Board Connector.	2422 025 04852
0224	1 Pin Board Connector.	2422 034 20021
0228	1 Pin Board Connector.	2422 034 20021
S 0243	Connector, 6 Pin	2422 025 04854
0244	4 Pin Board Connector.	2422 025 04852
S 0245	Connector, 6 Pin	2422 025 04854
S 0254	CRT Socket (9 Pin)	2422 500 80022
0267	Connector, 3 Pin	2412 020 00725
1000	Tuner.	2422 542 90057
1001	Filter	2422 549 42501
1003	45 MHz SAW, Filter,.	2422 549 42433
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807
1208	Crystal Resonator.	4835 242 77276
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10869
S 1571	1 Amp, Radial Fuse,.	4835 253 97162
S 1572	1 Amp, Radial Fuse,.	4835 253 97162
S 1580	Relay, 12V	2422 132 07317
1600	Switch, Tactile.	2422 128 02742
1601	Switch, Tactile.	2422 128 02742
1602	Switch, Tactile.	2422 128 02742
1603	Switch, Tactile.	2422 128 02742
1606	Switch, Tactile.	2422 128 02742
1660	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488
2001	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2002	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2003	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2004	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2011	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2201	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2202	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2203	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2204	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2205	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2208	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2209	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2211	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2212	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2213	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2214	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2215	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 16654
2220	Cap, 15p, 5%, 50V, Ceramic	3198 016 01590
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2222	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2226	Cap, 33u, 20%, 25V, Electrolytic . .	2020 021 90124
2227	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2247	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2248	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2249	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2330	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2340	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320
S 2343	Cap, 3n3, 10%, 2KV, Ceramic.	2020 558 90529
2345	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2401	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2402	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2404	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2405	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2407	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2409	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2420	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2426	Cap, 100n, 10%, 63V, Metalized Polyes ter.	2222 370 75104
2428	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2429	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2430	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2431	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2437	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2438	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2448	Cap, 220p, 10%, 500V, Ceramic. . . .	3198 019 42210
2450	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91139
2451	Cap, 15n, 10%, 50V, Polyester. . . .	2020 300 90575
2451	0.01uF., 10%, 50V, Polyester, only 27	3198 138 20941
2456	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176
2457	Cap, 390n, 5%, 250V, Metalized Polypr opylene.	2222 479 90021
2458	Cap, 2u2, 20%, 100V, Electrolytic. .	2020 021 91331
2459	Cap, 680p, 10%, 500V, Ceramic. . . .	3198 019 46810
2461	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2462	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176
2463	470pF., 10%, 2KV, Ceramic.	4835 122 47638
S 2465	Cap, 10n, 5%, 1600V, Polypropylene .	2222 375 90154
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050
2473	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2481	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2482	Cap, 68n, 10%, 250V, Polyester . . .	2222 347 90234
2484	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2485	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2486	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2487	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2488	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2489	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2490	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2491	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810
2500	0.47uF., 250V, Polyester	4835 121 47569
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
S 2507	Cap, 1n5, 10%, 1KV, Ceramic.	2020 558 90443
2508	Cap, 470u, 20%, 200V, Electrolytic .	2020 024 90647
S 2511	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
S 2518	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2530	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 021 91147
2531	Cap, 1n, 2%, 50V, Polypropylene. . .	2020 310 90049
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2540	Cap, 100u, 20%, 25V, Electrolytic. .	2020 021 90547
S 2545	1500pF., 250VAC, Ceramic	4835 122 47621
S 2550	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2551	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91358
2561	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
S 2562	Cap, 220p, 10%, 1KV, Ceramic	2020 558 90424
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2572	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2575	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2577	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2586	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2604	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2613	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2615	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2619	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2622	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2629	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2679	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2681	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2913	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2914	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2915	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2916	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648
2917	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2960	Cap, 220u, 20%, 50V, Electrolytic. .	3198 026 52210
2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090
2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010

S = Safety Part Be sure to use exact replacement part.

TR2503C101 (continued)

	3010	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610		3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
	3013	Zero ohm,.	4835 111 27056		3469	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
	3014	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052		3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
	3015	22k, 5%, 1/10W, Metal Film	4835 111 37441		3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703
	3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810		3481	Res, 100K, 1%, 3/5W, Metal Film. . .	2322 156 21004
	3021	Res, 1K, 2%, 0,25W	4822 051 10102		3482	Res, 32K4, 1%, 3/5W, Metal Film. . .	2322 156 23243
	3200	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
	3201	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253		3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3203	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443	S	3485	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
	3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	S	3486	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3205	Res, 1K, 2%, 0,25W	4822 051 10102	S	3487	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3206	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	S	3488	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
	3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3490	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3209	22k, 5%, 1/10W, Metal Film	4835 111 37441	S	3491	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3212	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253	S	3492	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3213	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3495	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272
	3215	22k, 5%, 1/10W, Metal Film	4835 111 37441		3496	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3216	Zero ohm,.	4835 111 27056		3497	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3217	Res, 1M5, 5%, 1/8W, Metalized Glass.	2322 730 61155		3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
	3218	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225
	3219	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3503	10ohm, 120VAC, Positive Temperature C	
	3220	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432			oefficient	4835 116 47001
	3225	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S	3505	Surge Protector.	2422 549 43073
	3228	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
	3231	Zero ohm,.	4835 111 27056	S	3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333
	3232	Zero ohm,.	4835 111 27056	S	3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102
	3233	Zero ohm,.	4835 111 27056		3512	15k, 5%, 1/10W, Metal Film	4835 111 37458
	3243	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052		3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184
	3246	82k, 5%, 1/10W, Metal Film	4835 111 37277		3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204
	3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3515	2.5 ohm, 20%, 3.6W, Negative Temperat	
	3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010			ure Coefficient.	2122 612 00023
	3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340		3516	Res, 1K, 2%, 0,25W	4822 051 10102
	3250	Zero ohm,.	4835 111 27056		3517	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
	3251	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S	3518	Res, 0R22, 5%, 3W, Metal Film. . . .	2120 106 90548
	3252	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		3520	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
	3253	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		3521	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443
	3257	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3525	33 ohm, 5%, 1/3W, Metal Film	4835 116 57665
	3258	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3528	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3259	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3529	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3530	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
	3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3532	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3534	15k, 5%, 1/10W, Metal Film	4835 111 37458
	3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3536	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3537	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046	S	3542	4.7 Megohm, 5%, 1/2W, Metal Film . .	4835 116 57009
S	3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109		3570	15k, 5%, 1/10W, Metal Film	4835 111 37458
S	3341	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483		3571	Res, 150K, 1%, 3/5W, Metal Film. . .	2322 156 21504
S	3342	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483		3573	Res, 2K, 1%, 1/10W, Metalized Glass.	2120 108 92657
	3343	1.5k, 20%, 1/2W, Carbon Composition.	4835 110 47034		3574	33k, 5%, 1/10W, Metal Film	4835 111 37248
	3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290		3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
S	3345	VDR, DC, 1mA, 50V, MAX 115V	2322 593 13507		3577	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290		3578	Res, 1K, 2%, 0,25W	4822 051 10102
	3401	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380		3579	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
	3402	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380		3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3403	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380		3592	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3405	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002		3594	22k, 5%, 1/10W, Metal Film	4835 111 37441
	3406	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020		3595	68k, 5%, 1/6W, Carbon Film	4835 111 37205
	3407	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002		3596	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020		3597	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
	3409	1.5 ohm, 5%, 1/3W, Metal Film. . . .	4835 116 57664		3598	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210		3599	22k, 5%, 1/10W, Metal Film	4835 111 37441
	3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210		3607	8.2k, 5%, 1/8W, Inline Package . . .	4835 111 97046
	3420	470k, 5%, 1/10W, Metal Film.	4835 111 37407		3608	2.2k, 5%, 1/8W, Inline Package . . .	4835 111 97049
	3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220		3609	2.2k, 5%, Resistor Network	2120 108 93868
	3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220		3611	Res, 1K, 2%, 0,25W	4822 051 10102
	3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840		3612	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606		3613	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3425	150k, 5%, 1/10W, Metal Film.	4835 111 27045		3615	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3426	39k, 5%, 1/10W, Metal Film	4835 111 27051		3617	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
	3428	22k, 5%, 1/10W, Metal Film	4835 111 37441		3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3429	27k, 5%, 1/10W, Metal Film	4835 111 37442		3619	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
	3431	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247		3629	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259
	3432	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
	3436	Res, 1K, 2%, 0,25W	4822 051 10102		3631	27k, 5%, 1/10W, Metal Film	4835 111 37442
	3437	10k, 5%, 1/10W, Metal Film	4835 111 37216	S	3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63479
	3438	33k, 1/4W, Carbon Film	4835 110 57375		3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210
	3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920		3634	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
	3447	10k, 5%, 1/10W, Metal Film	4835 111 37216		3635	22k, 5%, 1/10W, Metal Film	4835 111 37441
	3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3636	22k, 5%, 1/10W, Metal Film	4835 111 37441
	3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320		3637	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
S	3452	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63229		3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
S	3453	Res, 4R7, 5%, 5W, Wire Wound	2322 251 41478		3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
S	3454	Res, 33K, 5%, 1 1/3W, Metal Film . .	2322 194 63333		3653	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020		3654	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
	3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720		3655	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
S	3462	Res, 6K8, 5%, 5W, Metal Film	2322 257 41682		3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710
	3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790		3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3464	Res, 1K, 2%, 0,25W	4822 051 10102		3662	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
S	3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109		3663	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
	3466	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903		3664	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
	3467	Res, 14K, 1%, 3/5W, Metal Film . . .	2322 156 21403		3665	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
	3467	Res, 15K, 1%, 3/5W, Metal Film . . .	2322 156 21503		3666	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376

S = Safety Part Be sure to use exact replacement part.

TR2503C101 (continued)

3667	27k, 5%, 1/10W, Metal Film	4835 111 37442
3672	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
3673	10k, 5%, 1/10W, Metal Film	4835 111 37216
3674	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231
3675	Res, 150 ohm, 5%, 1/10W, Metalized Glass	3198 021 51510
3676	Res, 150 ohm, 5%, 1/10W, Metalized Glass	3198 021 51510
3677	Res, 150 ohm, 5%, 1/10W, Metalized Glass	3198 021 51510
3680	680 ohm, 5%, 1/10W, Metal Film	4835 111 37271
3681	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
3682	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
3683	100 ohm, 5%, 1/10W, Metal Film	4835 111 37432
3684	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
3908	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710
3909	Res, 1K, 2%, 0,25W	4822 051 10102
3910	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376
3911	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230
3912	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
3913	Res, 6K8, 5%, 1/6W, Carbon Film.	3198 011 06820
3914	Res, 1K8, 5%, 1/6W, Carbon Film.	3198 011 01820
3915	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231
3916	220 ohm, 5%, 1/10W, Metal Film	4835 111 37371
3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810
3951	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3953	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272
3955	Res, 4K7, 5%, 1/6W, Carbon Film.	3198 011 04720
4001	Zero ohm,	4835 111 27056
4002	Zero ohm,	4835 111 27056
4004	Zero ohm,	4835 111 27056
4007	Zero ohm,	4835 111 27056
4009	Zero ohm,	4835 111 27056
4010	Zero ohm,	4835 111 27056
4011	Zero ohm,	4835 111 27056
4012	Zero ohm,	4835 111 27056
4013	Zero ohm,	4835 111 27056
4020	Zero ohm,	4835 111 27056
4051	Zero ohm,	4835 111 27056
4100	Zero ohm,	4835 111 27056
4101	Zero ohm,	4835 111 27056
4102	Zero ohm,	4835 111 27056
4103	Zero ohm,	4835 111 27056
4143	Zero ohm,	4835 111 27056
4144	Zero ohm,	4835 111 27056
4203	Zero ohm,	4835 111 27056
4207	Zero ohm,	4835 111 27056
4212	Zero ohm,	4835 111 27056
4214	Zero ohm,	4835 111 27056
4215	Zero ohm,	4835 111 27056
4216	Zero ohm,	4835 111 27056
4501	Zero ohm,	4835 111 27056
4602	Zero ohm,	4835 111 27056
4650	Zero ohm,	4835 111 27056
4651	Zero ohm,	4835 111 27056
4652	Zero ohm,	4835 111 27056
4654	Zero ohm,	4835 111 27056
4655	Zero ohm,	4835 111 27056
4684	Zero ohm,	4835 111 27056
4687	Zero ohm,	4835 111 27056
4831	Zero ohm,	4835 111 27056
4832	Zero ohm,	4835 111 27056
4833	Zero ohm,	4835 111 27056
4902	Zero ohm,	4835 111 27056
4903	Zero ohm,	4835 111 27056
4904	Zero ohm,	4835 111 27056
4905	Zero ohm,	4835 111 27056
4909	Zero ohm,	4835 111 27056
4911	Zero ohm,	4835 111 27056
4912	Zero ohm,	4835 111 27056
4914	Zero ohm,	4835 111 27056
4957	Zero ohm,	4835 111 27056
4999	Zero ohm,	4835 111 27056
5000	Coil, 5u6.	3198 018 25680
5004	Coil, 820n	2422 535 97314
5201	Coil, 22u.	3198 018 22290
5202	Coil, 6u8.	3198 018 16880
5342	22uH., 10%, Coil, Peaking.	4835 157 67069
S 5445	Transformer, L.O.T., models ending in C101, C121, and C125	2422 531 02327
S 5445	Transformer, L.O.T., models ending in C221 and C225.	3128 138 20941
5451	Coil, 27u.	2422 535 96614
5457	Coil, Linear Correction.	3128 138 53241
5461	Transformer.	3128 138 33811
5480	Coil, 27u.	2422 535 97334
5480	Coil, 39u.	2422 535 97336
5480	33uH., Peaking Coil, only in 25.	4835 157 58205
S 5500	Filter, Mains, 5mH, 2A	2422 549 43432
5516	100uH., Coil	4835 157 67078
5518	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
5521	Coil, 2u2.	3198 018 12280
5540	Coil, 4u7.	3198 018 14780
S 5545	Transfomer,	2422 531 02314
5551	27uH., 5%, Coil, Peaking	4835 157 67052
5552	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
5572	100uH., Coil	4835 157 67078
5573	100uH., Coil	4835 157 67078
5576	100uH., Coil	4835 157 67078
5577	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
5600	Coil, 8u2.	3198 018 18280
5601	Coil, 8u2.	3198 018 18280
5620	Coil, 6u8.	3198 018 16880
5821	Coil, 100u	3198 018 21010
6008	Zener, 33 Volt BZX79-C33	4835 130 37904
6211	Diode, 1N4148.	4835 130 37048
6212	Diode, 1N4148.	4835 130 37048
6213	Diode, 1N4148.	4835 130 37048
6331	Diode.	4835 130 37294
6333	Diode.	4835 130 37294
6335	Diode.	4835 130 37294
6401	Diode.	4835 130 37094
6402	Zener, 33 Volt, BZX79-C33.	4835 130 37904
6403	Diode.	4835 130 37094
6404	Diode.	4835 130 37094
6449	Diode, 1N4148.	4835 130 37048
6450	Diode, 1N4148.	4835 130 37048
6460	Diode, Rect, BY228/20	9336 215 80112
6463	Diode, 1N4148.	4835 130 37048
6464	Zener, 6.2 Volt, BZX79-B6V2.	4835 130 37948
6464	Zener Diode, 6.2 volt.	9337 242 70133
6465	Diode, BYD33J.	4835 130 37094
6466	Diode, BYD33J.	4835 130 37094
6480	Diode, Zener	4835 130 37947
6481	Diode, 1N4148.	4835 130 37048
6485	Diode, BYD33J.	4835 130 37094
6486	Diode, EGP20DL-530	4835 130 37919
6487	Diode.	4835 130 37094
6488	Diode, Rect, BYV27-200.	9322 126 72673
6490	Diode, Rect, BYV27-200.	9322 126 72673
6505	Diode, Bridge Rect, GBU6JL-7002	9322 138 08667
6507	Diode, BYD33J.	4835 130 37094
6508	Diode, BYD33J.	4835 130 37094
6510	Zener Diode, 20 volt	9331 178 60133
6511	Diode, BYV95C.	4835 130 37052
6512	Diode, Rect, BY228/20	4822 130 41275
6513	Diode, Rect, BY228/20	4822 130 41275
6514	Zener, 18 Volt, BZX79-C18.	4835 130 37908
6540	Diode.	4835 130 37294
6550	Diode, Rect, BY229X-800	9340 380 30127
6560	Diode, EGP20DL-530	4835 130 37919
6580	Diode, Rect, BYV27-200.	9322 126 72673
6584	Diode, 1N4148.	4835 130 37048
6585	Diode, 1N4148.	4835 130 37048
6591	Diode, BAS216.	4835 130 37905
6601	Diode, Zener	4835 130 37684
6606	Zener, 4.7 Volt, BZX79-C4V7.	4835 130 37005
6607	Zener, 6.8 Volt, BZX79-C6V8.	4835 130 37945
6690	LED, LTL-307P.	4835 130 97096
6951	Diode, BAS216.	4835 130 37905
6961	Diode, BAS216.	4835 130 37905
7250	IC,	9352 620 26112
7251	IC, LM317T	9337 220 80682
7254	Transistor, NPN, BC847B.	4822 130 60511
7256	Transistor, NPN, BC847B.	4822 130 60511
7258	Transistor, NPN, BC847B.	4822 130 60511
7263	Transistor, PNP, BC857B.	5322 130 60508
7266	Transistor, NPN, BC847B.	4822 130 60511
7330	IC,	9352 184 10112
7401	IC,	9322 121 47687
7460	Transistor, NPN, BU1508DX.	9340 170 50127
7461	Transistor, NPN, BF819	9335 354 50127
7462	Transistor, BC547B	4835 130 47055
7463	Transistor, BC557B	4835 130 47409
7480	IC,	9322 028 93682
7481	Transistor, BC557B	4835 130 47409
7482	Transistor, PNP, BC857B.	5322 130 60508
7518	STH8NA60FI SMPS FET	9322 068 92687
7518	STH10NC60FI SMPS FET.	9322 155 66687
7520	IC, MC44603A	4835 209 88537
7570	IC,	9337 711 00676
S 7581	Coupler, TCDT1101G	9338 431 30682
7590	Transistor, NPN, BC847B.	4822 130 60511
7591	Transistor, NPN, BC847B.	4822 130 60511
7592	Transistor, NPN, BC847B.	4822 130 60511
7600	IC, SAA5542PS/M4/1044 L90UM1-1.3	4835 310 57476
7601	IC, ST24W04B6.	9322 097 23682
7603	Transistor, NPN, BC337	9331 796 00126
7604	Transistor, NPN, BC847B.	4822 130 60511
7605	Transistor, NPN, BC847B.	4822 130 60511
7608	Transistor, NPN, BC847B.	4822 130 60511
7609	Transistor, NPN, BC847B.	4822 130 60511
7680	IR Receiver.	9322 127 53667

S = Safety Part Be sure to use exact replacement part.

TR2503C101 (continued)

7904	Transistor, NPN, BC847B.	4822	130 60511
7952	IC,.	4835	209 88542
9423	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198	011 01030
CBA	00EMF801A001 Main Chassis Board Asm.	00EM	F80 1A001

Cabinet & Accessory Parts

	Cabinet & Accessory Parts		
S AC01	Mainscord, 125V, 10A	3135	010 03831
S AC02	Anode Clip	4835	256 97264
AC03	Cabinet Back	3139	124 27951
AC04	Cabinet Front.	3139	137 53291
AC05	Chassis Guide.	3139	124 31381
AC06	Control Buttons.	3139	124 27461
S AC07	Convergence and Purity Assembly. . .	2422	549 43385
S AC08	CRT A63AFW36X (C121 Version)	9301	763 20443
S AC08	CRT A63QDB891X01	9322	151 39682
S AC09	Coil, Degaussing	3121	218 62961
AC11	Light Guide.	3139	124 26461
AC13	Owner's Manual, English.	3135	015 10691
AC14	Power Button	3139	124 26444
REMOTE	Remote Transmitter	3139	148 54201
AC16	Speaker, 16R, 1W5 (2 Used)	2422	264 00343
S AC18	Yoke (C121 Version).	3321	203 00121
S AC18	Yoke, Vendor # DSE2603CL (M), (C125 V ersion).	4832	310 57502
AC19	Yoke Wedge (3 Used).	4835	535 27001
AC21	Batteries f/Remote Transmitter . . .	9299	000 13827
AC24	Spring	3139	121 26231

S = Safety Part Be sure to use exact replacement part.

TR2503C121 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts	
S 0127	3.15 Amp Fuse, ...	3122 358 72141
0152	Cable, DIP, 6 Pin, 400mm	3104 301 09421
0153	4 Pin Cable.	3104 301 09431
0212	Connector, 2 Pin	2422 025 15396
0215	Connector, 2 Pin	2412 020 00724
0220	4 Pin Board Connector.	2422 025 04852
0224	1 Pin Board Connector.	2422 034 20021
0228	1 Pin Board Connector.	2422 034 20021
S 0243	Connector, 6 Pin	2422 025 04854
0244	4 Pin Board Connector.	2422 025 04852
S 0245	Connector, 6 Pin	2422 025 04854
S 0254	CRT Socket (9 Pin)	2422 500 80022
0267	Connector, 3 Pin	2412 020 00725
1000	Tuner.	2422 542 90057
1001	Filter	2422 549 42501
1003	45 MHz SAW, Filter,.	2422 549 42433
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807
1208	Crystal Resonator.	4835 242 77276
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10869
S 1571	1 Amp, Radial Fuse,.	4835 253 97162
S 1572	1 Amp, Radial Fuse,.	4835 253 97162
S 1580	Relay, 12V	2422 132 07317
1600	Switch, Tactile.	2422 128 02742
1601	Switch, Tactile.	2422 128 02742
1602	Switch, Tactile.	2422 128 02742
1603	Switch, Tactile.	2422 128 02742
1606	Switch, Tactile.	2422 128 02742
1660	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488
2001	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2002	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2003	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2004	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2011	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2201	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2202	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2203	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2204	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2205	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2208	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2209	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2211	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2212	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2213	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2214	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2215	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 16654
2220	Cap, 15p, 5%, 50V, Ceramic	3198 016 01590
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2222	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2226	Cap, 33u, 20%, 25V, Electrolytic . .	2020 021 90124
2227	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2247	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2248	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2249	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2330	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2340	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320
S 2343	Cap, 3n3, 10%, 2KV, Ceramic.	2020 558 90529
2345	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2401	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2402	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2404	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2405	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2407	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2409	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2420	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2426	Cap, 100n, 10%, 63V, Metalized Polyes ter.	2222 370 75104
2428	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2429	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2430	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2431	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2437	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2438	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2448	Cap, 220p, 10%, 500V, Ceramic. . . .	3198 019 42210
2450	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91139
2451	Cap, 15n, 10%, 50V, Polyester. . . .	2020 300 90575
2451	0.01uF., 10%, 50V, Polyester, only 27	3198 138 20941
2456	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176
2457	Cap, 390n, 5%, 250V, Metalized Polypr opylene.	2222 479 90021
2458	Cap, 2u2, 20%, 100V, Electrolytic. .	2020 021 91331
2459	Cap, 680p, 10%, 500V, Ceramic. . . .	3198 019 46810
2461	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2462	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176
2463	470pF., 10%, 2KV, Ceramic.	4835 122 47638
S 2465	Cap, 10n, 5%, 1600V, Polypropylene .	2222 375 90154
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050
2473	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2481	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2482	Cap, 68n, 10%, 250V, Polyester . . .	2222 347 90234
2484	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2485	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2486	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2487	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2488	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2489	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2490	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2491	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810
2500	0.47uF., 250V, Polyester	4835 121 47569
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
S 2507	Cap, 1n5, 10%, 1KV, Ceramic.	2020 558 90443
2508	Cap, 470u, 20%, 200V, Electrolytic .	2020 024 90647
S 2511	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
S 2518	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2530	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 021 91147
2531	Cap, 1n, 2%, 50V, Polypropylene. . .	2020 310 90049
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2540	Cap, 100u, 20%, 25V, Electrolytic. .	2020 021 90547
S 2545	1500pF., 250VAC, Ceramic	4835 122 47621
S 2550	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2551	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91358
2561	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
S 2562	Cap, 220p, 10%, 1KV, Ceramic	2020 558 90424
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2572	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2575	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2577	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2586	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2604	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2613	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2615	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2619	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2622	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2629	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2679	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2681	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2913	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2914	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2915	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2916	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648
2917	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2960	Cap, 220u, 20%, 50V, Electrolytic. .	3198 026 52210
2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090
2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010

S = Safety Part Be sure to use exact replacement part.

TR2503C121 (continued)

	3010	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610		3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
	3013	Zero ohm,.	4835 111 27056		3469	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
	3014	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052		3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
	3015	22k, 5%, 1/10W, Metal Film	4835 111 37441		3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703
	3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810		3481	Res, 100K, 1%, 3/5W, Metal Film. . .	2322 156 21004
	3021	Res, 1K, 2%, 0,25W	4822 051 10102		3482	Res, 32K4, 1%, 3/5W, Metal Film. . .	2322 156 23243
	3200	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
	3201	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253		3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3203	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443	S	3485	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
	3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	S	3486	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3205	Res, 1K, 2%, 0,25W	4822 051 10102	S	3487	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3206	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	S	3488	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
	3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3490	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3209	22k, 5%, 1/10W, Metal Film	4835 111 37441	S	3491	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3212	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253	S	3492	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3213	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3495	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272
	3215	22k, 5%, 1/10W, Metal Film	4835 111 37441		3496	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3216	Zero ohm,.	4835 111 27056		3497	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3217	Res, 1M5, 5%, 1/8W, Metalized Glass.	2322 730 61155		3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
	3218	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225
	3219	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3503	10ohm, 120VAC, Positive Temperature C	
	3220	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432			oefficient	4835 116 47001
	3225	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S	3505	Surge Protector.	2422 549 43073
	3228	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
	3231	Zero ohm,.	4835 111 27056	S	3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333
	3232	Zero ohm,.	4835 111 27056	S	3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102
	3233	Zero ohm,.	4835 111 27056		3512	15k, 5%, 1/10W, Metal Film	4835 111 37458
	3243	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052		3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184
	3246	82k, 5%, 1/10W, Metal Film	4835 111 37277		3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204
	3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3515	2.5 ohm, 20%, 3.6W, Negative Temperat	
	3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010			ure Coefficient.	2122 612 00023
	3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340		3516	Res, 1K, 2%, 0,25W	4822 051 10102
	3250	Zero ohm,.	4835 111 27056		3517	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
	3251	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S	3518	Res, 0R22, 5%, 3W, Metal Film. . . .	2120 106 90548
	3252	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		3520	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
	3253	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		3521	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443
	3257	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3525	33 ohm, 5%, 1/3W, Metal Film	4835 116 57665
	3258	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3528	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3259	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3529	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3530	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
	3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3532	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3534	15k, 5%, 1/10W, Metal Film	4835 111 37458
	3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3536	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3537	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046	S	3542	4.7 Megohm, 5%, 1/2W, Metal Film . .	4835 116 57009
S	3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109		3570	15k, 5%, 1/10W, Metal Film	4835 111 37458
S	3341	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483		3571	Res, 150K, 1%, 3/5W, Metal Film. . .	2322 156 21504
S	3342	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483		3573	Res, 2K, 1%, 1/10W, Metalized Glass.	2120 108 92657
	3343	1.5k, 20%, 1/2W, Carbon Composition.	4835 110 47034		3574	33k, 5%, 1/10W, Metal Film	4835 111 37248
	3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290		3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
S	3345	VDR, DC, 1mA, 50V, MAX 115V	2322 593 13507		3577	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290		3578	Res, 1K, 2%, 0,25W	4822 051 10102
	3401	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380		3579	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
	3402	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380		3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3403	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380		3592	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3405	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002		3594	22k, 5%, 1/10W, Metal Film	4835 111 37441
	3406	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020		3595	68k, 5%, 1/6W, Carbon Film	4835 111 37205
	3407	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002		3596	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020		3597	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
	3409	1.5 ohm, 5%, 1/3W, Metal Film. . . .	4835 116 57664		3598	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210		3599	22k, 5%, 1/10W, Metal Film	4835 111 37441
	3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210		3607	8.2k, 5%, 1/8W, Inline Package . . .	4835 111 97046
	3420	470k, 5%, 1/10W, Metal Film.	4835 111 37407		3608	2.2k, 5%, 1/8W, Inline Package . . .	4835 111 97049
	3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220		3609	2.2k, 5%, Resistor Network	2120 108 93868
	3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220		3611	Res, 1K, 2%, 0,25W	4822 051 10102
	3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840		3612	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606		3613	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3425	150k, 5%, 1/10W, Metal Film.	4835 111 27045		3615	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3426	39k, 5%, 1/10W, Metal Film	4835 111 27051		3617	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
	3428	22k, 5%, 1/10W, Metal Film	4835 111 37441		3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3429	27k, 5%, 1/10W, Metal Film	4835 111 37442		3619	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
	3431	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247		3629	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259
	3432	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
	3436	Res, 1K, 2%, 0,25W	4822 051 10102		3631	27k, 5%, 1/10W, Metal Film	4835 111 37442
	3437	10k, 5%, 1/10W, Metal Film	4835 111 37216	S	3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63479
	3438	33k, 1/4W, Carbon Film	4835 110 57375		3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210
	3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920		3634	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
	3447	10k, 5%, 1/10W, Metal Film	4835 111 37216		3635	22k, 5%, 1/10W, Metal Film	4835 111 37441
	3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3636	22k, 5%, 1/10W, Metal Film	4835 111 37441
	3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320		3637	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
S	3452	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63229		3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
S	3453	Res, 4R7, 5%, 5W, Wire Wound	2322 251 41478		3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
S	3454	Res, 33K, 5%, 1 1/3W, Metal Film . .	2322 194 63333		3653	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020		3654	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
	3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720		3655	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
S	3462	Res, 6K8, 5%, 5W, Metal Film	2322 257 41682		3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710
	3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790		3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3464	Res, 1K, 2%, 0,25W	4822 051 10102		3662	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
S	3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109		3663	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
	3466	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903		3664	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
	3467	Res, 14K, 1%, 3/5W, Metal Film . . .	2322 156 21403		3665	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
	3467	Res, 15K, 1%, 3/5W, Metal Film . . .	2322 156 21503		3666	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376

S = Safety Part Be sure to use exact replacement part.

TR2503C121 (continued)

3667	27k, 5%, 1/10W, Metal Film	4835 111 37442	
3672	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3673	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3674	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231	
3675	Res, 150 ohm, 5%, 1/10W, Metalized Glass	3198 021 51510	
3676	Res, 150 ohm, 5%, 1/10W, Metalized Glass	3198 021 51510	
3677	Res, 150 ohm, 5%, 1/10W, Metalized Glass	3198 021 51510	
3680	680 ohm, 5%, 1/10W, Metal Film	4835 111 37271	
3681	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3682	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3683	100 ohm, 5%, 1/10W, Metal Film	4835 111 37432	
3684	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3908	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3909	Res, 1K, 2%, 0,25W	4822 051 10102	
3910	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376	
3911	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230	
3912	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3913	Res, 6K8, 5%, 1/6W, Carbon Film.	3198 011 06820	
3914	Res, 1K8, 5%, 1/6W, Carbon Film.	3198 011 01820	
3915	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231	
3916	220 ohm, 5%, 1/10W, Metal Film	4835 111 37371	
3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810	
3951	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3953	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272	
3955	Res, 4K7, 5%, 1/6W, Carbon Film.	3198 011 04720	
4001	Zero ohm,	4835 111 27056	
4002	Zero ohm,	4835 111 27056	
4004	Zero ohm,	4835 111 27056	
4007	Zero ohm,	4835 111 27056	
4009	Zero ohm,	4835 111 27056	
4010	Zero ohm,	4835 111 27056	
4011	Zero ohm,	4835 111 27056	
4012	Zero ohm,	4835 111 27056	
4013	Zero ohm,	4835 111 27056	
4020	Zero ohm,	4835 111 27056	
4051	Zero ohm,	4835 111 27056	
4100	Zero ohm,	4835 111 27056	
4101	Zero ohm,	4835 111 27056	
4102	Zero ohm,	4835 111 27056	
4103	Zero ohm,	4835 111 27056	
4143	Zero ohm,	4835 111 27056	
4144	Zero ohm,	4835 111 27056	
4203	Zero ohm,	4835 111 27056	
4207	Zero ohm,	4835 111 27056	
4212	Zero ohm,	4835 111 27056	
4214	Zero ohm,	4835 111 27056	
4215	Zero ohm,	4835 111 27056	
4216	Zero ohm,	4835 111 27056	
4501	Zero ohm,	4835 111 27056	
4602	Zero ohm,	4835 111 27056	
4650	Zero ohm,	4835 111 27056	
4651	Zero ohm,	4835 111 27056	
4652	Zero ohm,	4835 111 27056	
4654	Zero ohm,	4835 111 27056	
4655	Zero ohm,	4835 111 27056	
4684	Zero ohm,	4835 111 27056	
4687	Zero ohm,	4835 111 27056	
4831	Zero ohm,	4835 111 27056	
4832	Zero ohm,	4835 111 27056	
4833	Zero ohm,	4835 111 27056	
4902	Zero ohm,	4835 111 27056	
4903	Zero ohm,	4835 111 27056	
4904	Zero ohm,	4835 111 27056	
4905	Zero ohm,	4835 111 27056	
4909	Zero ohm,	4835 111 27056	
4911	Zero ohm,	4835 111 27056	
4912	Zero ohm,	4835 111 27056	
4914	Zero ohm,	4835 111 27056	
4957	Zero ohm,	4835 111 27056	
4999	Zero ohm,	4835 111 27056	
5000	Coil, 5u6.	3198 018 25680	
5004	Coil, 820n	2422 535 97314	
5201	Coil, 22u.	3198 018 22290	
5202	Coil, 6u8.	3198 018 16880	
5342	22uH., 10%, Coil, Peaking.	4835 157 67069	
S 5445	Transformer, L.O.T., models ending in C101, C121, and C125	2422 531 02327	
S 5445	Transformer, L.O.T., models ending in C221 and C225.	3128 138 20941	
5451	Coil, 27u.	2422 535 96614	
5457	Coil, Linear Correction.	3128 138 53241	
5461	Transformer.	3128 138 33811	
5480	Coil, 27u.	2422 535 97334	
5480	Coil, 39u.	2422 535 97336	
5480	33uH., Peaking Coil, only in 25.	4835 157 58205	
S 5500	Filter, Mains, 5mH, 2A	2422 549 43432	
5516	100uH., Coil	4835 157 67078	
5518	Fixed, Inductor, 100MHz, 50R.	3198 018 90010	
5521	Coil, 2u2.	3198 018 12280	
5540	Coil, 4u7.	3198 018 14780	
S 5545	Transfomer,	2422 531 02314	
5551	27uH., 5%, Coil, Peaking	4835 157 67052	
5552	Fixed, Inductor, 100MHz, 50R.	3198 018 90010	
5572	100uH., Coil	4835 157 67078	
5573	100uH., Coil	4835 157 67078	
5576	100uH., Coil	4835 157 67078	
5577	Fixed, Inductor, 100MHz, 50R.	3198 018 90010	
5600	Coil, 8u2.	3198 018 18280	
5601	Coil, 8u2.	3198 018 18280	
5620	Coil, 6u8.	3198 018 16880	
5821	Coil, 100u	3198 018 21010	
6008	Zener, 33 Volt BZX79-C33	4835 130 37904	
6211	Diode, 1N4148.	4835 130 37048	
6212	Diode, 1N4148.	4835 130 37048	
6213	Diode, 1N4148.	4835 130 37048	
6331	Diode.	4835 130 37294	
6333	Diode.	4835 130 37294	
6335	Diode.	4835 130 37294	
6401	Diode.	4835 130 37094	
6402	Zener, 33 Volt, BZX79-C33.	4835 130 37904	
6403	Diode.	4835 130 37094	
6404	Diode.	4835 130 37094	
6449	Diode, 1N4148.	4835 130 37048	
6450	Diode, 1N4148.	4835 130 37048	
6460	Diode, Rect, BY228/20	9336 215 80112	
6463	Diode, 1N4148.	4835 130 37048	
6464	Zener, 6.2 Volt, BZX79-B6V2.	4835 130 37948	
6464	Zener Diode, 6.2 volt.	9337 242 70133	
6465	Diode, BYD33J.	4835 130 37094	
6466	Diode, BYD33J.	4835 130 37094	
6480	Diode, Zener	4835 130 37947	
6481	Diode, 1N4148.	4835 130 37048	
6485	Diode, BYD33J.	4835 130 37094	
6486	Diode, EGP20DL-530	4835 130 37919	
6487	Diode.	4835 130 37094	
6488	Diode, Rect, BYV27-200.	9322 126 72673	
6490	Diode, Rect, BYV27-200.	9322 126 72673	
6505	Diode, Bridge Rect, GBU6JL-7002	9322 138 08667	
6507	Diode, BYD33J.	4835 130 37094	
6508	Diode, BYD33J.	4835 130 37094	
6510	Zener Diode, 20 volt	9331 178 60133	
6511	Diode, BYV95C.	4835 130 37052	
6512	Diode, Rect, BY228/20	4822 130 41275	
6513	Diode, Rect, BY228/20	4822 130 41275	
6514	Zener, 18 Volt, BZX79-C18.	4835 130 37908	
6540	Diode.	4835 130 37294	
6550	Diode, Rect, BY229X-800	9340 380 30127	
6560	Diode, EGP20DL-530	4835 130 37919	
6580	Diode, Rect, BYV27-200.	9322 126 72673	
6584	Diode, 1N4148.	4835 130 37048	
6585	Diode, 1N4148.	4835 130 37048	
6591	Diode, BAS216.	4835 130 37905	
6601	Diode, Zener	4835 130 37684	
6606	Zener, 4.7 Volt, BZX79-C4V7.	4835 130 37005	
6607	Zener, 6.8 Volt, BZX79-C6V8.	4835 130 37945	
6690	LED, LTL-307P.	4835 130 97096	
6951	Diode, BAS216.	4835 130 37905	
6961	Diode, BAS216.	4835 130 37905	
7250	IC,	9352 620 26112	
7251	IC, LM317T	9337 220 80682	
7254	Transistor, NPN, BC847B.	4822 130 60511	
7256	Transistor, NPN, BC847B.	4822 130 60511	
7258	Transistor, NPN, BC847B.	4822 130 60511	
7263	Transistor, PNP, BC857B.	5322 130 60508	
7266	Transistor, NPN, BC847B.	4822 130 60511	
7330	IC,	9352 184 10112	
7401	IC,	9322 121 47687	
7460	Transistor, NPN, BU1508DX.	9340 170 50127	
7461	Transistor, NPN, BF819	9335 354 50127	
7462	Transistor, BC547B	4835 130 47055	
7463	Transistor, BC557B	4835 130 47409	
7480	IC,	9322 028 93682	
7481	Transistor, BC557B	4835 130 47409	
7482	Transistor, PNP, BC857B.	5322 130 60508	
7518	STH8NA60FI SMPS FET	9322 068 92687	
7518	STH10NC60FI SMPS FET.	9322 155 66687	
7520	IC, MC44603A	4835 209 88537	
7570	IC,	9337 711 00676	
S 7581	Coupler, TCDT1101G	9338 431 30682	
7590	Transistor, NPN, BC847B.	4822 130 60511	
7591	Transistor, NPN, BC847B.	4822 130 60511	
7592	Transistor, NPN, BC847B.	4822 130 60511	
7600	IC, SAA5542PS/M4/1044 L90UM1-1.3	4835 310 57476	
7601	IC, ST24W04B6.	9322 097 23682	
7603	Transistor, NPN, BC337	9331 796 00126	
7604	Transistor, NPN, BC847B.	4822 130 60511	
7605	Transistor, NPN, BC847B.	4822 130 60511	
7608	Transistor, NPN, BC847B.	4822 130 60511	
7609	Transistor, NPN, BC847B.	4822 130 60511	
7680	IR Receiver.	9322 127 53667	

S = Safety Part Be sure to use exact replacement part.

TR2503C121 (continued)

7904	Transistor, NPN, BC847B.	4822 130 60511
7952	IC,.	4835 209 88542
9423	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
CBA	00EMF801A001 Main Chassis Board Asm.	00EM F80 1A001

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Mainscord, 125V, 10A	3135 010 03831
S AC02	Anode Clip	4835 256 97264
AC03	Cabinet Back	3139 124 27951
AC04	Cabinet Front.	3139 137 53291
AC05	Chassis Guide.	3139 124 31381
AC06	Control Buttons.	3139 124 27461
S AC07	Convergence and Purity Assembly. . .	2422 549 43385
S AC08	CRT A63AFW36X (C121 Version)	9301 763 20443
S AC08	CRT A63QDB891X01	9322 151 39682
S AC09	Coil, Degaussing	3121 218 62961
AC11	Light Guide.	3139 124 26461
AC13	Owner's Manual, English.	3135 015 10691
AC14	Power Button	3139 124 26444
REMOTE	Remote Transmitter	3139 148 54201
AC16	Speaker, 16R, 1W5 (2 Used)	2422 264 00343
S AC18	Yoke (C121 Version).	3321 203 00121
S AC18	Yoke, Vendor # DSE2603CL (M), (C125 V ersion).	4832 310 57502
AC19	Yoke Wedge (3 Used).	4835 535 27001
AC21	Batteries f/Remote Transmitter . . .	9299 000 13827
AC24	Spring	3139 121 26231

S = Safety Part Be sure to use exact replacement part.

TR2503C125 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts	
S 0127	3.15 Amp Fuse, ...	3122 358 72141
0152	Cable, DIP, 6 Pin, 400mm	3104 301 09421
0153	4 Pin Cable.	3104 301 09431
0212	Connector, 2 Pin	2422 025 15396
0215	Connector, 2 Pin	2412 020 00724
0220	4 Pin Board Connector.	2422 025 04852
0224	1 Pin Board Connector.	2422 034 20021
0228	1 Pin Board Connector.	2422 034 20021
S 0243	Connector, 6 Pin	2422 025 04854
0244	4 Pin Board Connector.	2422 025 04852
S 0245	Connector, 6 Pin	2422 025 04854
S 0254	CRT Socket (9 Pin)	2422 500 80022
0267	Connector, 3 Pin	2412 020 00725
1000	Tuner.	2422 542 90057
1001	Filter	2422 549 42501
1003	45 MHz SAW, Filter,.	2422 549 42433
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807
1208	Crystal Resonator.	4835 242 77276
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10869
S 1571	1 Amp, Radial Fuse,.	4835 253 97162
S 1572	1 Amp, Radial Fuse,.	4835 253 97162
S 1580	Relay, 12V	2422 132 07317
1600	Switch, Tactile.	2422 128 02742
1601	Switch, Tactile.	2422 128 02742
1602	Switch, Tactile.	2422 128 02742
1603	Switch, Tactile.	2422 128 02742
1606	Switch, Tactile.	2422 128 02742
1660	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488
2001	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2002	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2003	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2004	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2011	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2201	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2202	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2203	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2204	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2205	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2208	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2209	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2211	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2212	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2213	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2214	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2215	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 16654
2220	Cap, 15p, 5%, 50V, Ceramic	3198 016 01590
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2222	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2226	Cap, 33u, 20%, 25V, Electrolytic . .	2020 021 90124
2227	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2247	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2248	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2249	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2330	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2340	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320
S 2343	Cap, 3n3, 10%, 2KV, Ceramic.	2020 558 90529
2345	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2401	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2402	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2404	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2405	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2407	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2409	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2420	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2426	Cap, 100n, 10%, 63V, Metalized Polyes ter.	2222 370 75104
2428	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2429	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2430	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2431	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2437	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2438	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2448	Cap, 220p, 10%, 500V, Ceramic. . . .	3198 019 42210
2450	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91139
2451	Cap, 15n, 10%, 50V, Polyester. . . .	2020 300 90575
2451	0.01uF., 10%, 50V, Polyester, only 27	3198 138 20941
2456	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176
2457	Cap, 390n, 5%, 250V, Metalized Polypr opylene.	2222 479 90021
2458	Cap, 2u2, 20%, 100V, Electrolytic. .	2020 021 91331
2459	Cap, 680p, 10%, 500V, Ceramic. . . .	3198 019 46810
2461	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2462	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176
2463	470pF., 10%, 2KV, Ceramic.	4835 122 47638
S 2465	Cap, 10n, 5%, 1600V, Polypropylene .	2222 375 90154
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050
2473	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2481	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2482	Cap, 68n, 10%, 250V, Polyester . . .	2222 347 90234
2484	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2485	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2486	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2487	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2488	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2489	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2490	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2491	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810
2500	0.47uF., 250V, Polyester	4835 121 47569
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
S 2507	Cap, 1n5, 10%, 1KV, Ceramic.	2020 558 90443
2508	Cap, 470u, 20%, 200V, Electrolytic .	2020 024 90647
S 2511	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
S 2518	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2530	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 021 91147
2531	Cap, 1n, 2%, 50V, Polypropylene. . .	2020 310 90049
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2540	Cap, 100u, 20%, 25V, Electrolytic. .	2020 021 90547
S 2545	1500pF., 250VAC, Ceramic	4835 122 47621
S 2550	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2551	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91358
2561	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
S 2562	Cap, 220p, 10%, 1KV, Ceramic	2020 558 90424
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2572	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2575	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2577	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2586	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2604	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2613	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2615	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2619	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2622	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2629	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2679	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2681	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2913	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2914	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2915	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2916	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648
2917	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2960	Cap, 220u, 20%, 50V, Electrolytic. .	3198 026 52210
2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090
2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010

S = Safety Part Be sure to use exact replacement part.

TR2503C125 (continued)

	3010	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610		3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
	3013	Zero ohm,.	4835 111 27056		3469	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
	3014	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052		3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
	3015	22k, 5%, 1/10W, Metal Film	4835 111 37441		3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703
	3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810		3481	Res, 100K, 1%, 3/5W, Metal Film. . .	2322 156 21004
	3021	Res, 1K, 2%, 0,25W	4822 051 10102		3482	Res, 32K4, 1%, 3/5W, Metal Film. . .	2322 156 23243
	3200	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
	3201	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253		3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3203	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443	S	3485	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
	3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	S	3486	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3205	Res, 1K, 2%, 0,25W	4822 051 10102	S	3487	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3206	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	S	3488	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
	3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3490	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3209	22k, 5%, 1/10W, Metal Film	4835 111 37441	S	3491	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3212	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253	S	3492	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3213	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3495	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272
	3215	22k, 5%, 1/10W, Metal Film	4835 111 37441		3496	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3216	Zero ohm,.	4835 111 27056		3497	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3217	Res, 1M5, 5%, 1/8W, Metalized Glass.	2322 730 61155		3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
	3218	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225
	3219	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3503	10ohm, 120VAC, Positive Temperature C	
	3220	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432			oefficient	4835 116 47001
	3225	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S	3505	Surge Protector.	2422 549 43073
	3228	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
	3231	Zero ohm,.	4835 111 27056	S	3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333
	3232	Zero ohm,.	4835 111 27056	S	3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102
	3233	Zero ohm,.	4835 111 27056		3512	15k, 5%, 1/10W, Metal Film	4835 111 37458
	3243	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052		3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184
	3246	82k, 5%, 1/10W, Metal Film	4835 111 37277		3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204
	3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3515	2.5 ohm, 20%, 3.6W, Negative Temperat	
	3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010			ure Coefficient.	2122 612 00023
	3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340		3516	Res, 1K, 2%, 0,25W	4822 051 10102
	3250	Zero ohm,.	4835 111 27056		3517	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
	3251	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S	3518	Res, 0R22, 5%, 3W, Metal Film. . . .	2120 106 90548
	3252	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		3520	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
	3253	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		3521	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443
	3257	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3525	33 ohm, 5%, 1/3W, Metal Film	4835 116 57665
	3258	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3528	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3259	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3529	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3530	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
	3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3532	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3534	15k, 5%, 1/10W, Metal Film	4835 111 37458
	3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3536	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3537	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046	S	3542	4.7 Megohm, 5%, 1/2W, Metal Film . .	4835 116 57009
S	3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109		3570	15k, 5%, 1/10W, Metal Film	4835 111 37458
S	3341	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483		3571	Res, 150K, 1%, 3/5W, Metal Film. . .	2322 156 21504
S	3342	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483		3573	Res, 2K, 1%, 1/10W, Metalized Glass.	2120 108 92657
	3343	1.5k, 20%, 1/2W, Carbon Composition.	4835 110 47034		3574	33k, 5%, 1/10W, Metal Film	4835 111 37248
	3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290		3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
S	3345	VDR, DC, 1mA, 50V, MAX 115V	2322 593 13507		3577	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290		3578	Res, 1K, 2%, 0,25W	4822 051 10102
	3401	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380		3579	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
	3402	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380		3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3403	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380		3592	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3405	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002		3594	22k, 5%, 1/10W, Metal Film	4835 111 37441
	3406	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020		3595	68k, 5%, 1/6W, Carbon Film	4835 111 37205
	3407	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002		3596	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020		3597	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
	3409	1.5 ohm, 5%, 1/3W, Metal Film. . . .	4835 116 57664		3598	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210		3599	22k, 5%, 1/10W, Metal Film	4835 111 37441
	3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210		3607	8.2k, 5%, 1/8W, Inline Package . . .	4835 111 97046
	3420	470k, 5%, 1/10W, Metal Film.	4835 111 37407		3608	2.2k, 5%, 1/8W, Inline Package . . .	4835 111 97049
	3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220		3609	2.2k, 5%, Resistor Network	2120 108 93868
	3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220		3611	Res, 1K, 2%, 0,25W	4822 051 10102
	3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840		3612	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606		3613	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3425	150k, 5%, 1/10W, Metal Film.	4835 111 27045		3615	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3426	39k, 5%, 1/10W, Metal Film	4835 111 27051		3617	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
	3428	22k, 5%, 1/10W, Metal Film	4835 111 37441		3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3429	27k, 5%, 1/10W, Metal Film	4835 111 37442		3619	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
	3431	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247		3629	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259
	3432	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
	3436	Res, 1K, 2%, 0,25W	4822 051 10102		3631	27k, 5%, 1/10W, Metal Film	4835 111 37442
	3437	10k, 5%, 1/10W, Metal Film	4835 111 37216	S	3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63479
	3438	33k, 1/4W, Carbon Film	4835 110 57375		3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210
	3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920		3634	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
	3447	10k, 5%, 1/10W, Metal Film	4835 111 37216		3635	22k, 5%, 1/10W, Metal Film	4835 111 37441
	3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3636	22k, 5%, 1/10W, Metal Film	4835 111 37441
	3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320		3637	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
S	3452	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63229		3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
S	3453	Res, 4R7, 5%, 5W, Wire Wound	2322 251 41478		3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
S	3454	Res, 33K, 5%, 1 1/3W, Metal Film . .	2322 194 63333		3653	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020		3654	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
	3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720		3655	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
S	3462	Res, 6K8, 5%, 5W, Metal Film	2322 257 41682		3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710
	3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790		3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3464	Res, 1K, 2%, 0,25W	4822 051 10102		3662	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
S	3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109		3663	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
	3466	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903		3664	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
	3467	Res, 14K, 1%, 3/5W, Metal Film . . .	2322 156 21403		3665	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
	3467	Res, 15K, 1%, 3/5W, Metal Film . . .	2322 156 21503		3666	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376

S = Safety Part Be sure to use exact replacement part.

TR2503C125 (continued)

3667	27k, 5%, 1/10W, Metal Film	4835 111 37442	
3672	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3673	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3674	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231	
3675	Res, 150 ohm, 5%, 1/10W, Metalized Glass	3198 021 51510	
3676	Res, 150 ohm, 5%, 1/10W, Metalized Glass	3198 021 51510	
3677	Res, 150 ohm, 5%, 1/10W, Metalized Glass	3198 021 51510	
3680	680 ohm, 5%, 1/10W, Metal Film	4835 111 37271	
3681	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3682	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3683	100 ohm, 5%, 1/10W, Metal Film	4835 111 37432	
3684	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3908	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3909	Res, 1K, 2%, 0,25W	4822 051 10102	
3910	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376	
3911	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230	
3912	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3913	Res, 6K8, 5%, 1/6W, Carbon Film.	3198 011 06820	
3914	Res, 1K8, 5%, 1/6W, Carbon Film.	3198 011 01820	
3915	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231	
3916	220 ohm, 5%, 1/10W, Metal Film	4835 111 37371	
3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810	
3951	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3953	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272	
3955	Res, 4K7, 5%, 1/6W, Carbon Film.	3198 011 04720	
4001	Zero ohm,	4835 111 27056	
4002	Zero ohm,	4835 111 27056	
4004	Zero ohm,	4835 111 27056	
4007	Zero ohm,	4835 111 27056	
4009	Zero ohm,	4835 111 27056	
4010	Zero ohm,	4835 111 27056	
4011	Zero ohm,	4835 111 27056	
4012	Zero ohm,	4835 111 27056	
4013	Zero ohm,	4835 111 27056	
4020	Zero ohm,	4835 111 27056	
4051	Zero ohm,	4835 111 27056	
4100	Zero ohm,	4835 111 27056	
4101	Zero ohm,	4835 111 27056	
4102	Zero ohm,	4835 111 27056	
4103	Zero ohm,	4835 111 27056	
4143	Zero ohm,	4835 111 27056	
4144	Zero ohm,	4835 111 27056	
4203	Zero ohm,	4835 111 27056	
4207	Zero ohm,	4835 111 27056	
4212	Zero ohm,	4835 111 27056	
4214	Zero ohm,	4835 111 27056	
4215	Zero ohm,	4835 111 27056	
4216	Zero ohm,	4835 111 27056	
4501	Zero ohm,	4835 111 27056	
4602	Zero ohm,	4835 111 27056	
4650	Zero ohm,	4835 111 27056	
4651	Zero ohm,	4835 111 27056	
4652	Zero ohm,	4835 111 27056	
4654	Zero ohm,	4835 111 27056	
4655	Zero ohm,	4835 111 27056	
4684	Zero ohm,	4835 111 27056	
4687	Zero ohm,	4835 111 27056	
4831	Zero ohm,	4835 111 27056	
4832	Zero ohm,	4835 111 27056	
4833	Zero ohm,	4835 111 27056	
4902	Zero ohm,	4835 111 27056	
4903	Zero ohm,	4835 111 27056	
4904	Zero ohm,	4835 111 27056	
4905	Zero ohm,	4835 111 27056	
4909	Zero ohm,	4835 111 27056	
4911	Zero ohm,	4835 111 27056	
4912	Zero ohm,	4835 111 27056	
4914	Zero ohm,	4835 111 27056	
4957	Zero ohm,	4835 111 27056	
4999	Zero ohm,	4835 111 27056	
5000	Coil, 5u6.	3198 018 25680	
5004	Coil, 820n	2422 535 97314	
5201	Coil, 22u.	3198 018 22290	
5202	Coil, 6u8.	3198 018 16880	
5342	22uH., 10%, Coil, Peaking.	4835 157 67069	
S 5445	Transformer, L.O.T., models ending in C101, C121, and C125	2422 531 02327	
S 5445	Transformer, L.O.T., models ending in C221 and C225.	3128 138 20941	
5451	Coil, 27u.	2422 535 96614	
5457	Coil, Linear Correction.	3128 138 53241	
5461	Transformer.	3128 138 33811	
5480	Coil, 27u.	2422 535 97334	
5480	Coil, 39u.	2422 535 97336	
5480	33uH., Peaking Coil, only in 25.	4835 157 58205	
S 5500	Filter, Mains, 5mH, 2A	2422 549 43432	
5516	100uH., Coil	4835 157 67078	
5518	Fixed, Inductor, 100MHz, 50R.	3198 018 90010	
5521	Coil, 2u2.	3198 018 12280	
5540	Coil, 4u7.	3198 018 14780	
S 5545	Transfomer,	2422 531 02314	
5551	27uH., 5%, Coil, Peaking	4835 157 67052	
5552	Fixed, Inductor, 100MHz, 50R.	3198 018 90010	
5572	100uH., Coil	4835 157 67078	
5573	100uH., Coil	4835 157 67078	
5576	100uH., Coil	4835 157 67078	
5577	Fixed, Inductor, 100MHz, 50R.	3198 018 90010	
5600	Coil, 8u2.	3198 018 18280	
5601	Coil, 8u2.	3198 018 18280	
5620	Coil, 6u8.	3198 018 16880	
5821	Coil, 100u	3198 018 21010	
6008	Zener, 33 Volt BZX79-C33	4835 130 37904	
6211	Diode, 1N4148.	4835 130 37048	
6212	Diode, 1N4148.	4835 130 37048	
6213	Diode, 1N4148.	4835 130 37048	
6331	Diode.	4835 130 37294	
6333	Diode.	4835 130 37294	
6335	Diode.	4835 130 37294	
6401	Diode.	4835 130 37094	
6402	Zener, 33 Volt, BZX79-C33.	4835 130 37904	
6403	Diode.	4835 130 37094	
6404	Diode.	4835 130 37094	
6449	Diode, 1N4148.	4835 130 37048	
6450	Diode, 1N4148.	4835 130 37048	
6460	Diode, Rect, BY228/20	9336 215 80112	
6463	Diode, 1N4148.	4835 130 37048	
6464	Zener, 6.2 Volt, BZX79-B6V2.	4835 130 37948	
6464	Zener Diode, 6.2 volt.	9337 242 70133	
6465	Diode, BYD33J.	4835 130 37094	
6466	Diode, BYD33J.	4835 130 37094	
6480	Diode, Zener	4835 130 37947	
6481	Diode, 1N4148.	4835 130 37048	
6485	Diode, BYD33J.	4835 130 37094	
6486	Diode, EGP20DL-530	4835 130 37919	
6487	Diode.	4835 130 37094	
6488	Diode, Rect, BYV27-200.	9322 126 72673	
6490	Diode, Rect, BYV27-200.	9322 126 72673	
6505	Diode, Bridge Rect, GBU6JL-7002	9322 138 08667	
6507	Diode, BYD33J.	4835 130 37094	
6508	Diode, BYD33J.	4835 130 37094	
6510	Zener Diode, 20 volt	9331 178 60133	
6511	Diode, BYV95C.	4835 130 37052	
6512	Diode, Rect, BY228/20	4822 130 41275	
6513	Diode, Rect, BY228/20	4822 130 41275	
6514	Zener, 18 Volt, BZX79-C18.	4835 130 37908	
6540	Diode.	4835 130 37294	
6550	Diode, Rect, BY229X-800	9340 380 30127	
6560	Diode, EGP20DL-530	4835 130 37919	
6580	Diode, Rect, BYV27-200.	9322 126 72673	
6584	Diode, 1N4148.	4835 130 37048	
6585	Diode, 1N4148.	4835 130 37048	
6591	Diode, BAS216.	4835 130 37905	
6601	Diode, Zener	4835 130 37684	
6606	Zener, 4.7 Volt, BZX79-C4V7.	4835 130 37005	
6607	Zener, 6.8 Volt, BZX79-C6V8.	4835 130 37945	
6690	LED, LTL-307P.	4835 130 97096	
6951	Diode, BAS216.	4835 130 37905	
6961	Diode, BAS216.	4835 130 37905	
7250	IC,	9352 620 26112	
7251	IC, LM317T	9337 220 80682	
7254	Transistor, NPN, BC847B.	4822 130 60511	
7256	Transistor, NPN, BC847B.	4822 130 60511	
7258	Transistor, NPN, BC847B.	4822 130 60511	
7263	Transistor, PNP, BC857B.	5322 130 60508	
7266	Transistor, NPN, BC847B.	4822 130 60511	
7330	IC,	9352 184 10112	
7401	IC,	9322 121 47687	
7460	Transistor, NPN, BU1508DX.	9340 170 50127	
7461	Transistor, NPN, BF819	9335 354 50127	
7462	Transistor, BC547B	4835 130 47055	
7463	Transistor, BC557B	4835 130 47409	
7480	IC,	9322 028 93682	
7481	Transistor, BC557B	4835 130 47409	
7482	Transistor, PNP, BC857B.	5322 130 60508	
7518	STH8NA60FI SMPS FET	9322 068 92687	
7518	STH10NC60FI SMPS FET.	9322 155 66687	
7520	IC, MC44603A	4835 209 88537	
7570	IC,	9337 711 00676	
S 7581	Coupler, TCDT1101G	9338 431 30682	
7590	Transistor, NPN, BC847B.	4822 130 60511	
7591	Transistor, NPN, BC847B.	4822 130 60511	
7592	Transistor, NPN, BC847B.	4822 130 60511	
7600	IC, SAA5542PS/M4/1044 L90UM1-1.3	4835 310 57476	
7601	IC, ST24W04B6.	9322 097 23682	
7603	Transistor, NPN, BC337	9331 796 00126	
7604	Transistor, NPN, BC847B.	4822 130 60511	
7605	Transistor, NPN, BC847B.	4822 130 60511	
7608	Transistor, NPN, BC847B.	4822 130 60511	
7609	Transistor, NPN, BC847B.	4822 130 60511	
7680	IR Receiver.	9322 127 53667	

S = Safety Part Be sure to use exact replacement part.

TR2503C125 (continued)

7904	Transistor, NPN, BC847B.	4822 130 60511
7952	IC,.	4835 209 88542
9423	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
CBA	00EMF801A001 Main Chassis Board Asm.	00EM F80 1A001

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Mainscord, 125V, 10A	3135 010 03831
S AC02	Anode Clip	4835 256 97264
AC03	Cabinet Back	3139 124 27951
AC04	Cabinet Front.	3139 137 53291
AC05	Chassis Guide.	3139 124 31381
AC06	Control Buttons.	3139 124 27461
S AC07	Convergence and Purity Assembly. . .	2422 549 43385
S AC08	CRT A63AFW36X (C121 Version)	9301 763 20443
S AC08	CRT A63QDB891X01	9322 151 39682
S AC09	Coil, Degaussing	3121 218 62961
AC11	Light Guide.	3139 124 26461
AC13	Owner's Manual, English.	3135 015 10691
AC14	Power Button	3139 124 26444
REMOTE	Remote Transmitter	3139 148 54201
AC16	Speaker, 16R, 1W5 (2 Used)	2422 264 00343
S AC18	Yoke (C121 Version).	3321 203 00121
S AC18	Yoke, Vendor # DSE2603CL (M), (C125 V ersion).	4832 310 57502
AC19	Yoke Wedge (3 Used).	4835 535 27001
AC21	Batteries f/Remote Transmitter . . .	9299 000 13827
AC24	Spring	3139 121 26231

S = Safety Part Be sure to use exact replacement part.

TR2503C221 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts	
0113	L9 SOPS HEATSINK	3139 121 62041
0119	DIODE HEATSINK L9.	3139 121 26691
0121	LINE HEATSINK (CINCH).	3139 121 61942
S 0127	Holder, Fuse, 2 Pin.	3122 358 71251
0211	Connector, 2 Pin	2422 025 11196
0212	Connector, 2 Pin	2422 025 15396
0215	Connector, 2 Pin	2412 020 00724
0220	4 Pin Board Connector.	2422 025 04852
0221	Connector, 4 Pin	2422 025 15503
0222	Connector, 2 Pin	2422 025 10646
0224	1 Pin Board Connector.	2422 034 20021
0228	1 Pin Board Connector.	2422 034 20021
S 0243	Connector, 6 Pin	2422 025 04854
0244	4 Pin Board Connector.	2422 025 04852
S 0245	Connector, 6 Pin	2422 025 04854
S 0254	CRT Socket (9 Pin)	2422 500 80022
0267	Connector, 3 Pin	2412 020 00725
1000	TUNER.	3139 147 16412
1001	Filter	2422 549 42501
1003	45 MHz SAW, Filter,.	2422 549 42433
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807
1208	Crystal Resonator, 3.58MHz	2422 543 00832
S 1500	Fue, 4 A, 250V	2422 086 10905
S 1571	FUSE 1A 250V	2422 086 10779
S 1572	FUSE 1A 250V	2422 086 10779
S 1580	Relay, 12V, 5A G5PA-1.	2422 132 07444
1600	Switch, Tactile.	2422 128 02742
1601	Switch, Tactile.	2422 128 02742
1602	Switch, Tactile.	2422 128 02742
1603	Switch, Tactile.	2422 128 02742
1606	Switch, Tactile.	2422 128 02742
1660	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488
2001	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2002	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2003	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2004	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2011	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2201	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2202	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2203	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2204	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2205	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2208	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2209	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2211	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2212	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2213	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2214	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2215	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 15654
2220	Cap, 18p, 5%, 50V, Ceramic	3198 016 01890
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2222	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2226	Cap, 33u, 20%, 25V, Electrolytic . .	2020 021 90124
2227	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2247	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2248	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2249	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2330	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2340	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320
S 2343	Cap, 3n3, 10%, 2KV, Ceramic.	2020 558 90529
2345	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2401	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2402	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2404	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2405	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2407	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2409	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2420	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2426	Cap, 100n, 10%, 63V, Metalized Polyester.	2222 370 75104
2428	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2429	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2430	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2431	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2437	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2438	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2448	Cap, 33p, 5%, 500V, Ceramic.	2020 557 90192
2450	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91139
2451	Cap, 15n, 10%, 50V, Polyester. . . .	2020 300 90575
2456	Cap, 47n, 10%, 250V, Metalized Polyester.	2222 368 90176
2457	Cap, 390n, 5%, 250V, Metalized Polypropylene.	2222 479 90021
2458	Cap, 2u2, 20%, 100V, Electrolytic. .	2020 021 91331
2459	Cap, 680p, 10%, 500V, Ceramic. . . .	3198 019 46810
2461	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2462	Cap, 47n, 10%, 250V, Metalized Polyester.	2222 368 90176
S 2463	Cap, 470p, 10%, 2KV, Ceramic	2020 558 90483
S 2465	Cap, 10n, 5%, 1600V, Polypropylene .	2222 375 90154
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050
2473	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2481	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2482	Cap, 68n, 10%, 250V, Polyester . . .	2222 347 90234
2484	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2485	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2486	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2487	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2488	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2489	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2490	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2491	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810
2499	Cap, 220n, 10%, 100V, Metalized Polyester	2222 365 25224
2500	Cap, 470n, 20%, 275V, Polypropylene.	2222 336 29148
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2507	Cap, 1n5, 10%, 1KV, Ceramic.	3198 019 61520
2508	Cap, 470u, 20%, 200V, Electrolytic .	2020 024 90647
2511	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
2518	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2530	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 021 91147
2531	Cap, 1n, 2%, 50V, Polypropylene. . .	2020 310 90049
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2540	Cap, 100u, 20%, 25V, Electrolytic. .	2020 021 90547
S 2545	Cap, 1n5, 20%, v, Ceramic.	2020 554 90128
2550	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2551	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91358
2561	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2562	Cap, 220p, 10%, 1KV, Ceramic	3198 019 62210
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2572	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2575	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2577	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2586	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2604	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2613	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2615	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2619	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2622	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2629	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2679	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2681	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2913	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2914	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2915	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2916	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648
2917	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2960	Cap, 220u, 20%, 50V, Electrolytic. .	3198 026 52210
2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090

S = Safety Part Be sure to use exact replacement part.

TR2503C221 (continued)

2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090	
2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090	
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3010	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610	
3013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3015	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	
3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810	
3021	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3200	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610	
3201	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910	
3203	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310	
3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	
3205	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3206	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610	
3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3209	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	
3212	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910	
3213	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610	
3215	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	
3216	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
3218	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3219	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610	
3220	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3225	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040	
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3243	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3246	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230	
3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340	
3250	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
3251	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040	
3252	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	
3253	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	
3257	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3258	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3259	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	3198 013 01020	
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	3198 013 01020	
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	3198 013 01020	
S 3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109	
S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108	
S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108	
3343	Res, 1K5, 20%, 1/2W, Carbon Film . .	3198 013 01520	
3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290	
3345	VDR DC 1MA/50V S MAX 110V A . . .	2122 550 00152	
3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290	
3401	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380	
3402	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380	
3403	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380	
3405	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002	
3406	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
3407	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002	
3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
3409	Res, 1R5, 5%, 1/3W, Metal Film . . .	2306 204 03158	
3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210	
3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210	
3420	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740	
3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220	
3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220	
3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840	
3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606	
3425	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540	
3426	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930	
3428	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	
3429	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730	
3431	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	
3432	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3433	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3436	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3437	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3438	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330	
3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920	
3447	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220	
3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320	
S 3452	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	3198 012 32290	
S 3453	Res, 4R7, 5%, 5W, Wire Wound	2322 251 41478	
S 3454	Res, 33K, 5%, 1 1/3W, Metal Film . .	2322 194 63333	
3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
S 3462	Res, 6K8, 5%, 5W, Metal Film	2322 257 41682	
3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790	
3464	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
S 3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109	
3466	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903	
3467	Res, 14K, 1%, 3/5W, Metal Film . . .	2322 156 21403	
3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
3469	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	
3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240	
3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703	
3481	Res, 100K, 1%, 3/5W, Metal Film. . .	2322 156 21004	
3482	Res, 32K4, 1%, 3/5W, Metal Film. . .	2322 156 23243	
3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230	
3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
S 3486	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108	
S 3487	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108	
S 3488	Res, 4R7, 5%, 1/2W, Metal Film . . .	2306 207 03478	
S 3490	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108	
S 3491	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108	
S 3492	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108	
3495	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820	
3496	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3497	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3500	Res, 1M5, 5%, 1/2W, Metalized Glass.	2322 242 13155	
3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	3198 013 04710	
S 3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225	
3503	PTC DC ZPB 120V S 10R PM30 B . . .	2120 661 00019	
S 3505	Surge Protector.	2422 549 43073	
S 3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223	
S 3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333	
S 3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102	
3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530	
3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184	
3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204	
S 3515	2.5 ohm, 20%, 3.6W, Negative Temperat ure Coefficient.	2122 612 00023	
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3517	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
S 3518	Res, 0R22, 5%, 2 1/2W, Metal Film. .	3198 012 32270	
3520	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230	
3521	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310	
S 3525	Res, 47 ohm, 5%, 1/3W, Metal Film. .	2306 204 03479	
3528	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510	
3529	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890	
3530	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320	
3532	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3534	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530	
3536	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830	
3537	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
S 3542	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475	
3570	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530	
3571	Res, 150K, 1%, 3/5W, Metal Film. . .	2322 156 21504	
3573	Res, 2K, 1%, 1/8W, Metalized Glass .	2322 734 62002	
3574	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330	
3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3577	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3578	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3579	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002	
3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3592	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3594	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	
3595	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830	
3596	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3597	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3598	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3599	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	
3607	RST NETW RGLE 10X 8K2 PM5 B . . .	2120 108 93916	
3608	RST NETW RGLE 6X 2K2 PM5 B . . .	2120 108 93913	
3609	RST NETW RGLE 7X 2K2 PM5 B . . .	2120 108 93915	
3611	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3612	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3613	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3615	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3616	Jumper Wire/Staple	0322 179 00003	
3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3619	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3629	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710	
3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3631	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730	
S 3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790	
3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210	
3634	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	
3635	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	
3636	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	
3637	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3653	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3654	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	

S = Safety Part Be sure to use exact replacement part.

TR2503C221 (continued)

3655	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3662	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3663	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220	
3664	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220	
3665	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3666	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620	
3667	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730	
3672	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3673	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3674	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820	
3675	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3676	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3677	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3680	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810	
3681	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3682	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220	
3683	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3684	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	
3908	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3909	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3910	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620	
3911	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230	
3912	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3913	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3914	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	
3915	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820	
3916	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210	
3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810	
3951	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	
3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3953	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820	
3955	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4004	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4011	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4012	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4020	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4051	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4100	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4203	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4212	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4215	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4216	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4465	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4501	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4650	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4651	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4654	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4911	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4914	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4957	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4999	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
5000	Coil, 5u6.	3198 018 25680	
5004	Coil, 820n	2422 535 97314	
5201	Coil, 22u.	3198 018 22290	
5202	Coil, 6u8.	3198 018 16880	
5342	Coil, 22u.	3198 018 22290	
S 5445	Transformer, L.O.T., models ending in C221 and C225.	3128 138 20941	
5451	Coil, 27u.	2422 535 96614	
5457	Coil, Linear Correction.	3128 138 53241	
5461	TFM SIG SLOT UU-1522S WIRE B . . .	2422 531 02318	
5461	Transformer.	3128 138 33811	
5480	Coil, 33u.	2422 535 97335	
S 5500	Filter, Mains, 5mH, 2A	2422 549 43432	
5516	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5518	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5521	Coil, 2u2.	3198 018 12280	
5540	Coil, 4u7.	3198 018 14780	
S 5545	Transfomer,.	2422 531 02314	
5551	Coil, 27u.	2422 535 95366	
5552	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5572	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5573	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5576	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5577	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5600	Coil, 8u2.	3198 018 18280	
5601	Coil, 8u2.	3198 018 18280	
5620	Coil, 6u8.	3198 018 16880	
5821	Coil, 100u	3198 018 21010	
6008	Zener Diode, 33 volt	3198 010 23390	
6211	Diode, Signal, 1N4148.	3198 010 10010	
6212	Diode, Signal, 1N4148.	3198 010 10010	
6213	Diode, Signal, 1N4148.	3198 010 10010	
6331	Diode, Signal, BAV21	3198 010 10070	
6333	Diode, Signal, BAV21	3198 010 10070	
6335	Diode, Signal, BAV21	3198 010 10070	
6401	Diode, Rect, BYD33D	9337 234 00133	
6402	Zener Diode, 33 volt	3198 010 23390	
6403	Diode, Rect, BYD33D	9337 234 00133	
6404	Zener Diode, 75 volt	9331 180 00133	
6449	Diode, Signal, 1N4148.	3198 010 10010	
6450	Diode, Signal, 1N4148.	3198 010 10010	
6460	Diode, Rect, BY228/20	9336 215 80112	
6463	Diode, Signal, 1N4148.	3198 010 10010	
6464	Zener Diode, 6.2 volt.	9331 668 30133	
6465	Diode, Rect, BYD33J	9337 234 20133	
6466	Diode, Rect, BYD33J	9337 234 20133	
6480	Zener Diode, 27 volt	3198 010 22790	
6481	Diode, Signal, 1N4148.	3198 010 10010	
6485	Diode, Rect, BYD33J	9337 234 20133	
6486	Diode, Rect, EGP20DL-5300	9322 100 13682	
6487	Diode, Rect, BYD33D	9337 234 00133	
6488	Diode, Rect, BYV27-200.	9322 126 72673	
6490	Diode, Rect, BYV27-200.	9322 126 72673	
6505	Diode, Bridge Rect, GBU6JL-7002 . .	9322 138 08667	
6507	Diode, Rect, BYD33J	9337 234 20133	
6508	Diode, Rect, BYD33J	9337 234 20133	
6510	Zener Diode, 20 volt	9331 178 60133	
6511	Diode, Rect, BYV95C	9335 001 80133	
6512	Diode, Rect, 1N5062	3198 010 10120	
6513	Diode, Rect, 1N5062	3198 010 10120	
6514	Zener Diode, 18 volt	3198 010 21890	
6540	Diode, Signal, BAV21	3198 010 10070	
6550	Diode, Rect, BY229X-800	9340 380 30127	
6560	Diode, Rect, EGP20DL-5300	9322 100 13682	
6580	Diode, Rect, BYV27-200.	9322 126 72673	
6584	Diode, Signal, 1N4148.	3198 010 10010	
6585	Diode, Signal, 1N4148.	3198 010 10010	
6591	Diode, Signal, BAS16WS	9322 031 99685	
6601	Zener Diode, 3.9 volt.	3198 010 23980	
6603	Jumper Wire/Staple	0322 179 00003	
6604	Jumper Wire/Staple	0322 179 00003	
6605	Jumper Wire/Staple	0322 179 00003	
6606	Zener Diode, 4.7 volt.	3198 010 24780	
6607	Zener Diode, 6.8 volt.	3198 010 26880	
6690	LED VS LTL-307P (LITO) B . . .	9322 033 95682	
6951	Diode, Signal, BAS16WS	9322 031 99685	
6961	Diode, Signal, BAS16WS	9322 031 99685	
7250	IC,.	9352 620 26112	
7251	IC, LM317T	9337 220 80682	
7254	Transistor, NPN, BC847B.	3198 010 42030	
7256	Transistor, NPN, BC847B.	3198 010 42030	
7258	Transistor, NPN, BC847B.	3198 010 42030	
7263	Transistor, PNP, BC857B.	3198 010 42150	
7266	Transistor, NPN, BC847B.	3198 010 42030	
7330	IC, TDA6107Q/N2.	9352 576 50112	
7401	IC,.	9322 121 47687	
7460	Transistor, NPN, BU1508DX.	9340 170 50127	
7461	Transistor, NPN, BF819	9335 354 50127	
7462	Transistor, NPN, BC547B.	3198 020 40030	
7463	Transistor, PNP, BC557B.	3198 020 40110	
7480	IC,.	9322 028 93682	
7481	Transistor, PNP, BC557B.	3198 020 40110	
7482	Transistor, PNP, BC857B.	3198 010 42150	
7518	STH10NC60FI SMPS FET.	9322 155 66687	
7520	IC,.	9322 108 36682	
7570	IC,.	9337 711 00676	
S 7581	Coupler, TCDT1101G	9338 431 30682	
7590	Transistor, NPN, BC847B.	3198 010 42030	
7591	Transistor, NPN, BC847B.	3198 010 42030	
7592	Transistor, NPN, BC847B.	3198 010 42030	
7600	IC,.	9352 653 70112	
7601	IC, ST24W04B6.	9322 097 23682	
7603	Transistor, NPN, BC337	9331 796 00126	
7604	Transistor, NPN, BC847B.	3198 010 42030	
7605	Transistor, NPN, BC847B.	3198 010 42030	
7608	Transistor, NPN, BC847B.	3198 010 42030	
7609	Transistor, NPN, BC847B.	3198 010 42030	
7680	IR RECEIVER.	9322 154 48667	
7904	Transistor, NPN, BC847B.	3198 010 42030	
7952	IC,.	9350 662 70112	
7960	ISOPROPYL ALCOHOL.	1306 500 43201	
9001	Jumper Wire/Staple	0322 179 00003	
9003	Jumper Wire/Staple	0322 179 00003	
9005	Jumper Wire/Staple	0322 179 00003	

S = Safety Part Be sure to use exact replacement part.

TR2503C221 (continued)

9011	Jumper Wire/Staple	0322 179 00003
9012	Jumper Wire/Staple	0322 179 00003
9105	Jumper Wire/Staple	0322 179 00003
9126	Jumper Wire/Staple	0322 179 00003
9200	Jumper Wire/Staple	0322 179 00003
9202	Jumper Wire/Staple	0322 179 00003
9203	Jumper Wire/Staple	0322 179 00003
9204	Jumper Wire/Staple	0322 179 00003
9205	Jumper Wire/Staple	0322 179 00003
9206	Jumper Wire/Staple	0322 179 00003
9207	Jumper Wire/Staple	0322 179 00003
9208	Jumper Wire/Staple	0322 179 00003
9209	Jumper Wire/Staple	0322 179 00003
9210	Jumper Wire/Staple	0322 179 00003
9211	Jumper Wire/Staple	0322 179 00003
9214	Jumper Wire/Staple	0322 179 00003
9215	Jumper Wire/Staple	0322 179 00003
9216	Jumper Wire/Staple	0322 179 00003
9217	Jumper Wire/Staple	0322 179 00003
9218	Jumper Wire/Staple	0322 179 00003
9220	Jumper Wire/Staple	0322 179 00003
9221	Jumper Wire/Staple	0322 179 00003
9222	Jumper Wire/Staple	0322 179 00003
9225	Jumper Wire/Staple	0322 179 00003
9226	Jumper Wire/Staple	0322 179 00003
9227	Jumper Wire/Staple	0322 179 00003
9228	Jumper Wire/Staple	0322 179 00003
9229	Jumper Wire/Staple	0322 179 00003
9230	Jumper Wire/Staple	0322 179 00003
9231	Jumper Wire/Staple	0322 179 00003
9232	Jumper Wire/Staple	0322 179 00003
9233	Jumper Wire/Staple	0322 179 00003
9234	Jumper Wire/Staple	0322 179 00003
9236	Jumper Wire/Staple	0322 179 00003
9237	Jumper Wire/Staple	0322 179 00003
9238	Jumper Wire/Staple	0322 179 00003
9240	Jumper Wire/Staple	0322 179 00003
9241	Jumper Wire/Staple	0322 179 00003
9242	Jumper Wire/Staple	0322 179 00003
9243	Jumper Wire/Staple	0322 179 00003
9245	Jumper Wire/Staple	0322 179 00003
9301	Jumper Wire/Staple	0322 179 00003
9401	Jumper Wire/Staple	0322 179 00003
9402	Jumper Wire/Staple	0322 179 00003
9403	Jumper Wire/Staple	0322 179 00003
9404	Jumper Wire/Staple	0322 179 00003
9407	Jumper Wire/Staple	0322 179 00003
9408	Jumper Wire/Staple	0322 179 00003
9411	Jumper Wire/Staple	0322 179 00003
9414	Jumper Wire/Staple	0322 179 00003
9417	Jumper Wire/Staple	0322 179 00003
9419	Jumper Wire/Staple	0322 179 00003
9420	Jumper Wire/Staple	0322 179 00003
9421	Jumper Wire/Staple	0322 179 00003
9422	Jumper Wire/Staple	0322 179 00003
9424	Jumper Wire/Staple	0322 179 00003
9425	Jumper Wire/Staple	0322 179 00003
9427	Jumper Wire/Staple	0322 179 00003
9428	Jumper Wire/Staple	0322 179 00003
9460	Jumper Wire/Staple	0322 179 00003
9461	Jumper Wire/Staple	0322 179 00003
9500	Jumper Wire/Staple	0322 179 00003
9501	Jumper Wire/Staple	0322 179 00003
9502	Jumper Wire/Staple	0322 179 00003
9503	Jumper Wire/Staple	0322 179 00003
9505	Jumper Wire/Staple	0322 179 00003
9509	Jumper Wire/Staple	0322 179 00003
9510	Jumper Wire/Staple	0322 179 00003
9511	Jumper Wire/Staple	0322 179 00003
9512	Jumper Wire/Staple	0322 179 00003
9513	Jumper Wire/Staple	0322 179 00003
9515	Jumper Wire/Staple	0322 179 00003
9516	Jumper Wire/Staple	0322 179 00003
9517	Jumper Wire/Staple	0322 179 00003
9518	Jumper Wire/Staple	0322 179 00003
9526	Jumper Wire/Staple	0322 179 00003
9601	Jumper Wire/Staple	0322 179 00003
9602	Jumper Wire/Staple	0322 179 00003
9603	Jumper Wire/Staple	0322 179 00003
9604	Jumper Wire/Staple	0322 179 00003
9605	Jumper Wire/Staple	0322 179 00003
9606	Jumper Wire/Staple	0322 179 00003
9608	Jumper Wire/Staple	0322 179 00003
9609	Jumper Wire/Staple	0322 179 00003
9610	Jumper Wire/Staple	0322 179 00003
9611	Jumper Wire/Staple	0322 179 00003
9612	Jumper Wire/Staple	0322 179 00003
9613	Jumper Wire/Staple	0322 179 00003
9614	Jumper Wire/Staple	0322 179 00003
9615	Jumper Wire/Staple	0322 179 00003
9618	Jumper Wire/Staple	0322 179 00003
9621	Jumper Wire/Staple	0322 179 00003
9622	Jumper Wire/Staple	0322 179 00003
9624	Jumper Wire/Staple	0322 179 00003
9625	Jumper Wire/Staple	0322 179 00003
9626	Jumper Wire/Staple	0322 179 00003
9629	Jumper Wire/Staple	0322 179 00003
9631	Jumper Wire/Staple	0322 179 00003
9632	Jumper Wire/Staple	0322 179 00003
9637	Jumper Wire/Staple	0322 179 00003
9640	Jumper Wire/Staple	0322 179 00003
9642	Jumper Wire/Staple	0322 179 00003
9643	Jumper Wire/Staple	0322 179 00003
9644	Jumper Wire/Staple	0322 179 00003
9660	Jumper Wire/Staple	0322 179 00003
9754	Jumper Wire/Staple	0322 179 00003
9788	Jumper Wire/Staple	0322 179 00003
9793	Jumper Wire/Staple	0322 179 00003
9800	Jumper Wire/Staple	0322 179 00003
9805	Jumper Wire/Staple	0322 179 00003
9806	Jumper Wire/Staple	0322 179 00003
9807	Jumper Wire/Staple	0322 179 00003
9810	Jumper Wire/Staple	0322 179 00003
9901	Jumper Wire/Staple	0322 179 00003
9902	Jumper Wire/Staple	0322 179 00003
9905	Jumper Wire/Staple	0322 179 00003
9906	Jumper Wire/Staple	0322 179 00003
9933	Jumper Wire/Staple	0322 179 00003
9936	Jumper Wire/Staple	0322 179 00003
9940	Jumper Wire/Staple	0322 179 00003
9941	Jumper Wire/Staple	0322 179 00003
9942	Jumper Wire/Staple	0322 179 00003
9943	Jumper Wire/Staple	0322 179 00003
9944	Jumper Wire/Staple	0322 179 00003
9945	Jumper Wire/Staple	0322 179 00003
9946	Jumper Wire/Staple	0322 179 00003
9947	Jumper Wire/Staple	0322 179 00003
9948	Jumper Wire/Staple	0322 179 00003
9949	Jumper Wire/Staple	0322 179 00003
9950	Jumper Wire/Staple	0322 179 00003
9951	Jumper Wire/Staple	0322 179 00003
9952	Jumper Wire/Staple	0322 179 00003
9953	Jumper Wire/Staple	0322 179 00003
9955	Jumper Wire/Staple	0322 179 00003
9956	Jumper Wire/Staple	0322 179 00003
9957	Jumper Wire/Staple	0322 179 00003
9958	Jumper Wire/Staple	0322 179 00003
9959	Jumper Wire/Staple	0322 179 00003
9960	Jumper Wire/Staple	0322 179 00003
9962	Jumper Wire/Staple	0322 179 00003
9963	Jumper Wire/Staple	0322 179 00003
9964	Jumper Wire/Staple	0322 179 00003
9965	Jumper Wire/Staple	0322 179 00003
9966	Jumper Wire/Staple	0322 179 00003
9967	Jumper Wire/Staple	0322 179 00003
9968	Jumper Wire/Staple	0322 179 00003
9969	Jumper Wire/Staple	0322 179 00003
9970	Jumper Wire/Staple	0322 179 00003
9971	Jumper Wire/Staple	0322 179 00003
9972	Jumper Wire/Staple	0322 179 00003
9974	Jumper Wire/Staple	0322 179 00003
9975	Jumper Wire/Staple	0322 179 00003
9976	Jumper Wire/Staple	0322 179 00003
9977	Jumper Wire/Staple	0322 179 00003
9981	Jumper Wire/Staple	0322 179 00003
9982	Jumper Wire/Staple	0322 179 00003
9983	Jumper Wire/Staple	0322 179 00003
9984	Jumper Wire/Staple	0322 179 00003
9987	Jumper Wire/Staple	0322 179 00003
9989	Jumper Wire/Staple	0322 179 00003
9990	Jumper Wire/Staple	0322 179 00003
9991	Jumper Wire/Staple	0322 179 00003
9992	Jumper Wire/Staple	0322 179 00003
9993	Jumper Wire/Staple	0322 179 00003
CBA	313917887111 Main Chassis Assembly	3139 178 87111

Cabinet & Accessory Parts

		Cabinet & Accessory Parts	
S	AC01	Mainscord, 125V, 10A	3135 010 03831
	AC02	Clip, Anode Lead	3135 014 04471
	AC03	Cabinet Back	3139 124 27951
	AC04	Cabinet Front.	3139 137 53291
	AC05	Chassis Guide.	3139 124 31381
	AC06	Control Buttons.	3139 124 27461
S	AC07	Convergence and Purity Assembly.	2422 549 43385
S	AC08	CRT A63AFW36X (C121 Version)	9301 763 20443
S	AC08	CRT A63QDB891X01	9322 151 39682
S	AC09	Coil, Degaussing	2422 549 44489
	AC10	Holder, Degaussing (4 Used).	3135 013 01641
	AC11	Light Guide.	3139 124 26461
	AC13	Owner's Manual, English.	3135 015 10691
	AC14	Power Button	3139 124 26444
	REMOTE	Remote Transmitter	3139 148 54201
	AC16	Speaker 242226400312 16ohm 1.5W.	3121 230 40031

S = Safety Part Be sure to use exact replacement part.

TR2503C221 (continued)

S	AC18	Yoke (C121 Version).	3321 203 00121
S	AC18	Yoke, Vendor # DSE2603CL(M), (C125 Version)	4835 310 57502
	AC19	Yoke Wedge (3 used).	3135 013 00311
	AC21	Batteries f/Remote Transmitter . . .	9299 000 13827
	AC24	Spring	3139 121 26231

S = Safety Part Be sure to use exact replacement part.

TR2503C225 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts	
0113	L9 SOPS HEATSINK	3139 121 62041
0119	DIODE HEATSINK L9.	3139 121 26691
0121	LINE HEATSINK (CINCH).	3139 121 61942
S 0127	Holder, Fuse, 2 Pin.	3122 358 71251
0211	Connector, 2 Pin	2422 025 11196
0212	Connector, 2 Pin	2422 025 15396
0215	Connector, 2 Pin	2412 020 00724
0220	4 Pin Board Connector.	2422 025 04852
0221	Connector, 4 Pin	2422 025 15503
0222	Connector, 2 Pin	2422 025 10646
0224	1 Pin Board Connector.	2422 034 20021
0228	1 Pin Board Connector.	2422 034 20021
S 0243	Connector, 6 Pin	2422 025 04854
0244	4 Pin Board Connector.	2422 025 04852
S 0245	Connector, 6 Pin	2422 025 04854
S 0254	CRT Socket (9 Pin)	2422 500 80022
0267	Connector, 3 Pin	2412 020 00725
1000	TUNER.	3139 147 16412
1001	Filter	2422 549 42501
1003	45 MHz SAW, Filter,.	2422 549 42433
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807
1208	Crystal Resonator, 3.58MHz	2422 543 00832
S 1500	Fue, 4 A, 250V	2422 086 10905
S 1571	FUSE 1A 250V	2422 086 10779
S 1572	FUSE 1A 250V	2422 086 10779
S 1580	Relay, 12V, 5A G5PA-1.	2422 132 07444
1600	Switch, Tactile.	2422 128 02742
1601	Switch, Tactile.	2422 128 02742
1602	Switch, Tactile.	2422 128 02742
1603	Switch, Tactile.	2422 128 02742
1606	Switch, Tactile.	2422 128 02742
1660	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488
2001	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2002	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2003	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2004	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2011	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2201	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2202	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2203	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2204	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2205	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2208	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2209	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2211	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2212	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2213	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2214	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2215	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 15654
2220	Cap, 18p, 5%, 50V, Ceramic	3198 016 01890
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2222	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2226	Cap, 33u, 20%, 25V, Electrolytic . .	2020 021 90124
2227	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2247	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2248	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2249	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2330	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2340	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320
S 2343	Cap, 3n3, 10%, 2KV, Ceramic.	2020 558 90529
2345	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2401	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2402	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2404	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2405	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2407	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2409	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2420	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2426	Cap, 100n, 10%, 63V, Metalized Polyes ter.	2222 370 75104
2428	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2429	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2430	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2431	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2437	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2438	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2448	Cap, 33p, 5%, 500V, Ceramic.	2020 557 90192
2450	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91139
2451	Cap, 15n, 10%, 50V, Polyester. . . .	2020 300 90575
2456	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176
2457	Cap, 390n, 5%, 250V, Metalized Polypr opylene.	2222 479 90021
2458	Cap, 2u2, 20%, 100V, Electrolytic. .	2020 021 91331
2459	Cap, 680p, 10%, 500V, Ceramic. . . .	3198 019 46810
2461	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2462	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176
S 2463	Cap, 470p, 10%, 2KV, Ceramic	2020 558 90483
S 2465	Cap, 10n, 5%, 1600V, Polypropylene .	2222 375 90154
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050
2473	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2481	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2482	Cap, 68n, 10%, 250V, Polyester . . .	2222 347 90234
2484	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2485	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2486	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2487	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2488	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2489	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2490	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2491	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810
2499	Cap, 220n, 10%, 100V, Metalized Polye ster	2222 365 25224
2500	Cap, 470n, 20%, 275V, Polypropylene.	2222 336 29148
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2507	Cap, 1n5, 10%, 1KV, Ceramic.	3198 019 61520
2508	Cap, 470u, 20%, 200V, Electrolytic .	2020 024 90647
2511	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
2518	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2530	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 021 91147
2531	Cap, 1n, 2%, 50V, Polypropylene. . .	2020 310 90049
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2540	Cap, 100u, 20%, 25V, Electrolytic. .	2020 021 90547
S 2545	Cap, 1n5, 20%, v, Ceramic.	2020 554 90128
2550	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2551	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91358
2561	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2562	Cap, 220p, 10%, 1KV, Ceramic	3198 019 62210
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2572	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2575	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2577	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2586	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2604	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2613	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2615	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2619	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2622	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2629	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2679	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2681	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2913	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2914	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2915	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2916	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648
2917	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2960	Cap, 220u, 20%, 50V, Electrolytic. .	3198 026 52210
2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090

S = Safety Part Be sure to use exact replacement part.

TR2503C225 (continued)

2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090		3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090	S	3462	Res, 6K8, 5%, 5W, Metal Film	2322 257 41682
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3464	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3010	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610	S	3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
3013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020		3466	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720		3467	Res, 14K, 1%, 3/5W, Metal Film . . .	2322 156 21403
3015	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230		3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810		3469	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3021	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020		3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3200	Res, 560 ohm, 5%, 1/10W, Metalized Gl			3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703
	ass.	3198 021 55610		3481	Res, 100K, 1%, 3/5W, Metal Film. . .	2322 156 21004
3201	Res, 390 ohm, 5%, 1/10W, Metalized Gl			3482	Res, 32K4, 1%, 3/5W, Metal Film. . .	2322 156 23243
	ass.	3198 021 53910		3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3203	Res, 330 ohm, 5%, 1/10W, Metalized Gl			3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	ass.	3198 021 53310	S	3486	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	S	3487	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
3205	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	S	3488	Res, 4R7, 5%, 1/2W, Metal Film . . .	2306 207 03478
3206	Res, 560 ohm, 5%, 1/10W, Metalized Gl		S	3490	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
	ass.	3198 021 55610	S	3491	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3492	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
3209	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230		3495	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3212	Res, 390 ohm, 5%, 1/10W, Metalized Gl			3496	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	ass.	3198 021 53910		3497	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3213	Res, 560 ohm, 5%, 1/10W, Metalized Gl			3500	Res, 1M5, 5%, 1/2W, Metalized Glass.	2322 242 13155
	ass.	3198 021 55610		3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	3198 013 04710
3215	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	S	3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225
3216	Res, Zero ohm, 'Chip' Jumper	3198 021 90020		3503	PTC DC ZPB 120V S 10R PM30 B . . .	2120 661 00019
3218	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	S	3505	Surge Protector.	2422 549 43073
3219	Res, 560 ohm, 5%, 1/10W, Metalized Gl		S	3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
	ass.	3198 021 55610	S	3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333
3220	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	S	3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102
3225	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040		3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010		3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184
3243	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720		3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204
3246	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230	S	3515	2.5 ohm, 20%, 3.6W, Negative Temperat	
3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010			ure Coefficient.	2122 612 00023
3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340		3517	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3250	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	S	3518	Res, 0R22, 5%, 2 1/2W, Metal Film. .	3198 012 32270
3251	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040		3520	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3252	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220		3521	Res, 330 ohm, 5%, 1/10W, Metalized Gl	
3253	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220			ass.	3198 021 53310
3257	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	S	3525	Res, 47 ohm, 5%, 1/3W, Metal Film. .	2306 204 03479
3258	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010		3528	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510
3259	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010		3529	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3530	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	3198 013 01020		3532	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3534	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	3198 013 01020		3536	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3537	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	3198 013 01020	S	3542	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
S 3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109		3570	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108		3571	Res, 150K, 1%, 3/5W, Metal Film. . .	2322 156 21504
S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108		3573	Res, 2K, 1%, 1/8W, Metalized Glass .	2322 734 62002
3343	Res, 1K5, 20%, 1/2W, Carbon Film . .	3198 013 01520		3574	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290		3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3345	VDR DC 1MA/50V S MAX 110V A . . .	2122 550 00152		3577	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290		3578	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3401	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380		3579	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3402	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380		3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3403	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380		3592	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3405	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002		3594	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3406	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020		3595	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3407	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002		3596	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020		3597	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3409	Res, 1R5, 5%, 1/3W, Metal Film . . .	2306 204 03158		3598	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210		3599	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210		3607	RST NETW RGLE 10X 8K2 PM5 B . . .	2120 108 93916
3420	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740		3608	RST NETW RGLE 6X 2K2 PM5 B . . .	2120 108 93913
3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220		3609	RST NETW RGLE 7X 2K2 PM5 B . . .	2120 108 93915
3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220		3611	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840		3612	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606		3613	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3425	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540		3615	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3426	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930		3616	Jumper Wire/Staple	0322 179 00003
3428	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230		3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3429	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730		3619	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3431	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320		3629	Res, 470 ohm, 5%, 1/10W, Metalized Gl	
3432	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010			ass.	3198 021 54710
3433	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030		3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
3436	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020		3631	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3437	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	S	3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3438	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330		3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210
3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920		3634	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3447	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030		3635	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3636	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320		3637	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
S 3452	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	3198 012 32290		3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
S 3453	Res, 4R7, 5%, 5W, Wire Wound	2322 251 41478		3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
S 3454	Res, 33K, 5%, 1 1/3W, Metal Film . .	2322 194 63333		3653	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020		3654	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010

S = Safety Part Be sure to use exact replacement part.

TR2503C225 (continued)

3655	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3662	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3663	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220	
3664	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220	
3665	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3666	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620	
3667	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730	
3672	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3673	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3674	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820	
3675	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3676	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3677	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3680	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810	
3681	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3682	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220	
3683	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3684	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	
3908	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3909	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3910	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620	
3911	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230	
3912	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3913	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3914	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	
3915	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820	
3916	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210	
3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810	
3951	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	
3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3953	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820	
3955	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4004	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4011	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4012	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4020	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4051	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4100	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4203	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4212	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4215	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4216	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4465	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4501	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4650	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4651	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4654	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4911	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4914	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4957	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
4999	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
5000	Coil, 5u6.	3198 018 25680	
5004	Coil, 820n	2422 535 97314	
5201	Coil, 22u.	3198 018 22290	
5202	Coil, 6u8.	3198 018 16880	
5342	Coil, 22u.	3198 018 22290	
S 5445	Transformer, L.O.T., models ending in C221 and C225.	3128 138 20941	
5451	Coil, 27u.	2422 535 96614	
5457	Coil, Linear Correction.	3128 138 53241	
5461	TFM SIG SLOT UU-1522S WIRE B . . .	2422 531 02318	
5461	Transformer.	3128 138 33811	
5480	Coil, 33u.	2422 535 97335	
S 5500	Filter, Mains, 5mH, 2A	2422 549 43432	
5516	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5518	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5521	Coil, 2u2.	3198 018 12280	
5540	Coil, 4u7.	3198 018 14780	
S 5545	Transfomer,.	2422 531 02314	
5551	Coil, 27u.	2422 535 95366	
5552	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5572	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5573	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5576	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020	
5577	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5600	Coil, 8u2.	3198 018 18280	
5601	Coil, 8u2.	3198 018 18280	
5620	Coil, 6u8.	3198 018 16880	
5821	Coil, 100u	3198 018 21010	
6008	Zener Diode, 33 volt	3198 010 23390	
6211	Diode, Signal, 1N4148.	3198 010 10010	
6212	Diode, Signal, 1N4148.	3198 010 10010	
6213	Diode, Signal, 1N4148.	3198 010 10010	
6331	Diode, Signal, BAV21	3198 010 10070	
6333	Diode, Signal, BAV21	3198 010 10070	
6335	Diode, Signal, BAV21	3198 010 10070	
6401	Diode, Rect, BYD33D	9337 234 00133	
6402	Zener Diode, 33 volt	3198 010 23390	
6403	Diode, Rect, BYD33D	9337 234 00133	
6404	Zener Diode, 75 volt	9331 180 00133	
6449	Diode, Signal, 1N4148.	3198 010 10010	
6450	Diode, Signal, 1N4148.	3198 010 10010	
6460	Diode, Rect, BY228/20	9336 215 80112	
6463	Diode, Signal, 1N4148.	3198 010 10010	
6464	Zener Diode, 6.2 volt.	9331 668 30133	
6465	Diode, Rect, BYD33J	9337 234 20133	
6466	Diode, Rect, BYD33J	9337 234 20133	
6480	Zener Diode, 27 volt	3198 010 22790	
6481	Diode, Signal, 1N4148.	3198 010 10010	
6485	Diode, Rect, BYD33J	9337 234 20133	
6486	Diode, Rect, EGP20DL-5300	9322 100 13682	
6487	Diode, Rect, BYD33D	9337 234 00133	
6488	Diode, Rect, BYV27-200.	9322 126 72673	
6490	Diode, Rect, BYV27-200.	9322 126 72673	
6505	Diode, Bridge Rect, GBU6JL-7002 . .	9322 138 08667	
6507	Diode, Rect, BYD33J	9337 234 20133	
6508	Diode, Rect, BYD33J	9337 234 20133	
6510	Zener Diode, 20 volt	9331 178 60133	
6511	Diode, Rect, BYV95C	9335 001 80133	
6512	Diode, Rect, 1N5062	3198 010 10120	
6513	Diode, Rect, 1N5062	3198 010 10120	
6514	Zener Diode, 18 volt	3198 010 21890	
6540	Diode, Signal, BAV21	3198 010 10070	
6550	Diode, Rect, BY229X-800	9340 380 30127	
6560	Diode, Rect, EGP20DL-5300	9322 100 13682	
6580	Diode, Rect, BYV27-200.	9322 126 72673	
6584	Diode, Signal, 1N4148.	3198 010 10010	
6585	Diode, Signal, 1N4148.	3198 010 10010	
6591	Diode, Signal, BAS16WS	9322 031 99685	
6601	Zener Diode, 3.9 volt.	3198 010 23980	
6603	Jumper Wire/Staple	0322 179 00003	
6604	Jumper Wire/Staple	0322 179 00003	
6605	Jumper Wire/Staple	0322 179 00003	
6606	Zener Diode, 4.7 volt.	3198 010 24780	
6607	Zener Diode, 6.8 volt.	3198 010 26880	
6690	LED VS LTL-307P (LITO) B . . .	9322 033 95682	
6951	Diode, Signal, BAS16WS	9322 031 99685	
6961	Diode, Signal, BAS16WS	9322 031 99685	
7250	IC,.	9352 620 26112	
7251	IC, LM317T	9337 220 80682	
7254	Transistor, NPN, BC847B.	3198 010 42030	
7256	Transistor, NPN, BC847B.	3198 010 42030	
7258	Transistor, NPN, BC847B.	3198 010 42030	
7263	Transistor, PNP, BC857B.	3198 010 42150	
7266	Transistor, NPN, BC847B.	3198 010 42030	
7330	IC, TDA6107Q/N2.	9352 576 50112	
7401	IC,.	9322 121 47687	
7460	Transistor, NPN, BU1508DX.	9340 170 50127	
7461	Transistor, NPN, BF819	9335 354 50127	
7462	Transistor, NPN, BC547B.	3198 020 40030	
7463	Transistor, PNP, BC557B.	3198 020 40110	
7480	IC,.	9322 028 93682	
7481	Transistor, PNP, BC557B.	3198 020 40110	
7482	Transistor, PNP, BC857B.	3198 010 42150	
7518	STH10NC60FI SMPS FET.	9322 155 66687	
7520	IC,.	9322 108 36682	
7570	IC,.	9337 711 00676	
S 7581	Coupler, TCDT1101G	9338 431 30682	
7590	Transistor, NPN, BC847B.	3198 010 42030	
7591	Transistor, NPN, BC847B.	3198 010 42030	
7592	Transistor, NPN, BC847B.	3198 010 42030	
7600	IC,.	9352 653 70112	
7601	IC, ST24W04B6.	9322 097 23682	
7603	Transistor, NPN, BC337	9331 796 00126	
7604	Transistor, NPN, BC847B.	3198 010 42030	
7605	Transistor, NPN, BC847B.	3198 010 42030	
7608	Transistor, NPN, BC847B.	3198 010 42030	
7609	Transistor, NPN, BC847B.	3198 010 42030	
7680	IR RECEIVER.	9322 154 48667	
7904	Transistor, NPN, BC847B.	3198 010 42030	
7952	IC,.	9350 662 70112	
7960	ISOPROPYL ALCOHOL.	1306 500 43201	
9001	Jumper Wire/Staple	0322 179 00003	
9003	Jumper Wire/Staple	0322 179 00003	
9005	Jumper Wire/Staple	0322 179 00003	

S = Safety Part Be sure to use exact replacement part.

TR2503C225 (continued)

9011	Jumper Wire/Staple	0322 179 00003
9012	Jumper Wire/Staple	0322 179 00003
9105	Jumper Wire/Staple	0322 179 00003
9126	Jumper Wire/Staple	0322 179 00003
9200	Jumper Wire/Staple	0322 179 00003
9202	Jumper Wire/Staple	0322 179 00003
9203	Jumper Wire/Staple	0322 179 00003
9204	Jumper Wire/Staple	0322 179 00003
9205	Jumper Wire/Staple	0322 179 00003
9206	Jumper Wire/Staple	0322 179 00003
9207	Jumper Wire/Staple	0322 179 00003
9208	Jumper Wire/Staple	0322 179 00003
9209	Jumper Wire/Staple	0322 179 00003
9210	Jumper Wire/Staple	0322 179 00003
9211	Jumper Wire/Staple	0322 179 00003
9214	Jumper Wire/Staple	0322 179 00003
9215	Jumper Wire/Staple	0322 179 00003
9216	Jumper Wire/Staple	0322 179 00003
9217	Jumper Wire/Staple	0322 179 00003
9218	Jumper Wire/Staple	0322 179 00003
9220	Jumper Wire/Staple	0322 179 00003
9221	Jumper Wire/Staple	0322 179 00003
9222	Jumper Wire/Staple	0322 179 00003
9225	Jumper Wire/Staple	0322 179 00003
9226	Jumper Wire/Staple	0322 179 00003
9227	Jumper Wire/Staple	0322 179 00003
9228	Jumper Wire/Staple	0322 179 00003
9229	Jumper Wire/Staple	0322 179 00003
9230	Jumper Wire/Staple	0322 179 00003
9231	Jumper Wire/Staple	0322 179 00003
9232	Jumper Wire/Staple	0322 179 00003
9233	Jumper Wire/Staple	0322 179 00003
9234	Jumper Wire/Staple	0322 179 00003
9236	Jumper Wire/Staple	0322 179 00003
9237	Jumper Wire/Staple	0322 179 00003
9238	Jumper Wire/Staple	0322 179 00003
9240	Jumper Wire/Staple	0322 179 00003
9241	Jumper Wire/Staple	0322 179 00003
9242	Jumper Wire/Staple	0322 179 00003
9243	Jumper Wire/Staple	0322 179 00003
9245	Jumper Wire/Staple	0322 179 00003
9301	Jumper Wire/Staple	0322 179 00003
9401	Jumper Wire/Staple	0322 179 00003
9402	Jumper Wire/Staple	0322 179 00003
9403	Jumper Wire/Staple	0322 179 00003
9404	Jumper Wire/Staple	0322 179 00003
9407	Jumper Wire/Staple	0322 179 00003
9408	Jumper Wire/Staple	0322 179 00003
9411	Jumper Wire/Staple	0322 179 00003
9414	Jumper Wire/Staple	0322 179 00003
9417	Jumper Wire/Staple	0322 179 00003
9419	Jumper Wire/Staple	0322 179 00003
9420	Jumper Wire/Staple	0322 179 00003
9421	Jumper Wire/Staple	0322 179 00003
9422	Jumper Wire/Staple	0322 179 00003
9424	Jumper Wire/Staple	0322 179 00003
9425	Jumper Wire/Staple	0322 179 00003
9427	Jumper Wire/Staple	0322 179 00003
9428	Jumper Wire/Staple	0322 179 00003
9460	Jumper Wire/Staple	0322 179 00003
9461	Jumper Wire/Staple	0322 179 00003
9500	Jumper Wire/Staple	0322 179 00003
9501	Jumper Wire/Staple	0322 179 00003
9502	Jumper Wire/Staple	0322 179 00003
9503	Jumper Wire/Staple	0322 179 00003
9505	Jumper Wire/Staple	0322 179 00003
9509	Jumper Wire/Staple	0322 179 00003
9510	Jumper Wire/Staple	0322 179 00003
9511	Jumper Wire/Staple	0322 179 00003
9512	Jumper Wire/Staple	0322 179 00003
9513	Jumper Wire/Staple	0322 179 00003
9515	Jumper Wire/Staple	0322 179 00003
9516	Jumper Wire/Staple	0322 179 00003
9517	Jumper Wire/Staple	0322 179 00003
9518	Jumper Wire/Staple	0322 179 00003
9526	Jumper Wire/Staple	0322 179 00003
9601	Jumper Wire/Staple	0322 179 00003
9602	Jumper Wire/Staple	0322 179 00003
9603	Jumper Wire/Staple	0322 179 00003
9604	Jumper Wire/Staple	0322 179 00003
9605	Jumper Wire/Staple	0322 179 00003
9606	Jumper Wire/Staple	0322 179 00003
9608	Jumper Wire/Staple	0322 179 00003
9609	Jumper Wire/Staple	0322 179 00003
9610	Jumper Wire/Staple	0322 179 00003
9611	Jumper Wire/Staple	0322 179 00003
9612	Jumper Wire/Staple	0322 179 00003
9613	Jumper Wire/Staple	0322 179 00003
9614	Jumper Wire/Staple	0322 179 00003
9615	Jumper Wire/Staple	0322 179 00003
9618	Jumper Wire/Staple	0322 179 00003
9621	Jumper Wire/Staple	0322 179 00003
9622	Jumper Wire/Staple	0322 179 00003
9624	Jumper Wire/Staple	0322 179 00003
9625	Jumper Wire/Staple	0322 179 00003
9626	Jumper Wire/Staple	0322 179 00003
9629	Jumper Wire/Staple	0322 179 00003
9631	Jumper Wire/Staple	0322 179 00003
9632	Jumper Wire/Staple	0322 179 00003
9637	Jumper Wire/Staple	0322 179 00003
9640	Jumper Wire/Staple	0322 179 00003
9642	Jumper Wire/Staple	0322 179 00003
9643	Jumper Wire/Staple	0322 179 00003
9644	Jumper Wire/Staple	0322 179 00003
9660	Jumper Wire/Staple	0322 179 00003
9754	Jumper Wire/Staple	0322 179 00003
9788	Jumper Wire/Staple	0322 179 00003
9793	Jumper Wire/Staple	0322 179 00003
9800	Jumper Wire/Staple	0322 179 00003
9805	Jumper Wire/Staple	0322 179 00003
9806	Jumper Wire/Staple	0322 179 00003
9807	Jumper Wire/Staple	0322 179 00003
9810	Jumper Wire/Staple	0322 179 00003
9901	Jumper Wire/Staple	0322 179 00003
9902	Jumper Wire/Staple	0322 179 00003
9905	Jumper Wire/Staple	0322 179 00003
9906	Jumper Wire/Staple	0322 179 00003
9933	Jumper Wire/Staple	0322 179 00003
9936	Jumper Wire/Staple	0322 179 00003
9940	Jumper Wire/Staple	0322 179 00003
9941	Jumper Wire/Staple	0322 179 00003
9942	Jumper Wire/Staple	0322 179 00003
9943	Jumper Wire/Staple	0322 179 00003
9944	Jumper Wire/Staple	0322 179 00003
9945	Jumper Wire/Staple	0322 179 00003
9946	Jumper Wire/Staple	0322 179 00003
9947	Jumper Wire/Staple	0322 179 00003
9948	Jumper Wire/Staple	0322 179 00003
9949	Jumper Wire/Staple	0322 179 00003
9950	Jumper Wire/Staple	0322 179 00003
9951	Jumper Wire/Staple	0322 179 00003
9952	Jumper Wire/Staple	0322 179 00003
9953	Jumper Wire/Staple	0322 179 00003
9955	Jumper Wire/Staple	0322 179 00003
9956	Jumper Wire/Staple	0322 179 00003
9957	Jumper Wire/Staple	0322 179 00003
9958	Jumper Wire/Staple	0322 179 00003
9959	Jumper Wire/Staple	0322 179 00003
9960	Jumper Wire/Staple	0322 179 00003
9962	Jumper Wire/Staple	0322 179 00003
9963	Jumper Wire/Staple	0322 179 00003
9964	Jumper Wire/Staple	0322 179 00003
9965	Jumper Wire/Staple	0322 179 00003
9966	Jumper Wire/Staple	0322 179 00003
9967	Jumper Wire/Staple	0322 179 00003
9968	Jumper Wire/Staple	0322 179 00003
9969	Jumper Wire/Staple	0322 179 00003
9970	Jumper Wire/Staple	0322 179 00003
9971	Jumper Wire/Staple	0322 179 00003
9972	Jumper Wire/Staple	0322 179 00003
9974	Jumper Wire/Staple	0322 179 00003
9975	Jumper Wire/Staple	0322 179 00003
9976	Jumper Wire/Staple	0322 179 00003
9977	Jumper Wire/Staple	0322 179 00003
9981	Jumper Wire/Staple	0322 179 00003
9982	Jumper Wire/Staple	0322 179 00003
9983	Jumper Wire/Staple	0322 179 00003
9984	Jumper Wire/Staple	0322 179 00003
9987	Jumper Wire/Staple	0322 179 00003
9989	Jumper Wire/Staple	0322 179 00003
9990	Jumper Wire/Staple	0322 179 00003
9991	Jumper Wire/Staple	0322 179 00003
9992	Jumper Wire/Staple	0322 179 00003
9993	Jumper Wire/Staple	0322 179 00003
CBA	313917887111 Main Chassis Assembly	3139 178 87111

Cabinet & Accessory Parts

		Cabinet & Accessory Parts	
S	AC01	Mainscord, 125V, 10A	3135 010 03831
	AC02	Clip, Anode Lead	3135 014 04471
	AC03	Cabinet Back	3139 124 27951
	AC04	Cabinet Front.	3139 137 53291
	AC05	Chassis Guide.	3139 124 31381
	AC06	Control Buttons.	3139 124 27461
S	AC07	Convergence and Purity Assembly.	2422 549 43385
S	AC08	CRT A63AFW36X (C121 Version)	9301 763 20443
S	AC08	CRT A63QDB891X01	9322 151 39682
S	AC09	Coil, Degaussing	2422 549 44489
	AC10	Holder, Degaussing (4 Used).	3135 013 01641
	AC11	Light Guide.	3139 124 26461
	AC13	Owner's Manual, English.	3135 015 10691
	AC14	Power Button	3139 124 26444
	REMOTE	Remote Transmitter	3139 148 54201
	AC16	Speaker 242226400312 16ohm 1.5W.	3121 230 40031

S = Safety Part Be sure to use exact replacement part.

TR2503C225 (continued)

S	AC18	Yoke (C121 Version).	3321 203 00121
S	AC18	Yoke, Vendor # DSE2603CL(M), (C125 Version)	4835 310 57502
	AC19	Yoke Wedge (3 used).	3135 013 00311
	AC21	Batteries f/Remote Transmitter . . .	9299 000 13827
	AC24	Spring	3139 121 26231

S = Safety Part Be sure to use exact replacement part.

TR2519C121 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts	
S 0127	3.15 Amp Fuse, ...	3122 358 72141
0152	Cable, DIP, 6 Pin, 400mm	3104 301 09421
0153	4 Pin Cable.	3104 301 09431
0212	Connector, 2 Pin	2422 025 15396
0215	Connector, 2 Pin	2412 020 00724
0220	4 Pin Board Connector.	2422 025 04852
0224	1 Pin Board Connector.	2422 034 20021
0228	1 Pin Board Connector.	2422 034 20021
S 0243	Connector, 6 Pin	2422 025 04854
0244	4 Pin Board Connector.	2422 025 04852
S 0245	Connector, 6 Pin	2422 025 04854
S 0254	CRT Socket (9 Pin)	2422 500 80022
0267	Connector, 3 Pin	2412 020 00725
1000	Tuner.	2422 542 90057
1001	Filter	2422 549 42501
1003	45 MHz SAW, Filter,.	2422 549 42433
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807
1208	Crystal Resonator.	4835 242 77276
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10869
S 1571	1 Amp, Radial Fuse,.	4835 253 97162
S 1572	1 Amp, Radial Fuse,.	4835 253 97162
S 1580	Relay, 12V	2422 132 07317
1600	Switch, Tactile.	2422 128 02742
1601	Switch, Tactile.	2422 128 02742
1602	Switch, Tactile.	2422 128 02742
1603	Switch, Tactile.	2422 128 02742
1606	Switch, Tactile.	2422 128 02742
1660	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488
2001	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2002	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2003	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2004	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2011	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2201	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2203	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2204	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2205	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2208	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2209	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2211	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2212	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2213	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2214	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2215	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 16654
2220	Cap, 15p, 5%, 50V, Ceramic	3198 016 01590
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2222	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2226	Cap, 33u, 20%, 25V, Electrolytic . .	2020 021 90124
2227	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2228	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780
2247	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2248	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2249	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2330	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2340	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320
S 2343	Cap, 3n3, 10%, 2KV, Ceramic.	2020 558 90529
2345	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2401	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2402	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2404	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2405	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2407	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2409	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2420	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2426	Cap, 100n, 10%, 63V, Metalized Polyes ter.	2222 370 75104
2428	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2429	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2430	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2431	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2437	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2438	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2448	Cap, 220p, 10%, 500V, Ceramic. . . .	3198 019 42210
2450	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91139
2451	Cap, 15n, 10%, 50V, Polyester. . . .	2020 300 90575
2451	0.01uF., 10%, 50V, Polyester, only 27	3198 138 20941
2456	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176
2457	Cap, 390n, 5%, 250V, Metalized Polypr opylene.	2222 479 90021
2458	Cap, 2u2, 20%, 100V, Electrolytic. .	2020 021 91331
2459	Cap, 680p, 10%, 500V, Ceramic. . . .	3198 019 46810
2461	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2462	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176
2463	470pF., 10%, 2KV, Ceramic.	4835 122 47638
S 2465	Cap, 10n, 5%, 1600V, Polypropylene .	2222 375 90154
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050
2473	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2481	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2482	Cap, 68n, 10%, 250V, Polyester . . .	2222 347 90234
2484	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2485	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2486	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2487	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2488	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2489	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2490	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2491	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810
2500	0.47uF., 250V, Polyester	4835 121 47569
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
S 2507	Cap, 1n5, 10%, 1KV, Ceramic.	2020 558 90443
2508	Cap, 470u, 20%, 200V, Electrolytic .	2020 024 90647
S 2511	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
S 2518	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2530	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 021 91147
2531	Cap, 1n, 2%, 50V, Polypropylene. . .	2020 310 90049
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2540	Cap, 100u, 20%, 25V, Electrolytic. .	2020 021 90547
S 2545	1500pF., 250VAC, Ceramic	4835 122 47621
S 2550	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2551	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91358
2561	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
S 2562	Cap, 220p, 10%, 1KV, Ceramic	2020 558 90424
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2572	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2575	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2577	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2586	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2604	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2613	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2615	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2619	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2622	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2629	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2679	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2681	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2913	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2914	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2915	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2916	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648
2917	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2960	Cap, 220u, 20%, 50V, Electrolytic. .	3198 026 52210
2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090
2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010

S = Safety Part Be sure to use exact replacement part.

TR2519C121 (continued)

	3010	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610		3469	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
	3013	Zero ohm,.	4835 111 27056		3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
	3014	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052		3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703
	3015	22k, 5%, 1/10W, Metal Film	4835 111 37441		3481	Res, 100K, 1%, 3/5W, Metal Film. . .	2322 156 21004
	3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810		3482	Res, 32K4, 1%, 3/5W, Metal Film. . .	2322 156 23243
	3021	Res, 1K, 2%, 0,25W	4822 051 10102		3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
	3201	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253		3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3203	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443	S	3485	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
	3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	S	3486	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3205	Res, 1K, 2%, 0,25W	4822 051 10102	S	3487	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3206	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	S	3488	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
	3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3490	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3209	22k, 5%, 1/10W, Metal Film	4835 111 37441	S	3491	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3212	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253	S	3492	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3213	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3495	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272
	3215	22k, 5%, 1/10W, Metal Film	4835 111 37441		3496	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3216	Zero ohm,.	4835 111 27056		3497	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3217	Res, 1M5, 5%, 1/8W, Metalized Glass.	2322 730 61155		3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
	3218	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225
	3219	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3503	10ohm, 120VAC, Positive Temperature C	
	3220	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432			oefficient	4835 116 47001
	3225	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S	3505	Surge Protector.	2422 549 43073
	3228	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
	3231	Zero ohm,.	4835 111 27056	S	3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333
	3232	Zero ohm,.	4835 111 27056	S	3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102
	3233	Zero ohm,.	4835 111 27056		3512	15k, 5%, 1/10W, Metal Film	4835 111 37458
	3243	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052		3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184
	3246	82k, 5%, 1/10W, Metal Film	4835 111 37277		3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204
	3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3515	2.5 ohm, 20%, 3.6W, Negative Temperat	
	3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010			ure Coefficient.	2122 612 00023
	3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340		3516	Res, 1K, 2%, 0,25W	4822 051 10102
	3250	Zero ohm,.	4835 111 27056		3517	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
	3251	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S	3518	Res, 0R22, 5%, 3W, Metal Film. . . .	2120 106 90548
	3252	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		3520	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
	3253	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		3521	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443
	3257	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3525	33 ohm, 5%, 1/3W, Metal Film	4835 116 57665
	3258	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3528	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3259	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3529	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3530	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
	3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3532	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3534	15k, 5%, 1/10W, Metal Film	4835 111 37458
	3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3536	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3537	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046	S	3542	4.7 Megohm, 5%, 1/2W, Metal Film . .	4835 116 57009
S	3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109		3570	15k, 5%, 1/10W, Metal Film	4835 111 37458
S	3341	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483		3571	Res, 150K, 1%, 3/5W, Metal Film. . .	2322 156 21504
S	3342	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483		3573	Res, 2K, 1%, 1/10W, Metalized Glass.	2120 108 92657
	3343	1.5k, 20%, 1/2W, Carbon Composition.	4835 110 47034		3574	33k, 5%, 1/10W, Metal Film	4835 111 37248
	3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290		3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
S	3345	VDR, DC, 1mA, 50V, MAX 115V	2322 593 13507		3577	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290		3578	Res, 1K, 2%, 0,25W	4822 051 10102
	3401	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380		3579	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
	3402	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380		3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3403	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380		3592	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3405	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002		3594	22k, 5%, 1/10W, Metal Film	4835 111 37441
	3406	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020		3595	68k, 5%, 1/6W, Carbon Film	4835 111 37205
	3407	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002		3596	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020		3597	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
	3409	1.5 ohm, 5%, 1/3W, Metal Film. . . .	4835 116 57664		3598	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210		3599	22k, 5%, 1/10W, Metal Film	4835 111 37441
	3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210		3607	8.2k, 5%, 1/8W, Inline Package . . .	4835 111 97046
	3420	470k, 5%, 1/10W, Metal Film.	4835 111 37407		3608	2.2k, 5%, 1/8W, Inline Package . . .	4835 111 97049
	3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220		3609	2.2k, 5%, Resistor Network	2120 108 93868
	3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220		3611	Res, 1K, 2%, 0,25W	4822 051 10102
	3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840		3612	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606		3613	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3425	150k, 5%, 1/10W, Metal Film.	4835 111 27045		3615	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3426	39k, 5%, 1/10W, Metal Film	4835 111 27051		3617	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
	3428	22k, 5%, 1/10W, Metal Film	4835 111 37441		3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3429	27k, 5%, 1/10W, Metal Film	4835 111 37442		3619	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
	3431	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247		3629	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259
	3432	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
	3436	Res, 1K, 2%, 0,25W	4822 051 10102		3631	27k, 5%, 1/10W, Metal Film	4835 111 37442
	3437	10k, 5%, 1/10W, Metal Film	4835 111 37216	S	3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63479
	3438	33k, 1/4W, Carbon Film	4835 110 57375		3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210
	3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920		3634	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
	3447	10k, 5%, 1/10W, Metal Film	4835 111 37216		3635	22k, 5%, 1/10W, Metal Film	4835 111 37441
	3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3636	22k, 5%, 1/10W, Metal Film	4835 111 37441
	3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320		3637	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
S	3452	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63229		3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
S	3453	Res, 4R7, 5%, 5W, Wire Wound	2322 251 41478		3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
S	3454	Res, 33K, 5%, 1 1/3W, Metal Film . .	2322 194 63333		3653	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020		3654	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
	3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720		3655	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
S	3462	Res, 6K8, 5%, 5W, Metal Film	2322 257 41682		3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710
	3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790		3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3464	Res, 1K, 2%, 0,25W	4822 051 10102		3662	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
S	3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109		3663	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
	3466	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903		3664	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
	3467	Res, 14K, 1%, 3/5W, Metal Film . . .	2322 156 21403		3665	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
	3467	Res, 15K, 1%, 3/5W, Metal Film . . .	2322 156 21503		3666	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376
	3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020		3667	27k, 5%, 1/10W, Metal Film	4835 111 37442

S = Safety Part Be sure to use exact replacement part.

TR2519C121 (continued)

3672	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
3673	10k, 5%, 1/10W, Metal Film	4835 111 37216
3674	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231
3675	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3676	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3677	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3680	680 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37271
3681	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
3682	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
3683	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
3684	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
3908	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710
3909	Res, 1K, 2%, 0,25W	4822 051 10102
3910	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376
3911	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230
3912	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
3913	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3914	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820
3915	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231
3916	220 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37371
3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810
3951	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3953	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272
3955	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
4001	Zero ohm,.	4835 111 27056
4002	Zero ohm,.	4835 111 27056
4004	Zero ohm,.	4835 111 27056
4007	Zero ohm,.	4835 111 27056
4009	Zero ohm,.	4835 111 27056
4010	Zero ohm,.	4835 111 27056
4011	Zero ohm,.	4835 111 27056
4012	Zero ohm,.	4835 111 27056
4013	Zero ohm,.	4835 111 27056
4020	Zero ohm,.	4835 111 27056
4051	Zero ohm,.	4835 111 27056
4100	Zero ohm,.	4835 111 27056
4101	Zero ohm,.	4835 111 27056
4102	Zero ohm,.	4835 111 27056
4103	Zero ohm,.	4835 111 27056
4143	Zero ohm,.	4835 111 27056
4144	Zero ohm,.	4835 111 27056
4203	Zero ohm,.	4835 111 27056
4207	Zero ohm,.	4835 111 27056
4212	Zero ohm,.	4835 111 27056
4214	Zero ohm,.	4835 111 27056
4215	Zero ohm,.	4835 111 27056
4216	Zero ohm,.	4835 111 27056
4501	Zero ohm,.	4835 111 27056
4602	Zero ohm,.	4835 111 27056
4650	Zero ohm,.	4835 111 27056
4651	Zero ohm,.	4835 111 27056
4652	Zero ohm,.	4835 111 27056
4654	Zero ohm,.	4835 111 27056
4655	Zero ohm,.	4835 111 27056
4684	Zero ohm,.	4835 111 27056
4687	Zero ohm,.	4835 111 27056
4831	Zero ohm,.	4835 111 27056
4832	Zero ohm,.	4835 111 27056
4833	Zero ohm,.	4835 111 27056
4902	Zero ohm,.	4835 111 27056
4903	Zero ohm,.	4835 111 27056
4904	Zero ohm,.	4835 111 27056
4905	Zero ohm,.	4835 111 27056
4909	Zero ohm,.	4835 111 27056
4911	Zero ohm,.	4835 111 27056
4912	Zero ohm,.	4835 111 27056
4914	Zero ohm,.	4835 111 27056
4957	Zero ohm,.	4835 111 27056
4999	Zero ohm,.	4835 111 27056
5000	Coil, 5u6.	3198 018 25680
5004	Coil, 820n	2422 535 97314
5201	Coil, 22u.	3198 018 22290
5202	Coil, 6u8.	3198 018 16880
5342	22uH., 10%, Coil, Peaking.	4835 157 67069
S 5445	Transformer, L.O.T., models ending in C101, C121, and C125	2422 531 02327
S 5445	Transformer, L.O.T., models ending in C221 and C225.	3128 138 20941
5451	Coil, 27u.	2422 535 96614
5457	Coil, Linear Correction.	3128 138 53241
5461	Transformer.	3128 138 33811
5480	Coil, 27u.	2422 535 97334
5480	Coil, 39u.	2422 535 97336
5480	33uH., Peaking Coil, only in 25. . .	4835 157 58205
S 5500	Filter, Mains, 5mH, 2A	2422 549 43432
5516	100uH., Coil	4835 157 67078
5518	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5521	Coil, 2u2.	3198 018 12280
5540	Coil, 4u7.	3198 018 14780
S 5545	Transfomer,.	2422 531 02314
5551	27uH., 5%, Coil, Peaking	4835 157 67052
5552	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5572	100uH., Coil	4835 157 67078
5573	100uH., Coil	4835 157 67078
5576	100uH., Coil	4835 157 67078
5577	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5600	Coil, 8u2.	3198 018 18280
5601	Coil, 8u2.	3198 018 18280
5620	Coil, 6u8.	3198 018 16880
5821	Coil, 100u	3198 018 21010
6008	Zener, 33 Volt BZX79-C33	4835 130 37904
6211	Diode, 1N4148.	4835 130 37048
6212	Diode, 1N4148.	4835 130 37048
6213	Diode, 1N4148.	4835 130 37048
6331	Diode.	4835 130 37294
6333	Diode.	4835 130 37294
6335	Diode.	4835 130 37294
6401	Diode.	4835 130 37094
6402	Zener, 33 Volt, BZX79-C33.	4835 130 37904
6403	Diode.	4835 130 37094
6404	Diode.	4835 130 37094
6449	Diode, 1N4148.	4835 130 37048
6450	Diode, 1N4148.	4835 130 37048
6460	Diode, Rect, BY228/20	9336 215 80112
6463	Diode, 1N4148.	4835 130 37048
6464	Zener Diode, 6.2 volt.	9337 242 70133
6465	Diode, BYD33J.	4835 130 37094
6466	Diode, BYD33J.	4835 130 37094
6480	Diode, Zener	4835 130 37947
6481	Diode, 1N4148.	4835 130 37048
6485	Diode, BYD33J.	4835 130 37094
6486	Diode, EGP20DL-530	4835 130 37919
6487	Diode.	4835 130 37094
6488	Diode, Rect, BYV27-200.	9322 126 72673
6490	Diode, Rect, BYV27-200.	9322 126 72673
6505	Diode, Bridge Rect, GBU6JL-7002 . .	9322 138 08667
6507	Diode, BYD33J.	4835 130 37094
6508	Diode, BYD33J.	4835 130 37094
6510	Zener Diode, 20 volt	9331 178 60133
6511	Diode, BYV95C.	4835 130 37052
6512	Diode, Rect, BY228/20	4822 130 41275
6513	Diode, Rect, BY228/20	4822 130 41275
6514	Zener, 18 Volt, BZX79-C18.	4835 130 37908
6540	Diode.	4835 130 37294
6550	Diode, Rect, BY229X-800	9340 380 30127
6560	Diode, EGP20DL-530	4835 130 37919
6580	Diode, Rect, BYV27-200.	9322 126 72673
6584	Diode, 1N4148.	4835 130 37048
6585	Diode, 1N4148.	4835 130 37048
6591	Diode, BAS216.	4835 130 37905
6601	Diode, Zener	4835 130 37684
6606	Zener, 4.7 Volt, BZX79-C4V7.	4835 130 37005
6607	Zener, 6.8 Volt, BZX79-C6V8.	4835 130 37945
6690	LED, LTL-307P.	4835 130 97096
6951	Diode, BAS216.	4835 130 37905
6961	Diode, BAS216.	4835 130 37905
7250	IC,.	9352 620 26112
7251	IC, LM317T	9337 220 80682
7254	Transistor, NPN, BC847B.	4822 130 60511
7256	Transistor, NPN, BC847B.	4822 130 60511
7258	Transistor, NPN, BC847B.	4822 130 60511
7263	Transistor, PNP, BC857B.	5322 130 60508
7266	Transistor, NPN, BC847B.	4822 130 60511
7330	IC,.	9352 184 10112
7401	IC,.	9322 121 47687
7460	Transistor, NPN, BU1508DX.	9340 170 50127
7461	Transistor, NPN, BF819	9335 354 50127
7462	Transistor, BC547B	4835 130 47055
7463	Transistor, BC557B	4835 130 47409
7480	IC,.	9322 028 93682
7481	Transistor, BC557B	4835 130 47409
7482	Transistor, PNP, BC857B.	5322 130 60508
7518	STH8NA60FI SMPS FET	9322 068 92687
7518	STH10NC60FI SMPS FET.	9322 155 66687
7520	IC, MC44603A	4835 209 88537
7570	IC,.	9337 711 00676
S 7581	Coupler, TCDT1101G	9338 431 30682
7590	Transistor, NPN, BC847B.	4822 130 60511
7591	Transistor, NPN, BC847B.	4822 130 60511
7592	Transistor, NPN, BC847B.	4822 130 60511
7600	IC, SAA5543PS/M4/1046 L90US1-1.4 . .	4835 310 57477
7601	IC, ST24W04B6.	9322 097 23682
7603	Transistor, NPN, BC337	9331 796 00126
7604	Transistor, NPN, BC847B.	4822 130 60511
7605	Transistor, NPN, BC847B.	4822 130 60511
7608	Transistor, NPN, BC847B.	4822 130 60511
7609	Transistor, NPN, BC847B.	4822 130 60511
7680	IR Receiver.	9322 127 53667
7904	Transistor, NPN, BC847B.	4822 130 60511
7905	Transistor, NPN, BC847B.	4822 130 60511

S = Safety Part Be sure to use exact replacement part.

TR2519C121 (continued)

7906	Transistor, NPN, BC847B.	4822	130 60511
7952	IC,.	4835	209 88542
9423	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198	011 01030
CBA	00EMF803A001 Main Chassis Board Asm.	00EM	F80 3A001

Cabinet & Accessory Parts

	Cabinet & Accessory Parts			
S AC01	Mainscord, 125V, 10A	3135	010	03831
S AC02	Anode Clip	4835	256	97264
AC03	Cabinet Back	3139	124	27951
AC04	Cabinet Front.	3139	137	55891
AC05	Chassis Guide.	3139	124	31381
AC06	Customer Control Button.	3139	124	27471
S AC07	Convergence and Purity Assembly. . .	2422	549	43385
S AC08	CRT A63AFW36X (C121 Version)	9301	763	20443
S AC09	Coil, Degaussing	3121	218	62961
AC11	Light Guide.	3139	124	26461
AC13	Owner's Manual, English.	3135	015	10651
AC14	Power Button	3139	124	30891
REMOTE	Remote Transmitter, RC282901/04. . .	3139	228	81451
AC16	Speaker, 16R, 1W5 (2 Used)	2422	264	00343
S AC18	Yoke (C121 Version).	3321	203	00121
AC19	Yoke Wedge (3 Used).	4835	535	27001
AC21	Battery, 1.5V AA, 2-Pack, (Not Shown	9299	000	10137
AC24	Spring	3139	121	26231

TS2546C121 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts	
S 0127	3.15 Amp Fuse, ...	3122 358 72141
0152	Cable, DIP, 6 Pin, 400mm	3104 301 09421
0153	4 Pin Cable.	3104 301 09431
0212	Connector, 2 Pin	2422 025 15396
0220	4 Pin Board Connector.	2422 025 04852
0223	3 Pin Board Connector.	2422 026 04963
0224	1 Pin Board Connector.	2422 034 20021
0228	1 Pin Board Connector.	2422 034 20021
0234	Connector, 4 Pin	2422 025 15847
S 0243	Connector, 6 Pin	2422 025 04854
0244	4 Pin Board Connector.	2422 025 04852
S 0245	Connector, 6 Pin	2422 025 04854
S 0254	CRT Socket (9 Pin)	2422 500 80022
0267	Connector, 3 Pin	2412 020 00725
1000	Tuner.	2422 542 90057
1001	Filter	2422 549 42501
1003	45 MHz SAW, Filter,.	2422 549 42433
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807
1208	Crystal Resonator.	4835 242 77276
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10869
S 1571	1 Amp, Radial Fuse,.	4835 253 97162
S 1572	1 Amp, Radial Fuse,.	4835 253 97162
S 1580	Relay, 12V	2422 132 07317
1600	Switch, Tactile.	2422 128 02742
1601	Switch, Tactile.	2422 128 02742
1602	Switch, Tactile.	2422 128 02742
1603	Switch, Tactile.	2422 128 02742
1606	Switch, Tactile.	2422 128 02742
1660	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488
1821	Ceramic Resonator.	4835 122 97102
2001	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2002	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2003	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2004	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2011	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2102	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2103	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2104	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2201	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2202	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2203	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2204	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2205	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2208	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2209	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2211	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2212	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2213	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2214	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2215	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 16654
2220	Cap, 15p, 5%, 50V, Ceramic	3198 016 01590
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2222	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2226	Cap, 33u, 20%, 25V, Electrolytic . .	2020 021 90124
2227	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2247	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2248	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2249	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2330	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2340	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320
S 2343	Cap, 3n3, 10%, 2KV, Ceramic.	2020 558 90529
2345	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2401	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2402	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2404	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2405	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2407	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2409	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2420	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2426	Cap, 100n, 10%, 63V, Metalized Polyes ter.	2222 370 75104
2428	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2429	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2430	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2431	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2437	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2438	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2448	Cap, 220p, 10%, 500V, Ceramic. . . .	3198 019 42210
2450	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91139
2451	Cap, 15n, 10%, 50V, Polyester. . . .	2020 300 90575
2451	0.01uF., 10%, 50V, Polyester, only 27	3198 138 20941
2456	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176
2457	Cap, 390n, 5%, 250V, Metalized Polypr opylene.	2222 479 90021
2458	Cap, 2u2, 20%, 100V, Electrolytic. .	2020 021 91331
2459	Cap, 680p, 10%, 500V, Ceramic. . . .	3198 019 46810
2461	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2462	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176
2463	470pF., 10%, 2KV, Ceramic.	4835 122 47638
S 2465	Cap, 10n, 5%, 1600V, Polypropylene .	2222 375 90154
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050
2473	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2481	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2482	Cap, 68n, 10%, 250V, Polyester . . .	2222 347 90234
2484	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2485	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2486	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2487	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2488	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2489	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2490	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2491	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810
2500	0.47uF., 250V, Polyester	4835 121 47569
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
S 2507	Cap, 1n5, 10%, 1KV, Ceramic.	2020 558 90443
2508	Cap, 470u, 20%, 200V, Electrolytic .	2020 024 90647
S 2511	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
S 2518	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2530	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 021 91147
2531	Cap, 1n, 2%, 50V, Polypropylene. . .	2020 310 90049
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2540	Cap, 100u, 20%, 25V, Electrolytic. .	2020 021 90547
S 2545	1500pF., 250VAC, Ceramic	4835 122 47621
S 2550	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2551	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91358
2561	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
S 2562	Cap, 220p, 10%, 1KV, Ceramic	2020 558 90424
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2572	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2575	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2577	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2586	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2604	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2613	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2615	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2619	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2622	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2629	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2679	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2681	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2821	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280
2823	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2825	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2826	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090
2827	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2828	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2829	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2830	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280
2831	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2832	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280

S = Safety Part Be sure to use exact replacement part.

TS2546C121 (continued)

	2833	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280		3403	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
	2834	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780		3405	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002
	2835	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3406	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
	2836	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3407	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002
	2837	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740		3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
	2838	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3409	1.5 ohm, 5%, 1/3W, Metal Film. . . .	4835 116 57664
	2839	Cap, 1u, 5%, 50V, Metalized Polyester	2020 308 90124		3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
	2840	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
	2841	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3420	470k, 5%, 1/10W, Metal Film.	4835 111 37407
	2842	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
	2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
	2844	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840
	2845	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606
	2913	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280		3425	150k, 5%, 1/10W, Metal Film.	4835 111 27045
	2914	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330		3426	39k, 5%, 1/10W, Metal Film	4835 111 27051
	2915	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3428	22k, 5%, 1/10W, Metal Film	4835 111 37441
	2916	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648		3429	27k, 5%, 1/10W, Metal Film	4835 111 37442
	2917	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3431	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
	2918	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330		3432	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
	2919	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3436	Res, 1K, 2%, 0,25W	4822 051 10102
	2920	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648		3437	10k, 5%, 1/10W, Metal Film	4835 111 37216
	2921	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3438	33k, 1/4W, Carbon Film	4835 110 57375
	2931	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280		3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
	2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3447	10k, 5%, 1/10W, Metal Film	4835 111 37216
	2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
	2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
	2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	S	3452	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63229
	2960	Cap, 220u, 20%, 50V, Electrolytic. .	3198 026 52210	S	3453	Res, 4R7, 5%, 5W, Wire Wound	2322 251 41478
	2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090	S	3454	Res, 33K, 5%, 1 1/3W, Metal Film . .	2322 194 63333
	2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090		3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
	2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090		3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
	3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3462	Res, 6K8, 5%, 5W, Metal Film	2322 257 41682
	3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
	3010	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610		3464	Res, 1K, 2%, 0,25W	4822 051 10102
	3013	Zero ohm,.	4835 111 27056	S	3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
	3014	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052		3466	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903
	3015	22k, 5%, 1/10W, Metal Film	4835 111 37441		3467	Res, 14K, 1%, 3/5W, Metal Film . . .	2322 156 21403
	3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810		3467	Res, 15K, 1%, 3/5W, Metal Film . . .	2322 156 21503
	3021	Res, 1K, 2%, 0,25W	4822 051 10102		3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
	3103	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3469	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
	3104	10k, 5%, 1/10W, Metal Film	4835 111 37216		3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
	3108	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703
	3109	10k, 5%, 1/10W, Metal Film	4835 111 37216		3481	Res, 100K, 1%, 3/5W, Metal Film. . .	2322 156 21004
	3123	75 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37276		3482	Res, 32K4, 1%, 3/5W, Metal Film. . .	2322 156 23243
	3200	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
	3201	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253		3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3203	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443	S	3485	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
	3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	S	3486	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3205	Res, 1K, 2%, 0,25W	4822 051 10102	S	3487	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3206	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	S	3488	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
	3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3490	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3209	22k, 5%, 1/10W, Metal Film	4835 111 37441	S	3491	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3212	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253	S	3492	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3213	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3495	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272
	3215	22k, 5%, 1/10W, Metal Film	4835 111 37441		3496	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3216	Zero ohm,.	4835 111 27056		3497	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3217	Res, 1M5, 5%, 1/8W, Metalized Glass.	2322 730 61155		3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
	3218	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225
	3219	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3503	10ohm, 120VAC, Positive Temperature C	
	3220	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432			oefficient	4835 116 47001
	3225	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S	3505	Surge Protector.	2422 549 43073
	3228	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
	3231	Zero ohm,.	4835 111 27056	S	3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333
	3232	Zero ohm,.	4835 111 27056	S	3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102
	3233	Zero ohm,.	4835 111 27056		3512	15k, 5%, 1/10W, Metal Film	4835 111 37458
	3243	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052		3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184
	3246	82k, 5%, 1/10W, Metal Film	4835 111 37277		3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204
	3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3515	2.5 ohm, 20%, 3.6W, Negative Temperat	
	3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010			ure Coefficient.	2122 612 00023
	3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340		3516	Res, 1K, 2%, 0,25W	4822 051 10102
	3250	Zero ohm,.	4835 111 27056		3517	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
	3251	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S	3518	Res, 0R22, 5%, 3W, Metal Film. . . .	2120 106 90548
	3252	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		3520	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
	3253	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		3521	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443
	3257	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3525	33 ohm, 5%, 1/3W, Metal Film	4835 116 57665
	3258	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3528	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3259	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3529	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3530	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
	3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3532	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3534	15k, 5%, 1/10W, Metal Film	4835 111 37458
	3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3536	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3537	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046	S	3542	4.7 Megohm, 5%, 1/2W, Metal Film . .	4835 116 57009
S	3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109		3570	15k, 5%, 1/10W, Metal Film	4835 111 37458
S	3341	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483		3571	Res, 150K, 1%, 3/5W, Metal Film. . .	2322 156 21504
S	3342	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483		3573	Res, 2K, 1%, 1/10W, Metalized Glass.	2120 108 92657
	3343	1.5k, 20%, 1/2W, Carbon Composition.	4835 110 47034		3574	33k, 5%, 1/10W, Metal Film	4835 111 37248
	3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290		3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
S	3345	VDR, DC, 1mA, 50V, MAX 115V	2322 593 13507		3577	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290		3578	Res, 1K, 2%, 0,25W	4822 051 10102
	3401	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380		3579	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
	3402	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380		3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010

S = Safety Part Be sure to use exact replacement part.

TS2546C121 (continued)

3592	10k, 5%, 1/10W, Metal Film	4835 111 37216
3594	22k, 5%, 1/10W, Metal Film	4835 111 37441
3595	68k, 5%, 1/6W, Carbon Film	4835 111 37205
3596	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3597	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
3598	10k, 5%, 1/10W, Metal Film	4835 111 37216
3599	22k, 5%, 1/10W, Metal Film	4835 111 37441
3607	8.2k, 5%, 1/8W, Inline Package . . .	4835 111 97046
3608	2.2k, 5%, 1/8W, Inline Package . . .	4835 111 97049
3609	2.2k, 5%, Resistor Network	2120 108 93868
3611	Res, 1K, 2%, 0,25W	4822 051 10102
3612	10k, 5%, 1/10W, Metal Film	4835 111 37216
3613	10k, 5%, 1/10W, Metal Film	4835 111 37216
3615	10k, 5%, 1/10W, Metal Film	4835 111 37216
3617	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3619	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
3629	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259
3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
3631	27k, 5%, 1/10W, Metal Film	4835 111 37442
S 3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63479
3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210
3634	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
3635	22k, 5%, 1/10W, Metal Film	4835 111 37441
3636	22k, 5%, 1/10W, Metal Film	4835 111 37441
3637	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3653	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3654	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
3655	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710
3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3662	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
3663	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
3664	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
3665	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
3666	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376
3667	27k, 5%, 1/10W, Metal Film	4835 111 37442
3672	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
3673	10k, 5%, 1/10W, Metal Film	4835 111 37216
3674	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231
3675	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3676	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3677	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3680	680 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37271
3681	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
3682	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
3683	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
3684	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
3821	15k, 5%, 1/10W, Metal Film	4835 111 37458
3822	1.2k, 5%, 1/10W, Metal Film.	4835 111 27042
3823	100k, 5%, 1/10W, Metal Film.	4835 111 37434
3824	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
3825	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3826	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3827	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3828	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3829	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272
3830	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272
3831	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198 011 03310
3832	47 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37262
3908	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710
3909	Res, 1K, 2%, 0,25W	4822 051 10102
3910	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376
3911	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230
3912	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
3913	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3914	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820
3915	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231
3916	220 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37371
3917	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
3918	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3919	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376
3920	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231
3921	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230
3922	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820
3923	220 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37371
3924	39k, 5%, 1/10W, Metal Film	4835 111 27051
3925	39k, 5%, 1/10W, Metal Film	4835 111 27051
3926	39k, 5%, 1/10W, Metal Film	4835 111 27051
3929	39k, 5%, 1/10W, Metal Film	4835 111 27051
3930	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710
3931	Res, 1K, 2%, 0,25W	4822 051 10102
3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810
3951	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3953	10k, 5%, 1/10W, Metal Film	4835 111 37216
3955	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
4001	Zero ohm,.	4835 111 27056
4002	Zero ohm,.	4835 111 27056
4004	Zero ohm,.	4835 111 27056
4007	Zero ohm,.	4835 111 27056
4009	Zero ohm,.	4835 111 27056
4010	Zero ohm,.	4835 111 27056
4011	Zero ohm,.	4835 111 27056
4012	Zero ohm,.	4835 111 27056
4013	Zero ohm,.	4835 111 27056
4020	Zero ohm,.	4835 111 27056
4051	Zero ohm,.	4835 111 27056
4100	Zero ohm,.	4835 111 27056
4101	Zero ohm,.	4835 111 27056
4102	Zero ohm,.	4835 111 27056
4103	Zero ohm,.	4835 111 27056
4143	Zero ohm,.	4835 111 27056
4144	Zero ohm,.	4835 111 27056
4203	Zero ohm,.	4835 111 27056
4207	Zero ohm,.	4835 111 27056
4212	Zero ohm,.	4835 111 27056
4214	Zero ohm,.	4835 111 27056
4215	Zero ohm,.	4835 111 27056
4216	Zero ohm,.	4835 111 27056
4501	Zero ohm,.	4835 111 27056
4602	Zero ohm,.	4835 111 27056
4650	Zero ohm,.	4835 111 27056
4651	Zero ohm,.	4835 111 27056
4652	Zero ohm,.	4835 111 27056
4654	Zero ohm,.	4835 111 27056
4655	Zero ohm,.	4835 111 27056
4684	Zero ohm,.	4835 111 27056
4687	Zero ohm,.	4835 111 27056
4831	Zero ohm,.	4835 111 27056
4832	Zero ohm,.	4835 111 27056
4833	Zero ohm,.	4835 111 27056
4902	Zero ohm,.	4835 111 27056
4903	Zero ohm,.	4835 111 27056
4904	Zero ohm,.	4835 111 27056
4905	Zero ohm,.	4835 111 27056
4909	Zero ohm,.	4835 111 27056
4911	Zero ohm,.	4835 111 27056
4912	Zero ohm,.	4835 111 27056
4914	Zero ohm,.	4835 111 27056
4957	Zero ohm,.	4835 111 27056
4999	Zero ohm,.	4835 111 27056
5000	Coil, 5u6.	3198 018 25680
5004	Coil, 820n	2422 535 97314
5201	Coil, 22u.	3198 018 22290
5202	Coil, 6u8.	3198 018 16880
5342	22uH., 10%, Coil, Peaking.	4835 157 67069
S 5445	Transformer, L.O.T., models ending in C101, C121, and C125	2422 531 02327
S 5445	Transformer, L.O.T., models ending in C221 and C225.	3128 138 20941
5451	Coil, 27u.	2422 535 96614
5457	Coil, Linear Correction.	3128 138 53241
5461	Transformer.	3128 138 33811
5480	Coil, 27u.	2422 535 97334
5480	Coil, 39u.	2422 535 97336
5480	33uH., Peaking Coil, only in 25. . .	4835 157 58205
S 5500	Filter, Mains, 5mH, 2A	2422 549 43432
5516	100uH., Coil	4835 157 67078
5518	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5521	Coil, 2u2.	3198 018 12280
5540	Coil, 4u7.	3198 018 14780
S 5545	Transfomer,.	2422 531 02314
5551	27uH., 5%, Coil, Peaking	4835 157 67052
5552	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5572	100uH., Coil	4835 157 67078
5573	100uH., Coil	4835 157 67078
5576	100uH., Coil	4835 157 67078
5577	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5600	Coil, 8u2.	3198 018 18280
5601	Coil, 8u2.	3198 018 18280
5620	Coil, 6u8.	3198 018 16880
5821	Coil, 100u	3198 018 21010
5822	Coil, 18u.	3198 018 21890
6008	Zener, 33 Volt BZX79-C33	4835 130 37904
6113	Zener Diode, 6.8 volt.	9340 386 40115
6211	Diode, 1N4148.	4835 130 37048
6212	Diode, 1N4148.	4835 130 37048
6213	Diode, 1N4148.	4835 130 37048
6331	Diode.	4835 130 37294
6333	Diode.	4835 130 37294
6335	Diode.	4835 130 37294
6401	Diode.	4835 130 37094
6402	Zener, 33 Volt, BZX79-C33.	4835 130 37904
6403	Diode.	4835 130 37094
6404	Diode.	4835 130 37094
6449	Diode, 1N4148.	4835 130 37048
6450	Diode, 1N4148.	4835 130 37048
6460	Diode, Rect, BY228/20	9336 215 80112

S = Safety Part Be sure to use exact replacement part.

TS2546C121 (continued)

6463	Diode, 1N4148.	4835 130 37048
6464	Zener Diode, 6.2 volt.	9337 242 70133
6465	Diode, BYD33J.	4835 130 37094
6466	Diode, BYD33J.	4835 130 37094
6480	Diode, Zener	4835 130 37947
6481	Diode, 1N4148.	4835 130 37048
6485	Diode, BYD33J.	4835 130 37094
6486	Diode, EGP20DL-530	4835 130 37919
6487	Diode.	4835 130 37094
6488	Diode, Rect, BYV27-200.	9322 126 72673
6490	Diode, Rect, BYV27-200.	9322 126 72673
6505	Diode, Bridge Rect, GBU6JL-7002 . .	9322 138 08667
6507	Diode, BYD33J.	4835 130 37094
6508	Diode, BYD33J.	4835 130 37094
6510	Zener Diode, 20 volt	9331 178 60133
6511	Diode, BYV95C.	4835 130 37052
6512	Diode, Rect, BY228/20	4822 130 41275
6513	Diode, Rect, BY228/20	4822 130 41275
6514	Zener, 18 Volt, BZX79-C18.	4835 130 37908
6540	Diode.	4835 130 37294
6550	Diode, Rect, BY229X-800	9340 380 30127
6560	Diode, EGP20DL-530	4835 130 37919
6580	Diode, Rect, SB140.	9339 577 60673
6584	Diode, 1N4148.	4835 130 37048
6585	Diode, 1N4148.	4835 130 37048
6591	Diode, BAS216.	4835 130 37905
6601	Diode, Zener	4835 130 37684
6606	Zener, 4.7 Volt, BZX79-C4V7.	4835 130 37005
6607	Zener, 6.8 Volt, BZX79-C6V8.	4835 130 37945
6690	LED, LTL-307P.	4835 130 97096
6821	Zener Diode, 9.1 volt.	9331 177 80133
6822	Fixed Coil	4835 130 37048
6951	Diode, BAS216.	4835 130 37905
6961	Diode, BAS216.	4835 130 37905
7250	IC,.	9352 620 26112
7251	IC, LM317T	9337 220 80682
7254	Transistor, NPN, BC847B.	4822 130 60511
7256	Transistor, NPN, BC847B.	4822 130 60511
7258	Transistor, NPN, BC847B.	4822 130 60511
7263	Transistor, PNP, BC857B.	5322 130 60508
7266	Transistor, NPN, BC847B.	4822 130 60511
7330	IC,.	9352 184 10112
7401	IC,.	9322 121 47687
7460	Transistor, NPN, BU1508DX.	9340 170 50127
7461	Transistor, NPN, BF819	9335 354 50127
7462	Transistor, BC547B	4835 130 47055
7463	Transistor, BC557B	4835 130 47409
7480	IC,.	9322 028 93682
7481	Transistor, BC557B	4835 130 47409
7482	Transistor, PNP, BC857B.	5322 130 60508
7518	STH8NA60FI SMPS FET	9322 068 92687
7518	STH10NC60FI SMPS FET.	9322 155 66687
7520	IC, MC44603A	4835 209 88537
7570	IC,.	9337 711 00676
S 7581	Coupler, TCDT1101G	9338 431 30682
7590	Transistor, NPN, BC847B.	4822 130 60511
7591	Transistor, NPN, BC847B.	4822 130 60511
7592	Transistor, NPN, BC847B.	4822 130 60511
7600	IC, SAA5543PS/M4/1046 L90US1-1.4 . .	4835 310 57477
7601	IC, ST24W04B6.	9322 097 23682
7603	Transistor, NPN, BC337	9331 796 00126
7604	Transistor, NPN, BC847B.	4822 130 60511
7605	Transistor, NPN, BC847B.	4822 130 60511
7608	Transistor, NPN, BC847B.	4822 130 60511
7609	Transistor, NPN, BC847B.	4822 130 60511
7680	IR Receiver.	9322 127 53667
7821	IC,.	9352 374 70112
7822	IC, HEF4052BT.	9333 729 50653
7823	Transistor, NPN, BC337-25.	3198 020 43530
7904	Transistor, NPN, BC847B.	4822 130 60511
7908	Transistor, NPN, BC847B.	4822 130 60511
7951	IC,.	4822 209 13706
9423	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
CBA	00EMF805A002 Main Chassis Board Asm.	00EM F80 5A002

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Mainscord, 125V, 10A	3135 010 03831
S AC02	Anode Clip	4835 256 97264
AC03	Cabinet Back	3139 124 27951
AC04	Cabinet Front.	3139 137 65891
AC05	Chassis Guide.	3139 124 31381
AC06	Control Buttons.	3139 124 27461
S AC07	Convergence and Purity Assembly. . .	2422 549 43385
S AC08	CRT A63AFW36X (C121 Version)	9301 763 20443
S AC09	Coil, Degaussing	3121 218 62961
AC10	Holder, Degaussing (4 Used).	3135 013 01641
AC11	Light Guide.	3139 124 26461
AC13	Owner's Manual, English.	3135 015 10912
AC14	Power Button	3139 124 26444
REMOTE	Remote Transmitter	3139 148 54201
AC16	Speaker, 16R, 1W5 (2 Used)	2422 264 00343
S AC18	Yoke (C121 Version).	3321 203 00121
AC19	Yoke Wedge (3 Used).	4835 535 27001
AC21	Batteries f/Remote Transmitter . . .	9299 000 13827
AC24	Spring	3139 121 26231

S = Safety Part Be sure to use exact replacement part.

TS2546C221 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts	
0113	L9 SOPS HEATSINK	3139 121 62041
0119	DIODE HEATSINK L9.	3139 121 26691
0121	LINE HEATSINK (CINCH).	3139 121 61942
S 0127	Holder, Fuse, 2 Pin.	3122 358 71251
0211	Connector, 2 Pin	2422 025 11196
0212	Connector, 2 Pin	2422 025 15396
0220	4 Pin Board Connector.	2422 025 04852
0221	Connector, 4 Pin	2422 025 15503
0222	Connector, 2 Pin	2422 025 10646
0225	1 Pin Board Connector.	2422 034 20021
0226	1 Pin Board Connector.	2422 034 20021
0234	Connector, 4 Pin	2422 025 15847
S 0243	Connector, 6 Pin	2422 025 04854
0244	4 Pin Board Connector.	2422 025 04852
S 0245	Connector, 6 Pin	2422 025 04854
S 0254	CRT Socket (9 Pin)	2422 500 80022
0267	Connector, 3 Pin	2412 020 00725
1000	TUNER.	3139 147 16412
1001	Filter	2422 549 42501
1003	45 MHz SAW, Filter,.	2422 549 42433
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807
1208	Crystal Resonator, 3.58MHz	2422 543 00832
S 1500	Fue, 4 A, 250V	2422 086 10905
S 1571	FUSE 1A 250V	2422 086 10779
S 1572	FUSE 1A 250V	2422 086 10779
S 1580	Relay, 12V, 5A G5PA-1.	2422 132 07444
1600	Switch, Tactile.	2422 128 02742
1601	Switch, Tactile.	2422 128 02742
1602	Switch, Tactile.	2422 128 02742
1603	Switch, Tactile.	2422 128 02742
1606	Switch, Tactile.	2422 128 02742
1660	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488
1821	Ceramic Resonator, 514KHz5, CSB503F58	2422 540 98344
2001	Cap, 47n, 10%, 25V, Ceramic. . . .	3198 023 04730
2002	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2003	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2004	Cap, 22n, 10%, 50V, Ceramic. . . .	3198 017 02230
2005	Cap, 330p, 5%, 50V, Ceramic. . . .	3198 016 03310
2006	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2011	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2201	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2202	Cap, 100p, 5%, 50V, Ceramic. . . .	3198 016 01010
2203	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2204	Cap, 100p, 5%, 50V, Ceramic. . . .	3198 016 01010
2205	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2208	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2209	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2211	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2212	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2213	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2214	Cap, 22n, 10%, 50V, Ceramic. . . .	3198 017 02230
2215	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 15654
2220	Cap, 18p, 5%, 50V, Ceramic	3198 016 01890
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2222	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2226	Cap, 33u, 20%, 25V, Electrolytic . .	2020 021 90124
2227	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2247	Cap, 47n, 10%, 25V, Ceramic. . . .	3198 023 04730
2248	Cap, 47n, 10%, 25V, Ceramic. . . .	3198 023 04730
2249	Cap, 47n, 10%, 25V, Ceramic. . . .	3198 023 04730
2330	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2340	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320
S 2343	Cap, 3n3, 10%, 2KV, Ceramic. . . .	2020 558 90529
2345	Cap, 1n, 10%, 500V, Ceramic. . . .	3198 019 41020
2401	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2402	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2404	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2405	Cap, 470p, 5%, 50V, Ceramic. . . .	3198 016 04710
2407	Cap, 470p, 5%, 50V, Ceramic. . . .	3198 016 04710
2409	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2420	Cap, 4n7, 10%, 50V, Ceramic. . . .	3198 017 04720
2426	Cap, 100n, 10%, 63V, Metalized Polyes ter.	2222 370 75104
2428	Cap, 2n2, 10%, 50V, Ceramic. . . .	3198 017 02220
2429	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2430	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2431	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2437	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2438	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2448	Cap, 33p, 5%, 500V, Ceramic. . . .	2020 557 90192
2450	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91139
2451	Cap, 15n, 10%, 50V, Polyester. . . .	2020 300 90575
2456	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176
2457	Cap, 390n, 5%, 250V, Metalized Polypr opylene.	2222 479 90021
2458	Cap, 2u2, 20%, 100V, Electrolytic. .	2020 021 91331
2459	Cap, 680p, 10%, 500V, Ceramic. . . .	3198 019 46810
2461	Cap, 1n, 10%, 500V, Ceramic. . . .	3198 019 41020
2462	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176
S 2463	Cap, 470p, 10%, 2KV, Ceramic	2020 558 90483
S 2465	Cap, 10n, 5%, 1600V, Polypropylene .	2222 375 90154
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050
2473	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2481	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2482	Cap, 68n, 10%, 250V, Polyester . . .	2222 347 90234
2484	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2485	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2486	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2487	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2488	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2489	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2490	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2491	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810
2499	Cap, 220n, 10%, 100V, Metalized Polye ster	2222 365 25224
2500	Cap, 470n, 20%, 275V, Polypropylene.	2222 336 29148
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2507	Cap, 1n5, 10%, 1KV, Ceramic.	3198 019 61520
2508	Cap, 470u, 20%, 200V, Electrolytic .	2020 024 90647
2511	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
2518	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2530	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 021 91147
2531	Cap, 1n, 2%, 50V, Polypropylene. . .	2020 310 90049
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2540	Cap, 100u, 20%, 25V, Electrolytic. .	2020 021 90547
S 2545	Cap, 1n5, 20%, v, Ceramic.	2020 554 90128
2550	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2551	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91358
2561	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2562	Cap, 220p, 10%, 1KV, Ceramic	3198 019 62210
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2572	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2575	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2577	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2586	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2604	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2613	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2615	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2619	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2622	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2629	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2679	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2681	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2821	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280
2823	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2825	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2826	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090
2827	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2828	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2829	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240
2830	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280
2831	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240

S = Safety Part Be sure to use exact replacement part.

TS2546C221 (continued)

2832	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280	
2833	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280	
2834	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780	
2835	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	
2836	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2837	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740	
2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2844	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2845	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2913	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280	
2914	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330	
2915	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	
2916	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648	
2917	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2918	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330	
2919	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	
2920	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648	
2921	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2931	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280	
2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2952	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2954	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2955	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2960	Cap, 220u, 20%, 50V, Electrolytic. .	3198 026 52210	
2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090	
2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090	
2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090	
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3010	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610	
3013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3015	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	
3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810	
3021	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3201	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910	
3203	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310	
3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	
3205	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3206	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610	
3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3209	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	
3212	Res, 390 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53910	
3213	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610	
3215	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	
3216	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
3217	Res, 1M5, 5%, 1/8W, Metalized Glass.	2322 730 61155	
3218	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3219	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610	
3220	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3225	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040	
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3243	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	
3246	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230	
3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340	
3250	Res, Zero ohm, 'Chip' Jumper	3198 021 90020	
3251	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040	
3252	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	
3253	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	
3257	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3258	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3259	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	3198 013 01020	
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	3198 013 01020	
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	3198 013 01020	
S 3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109	
S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108	
S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108	
3343	Res, 1K5, 20%, 1/2W, Carbon Film . .	3198 013 01520	
3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290	
3345	VDR DC 1MA/50V S MAX 110V A . . .	2122 550 00152	
3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290	
3401	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380	
3402	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380	
3403	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380	
3405	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002	
3406	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
3407	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002	
3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
3409	Res, 1R5, 5%, 1/3W, Metal Film . . .	2306 204 03158	
3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210	
3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210	
3420	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740	
3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220	
3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220	
3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840	
3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606	
3425	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540	
3426	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930	
3428	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	
3429	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730	
3431	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	
3432	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	
3433	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3436	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3437	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3438	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330	
3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920	
3447	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220	
3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320	
S 3452	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	3198 012 32290	
S 3453	Res, 4R7, 5%, 5W, Wire Wound	2322 251 41478	
S 3454	Res, 33K, 5%, 1 1/3W, Metal Film . .	2322 194 63333	
3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
S 3462	Res, 6K8, 5%, 5W, Metal Film	2322 257 41682	
3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790	
3464	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
S 3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109	
3466	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903	
3467	Res, 14K, 1%, 3/5W, Metal Film . . .	2322 156 21403	
3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
3469	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	
3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240	
3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703	
3481	Res, 100K, 1%, 3/5W, Metal Film. . .	2322 156 21004	
3482	Res, 32K4, 1%, 3/5W, Metal Film. . .	2322 156 23243	
3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230	
3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
S 3486	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108	
S 3487	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108	
S 3488	Res, 4R7, 5%, 1/2W, Metal Film . . .	2306 207 03478	
S 3490	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108	
S 3491	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108	
S 3492	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108	
3495	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820	
3496	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3497	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019	
S 3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225	
3503	PTC DC ZPB 120V S 10R PM30 B . . .	2120 661 00019	
S 3505	Surge Protector.	2422 549 43073	
S 3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223	
S 3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333	
S 3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102	
3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530	
3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184	
3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204	
S 3515	2.5 ohm, 20%, 3.6W, Negative Temperat ure Coefficient.	2122 612 00023	
3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3517	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020	
S 3518	Res, 0R22, 5%, 2 1/2W, Metal Film. .	3198 012 32270	
3520	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230	
3521	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310	
S 3525	Res, 47 ohm, 5%, 1/3W, Metal Film. .	2306 204 03479	
3528	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3529	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890	
3530	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320	
3532	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3534	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530	
3536	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830	
3537	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
S 3542	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475	
3570	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530	
3571	Res, 150K, 1%, 3/5W, Metal Film. . .	2322 156 21504	
3573	Res, 2K, 1%, 1/8W, Metalized Glass .	2322 734 62002	
3574	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330	
3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3577	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3578	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	
3579	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002	
3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3592	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	
3594	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	
3595	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830	
3596	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	

S = Safety Part Be sure to use exact replacement part.

TS2546C221 (continued)

3597	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3598	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3599	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3607	RST NETW RGLE 10X 8K2 PM5 B . . .	2120 108 93916
3608	RST NETW RGLE 6X 2K2 PM5 B . . .	2120 108 93913
3609	RST NETW RGLE 7X 2K2 PM5 B . . .	2120 108 93915
3611	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3612	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3613	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3615	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3616	Jumper Wire/Staple	0322 179 00003
3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3619	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3629	Res, 470 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54710
3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
3631	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
S 3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210
3634	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3635	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3636	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3637	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3653	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3654	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3655	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710
3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3662	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3663	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220
3664	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220
3665	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3666	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3667	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3672	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3673	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3674	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3675	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510
3676	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510
3677	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510
3680	Res, 680 ohm, 5%, 1/10W, Metalized Glass.	3198 021 56810
3681	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3682	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220
3683	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3684	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3821	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3822	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3823	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3824	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3825	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3826	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3827	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3828	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3829	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3830	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3831	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198 011 03310
3832	Res, 47 ohm, 5%, 1/10W, Metalized Glass.	3198 021 54790
3908	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710
3909	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3910	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3911	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230
3912	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
3913	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3914	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820
3915	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3916	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3917	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
3918	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3919	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3920	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3921	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230
3922	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820
3923	Res, 220 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52210
3924	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3925	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3926	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3929	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3930	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710
3931	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810
3951	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3953	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3955	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3957	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4004	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4011	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4012	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4020	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4051	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4100	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4203	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4212	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4215	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4216	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4465	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4501	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4650	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4651	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4654	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4832	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4911	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4914	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4957	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4999	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 5u6.	3198 018 25680
5004	Coil, 820n	2422 535 97314
5201	Coil, 22u.	3198 018 22290
5202	Coil, 6u8.	3198 018 16880
5342	Coil, 22u.	3198 018 22290
S 5445	Transformer, L.O.T., models ending in C221 and C225.	3128 138 20941
5451	Coil, 27u.	2422 535 96614
5457	Coil, Linear Correction.	3128 138 53241
5461	TFM SIG SLOT UU-1522S WIRE B . . .	2422 531 02318
5461	Transformer.	3128 138 33811
5480	Coil, 33u.	2422 535 97335
S 5500	Filter, Mains, 5mH, 2A	2422 549 43432
5516	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5518	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5521	Coil, 2u2.	3198 018 12280
5540	Coil, 4u7.	3198 018 14780
S 5545	Transfomer,.	2422 531 02314
5551	Coil, 27u.	2422 535 95366
5552	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5572	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5573	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5576	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5577	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5600	Coil, 8u2.	3198 018 18280
5601	Coil, 8u2.	3198 018 18280
5620	Coil, 6u8.	3198 018 16880
5821	Coil, 100u	3198 018 21010
5822	Coil, 18u.	3198 018 21890
6008	Zener Diode, 33 volt	3198 010 23390
6211	Diode, Signal, 1N4148.	3198 010 10010
6212	Diode, Signal, 1N4148.	3198 010 10010
6213	Diode, Signal, 1N4148.	3198 010 10010
6331	Diode, Signal, BAV21	3198 010 10070
6333	Diode, Signal, BAV21	3198 010 10070
6335	Diode, Signal, BAV21	3198 010 10070
6401	Diode, Rect, BYD33D	9337 234 00133
6402	Zener Diode, 33 volt	3198 010 23390
6403	Diode, Rect, BYD33D	9337 234 00133
6404	Zener Diode, 75 volt	9331 180 00133
6449	Diode, Signal, 1N4148.	3198 010 10010
6450	Diode, Signal, 1N4148.	3198 010 10010
6460	Diode, Rect, BY228/20	9336 215 80112
6463	Diode, Signal, 1N4148.	3198 010 10010
6464	Zener Diode, 6.2 volt.	9331 668 30133
6465	Diode, Rect, BYD33J	9337 234 20133
6466	Diode, Rect, BYD33J	9337 234 20133
6480	Zener Diode, 27 volt	3198 010 22790
6481	Diode, Signal, 1N4148.	3198 010 10010
6485	Diode, Rect, BYD33J	9337 234 20133
6486	Diode, Rect, EGP20DL-5300	9322 100 13682
6487	Diode, Rect, BYD33D	9337 234 00133
6488	Diode, Rect, BYV27-200.	9322 126 72673
6490	Diode, Rect, BYV27-200.	9322 126 72673
6505	Diode, Bridge Rect, GBU6JL-7002 . .	9322 138 08667
6507	Diode, Rect, BYD33J	9337 234 20133

S = Safety Part Be sure to use exact replacement part.

TS2546C221 (continued)

6508	Diode, Rect, BYD33J	9337 234 20133	9230	Jumper Wire/Staple	0322 179 00003
6510	Zener Diode, 20 volt	9331 178 60133	9231	Jumper Wire/Staple	0322 179 00003
6511	Diode, Rect, BYV95C	9335 001 80133	9232	Jumper Wire/Staple	0322 179 00003
6512	Diode, Rect, 1N5062	3198 010 10120	9233	Jumper Wire/Staple	0322 179 00003
6513	Diode, Rect, 1N5062	3198 010 10120	9234	Jumper Wire/Staple	0322 179 00003
6514	Zener Diode, 18 volt	3198 010 21890	9236	Jumper Wire/Staple	0322 179 00003
6540	Diode, Signal, BAV21	3198 010 10070	9237	Jumper Wire/Staple	0322 179 00003
6550	Diode, Rect, BY229X-800	9340 380 30127	9238	Jumper Wire/Staple	0322 179 00003
6560	Diode, Rect, EGP20DL-5300	9322 100 13682	9240	Jumper Wire/Staple	0322 179 00003
6580	Diode, Rect, SB140	9339 577 60673	9241	Jumper Wire/Staple	0322 179 00003
6584	Diode, Signal, 1N4148	3198 010 10010	9242	Jumper Wire/Staple	0322 179 00003
6585	Diode, Signal, 1N4148	3198 010 10010	9243	Jumper Wire/Staple	0322 179 00003
6591	Diode, Signal, BAS16WS	9322 031 99685	9245	Jumper Wire/Staple	0322 179 00003
6601	Zener Diode, 3.9 volt	3198 010 23980	9301	Jumper Wire/Staple	0322 179 00003
6603	Jumper Wire/Staple	0322 179 00003	9401	Jumper Wire/Staple	0322 179 00003
6604	Jumper Wire/Staple	0322 179 00003	9402	Jumper Wire/Staple	0322 179 00003
6605	Jumper Wire/Staple	0322 179 00003	9403	Jumper Wire/Staple	0322 179 00003
6606	Zener Diode, 4.7 volt	3198 010 24780	9404	Jumper Wire/Staple	0322 179 00003
6607	Zener Diode, 6.8 volt	3198 010 26880	9407	Jumper Wire/Staple	0322 179 00003
6690	LED VS LTL-307P (LITO) B	9322 033 95682	9408	Jumper Wire/Staple	0322 179 00003
6821	Zener Diode, 9.1 volt	9331 177 80133	9411	Jumper Wire/Staple	0322 179 00003
6822	Diode, Signal, 1N4148	3198 010 10010	9414	Jumper Wire/Staple	0322 179 00003
6951	Diode, Signal, BAS16WS	9322 031 99685	9417	Jumper Wire/Staple	0322 179 00003
6961	Diode, Signal, BAS16WS	9322 031 99685	9419	Jumper Wire/Staple	0322 179 00003
7250	IC,	9352 620 26112	9420	Jumper Wire/Staple	0322 179 00003
7251	IC, LM317T	9337 220 80682	9421	Jumper Wire/Staple	0322 179 00003
7254	Transistor, NPN, BC847B	3198 010 42030	9422	Jumper Wire/Staple	0322 179 00003
7256	Transistor, NPN, BC847B	3198 010 42030	9424	Jumper Wire/Staple	0322 179 00003
7258	Transistor, NPN, BC847B	3198 010 42030	9425	Jumper Wire/Staple	0322 179 00003
7263	Transistor, PNP, BC857B	3198 010 42150	9427	Jumper Wire/Staple	0322 179 00003
7266	Transistor, NPN, BC847B	3198 010 42030	9428	Jumper Wire/Staple	0322 179 00003
7330	IC, TDA6107Q/N2	9352 576 50112	9460	Jumper Wire/Staple	0322 179 00003
7401	IC,	9322 121 47687	9461	Jumper Wire/Staple	0322 179 00003
7460	Transistor, NPN, BU1508DX	9340 170 50127	9500	Jumper Wire/Staple	0322 179 00003
7461	Transistor, NPN, BF819	9335 354 50127	9501	Jumper Wire/Staple	0322 179 00003
7462	Transistor, NPN, BC547B	3198 020 40030	9502	Jumper Wire/Staple	0322 179 00003
7463	Transistor, PNP, BC557B	3198 020 40110	9503	Jumper Wire/Staple	0322 179 00003
7480	IC,	9322 028 93682	9505	Jumper Wire/Staple	0322 179 00003
7481	Transistor, PNP, BC557B	3198 020 40110	9509	Jumper Wire/Staple	0322 179 00003
7482	Transistor, PNP, BC857B	3198 010 42150	9510	Jumper Wire/Staple	0322 179 00003
7518	STH10NC60FI SMPS FET	9322 155 66687	9511	Jumper Wire/Staple	0322 179 00003
7520	IC,	9322 108 36682	9512	Jumper Wire/Staple	0322 179 00003
7570	IC,	9337 711 00676	9513	Jumper Wire/Staple	0322 179 00003
S 7581	Coupler, TCDT1101G	9338 431 30682	9515	Jumper Wire/Staple	0322 179 00003
7590	Transistor, NPN, BC847B	3198 010 42030	9516	Jumper Wire/Staple	0322 179 00003
7591	Transistor, NPN, BC847B	3198 010 42030	9517	Jumper Wire/Staple	0322 179 00003
7592	Transistor, NPN, BC847B	3198 010 42030	9518	Jumper Wire/Staple	0322 179 00003
7600	IC,	9352 670 96112	9521	Jumper Wire/Staple	0322 179 00003
7601	IC, ST24W04B6	9322 097 23682	9526	Jumper Wire/Staple	0322 179 00003
7603	Transistor, NPN, BC337	9331 796 00126	9601	Jumper Wire/Staple	0322 179 00003
7604	Transistor, NPN, BC847B	3198 010 42030	9602	Jumper Wire/Staple	0322 179 00003
7605	Transistor, NPN, BC847B	3198 010 42030	9603	Jumper Wire/Staple	0322 179 00003
7608	Transistor, NPN, BC847B	3198 010 42030	9604	Jumper Wire/Staple	0322 179 00003
7609	Transistor, NPN, BC847B	3198 010 42030	9605	Jumper Wire/Staple	0322 179 00003
7680	IR RECEIVER	9322 154 48667	9606	Jumper Wire/Staple	0322 179 00003
7821	IC,	9352 374 70112	9608	Jumper Wire/Staple	0322 179 00003
7823	Transistor, NPN, BC337-25	3198 020 43530	9609	Jumper Wire/Staple	0322 179 00003
7904	Transistor, NPN, BC847B	3198 010 42030	9610	Jumper Wire/Staple	0322 179 00003
7908	Transistor, NPN, BC847B	3198 010 42030	9611	Jumper Wire/Staple	0322 179 00003
7951	IC,	9351 861 60112	9612	Jumper Wire/Staple	0322 179 00003
7960	ISOPROPYL ALCOHOL	1306 500 43201	9613	Jumper Wire/Staple	0322 179 00003
9001	Jumper Wire/Staple	0322 179 00003	9614	Jumper Wire/Staple	0322 179 00003
9003	Jumper Wire/Staple	0322 179 00003	9615	Jumper Wire/Staple	0322 179 00003
9005	Jumper Wire/Staple	0322 179 00003	9618	Jumper Wire/Staple	0322 179 00003
9011	Jumper Wire/Staple	0322 179 00003	9621	Jumper Wire/Staple	0322 179 00003
9012	Jumper Wire/Staple	0322 179 00003	9622	Jumper Wire/Staple	0322 179 00003
9105	Jumper Wire/Staple	0322 179 00003	9624	Jumper Wire/Staple	0322 179 00003
9126	Jumper Wire/Staple	0322 179 00003	9625	Jumper Wire/Staple	0322 179 00003
9200	Jumper Wire/Staple	0322 179 00003	9626	Jumper Wire/Staple	0322 179 00003
9202	Jumper Wire/Staple	0322 179 00003	9629	Jumper Wire/Staple	0322 179 00003
9203	Jumper Wire/Staple	0322 179 00003	9631	Jumper Wire/Staple	0322 179 00003
9204	Jumper Wire/Staple	0322 179 00003	9632	Jumper Wire/Staple	0322 179 00003
9205	Jumper Wire/Staple	0322 179 00003	9637	Jumper Wire/Staple	0322 179 00003
9206	Jumper Wire/Staple	0322 179 00003	9640	Jumper Wire/Staple	0322 179 00003
9207	Jumper Wire/Staple	0322 179 00003	9642	Jumper Wire/Staple	0322 179 00003
9208	Jumper Wire/Staple	0322 179 00003	9643	Jumper Wire/Staple	0322 179 00003
9209	Jumper Wire/Staple	0322 179 00003	9644	Jumper Wire/Staple	0322 179 00003
9210	Jumper Wire/Staple	0322 179 00003	9660	Jumper Wire/Staple	0322 179 00003
9211	Jumper Wire/Staple	0322 179 00003	9754	Jumper Wire/Staple	0322 179 00003
9214	Jumper Wire/Staple	0322 179 00003	9788	Jumper Wire/Staple	0322 179 00003
9215	Jumper Wire/Staple	0322 179 00003	9793	Jumper Wire/Staple	0322 179 00003
9216	Jumper Wire/Staple	0322 179 00003	9800	Jumper Wire/Staple	0322 179 00003
9217	Jumper Wire/Staple	0322 179 00003	9805	Jumper Wire/Staple	0322 179 00003
9218	Jumper Wire/Staple	0322 179 00003	9806	Jumper Wire/Staple	0322 179 00003
9220	Jumper Wire/Staple	0322 179 00003	9807	Jumper Wire/Staple	0322 179 00003
9221	Jumper Wire/Staple	0322 179 00003	9810	Jumper Wire/Staple	0322 179 00003
9222	Jumper Wire/Staple	0322 179 00003	9821	Jumper Wire/Staple	0322 179 00003
9225	Jumper Wire/Staple	0322 179 00003	9901	Jumper Wire/Staple	0322 179 00003
9226	Jumper Wire/Staple	0322 179 00003	9904	Jumper Wire/Staple	0322 179 00003
9227	Jumper Wire/Staple	0322 179 00003	9905	Jumper Wire/Staple	0322 179 00003
9228	Jumper Wire/Staple	0322 179 00003	9906	Jumper Wire/Staple	0322 179 00003
9229	Jumper Wire/Staple	0322 179 00003	9933	Jumper Wire/Staple	0322 179 00003

S = Safety Part Be sure to use exact replacement part.

TS2546C221 (continued)

9936	Jumper Wire/Staple	0322 179 00003
9940	Jumper Wire/Staple	0322 179 00003
9941	Jumper Wire/Staple	0322 179 00003
9942	Jumper Wire/Staple	0322 179 00003
9943	Jumper Wire/Staple	0322 179 00003
9944	Jumper Wire/Staple	0322 179 00003
9945	Jumper Wire/Staple	0322 179 00003
9946	Jumper Wire/Staple	0322 179 00003
9947	Jumper Wire/Staple	0322 179 00003
9948	Jumper Wire/Staple	0322 179 00003
9949	Jumper Wire/Staple	0322 179 00003
9950	Jumper Wire/Staple	0322 179 00003
9951	Jumper Wire/Staple	0322 179 00003
9952	Jumper Wire/Staple	0322 179 00003
9953	Jumper Wire/Staple	0322 179 00003
9955	Jumper Wire/Staple	0322 179 00003
9956	Jumper Wire/Staple	0322 179 00003
9957	Jumper Wire/Staple	0322 179 00003
9958	Jumper Wire/Staple	0322 179 00003
9959	Jumper Wire/Staple	0322 179 00003
9960	Jumper Wire/Staple	0322 179 00003
9962	Jumper Wire/Staple	0322 179 00003
9963	Jumper Wire/Staple	0322 179 00003
9964	Jumper Wire/Staple	0322 179 00003
9965	Jumper Wire/Staple	0322 179 00003
9966	Jumper Wire/Staple	0322 179 00003
9967	Jumper Wire/Staple	0322 179 00003
9968	Jumper Wire/Staple	0322 179 00003
9969	Jumper Wire/Staple	0322 179 00003
9970	Jumper Wire/Staple	0322 179 00003
9971	Jumper Wire/Staple	0322 179 00003
9972	Jumper Wire/Staple	0322 179 00003
9974	Jumper Wire/Staple	0322 179 00003
9975	Jumper Wire/Staple	0322 179 00003
9976	Jumper Wire/Staple	0322 179 00003
9977	Jumper Wire/Staple	0322 179 00003
9981	Jumper Wire/Staple	0322 179 00003
9982	Jumper Wire/Staple	0322 179 00003
9983	Jumper Wire/Staple	0322 179 00003
9984	Jumper Wire/Staple	0322 179 00003
9987	Jumper Wire/Staple	0322 179 00003
9989	Jumper Wire/Staple	0322 179 00003
9990	Jumper Wire/Staple	0322 179 00003
9991	Jumper Wire/Staple	0322 179 00003
9992	Jumper Wire/Staple	0322 179 00003
9993	Jumper Wire/Staple	0322 179 00003
CBA	313917808991 Main Chassis Boarrd Asm.	3139 178 08991

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Mainscord, 125V, 10A	3135 010 03831
AC02	Clip, Anode Lead	3135 014 04471
AC03	Cabinet Back	3139 124 27951
AC04	Cabinet Front.	3139 137 65891
AC05	Chassis Guide.	3139 124 31381
AC06	Control Buttons.	3139 124 27461
S AC07	Convergence and Purity Assembly. . .	2422 549 43385
S AC08	CRT A63AFW36X (C121 Version)	9301 763 20443
S AC09	Coil, Degaussing	2422 549 44489
AC10	Holder, Degaussing (4 Used).	3135 013 01641
AC11	Light Guide.	3139 124 26461
AC13	Owner's Manual, English.	3135 015 10912
AC14	Power Button	3139 124 26444
REMOTE	Remote Transmitter	3139 148 54201
AC16	Speaker, 16R, 1W5 (2 Used)	2422 264 00343
S AC18	Yoke (C121 Version).	3321 203 00121
AC19	Yoke Wedge (3 used).	3135 013 00311
AC21	Batteries f/Remote Transmitter . . .	9299 000 13827
AC24	Spring	3139 121 26231

S = Safety Part Be sure to use exact replacement part.

TS2556C121 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts		
S 0127	3.15 Amp Fuse, ...	3122 358 72141	
0152	Cable, DIP, 6 Pin, 400mm	3104 301 09421	
0153	4 Pin Cable.	3104 301 09431	
0212	Connector, 2 Pin	2422 025 15396	
0220	4 Pin Board Connector.	2422 025 04852	
0223	3 Pin Board Connector.	2422 026 04963	
0224	1 Pin Board Connector.	2422 034 20021	
0228	1 Pin Board Connector.	2422 034 20021	
0234	Connector, 4 Pin	2422 025 15847	
S 0243	Connector, 6 Pin	2422 025 04854	
0244	4 Pin Board Connector.	2422 025 04852	
S 0245	Connector, 6 Pin	2422 025 04854	
S 0254	CRT Socket (9 Pin)	2422 500 80022	
0267	Connector, 3 Pin	2412 020 00725	
1000	Tuner.	2422 542 90057	
1001	Filter	2422 549 42501	
1003	45 MHz SAW, Filter,.	2422 549 42433	
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807	
1208	Crystal Resonator.	4835 242 77276	
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10869	
S 1571	1 Amp, Radial Fuse,.	4835 253 97162	
S 1572	1 Amp, Radial Fuse,.	4835 253 97162	
S 1580	Relay, 12V	2422 132 07317	
1600	Switch, Tactile.	2422 128 02742	
1601	Switch, Tactile.	2422 128 02742	
1602	Switch, Tactile.	2422 128 02742	
1603	Switch, Tactile.	2422 128 02742	
1606	Switch, Tactile.	2422 128 02742	
1660	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488	
1821	Ceramic Resonator.	4835 122 97102	
2001	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2002	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2003	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2004	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2006	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290	
2011	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2102	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2103	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2104	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2201	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2202	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2203	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2204	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2205	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2207	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2208	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2209	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2211	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2212	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2213	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2214	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2215	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280	
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 16654	
2220	Cap, 15p, 5%, 50V, Ceramic	3198 016 01590	
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2222	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2226	Cap, 33u, 20%, 25V, Electrolytic . .	2020 021 90124	
2227	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2247	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2248	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2249	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2330	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177	
2340	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495	
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320	
S 2343	Cap, 3n3, 10%, 2KV, Ceramic.	2020 558 90529	
2345	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020	
2401	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2402	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2404	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2405	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2407	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2409	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2420	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2426	Cap, 100n, 10%, 63V, Metalized Polyes ter.	2222 370 75104	
2428	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220	
2429	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2430	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2431	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2437	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2438	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2448	Cap, 220p, 10%, 500V, Ceramic. . . .	3198 019 42210	
2450	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91139	
2451	Cap, 15n, 10%, 50V, Polyester. . . .	2020 300 90575	
2451	0.01uF., 10%, 50V, Polyester, only 27	3198 138 20941	
2456	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176	
2457	Cap, 390n, 5%, 250V, Metalized Polypr opylene.	2222 479 90021	
2458	Cap, 2u2, 20%, 100V, Electrolytic. .	2020 021 91331	
2459	Cap, 680p, 10%, 500V, Ceramic. . . .	3198 019 46810	
2461	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020	
2462	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176	
2463	470pF., 10%, 2KV, Ceramic.	4835 122 47638	
S 2465	Cap, 10n, 5%, 1600V, Polypropylene .	2222 375 90154	
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050	
2473	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790	
2481	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740	
2482	Cap, 68n, 10%, 250V, Polyester . . .	2222 347 90234	
2484	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2485	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293	
2486	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2487	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2488	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2489	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2490	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710	
2491	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710	
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810	
2500	0.47uF., 250V, Polyester	4835 121 47569	
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
S 2507	Cap, 1n5, 10%, 1KV, Ceramic.	2020 558 90443	
2508	Cap, 470u, 20%, 200V, Electrolytic .	2020 024 90647	
S 2511	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020	
S 2518	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290	
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320	
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320	
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2530	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 021 91147	
2531	Cap, 1n, 2%, 50V, Polypropylene. . .	2020 310 90049	
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220	
2540	Cap, 100u, 20%, 25V, Electrolytic. .	2020 021 90547	
S 2545	1500pF., 250VAC, Ceramic	4835 122 47621	
S 2550	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2551	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91358	
2561	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020	
S 2562	Cap, 220p, 10%, 1KV, Ceramic	2020 558 90424	
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020	
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020	
2572	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330	
2575	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820	
2577	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020	
2586	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2604	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290	
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2613	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2615	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2619	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2622	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890	
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2629	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230	
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2631	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2679	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2681	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2821	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280	
2823	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2825	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2826	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090	
2827	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2828	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2829	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	
2830	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280	
2831	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	
2832	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280	

S = Safety Part Be sure to use exact replacement part.

TS2556C121 (continued)

	2833	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280		3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
	2834	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780		3401	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
	2835	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3402	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
	2836	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3403	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
	2837	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740		3405	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002
	2838	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3406	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
	2839	Cap, 1u, 5%, 50V, Metalized Polyester	2020 308 90124		3407	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002
	2840	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
	2841	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3409	1.5 ohm, 5%, 1/3W, Metal Film. . . .	4835 116 57664
	2842	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
	2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
	2844	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3420	470k, 5%, 1/10W, Metal Film.	4835 111 37407
	2845	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
	2913	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280		3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
	2914	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330		3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840
	2915	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606
	2916	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648		3425	150k, 5%, 1/10W, Metal Film.	4835 111 27045
	2917	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3426	39k, 5%, 1/10W, Metal Film	4835 111 27051
	2918	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330		3428	22k, 5%, 1/10W, Metal Film	4835 111 37441
	2919	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3429	27k, 5%, 1/10W, Metal Film	4835 111 37442
	2920	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648		3431	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
	2921	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3432	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
	2931	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280		3436	Res, 1K, 2%, 0,25W	4822 051 10102
	2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3437	10k, 5%, 1/10W, Metal Film	4835 111 37216
	2952	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3438	33k, 1/4W, Carbon Film	4835 110 57375
	2954	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
	2955	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3447	10k, 5%, 1/10W, Metal Film	4835 111 37216
	2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
	2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
	2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	S	3452	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63229
	2960	Cap, 220u, 20%, 50V, Electrolytic. .	3198 026 52210	S	3453	Res, 4R7, 5%, 5W, Wire Wound	2322 251 41478
	2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090	S	3454	Res, 33K, 5%, 1 1/3W, Metal Film . .	2322 194 63333
	2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090		3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
	2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090		3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
	3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3462	Res, 6K8, 5%, 5W, Metal Film	2322 257 41682
	3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
	3010	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610		3464	Res, 1K, 2%, 0,25W	4822 051 10102
	3013	Zero ohm,.	4835 111 27056	S	3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
	3014	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052		3466	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903
	3015	22k, 5%, 1/10W, Metal Film	4835 111 37441		3467	Res, 14K, 1%, 3/5W, Metal Film . . .	2322 156 21403
	3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810		3467	Res, 15K, 1%, 3/5W, Metal Film . . .	2322 156 21503
	3021	Res, 1K, 2%, 0,25W	4822 051 10102		3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
	3103	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3469	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
	3104	10k, 5%, 1/10W, Metal Film	4835 111 37216		3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
	3108	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703
	3109	10k, 5%, 1/10W, Metal Film	4835 111 37216		3481	Res, 100K, 1%, 3/5W, Metal Film. . .	2322 156 21004
	3123	75 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37276		3482	Res, 32K4, 1%, 3/5W, Metal Film. . .	2322 156 23243
	3200	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
	3201	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253		3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3203	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443	S	3485	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
	3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	S	3486	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3205	Res, 1K, 2%, 0,25W	4822 051 10102	S	3487	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3206	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	S	3488	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
	3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3490	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3209	22k, 5%, 1/10W, Metal Film	4835 111 37441	S	3491	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3212	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253	S	3492	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3213	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3495	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272
	3215	22k, 5%, 1/10W, Metal Film	4835 111 37441		3496	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3216	Zero ohm,.	4835 111 27056		3497	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3217	Res, 1M5, 5%, 1/8W, Metalized Glass.	2322 730 61155		3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
	3218	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225
	3219	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3503	10ohm, 120VAC, Positive Temperature C	
	3220	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432			oefficient	4835 116 47001
	3225	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S	3505	Surge Protector.	2422 549 43073
	3228	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
	3231	Zero ohm,.	4835 111 27056	S	3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333
	3232	Zero ohm,.	4835 111 27056	S	3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102
	3233	Zero ohm,.	4835 111 27056		3512	15k, 5%, 1/10W, Metal Film	4835 111 37458
	3243	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052		3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184
	3246	82k, 5%, 1/10W, Metal Film	4835 111 37277		3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204
	3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3515	2.5 ohm, 20%, 3.6W, Negative Temperat	
	3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010			ure Coefficient.	2122 612 00023
	3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340		3516	Res, 1K, 2%, 0,25W	4822 051 10102
	3250	Zero ohm,.	4835 111 27056		3517	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
	3251	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S	3518	Res, 0R22, 5%, 3W, Metal Film. . . .	2120 106 90548
	3252	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		3520	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
	3253	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		3521	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443
	3257	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3525	33 ohm, 5%, 1/3W, Metal Film	4835 116 57665
	3258	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3528	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3259	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3529	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3530	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
	3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3532	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3534	15k, 5%, 1/10W, Metal Film	4835 111 37458
	3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3536	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3537	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046	S	3542	4.7 Megohm, 5%, 1/2W, Metal Film . .	4835 116 57009
S	3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109		3570	15k, 5%, 1/10W, Metal Film	4835 111 37458
S	3341	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483		3571	Res, 150K, 1%, 3/5W, Metal Film. . .	2322 156 21504
S	3342	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483		3573	Res, 2K, 1%, 1/10W, Metalized Glass.	2120 108 92657
	3343	1.5k, 20%, 1/2W, Carbon Composition.	4835 110 47034		3574	33k, 5%, 1/10W, Metal Film	4835 111 37248
	3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290		3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
S	3345	VDR, DC, 1mA, 50V, MAX 115V	2322 593 13507		3577	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030

S = Safety Part Be sure to use exact replacement part.

TS2556C121 (continued)

3578	Res, 1K, 2%, 0,25W	4822 051 10102	
3579	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451	
3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3592	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3594	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3595	68k, 5%, 1/6W, Carbon Film	4835 111 37205	
3596	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3597	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3598	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3599	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3607	8.2k, 5%, 1/8W, Inline Package . . .	4835 111 97046	
3608	2.2k, 5%, 1/8W, Inline Package . . .	4835 111 97049	
3609	2.2k, 5%, Resistor Network	2120 108 93868	
3611	Res, 1K, 2%, 0,25W	4822 051 10102	
3612	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3613	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3615	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3617	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3619	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3629	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259	
3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3631	27k, 5%, 1/10W, Metal Film	4835 111 37442	
S 3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63479	
3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210	
3634	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3635	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3636	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3637	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3653	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3654	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3655	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3662	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3663	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3664	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3665	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3666	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376	
3667	27k, 5%, 1/10W, Metal Film	4835 111 37442	
3672	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3673	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3674	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231	
3675	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3676	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3677	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3680	680 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37271	
3681	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3682	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3683	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3684	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3821	15k, 5%, 1/10W, Metal Film	4835 111 37458	
3822	1.2k, 5%, 1/10W, Metal Film.	4835 111 27042	
3823	100k, 5%, 1/10W, Metal Film.	4835 111 37434	
3824	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3825	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3826	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3827	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3828	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3829	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272	
3830	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272	
3831	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198 011 03310	
3832	47 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37262	
3908	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3909	Res, 1K, 2%, 0,25W	4822 051 10102	
3910	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376	
3911	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230	
3912	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3913	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3914	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	
3915	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231	
3916	220 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37371	
3917	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3918	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3919	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376	
3920	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231	
3921	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230	
3922	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	
3923	220 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37371	
3924	39k, 5%, 1/10W, Metal Film	4835 111 27051	
3925	39k, 5%, 1/10W, Metal Film	4835 111 27051	
3926	39k, 5%, 1/10W, Metal Film	4835 111 27051	
3929	39k, 5%, 1/10W, Metal Film	4835 111 27051	
3930	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3931	Res, 1K, 2%, 0,25W	4822 051 10102	
3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810	
3951	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3953	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3955	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
3957	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
4001	Zero ohm,.	4835 111 27056	
4002	Zero ohm,.	4835 111 27056	
4004	Zero ohm,.	4835 111 27056	
4007	Zero ohm,.	4835 111 27056	
4009	Zero ohm,.	4835 111 27056	
4010	Zero ohm,.	4835 111 27056	
4011	Zero ohm,.	4835 111 27056	
4012	Zero ohm,.	4835 111 27056	
4013	Zero ohm,.	4835 111 27056	
4020	Zero ohm,.	4835 111 27056	
4051	Zero ohm,.	4835 111 27056	
4100	Zero ohm,.	4835 111 27056	
4101	Zero ohm,.	4835 111 27056	
4102	Zero ohm,.	4835 111 27056	
4103	Zero ohm,.	4835 111 27056	
4143	Zero ohm,.	4835 111 27056	
4144	Zero ohm,.	4835 111 27056	
4203	Zero ohm,.	4835 111 27056	
4207	Zero ohm,.	4835 111 27056	
4212	Zero ohm,.	4835 111 27056	
4214	Zero ohm,.	4835 111 27056	
4215	Zero ohm,.	4835 111 27056	
4216	Zero ohm,.	4835 111 27056	
4501	Zero ohm,.	4835 111 27056	
4602	Zero ohm,.	4835 111 27056	
4650	Zero ohm,.	4835 111 27056	
4651	Zero ohm,.	4835 111 27056	
4652	Zero ohm,.	4835 111 27056	
4654	Zero ohm,.	4835 111 27056	
4655	Zero ohm,.	4835 111 27056	
4684	Zero ohm,.	4835 111 27056	
4687	Zero ohm,.	4835 111 27056	
4831	Zero ohm,.	4835 111 27056	
4832	Zero ohm,.	4835 111 27056	
4833	Zero ohm,.	4835 111 27056	
4902	Zero ohm,.	4835 111 27056	
4903	Zero ohm,.	4835 111 27056	
4904	Zero ohm,.	4835 111 27056	
4905	Zero ohm,.	4835 111 27056	
4909	Zero ohm,.	4835 111 27056	
4911	Zero ohm,.	4835 111 27056	
4912	Zero ohm,.	4835 111 27056	
4914	Zero ohm,.	4835 111 27056	
4957	Zero ohm,.	4835 111 27056	
4999	Zero ohm,.	4835 111 27056	
5000	Coil, 5u6.	3198 018 25680	
5004	Coil, 820n	2422 535 97314	
5201	Coil, 22u.	3198 018 22290	
5202	Coil, 6u8.	3198 018 16880	
5342	22uH., 10%, Coil, Peaking.	4835 157 67069	
S 5445	Transformer, L.O.T., models ending in C101, C121, and C125	2422 531 02327	
S 5445	Transformer, L.O.T., models ending in C221 and C225.	3128 138 20941	
5451	Coil, 27u.	2422 535 96614	
5457	Coil, Linear Correction.	3128 138 53241	
5461	Transformer.	3128 138 33811	
5480	Coil, 27u.	2422 535 97334	
5480	Coil, 39u.	2422 535 97336	
5480	33uH., Peaking Coil, only in 25. . .	4835 157 58205	
S 5500	Filter, Mains, 5mH, 2A	2422 549 43432	
5516	100uH., Coil	4835 157 67078	
5518	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5521	Coil, 2u2.	3198 018 12280	
5540	Coil, 4u7.	3198 018 14780	
S 5545	Transfomer,.	2422 531 02314	
5551	27uH., 5%, Coil, Peaking	4835 157 67052	
5552	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5572	100uH., Coil	4835 157 67078	
5573	100uH., Coil	4835 157 67078	
5576	100uH., Coil	4835 157 67078	
5577	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5600	Coil, 8u2.	3198 018 18280	
5601	Coil, 8u2.	3198 018 18280	
5620	Coil, 6u8.	3198 018 16880	
5821	Coil, 100u	3198 018 21010	
5822	Coil, 18u.	3198 018 21890	
6008	Zener, 33 Volt BZX79-C33	4835 130 37904	
6113	Zener Diode, 6.8 volt.	9340 386 40115	
6211	Diode, 1N4148.	4835 130 37048	
6212	Diode, 1N4148.	4835 130 37048	
6213	Diode, 1N4148.	4835 130 37048	
6331	Diode.	4835 130 37294	
6333	Diode.	4835 130 37294	
6335	Diode.	4835 130 37294	
6401	Diode.	4835 130 37094	
6402	Zener, 33 Volt, BZX79-C33.	4835 130 37904	
6403	Diode.	4835 130 37094	

S = Safety Part Be sure to use exact replacement part.

TS2556C121 (continued)

	6404	Diode.	4835 130 37094
	6449	Diode, 1N4148.	4835 130 37048
	6450	Diode, 1N4148.	4835 130 37048
	6460	Diode, Rect, BY228/20	9336 215 80112
	6463	Diode, 1N4148.	4835 130 37048
	6464	Zener Diode, 6.2 volt.	9337 242 70133
	6465	Diode, BYD33J.	4835 130 37094
	6466	Diode, BYD33J.	4835 130 37094
	6480	Diode, Zener	4835 130 37947
	6481	Diode, 1N4148.	4835 130 37048
	6485	Diode, BYD33J.	4835 130 37094
	6486	Diode, EGP20DL-530	4835 130 37919
	6487	Diode.	4835 130 37094
	6488	Diode, Rect, BYV27-200.	9322 126 72673
	6490	Diode, Rect, BYV27-200.	9322 126 72673
	6505	Diode, Bridge Rect, GBU6JL-7002	9322 138 08667
	6507	Diode, BYD33J.	4835 130 37094
	6508	Diode, BYD33J.	4835 130 37094
	6510	Zener Diode, 20 volt	9331 178 60133
	6511	Diode, BYV95C.	4835 130 37052
	6512	Diode, Rect, BY228/20	4822 130 41275
	6513	Diode, Rect, BY228/20	4822 130 41275
	6514	Zener, 18 Volt, BZX79-C18.	4835 130 37908
	6540	Diode.	4835 130 37294
	6550	Diode, Rect, BY229X-800	9340 380 30127
	6560	Diode, EGP20DL-530	4835 130 37919
	6580	Diode, Rect, SB140.	9339 577 60673
	6584	Diode, 1N4148.	4835 130 37048
	6585	Diode, 1N4148.	4835 130 37048
	6591	Diode, BAS216.	4835 130 37905
	6601	Diode, Zener	4835 130 37684
	6606	Zener, 4.7 Volt, BZX79-C4V7.	4835 130 37005
	6607	Zener, 6.8 Volt, BZX79-C6V8.	4835 130 37945
	6690	LED, LTL-307P.	4835 130 97096
	6821	Zener Diode, 9.1 volt.	9331 177 80133
	6822	Fixed Coil	4835 130 37048
	6951	Diode, BAS216.	4835 130 37905
	6961	Diode, BAS216.	4835 130 37905
	7250	IC,.	9352 620 26112
	7251	IC, LM317T	9337 220 80682
	7254	Transistor, NPN, BC847B.	4822 130 60511
	7256	Transistor, NPN, BC847B.	4822 130 60511
	7258	Transistor, NPN, BC847B.	4822 130 60511
	7263	Transistor, PNP, BC857B.	5322 130 60508
	7266	Transistor, NPN, BC847B.	4822 130 60511
	7330	IC,.	9352 184 10112
	7401	IC,.	9322 121 47687
	7460	Transistor, NPN, BU1508DX.	9340 170 50127
	7461	Transistor, NPN, BF819	9335 354 50127
	7462	Transistor, BC547B	4835 130 47055
	7463	Transistor, BC557B	4835 130 47409
	7480	IC,.	9322 028 93682
	7481	Transistor, BC557B	4835 130 47409
	7482	Transistor, PNP, BC857B.	5322 130 60508
	7518	STH8NA60FI SMPS FET	9322 068 92687
	7518	STH10NC60FI SMPS FET.	9322 155 66687
	7520	IC, MC44603A	4835 209 88537
	7570	IC,.	9337 711 00676
S	7581	Coupler, TCDT1101G	9338 431 30682
	7590	Transistor, NPN, BC847B.	4822 130 60511
	7591	Transistor, NPN, BC847B.	4822 130 60511
	7592	Transistor, NPN, BC847B.	4822 130 60511
	7600	IC, SAA5543PS/M4/1046 L90US1-1.4	4835 310 57477
	7601	IC, ST24W04B6.	9322 097 23682
	7603	Transistor, NPN, BC337	9331 796 00126
	7604	Transistor, NPN, BC847B.	4822 130 60511
	7605	Transistor, NPN, BC847B.	4822 130 60511
	7608	Transistor, NPN, BC847B.	4822 130 60511
	7609	Transistor, NPN, BC847B.	4822 130 60511
	7680	IR Receiver.	9322 127 53667
	7821	IC,.	9352 374 70112
	7822	IC, HEF4052BT.	9333 729 50653
	7823	Transistor, NPN, BC337-25.	3198 020 43530
	7904	Transistor, NPN, BC847B.	4822 130 60511
	7905	Transistor, NPN, BC847B.	4822 130 60511
	7906	Transistor, NPN, BC847B.	4822 130 60511
	7908	Transistor, NPN, BC847B.	4822 130 60511
	7909	Transistor, NPN, BC847B.	4822 130 60511
	7910	Transistor, NPN, BC847B.	4822 130 60511
	7951	IC,.	4822 209 13706
	9423	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	CBA	00EMF806A002 Main Chassis Board Asm.	00EM F80 6A002

Cabinet & Accessory Parts

		Cabinet & Accessory Parts	
S	AC01	Mainscord, 125V, 10A	3135 010 03831
S	AC02	Anode Clip	4835 256 97264
	AC03	Cabinet Back	3139 124 27731
	AC05	Chassis Guide.	3139 124 31381
	AC06	Control Buttons.	3139 124 27351
S	AC07	Convergence and Purity Assembly.	2422 549 43385
S	AC08	CRT A63AFW36X (C121 Version)	9301 763 20443
S	AC09	Coil, Degaussing	3121 218 62961
	AC10	Holder, Degaussing (4 Used).	3135 013 01641
	AC11	Light Guide.	3139 124 26461
	REMOTE	Remote Transmitter, RC282901/04.	3139 228 81451
	AC16	Speaker, 16R, 1W5 (2 Used)	2422 264 00343
S	AC18	Yoke (C121 Version).	3321 203 00121
	AC19	Yoke Wedge (3 Used).	4835 535 27001
	AC21	Battery, 1.5V AA, 2-Pack, (Not Shown	9299 000 10137
	AC24	Spring	3139 121 26231
	AC13	Owner's Manual, English.	3135 015 10741
	AC04	Cabinet Front,	3139 137 52851
	AC14	Power Button	3139 124 26443

S = Safety Part Be sure to use exact replacement part.

TS2556C221 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts		
S 0127	3.15 Amp Fuse, ...	3122 358 72141	
0152	Cable, DIP, 6 Pin, 400mm	3104 301 09421	
0153	4 Pin Cable.	3104 301 09431	
0212	Connector, 2 Pin	2422 025 15396	
0220	4 Pin Board Connector.	2422 025 04852	
0223	3 Pin Board Connector.	2422 026 04963	
0224	1 Pin Board Connector.	2422 034 20021	
0228	1 Pin Board Connector.	2422 034 20021	
0234	Connector, 4 Pin	2422 025 15847	
S 0243	Connector, 6 Pin	2422 025 04854	
0244	4 Pin Board Connector.	2422 025 04852	
S 0245	Connector, 6 Pin	2422 025 04854	
S 0254	CRT Socket (9 Pin)	2422 500 80022	
0267	Connector, 3 Pin	2412 020 00725	
1000	Tuner.	2422 542 90057	
1001	Filter	2422 549 42501	
1003	45 MHz SAW, Filter,.	2422 549 42433	
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807	
1208	Crystal Resonator.	4835 242 77276	
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10869	
S 1571	1 Amp, Radial Fuse,.	4835 253 97162	
S 1572	1 Amp, Radial Fuse,.	4835 253 97162	
S 1580	Relay, 12V	2422 132 07317	
1600	Switch, Tactile.	2422 128 02742	
1601	Switch, Tactile.	2422 128 02742	
1602	Switch, Tactile.	2422 128 02742	
1603	Switch, Tactile.	2422 128 02742	
1606	Switch, Tactile.	2422 128 02742	
1660	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488	
1821	Ceramic Resonator.	4835 122 97102	
2001	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2002	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2003	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2004	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2006	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290	
2011	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2102	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2103	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2104	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2201	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2202	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2203	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2204	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2205	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2207	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2208	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2209	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2211	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2212	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2213	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2214	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2215	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280	
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 16654	
2220	Cap, 15p, 5%, 50V, Ceramic	3198 016 01590	
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2222	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2226	Cap, 33u, 20%, 25V, Electrolytic . .	2020 021 90124	
2227	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2247	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2248	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2249	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2330	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177	
2340	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495	
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320	
S 2343	Cap, 3n3, 10%, 2KV, Ceramic.	2020 558 90529	
2345	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020	
2401	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2402	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2404	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2405	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2407	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2409	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2420	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2426	Cap, 100n, 10%, 63V, Metalized Polyes ter.	2222 370 75104	
2428	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220	
2429	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2430	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2431	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2437	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2438	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2448	Cap, 220p, 10%, 500V, Ceramic. . . .	3198 019 42210	
2450	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91139	
2451	Cap, 15n, 10%, 50V, Polyester. . . .	2020 300 90575	
2451	0.01uF., 10%, 50V, Polyester, only 27	3198 138 20941	
2456	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176	
2457	Cap, 390n, 5%, 250V, Metalized Polypr opylene.	2222 479 90021	
2458	Cap, 2u2, 20%, 100V, Electrolytic. .	2020 021 91331	
2459	Cap, 680p, 10%, 500V, Ceramic. . . .	3198 019 46810	
2461	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020	
2462	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176	
2463	470pF., 10%, 2KV, Ceramic.	4835 122 47638	
S 2465	Cap, 10n, 5%, 1600V, Polypropylene .	2222 375 90154	
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050	
2473	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790	
2481	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740	
2482	Cap, 68n, 10%, 250V, Polyester . . .	2222 347 90234	
2484	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2485	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293	
2486	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2487	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2488	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2489	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2490	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710	
2491	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710	
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810	
2500	0.47uF., 250V, Polyester	4835 121 47569	
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
S 2507	Cap, 1n5, 10%, 1KV, Ceramic.	2020 558 90443	
2508	Cap, 470u, 20%, 200V, Electrolytic .	2020 024 90647	
S 2511	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020	
S 2518	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290	
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320	
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320	
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2530	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 021 91147	
2531	Cap, 1n, 2%, 50V, Polypropylene. . .	2020 310 90049	
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220	
2540	Cap, 100u, 20%, 25V, Electrolytic. .	2020 021 90547	
S 2545	1500pF., 250VAC, Ceramic	4835 122 47621	
S 2550	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2551	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91358	
2561	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020	
S 2562	Cap, 220p, 10%, 1KV, Ceramic	2020 558 90424	
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020	
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020	
2572	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330	
2575	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820	
2577	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020	
2586	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2604	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290	
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2613	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2615	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2619	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2622	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890	
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2629	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230	
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2631	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2679	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2681	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2821	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280	
2823	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2825	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2826	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090	
2827	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2828	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2829	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	
2830	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280	
2831	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	
2832	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280	

S = Safety Part Be sure to use exact replacement part.

TS2556C221 (continued)

2833	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280		3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
2834	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780		3401	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2835	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3402	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2836	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3403	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2837	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740		3405	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002
2838	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3406	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2839	Cap, 1u, 5%, 50V, Metalized Polyester	2020 308 90124		3407	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002
2840	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2841	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3409	1.5 ohm, 5%, 1/3W, Metal Film. . . .	4835 116 57664
2842	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2844	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3420	470k, 5%, 1/10W, Metal Film.	4835 111 37407
2845	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2913	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280		3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2914	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330		3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840
2915	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606
2916	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648		3425	150k, 5%, 1/10W, Metal Film.	4835 111 27045
2917	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3426	39k, 5%, 1/10W, Metal Film	4835 111 27051
2918	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330		3428	22k, 5%, 1/10W, Metal Film	4835 111 37441
2919	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3429	27k, 5%, 1/10W, Metal Film	4835 111 37442
2920	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648		3431	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
2921	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3432	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
2931	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280		3436	Res, 1K, 2%, 0,25W	4822 051 10102
2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3437	10k, 5%, 1/10W, Metal Film	4835 111 37216
2952	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3438	33k, 1/4W, Carbon Film	4835 110 57375
2954	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
2955	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3447	10k, 5%, 1/10W, Metal Film	4835 111 37216
2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	S	3452	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63229
2960	Cap, 220u, 20%, 50V, Electrolytic. .	3198 026 52210	S	3453	Res, 4R7, 5%, 5W, Wire Wound	2322 251 41478
2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090	S	3454	Res, 33K, 5%, 1 1/3W, Metal Film . .	2322 194 63333
2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090		3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090		3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3462	Res, 6K8, 5%, 5W, Metal Film	2322 257 41682
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3010	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610		3464	Res, 1K, 2%, 0,25W	4822 051 10102
3013	Zero ohm,.	4835 111 27056	S	3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
3014	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052		3466	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903
3015	22k, 5%, 1/10W, Metal Film	4835 111 37441		3467	Res, 14K, 1%, 3/5W, Metal Film . . .	2322 156 21403
3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810		3467	Res, 15K, 1%, 3/5W, Metal Film . . .	2322 156 21503
3021	Res, 1K, 2%, 0,25W	4822 051 10102		3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3103	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3469	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
3104	10k, 5%, 1/10W, Metal Film	4835 111 37216		3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3108	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703
3109	10k, 5%, 1/10W, Metal Film	4835 111 37216		3481	Res, 100K, 1%, 3/5W, Metal Film. . .	2322 156 21004
3123	75 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37276		3482	Res, 32K4, 1%, 3/5W, Metal Film. . .	2322 156 23243
3200	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3201	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253		3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3203	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443	S	3485	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	S	3486	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3205	Res, 1K, 2%, 0,25W	4822 051 10102	S	3487	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3206	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	S	3488	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3490	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3209	22k, 5%, 1/10W, Metal Film	4835 111 37441	S	3491	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3212	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253	S	3492	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3213	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3495	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272
3215	22k, 5%, 1/10W, Metal Film	4835 111 37441		3496	10k, 5%, 1/10W, Metal Film	4835 111 37216
3216	Zero ohm,.	4835 111 27056		3497	10k, 5%, 1/10W, Metal Film	4835 111 37216
3217	Res, 1M5, 5%, 1/8W, Metalized Glass.	2322 730 61155		3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3218	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225
3219	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3503	10ohm, 120VAC, Positive Temperature C	
3220	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432			oefficient	4835 116 47001
3225	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S	3505	Surge Protector.	2422 549 43073
3228	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3231	Zero ohm,.	4835 111 27056	S	3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333
3232	Zero ohm,.	4835 111 27056	S	3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102
3233	Zero ohm,.	4835 111 27056		3512	15k, 5%, 1/10W, Metal Film	4835 111 37458
3243	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052		3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184
3246	82k, 5%, 1/10W, Metal Film	4835 111 37277		3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204
3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3515	2.5 ohm, 20%, 3.6W, Negative Temperat	
3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010			ure Coefficient.	2122 612 00023
3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340		3516	Res, 1K, 2%, 0,25W	4822 051 10102
3250	Zero ohm,.	4835 111 27056		3517	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3251	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S	3518	Res, 0R22, 5%, 3W, Metal Film. . . .	2120 106 90548
3252	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		3520	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3253	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		3521	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443
3257	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3525	33 ohm, 5%, 1/3W, Metal Film	4835 116 57665
3258	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3528	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3259	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3529	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3530	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3532	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3534	15k, 5%, 1/10W, Metal Film	4835 111 37458
3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3536	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3537	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046	S	3542	4.7 Megohm, 5%, 1/2W, Metal Film . .	4835 116 57009
S 3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109		3570	15k, 5%, 1/10W, Metal Film	4835 111 37458
S 3341	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483		3571	Res, 150K, 1%, 3/5W, Metal Film. . .	2322 156 21504
S 3342	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483		3573	Res, 2K, 1%, 1/10W, Metalized Glass.	2120 108 92657
3343	1.5k, 20%, 1/2W, Carbon Composition.	4835 110 47034		3574	33k, 5%, 1/10W, Metal Film	4835 111 37248
3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290		3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
S 3345	VDR, DC, 1mA, 50V, MAX 115V	2322 593 13507		3577	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030

S = Safety Part Be sure to use exact replacement part.

TS2556C221 (continued)

3578	Res, 1K, 2%, 0,25W	4822 051 10102	
3579	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451	
3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3592	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3594	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3595	68k, 5%, 1/6W, Carbon Film	4835 111 37205	
3596	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3597	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3598	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3599	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3607	8.2k, 5%, 1/8W, Inline Package . . .	4835 111 97046	
3608	2.2k, 5%, 1/8W, Inline Package . . .	4835 111 97049	
3609	2.2k, 5%, Resistor Network	2120 108 93868	
3611	Res, 1K, 2%, 0,25W	4822 051 10102	
3612	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3613	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3615	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3617	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3619	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3629	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259	
3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3631	27k, 5%, 1/10W, Metal Film	4835 111 37442	
S 3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63479	
3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210	
3634	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3635	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3636	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3637	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3653	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3654	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3655	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3662	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3663	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3664	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3665	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3666	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376	
3667	27k, 5%, 1/10W, Metal Film	4835 111 37442	
3672	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3673	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3674	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231	
3675	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3676	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3677	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3680	680 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37271	
3681	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3682	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3683	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3684	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3821	15k, 5%, 1/10W, Metal Film	4835 111 37458	
3822	1.2k, 5%, 1/10W, Metal Film.	4835 111 27042	
3823	100k, 5%, 1/10W, Metal Film.	4835 111 37434	
3824	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3825	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3826	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3827	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3828	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3829	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272	
3830	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272	
3831	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198 011 03310	
3832	47 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37262	
3908	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3909	Res, 1K, 2%, 0,25W	4822 051 10102	
3910	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376	
3911	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230	
3912	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3913	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3914	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	
3915	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231	
3916	220 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37371	
3917	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3918	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3919	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376	
3920	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231	
3921	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230	
3922	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	
3923	220 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37371	
3924	39k, 5%, 1/10W, Metal Film	4835 111 27051	
3925	39k, 5%, 1/10W, Metal Film	4835 111 27051	
3926	39k, 5%, 1/10W, Metal Film	4835 111 27051	
3929	39k, 5%, 1/10W, Metal Film	4835 111 27051	
3930	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3931	Res, 1K, 2%, 0,25W	4822 051 10102	
3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810	
3951	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3953	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3955	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
3957	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
4001	Zero ohm,.	4835 111 27056	
4002	Zero ohm,.	4835 111 27056	
4004	Zero ohm,.	4835 111 27056	
4007	Zero ohm,.	4835 111 27056	
4009	Zero ohm,.	4835 111 27056	
4010	Zero ohm,.	4835 111 27056	
4011	Zero ohm,.	4835 111 27056	
4012	Zero ohm,.	4835 111 27056	
4013	Zero ohm,.	4835 111 27056	
4020	Zero ohm,.	4835 111 27056	
4051	Zero ohm,.	4835 111 27056	
4100	Zero ohm,.	4835 111 27056	
4101	Zero ohm,.	4835 111 27056	
4102	Zero ohm,.	4835 111 27056	
4103	Zero ohm,.	4835 111 27056	
4143	Zero ohm,.	4835 111 27056	
4144	Zero ohm,.	4835 111 27056	
4203	Zero ohm,.	4835 111 27056	
4207	Zero ohm,.	4835 111 27056	
4212	Zero ohm,.	4835 111 27056	
4214	Zero ohm,.	4835 111 27056	
4215	Zero ohm,.	4835 111 27056	
4216	Zero ohm,.	4835 111 27056	
4501	Zero ohm,.	4835 111 27056	
4602	Zero ohm,.	4835 111 27056	
4650	Zero ohm,.	4835 111 27056	
4651	Zero ohm,.	4835 111 27056	
4652	Zero ohm,.	4835 111 27056	
4654	Zero ohm,.	4835 111 27056	
4655	Zero ohm,.	4835 111 27056	
4684	Zero ohm,.	4835 111 27056	
4687	Zero ohm,.	4835 111 27056	
4831	Zero ohm,.	4835 111 27056	
4832	Zero ohm,.	4835 111 27056	
4833	Zero ohm,.	4835 111 27056	
4902	Zero ohm,.	4835 111 27056	
4903	Zero ohm,.	4835 111 27056	
4904	Zero ohm,.	4835 111 27056	
4905	Zero ohm,.	4835 111 27056	
4909	Zero ohm,.	4835 111 27056	
4911	Zero ohm,.	4835 111 27056	
4912	Zero ohm,.	4835 111 27056	
4914	Zero ohm,.	4835 111 27056	
4957	Zero ohm,.	4835 111 27056	
4999	Zero ohm,.	4835 111 27056	
5000	Coil, 5u6.	3198 018 25680	
5004	Coil, 820n	2422 535 97314	
5201	Coil, 22u.	3198 018 22290	
5202	Coil, 6u8.	3198 018 16880	
5342	22uH., 10%, Coil, Peaking.	4835 157 67069	
S 5445	Transformer, L.O.T., models ending in C101, C121, and C125	2422 531 02327	
S 5445	Transformer, L.O.T., models ending in C221 and C225.	3128 138 20941	
5451	Coil, 27u.	2422 535 96614	
5457	Coil, Linear Correction.	3128 138 53241	
5461	Transformer.	3128 138 33811	
5480	Coil, 27u.	2422 535 97334	
5480	Coil, 39u.	2422 535 97336	
5480	33uH., Peaking Coil, only in 25. . .	4835 157 58205	
S 5500	Filter, Mains, 5mH, 2A	2422 549 43432	
5516	100uH., Coil	4835 157 67078	
5518	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5521	Coil, 2u2.	3198 018 12280	
5540	Coil, 4u7.	3198 018 14780	
S 5545	Transfomer,.	2422 531 02314	
5551	27uH., 5%, Coil, Peaking	4835 157 67052	
5552	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5572	100uH., Coil	4835 157 67078	
5573	100uH., Coil	4835 157 67078	
5576	100uH., Coil	4835 157 67078	
5577	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5600	Coil, 8u2.	3198 018 18280	
5601	Coil, 8u2.	3198 018 18280	
5620	Coil, 6u8.	3198 018 16880	
5821	Coil, 100u	3198 018 21010	
5822	Coil, 18u.	3198 018 21890	
6008	Zener, 33 Volt BZX79-C33	4835 130 37904	
6113	Zener Diode, 6.8 volt.	9340 386 40115	
6211	Diode, 1N4148.	4835 130 37048	
6212	Diode, 1N4148.	4835 130 37048	
6213	Diode, 1N4148.	4835 130 37048	
6331	Diode.	4835 130 37294	
6333	Diode.	4835 130 37294	
6335	Diode.	4835 130 37294	
6401	Diode.	4835 130 37094	
6402	Zener, 33 Volt, BZX79-C33.	4835 130 37904	
6403	Diode.	4835 130 37094	

S = Safety Part Be sure to use exact replacement part.

TS2556C221 (continued)

6404	Diode.	4835 130 37094
6449	Diode, 1N4148.	4835 130 37048
6450	Diode, 1N4148.	4835 130 37048
6460	Diode, Rect, BY228/20	9336 215 80112
6463	Diode, 1N4148.	4835 130 37048
6464	Zener Diode, 6.2 volt.	9337 242 70133
6465	Diode, BYD33J.	4835 130 37094
6466	Diode, BYD33J.	4835 130 37094
6480	Diode, Zener	4835 130 37947
6481	Diode, 1N4148.	4835 130 37048
6485	Diode, BYD33J.	4835 130 37094
6486	Diode, EGP20DL-530	4835 130 37919
6487	Diode.	4835 130 37094
6488	Diode, Rect, BYV27-200.	9322 126 72673
6490	Diode, Rect, BYV27-200.	9322 126 72673
6505	Diode, Bridge Rect, GBU6JL-7002	9322 138 08667
6507	Diode, BYD33J.	4835 130 37094
6508	Diode, BYD33J.	4835 130 37094
6510	Zener Diode, 20 volt	9331 178 60133
6511	Diode, BYV95C.	4835 130 37052
6512	Diode, Rect, BY228/20	4822 130 41275
6513	Diode, Rect, BY228/20	4822 130 41275
6514	Zener, 18 Volt, BZX79-C18.	4835 130 37908
6540	Diode.	4835 130 37294
6550	Diode, Rect, BY229X-800	9340 380 30127
6560	Diode, EGP20DL-530	4835 130 37919
6580	Diode, Rect, SB140.	9339 577 60673
6584	Diode, 1N4148.	4835 130 37048
6585	Diode, 1N4148.	4835 130 37048
6591	Diode, BAS216.	4835 130 37905
6601	Diode, Zener	4835 130 37684
6606	Zener, 4.7 Volt, BZX79-C4V7.	4835 130 37005
6607	Zener, 6.8 Volt, BZX79-C6V8.	4835 130 37945
6690	LED, LTL-307P.	4835 130 97096
6821	Zener Diode, 9.1 volt.	9331 177 80133
6822	Fixed Coil	4835 130 37048
6951	Diode, BAS216.	4835 130 37905
6961	Diode, BAS216.	4835 130 37905
7250	IC,.	9352 620 26112
7251	IC, LM317T	9337 220 80682
7254	Transistor, NPN, BC847B.	4822 130 60511
7256	Transistor, NPN, BC847B.	4822 130 60511
7258	Transistor, NPN, BC847B.	4822 130 60511
7263	Transistor, PNP, BC857B.	5322 130 60508
7266	Transistor, NPN, BC847B.	4822 130 60511
7330	IC,.	9352 184 10112
7401	IC,.	9322 121 47687
7460	Transistor, NPN, BU1508DX.	9340 170 50127
7461	Transistor, NPN, BF819	9335 354 50127
7462	Transistor, BC547B	4835 130 47055
7463	Transistor, BC557B	4835 130 47409
7480	IC,.	9322 028 93682
7481	Transistor, BC557B	4835 130 47409
7482	Transistor, PNP, BC857B.	5322 130 60508
7518	STH8NA60FI SMPS FET	9322 068 92687
7518	STH10NC60FI SMPS FET.	9322 155 66687
7520	IC, MC44603A	4835 209 88537
7570	IC,.	9337 711 00676
S 7581	Coupler, TCDT1101G	9338 431 30682
7590	Transistor, NPN, BC847B.	4822 130 60511
7591	Transistor, NPN, BC847B.	4822 130 60511
7592	Transistor, NPN, BC847B.	4822 130 60511
7600	IC, SAA5543PS/M4/1046 L90US1-1.4	4835 310 57477
7601	IC, ST24W04B6.	9322 097 23682
7603	Transistor, NPN, BC337	9331 796 00126
7604	Transistor, NPN, BC847B.	4822 130 60511
7605	Transistor, NPN, BC847B.	4822 130 60511
7608	Transistor, NPN, BC847B.	4822 130 60511
7609	Transistor, NPN, BC847B.	4822 130 60511
7680	IR Receiver.	9322 127 53667
7821	IC,.	9352 374 70112
7822	IC, HEF4052BT.	9333 729 50653
7823	Transistor, NPN, BC337-25.	3198 020 43530
7904	Transistor, NPN, BC847B.	4822 130 60511
7905	Transistor, NPN, BC847B.	4822 130 60511
7906	Transistor, NPN, BC847B.	4822 130 60511
7908	Transistor, NPN, BC847B.	4822 130 60511
7909	Transistor, NPN, BC847B.	4822 130 60511
7910	Transistor, NPN, BC847B.	4822 130 60511
7951	IC,.	4822 209 13706
9423	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
CBA	00EMF806A002 Main Chassis Board Asm.	00EM F80 6A002

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Mainscord, 125V, 10A	3135 010 03831
S AC02	Anode Clip	4835 256 97264
AC03	Cabinet Back	3139 124 27731
AC05	Chassis Guide.	3139 124 31381
AC06	Control Buttons.	3139 124 27351
S AC07	Convergence and Purity Assembly.	2422 549 43385
S AC08	CRT A63AFW36X (C121 Version)	9301 763 20443
S AC09	Coil, Degaussing	3121 218 62961
AC10	Holder, Degaussing (4 Used).	3135 013 01641
AC11	Light Guide.	3139 124 26461
REMOTE	Remote Transmitter, RC282901/04.	3139 228 81451
AC16	Speaker, 16R, 1W5 (2 Used)	2422 264 00343
S AC18	Yoke (C121 Version).	3321 203 00121
AC19	Yoke Wedge (3 Used).	4835 535 27001
AC21	Battery, 1.5V AA, 2-Pack, (Not Shown	9299 000 10137
AC24	Spring	3139 121 26231
AC13	Owner's Manual, English.	3135 015 10741
AC04	Cabinet Front,	3139 137 52851
AC14	Power Button	3139 124 26443

S = Safety Part Be sure to use exact replacement part.

TS2575C121 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts	
S 0127	3.15 Amp Fuse, ...	3122 358 72141
0152	Cable, DIP, 6 Pin, 400mm	3104 301 09421
0153	4 Pin Cable.	3104 301 09431
0212	Connector, 2 Pin	2422 025 15396
0220	4 Pin Board Connector.	2422 025 04852
0223	Socket, Cinch, 6 Pin	2422 026 04827
0224	1 Pin Board Connector.	2422 034 20021
0228	1 Pin Board Connector.	2422 034 20021
0234	Connector, 4 Pin	2422 025 12479
S 0243	Connector, 6 Pin	2422 025 04854
0244	4 Pin Board Connector.	2422 025 04852
S 0245	Connector, 6 Pin	2422 025 04854
S 0254	CRT Socket (9 Pin)	2422 500 80022
0267	Connector, 3 Pin	2412 020 00725
1000	Tuner.	2422 542 90057
1003	45 MHz SAW, Filter,.	2422 549 42433
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807
1208	Crystal Resonator.	4835 242 77276
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10869
S 1572	1 Amp, Radial Fuse,.	4835 253 97162
S 1573	2.5 Amp Fuse, Radial,.	2422 086 10422
S 1580	Relay, 12V	2422 132 07317
1600	Switch, Tactile.	2422 128 02742
1601	Switch, Tactile.	2422 128 02742
1602	Switch, Tactile.	2422 128 02742
1603	Switch, Tactile.	2422 128 02742
1606	Switch, Tactile.	2422 128 02742
1660	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488
1822	Crystal Resonator, 18MHz432, 12 Pin, HC49/U A	2422 543 00842
2001	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2002	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2003	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2004	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2011	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2101	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2102	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2103	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2104	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2111	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2112	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2115	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2201	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2205	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2208	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2209	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2211	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2212	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2213	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2214	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2215	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 16654
2220	Cap, 15p, 5%, 50V, Ceramic	3198 016 01590
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2222	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2226	Cap, 33u, 20%, 25V, Electrolytic . .	2020 021 90124
2227	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2247	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2248	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2249	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2330	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2340	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320
S 2343	Cap, 3n3, 10%, 2KV, Ceramic.	2020 558 90529
2345	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2401	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2402	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2404	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2405	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2407	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2409	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2420	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2426	Cap, 100n, 10%, 63V, Metalized Polyester.	2222 370 75104
2428	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2429	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2430	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2431	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2437	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2438	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2448	Cap, 220p, 10%, 500V, Ceramic. . . .	3198 019 42210
2450	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91139
2451	Cap, 15n, 10%, 50V, Polyester. . . .	2020 300 90575
2451	0.01uF., 10%, 50V, Polyester, only 27	3198 138 20941
2456	Cap, 47n, 10%, 250V, Metalized Polyester.	2222 368 90176
2457	Cap, 390n, 5%, 250V, Metalized Polypropylene.	2222 479 90021
2458	Cap, 2u2, 20%, 100V, Electrolytic. .	2020 021 91331
2459	Cap, 680p, 10%, 500V, Ceramic. . . .	3198 019 46810
2461	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2462	Cap, 47n, 10%, 250V, Metalized Polyester.	2222 368 90176
2463	470pF., 10%, 2KV, Ceramic.	4835 122 47638
S 2465	Cap, 10n, 5%, 1600V, Polypropylene .	2222 375 90154
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050
2473	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2481	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2482	Cap, 68n, 10%, 250V, Polyester . . .	2222 347 90234
2484	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2485	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2486	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2487	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2488	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2489	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2490	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2491	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810
2500	0.47uF., 250V, Polyester	4835 121 47569
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
S 2507	Cap, 1n5, 10%, 1KV, Ceramic.	2020 558 90443
2508	Cap, 470u, 20%, 200V, Electrolytic .	2020 024 90647
S 2511	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
S 2518	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2530	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 021 91147
2531	Cap, 1n, 2%, 50V, Polypropylene. . .	2020 310 90049
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2540	Cap, 100u, 20%, 25V, Electrolytic. .	2020 021 90547
S 2545	1500pF., 250VAC, Ceramic	4835 122 47621
S 2550	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2551	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91358
2561	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
S 2562	Cap, 220p, 10%, 1KV, Ceramic	2020 558 90424
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2571	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91353
2572	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2575	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2586	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2604	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2613	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2615	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2619	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2622	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2629	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2679	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2681	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2850	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810
2851	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2852	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2853	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2854	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2855	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2856	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2858	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2859	Cap, 15p, 5%, 50V, Ceramic	3198 016 01590
2860	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2861	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040

S = Safety Part Be sure to use exact replacement part.

TS2575C121 (continued)

2862	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	S 3345	VDR, DC, 1mA, 50V, MAX 115V	2322 593 13507
2863	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
2864	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	3401	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2865	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	3402	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2866	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	3403	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2867	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	3405	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002
2868	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780	3406	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2869	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	3407	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002
2870	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2871	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	3409	1.5 ohm, 5%, 1/3W, Metal Film. . . .	4835 116 57664
2874	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790	3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2875	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790	3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2877	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	3420	470k, 5%, 1/10W, Metal Film.	4835 111 37407
2882	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2883	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2884	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840
2887	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810	3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606
2888	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	3425	150k, 5%, 1/10W, Metal Film.	4835 111 27045
2889	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	3426	39k, 5%, 1/10W, Metal Film	4835 111 27051
2891	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390	3428	22k, 5%, 1/10W, Metal Film	4835 111 37441
2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	3429	27k, 5%, 1/10W, Metal Film	4835 111 37442
2952	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	3431	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
2954	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	3432	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
2955	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	3436	Res, 1K, 2%, 0,25W	4822 051 10102
2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	3437	10k, 5%, 1/10W, Metal Film	4835 111 37216
2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	3438	33k, 1/4W, Carbon Film	4835 110 57375
2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
2960	Cap, 2u2, 20%, 25V, Electrolytic . .	3198 026 32220	3447	10k, 5%, 1/10W, Metal Film	4835 111 37216
2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090	3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090	3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090	S 3452	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63229
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S 3453	Res, 4R7, 5%, 5W, Wire Wound	2322 251 41478
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S 3454	Res, 33K, 5%, 1 1/3W, Metal Film . .	2322 194 63333
3013	Zero ohm,.	4835 111 27056	3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3014	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3015	22k, 5%, 1/10W, Metal Film	4835 111 37441	S 3462	Res, 6K8, 5%, 5W, Metal Film	2322 257 41682
3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810	3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3100	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510	3464	Res, 1K, 2%, 0,25W	4822 051 10102
3101	220k, 5%, 1/10W, Metal Film.	4835 111 37235	S 3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
3103	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220	3466	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903
3104	10k, 5%, 1/10W, Metal Film	4835 111 37216	3467	Res, 14K, 1%, 3/5W, Metal Film . . .	2322 156 21403
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510	3467	Res, 15K, 1%, 3/5W, Metal Film . . .	2322 156 21503
3108	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220	3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3109	10k, 5%, 1/10W, Metal Film	4835 111 37216	3469	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
3122	220k, 5%, 1/10W, Metal Film.	4835 111 37235	3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3123	75 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37276	3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703
3125	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890	3481	Res, 100K, 1%, 3/5W, Metal Film. . .	2322 156 21004
3145	Res, 1K, 2%, 0,25W	4822 051 10102	3482	Res, 32K4, 1%, 3/5W, Metal Film. . .	2322 156 23243
3155	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259	3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3201	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253	3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3203	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443	S 3485	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	S 3486	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3205	Res, 1K, 2%, 0,25W	4822 051 10102	S 3487	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3206	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	S 3488	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S 3490	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3209	22k, 5%, 1/10W, Metal Film	4835 111 37441	S 3491	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3212	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253	S 3492	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3213	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	3495	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272
3215	22k, 5%, 1/10W, Metal Film	4835 111 37441	3496	10k, 5%, 1/10W, Metal Film	4835 111 37216
3216	Zero ohm,.	4835 111 27056	3497	10k, 5%, 1/10W, Metal Film	4835 111 37216
3217	Res, 1M5, 5%, 1/8W, Metalized Glass.	2322 730 61155	3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3218	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S 3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225
3219	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	3503	10ohm, 120VAC, Positive Temperature C	
3220	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		oefficient	4835 116 47001
3225	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S 3505	Surge Protector.	2422 549 43073
3228	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S 3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3231	Zero ohm,.	4835 111 27056	S 3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333
3232	Zero ohm,.	4835 111 27056	S 3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102
3233	Zero ohm,.	4835 111 27056	3512	15k, 5%, 1/10W, Metal Film	4835 111 37458
3243	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184
3246	82k, 5%, 1/10W, Metal Film	4835 111 37277	3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204
3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S 3515	2.5 ohm, 20%, 3.6W, Negative Temperat	
3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		ure Coefficient.	2122 612 00023
3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340	3516	Res, 1K, 2%, 0,25W	4822 051 10102
3250	Zero ohm,.	4835 111 27056	3517	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3251	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S 3518	Res, 0R22, 5%, 3W, Metal Film. . . .	2120 106 90548
3252	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	3520	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3253	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	3521	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443
3257	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S 3525	33 ohm, 5%, 1/3W, Metal Film	4835 116 57665
3258	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	3528	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3259	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	3529	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	3530	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046	3532	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	3534	15k, 5%, 1/10W, Metal Film	4835 111 37458
3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046	3536	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	3537	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046	S 3542	4.7 Megohm, 5%, 1/2W, Metal Film . .	4835 116 57009
S 3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109	3570	15k, 5%, 1/10W, Metal Film	4835 111 37458
S 3341	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483	3571	Res, 150K, 1%, 3/5W, Metal Film. . .	2322 156 21504
S 3342	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483	3573	Res, 2K, 1%, 1/10W, Metalized Glass.	2120 108 92657
3343	1.5k, 20%, 1/2W, Carbon Composition.	4835 110 47034	3574	33k, 5%, 1/10W, Metal Film	4835 111 37248
3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290	3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010

S = Safety Part Be sure to use exact replacement part.

TS2575C121 (continued)

3577	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3578	Res, 1K, 2%, 0,25W	4822 051 10102	
3579	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451	
3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3592	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3594	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3595	68k, 5%, 1/6W, Carbon Film	4835 111 37205	
3596	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3597	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3598	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3599	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3607	8.2k, 5%, 1/8W, Inline Package . . .	4835 111 97046	
3608	2.2k, 5%, 1/8W, Inline Package . . .	4835 111 97049	
3609	2.2k, 5%, Resistor Network	2120 108 93868	
3611	Res, 1K, 2%, 0,25W	4822 051 10102	
3612	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3613	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3615	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3617	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3619	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3629	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259	
3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3631	27k, 5%, 1/10W, Metal Film	4835 111 37442	
S 3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63479	
3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210	
3634	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3635	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3636	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3637	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3653	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3654	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3655	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3662	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3663	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3664	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3665	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3666	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376	
3667	27k, 5%, 1/10W, Metal Film	4835 111 37442	
3672	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3673	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3674	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231	
3675	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3676	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3677	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3680	680 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37271	
3681	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3682	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3683	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3684	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3841	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3842	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3843	47k, 5%, 1/10W, Metal Film	4835 111 37445	
3844	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259	
3845	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259	
3850	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810	
3951	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3953	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272	
3954	1.5k, 5%, 1/10W, Metal Film.	4835 111 37437	
3955	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
3956	1.5k, 5%, 1/10W, Metal Film.	4835 111 37437	
3957	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
4001	Zero ohm, ...	4835 111 27056	
4002	Zero ohm, ...	4835 111 27056	
4004	Zero ohm, ...	4835 111 27056	
4007	Zero ohm, ...	4835 111 27056	
4009	Zero ohm, ...	4835 111 27056	
4010	Zero ohm, ...	4835 111 27056	
4011	Zero ohm, ...	4835 111 27056	
4012	Zero ohm, ...	4835 111 27056	
4013	Zero ohm, ...	4835 111 27056	
4020	Zero ohm, ...	4835 111 27056	
4051	Zero ohm, ...	4835 111 27056	
4100	Zero ohm, ...	4835 111 27056	
4101	Zero ohm, ...	4835 111 27056	
4102	Zero ohm, ...	4835 111 27056	
4103	Zero ohm, ...	4835 111 27056	
4143	Zero ohm, ...	4835 111 27056	
4144	Zero ohm, ...	4835 111 27056	
4203	Zero ohm, ...	4835 111 27056	
4207	Zero ohm, ...	4835 111 27056	
4212	Zero ohm, ...	4835 111 27056	
4214	Zero ohm, ...	4835 111 27056	
4215	Zero ohm, ...	4835 111 27056	
4216	Zero ohm, ...	4835 111 27056	
4501	Zero ohm, ...	4835 111 27056	
4602	Zero ohm, ...	4835 111 27056	
4650	Zero ohm, ...	4835 111 27056	
4651	Zero ohm, ...	4835 111 27056	
4652	Zero ohm, ...	4835 111 27056	
4654	Zero ohm, ...	4835 111 27056	
4655	Zero ohm, ...	4835 111 27056	
4684	Zero ohm, ...	4835 111 27056	
4687	Zero ohm, ...	4835 111 27056	
4831	Zero ohm, ...	4835 111 27056	
4832	Zero ohm, ...	4835 111 27056	
4833	Zero ohm, ...	4835 111 27056	
4902	Zero ohm, ...	4835 111 27056	
4903	Zero ohm, ...	4835 111 27056	
4904	Zero ohm, ...	4835 111 27056	
4905	Zero ohm, ...	4835 111 27056	
4909	Zero ohm, ...	4835 111 27056	
4911	Zero ohm, ...	4835 111 27056	
4912	Zero ohm, ...	4835 111 27056	
4914	Zero ohm, ...	4835 111 27056	
4957	Zero ohm, ...	4835 111 27056	
4999	Zero ohm, ...	4835 111 27056	
5000	Coil, 5u6.	3198 018 25680	
5004	Coil, 820n	2422 535 97314	
5101	Coil, 5u6.	3198 018 15680	
5201	Coil, 22u.	3198 018 22290	
5202	Coil, 6u8.	3198 018 16880	
5342	22uH., 10%, Coil, Peaking.	4835 157 67069	
S 5445	Transformer, L.O.T., models ending in C101, C121, and C125	2422 531 02327	
S 5445	Transformer, L.O.T., models ending in C221 and C225.	3128 138 20941	
5451	Coil, 27u.	2422 535 96614	
5457	Coil, Linear Correction.	3128 138 53241	
5461	Transformer.	3128 138 33811	
5480	Coil, 27u.	2422 535 97334	
5480	Coil, 39u.	2422 535 97336	
5480	33uH., Peaking Coil, only in 25. . .	4835 157 58205	
S 5500	Filter, Mains, 5mH, 2A	2422 549 43432	
5516	100uH., Coil	4835 157 67078	
5518	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5521	Coil, 2u2.	3198 018 12280	
5540	Coil, 4u7.	3198 018 14780	
S 5545	Transfomer, ...	2422 531 02314	
5551	27uH., 5%, Coil, Peaking	4835 157 67052	
5552	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5572	100uH., Coil	4835 157 67078	
5573	100uH., Coil	4835 157 67078	
5575	100uH., Coil	4835 157 67078	
5576	100uH., Coil	4835 157 67078	
5577	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5600	Coil, 8u2.	3198 018 18280	
5601	Coil, 8u2.	3198 018 18280	
5620	Coil, 6u8.	3198 018 16880	
5821	Coil, 100u	3198 018 21010	
5831	Coil, 12u.	3198 018 21290	
5832	Coil, 12u.	3198 018 21290	
5833	Coil, 12u.	3198 018 11290	
6008	Zener, 33 Volt BZX79-C33	4835 130 37904	
6113	Zener Diode, 6.8 volt.	9340 386 40115	
6125	Zener Diode, 6.8 volt.	9340 386 40115	
6211	Diode, 1N4148.	4835 130 37048	
6212	Diode, 1N4148.	4835 130 37048	
6213	Diode, 1N4148.	4835 130 37048	
6331	Diode.	4835 130 37294	
6333	Diode.	4835 130 37294	
6335	Diode.	4835 130 37294	
6401	Diode.	4835 130 37094	
6402	Zener, 33 Volt, BZX79-C33.	4835 130 37904	
6403	Diode.	4835 130 37094	
6404	Diode.	4835 130 37094	
6449	Diode, 1N4148.	4835 130 37048	
6450	Diode, 1N4148.	4835 130 37048	
6460	Diode, Rect, BY228/20	9336 215 80112	
6463	Diode, 1N4148.	4835 130 37048	
6464	Zener Diode, 6.2 volt.	9337 242 70133	
6465	Diode, BYD33J.	4835 130 37094	
6466	Diode, BYD33J.	4835 130 37094	
6480	Diode, Zener	4835 130 37947	
6481	Diode, 1N4148.	4835 130 37048	
6485	Diode, BYD33J.	4835 130 37094	
6486	Diode, EGP20DL-530	4835 130 37919	
6487	Diode.	4835 130 37094	
6488	Diode, Rect, BYV27-200.	9322 126 72673	
6490	Diode, Rect, BYV27-200.	9322 126 72673	
6505	Diode, Bridge Rect, GBU6JL-7002 . .	9322 138 08667	
6507	Diode, BYD33J.	4835 130 37094	
6508	Diode, BYD33J.	4835 130 37094	
6510	Zener Diode, 20 volt	9331 178 60133	
6511	Diode, BYV95C.	4835 130 37052	

S = Safety Part Be sure to use exact replacement part.

TS2575C121 (continued)

6512	Diode, Rect, BY228/20	4822 130 41275
6513	Diode, Rect, BY228/20	4822 130 41275
6514	Zener, 18 Volt, BZX79-C18.	4835 130 37908
6540	Diode.	4835 130 37294
6550	Diode, Rect, BY229X-800	9340 380 30127
6560	Diode, EGP20DL-530	4835 130 37919
6570	Diode, EGP20DL-530	4835 130 37919
6582	Diode, EGP20DL-530	4835 130 37919
6584	Diode, 1N4148.	4835 130 37048
6585	Diode, 1N4148.	4835 130 37048
6590	Diode, EGP20DL-530	4835 130 37919
6591	Diode, BAS216.	4835 130 37905
6601	Diode, Zener	4835 130 37684
6606	Zener, 4.7 Volt, BZX79-C4V7.	4835 130 37005
6607	Zener, 6.8 Volt, BZX79-C6V8.	4835 130 37945
6690	LED, LTL-307P.	4835 130 97096
6831	Diode, BAS216.	4835 130 37905
6951	Diode, BAS216.	4835 130 37905
6961	Diode, BAS216.	4835 130 37905
7134	Transistor, BC547B	4835 130 47055
7250	IC,.	9352 620 26112
7251	IC, LM317T	9337 220 80682
7254	Transistor, NPN, BC847B.	4822 130 60511
7256	Transistor, NPN, BC847B.	4822 130 60511
7258	Transistor, NPN, BC847B.	4822 130 60511
7263	Transistor, PNP, BC857B.	5322 130 60508
7266	Transistor, NPN, BC847B.	4822 130 60511
7330	IC,.	9352 184 10112
7401	IC,.	9322 121 47687
7460	Transistor, NPN, BU1508DX.	9340 170 50127
7461	Transistor, NPN, BF819	9335 354 50127
7462	Transistor, BC547B	4835 130 47055
7463	Transistor, BC557B	4835 130 47409
7480	IC,.	9322 028 93682
7481	Transistor, BC557B	4835 130 47409
7482	Transistor, PNP, BC857B.	5322 130 60508
7518	STH8NA60FI SMPS FET	9322 068 92687
7518	STH10NC60FI SMPS FET.	9322 155 66687
7520	IC, MC44603A	4835 209 88537
7570	IC,.	9337 711 00676
S 7581	Coupler, TCDT1101G	9338 431 30682
7590	Transistor, NPN, BC847B.	4822 130 60511
7591	Transistor, NPN, BC847B.	4822 130 60511
7592	Transistor, NPN, BC847B.	4822 130 60511
7600	IC, SAA5543PS/M4/1046 L90US1-1.4 . .	4835 310 57477
7601	IC, ST24W04B6.	9322 097 23682
7603	Transistor, NPN, BC337	9331 796 00126
7604	Transistor, NPN, BC847B.	4822 130 60511
7605	Transistor, NPN, BC847B.	4822 130 60511
7608	Transistor, NPN, BC847B.	4822 130 60511
7609	Transistor, NPN, BC847B.	4822 130 60511
7680	IR Receiver.	9322 127 53667
7833	IC,.	9322 136 54682
7950	IC,.	4835 209 88543
9423	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
CBA	00EMF807A002 Main Chassis Board Asm.	00EM F80 7A002

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Mainscord, 125V, 10A	3135 010 03831
S AC02	Anode Clip	4835 256 97264
AC03	Cabinet Back	3139 124 28681
AC04	Cabinet Front.	3139 137 55921
AC05	Chassis Guide.	3139 124 31381
AC06	Customer Control Buttons	3139 124 30901
S AC07	Convergence and Purity Assembly. . .	2422 549 43385
S AC08	CRT A63AFW36X (C121 Version)	9301 763 20443
S AC09	Coil, Degaussing	3121 218 62961
AC11	Light Guide.	3139 124 26461
AC13	Owner's Manual, English & Spanish. .	3135 015 10892
AC14	Power Button	3139 124 26444
REMOTE	Remote Transmitter, RC2524/04. . . .	3139 228 81592
AC16	Speaker, 5W, 16 ohm (2 Used)	2422 264 00333
S AC18	Yoke (C121 Version).	3321 203 00121
AC19	Yoke Wedge (3 Used).	4835 535 27001
AC21	Battery, 1.5V AA, 2-Pack, (Not Shown	9299 000 10137
AC24	Spring	3139 121 26231

S = Safety Part Be sure to use exact replacement part.

TS2575C221 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts		
S 0127	3.15 Amp Fuse, ...	3122 358 72141	
0152	Cable, DIP, 6 Pin, 400mm	3104 301 09421	
0153	4 Pin Cable.	3104 301 09431	
0212	Connector, 2 Pin	2422 025 15396	
0220	4 Pin Board Connector.	2422 025 04852	
0223	Socket, Cinch, 6 Pin	2422 026 04827	
0224	1 Pin Board Connector.	2422 034 20021	
0228	1 Pin Board Connector.	2422 034 20021	
0234	Connector, 4 Pin	2422 025 12479	
S 0243	Connector, 6 Pin	2422 025 04854	
0244	4 Pin Board Connector.	2422 025 04852	
S 0245	Connector, 6 Pin	2422 025 04854	
S 0254	CRT Socket (9 Pin)	2422 500 80022	
0267	Connector, 3 Pin	2412 020 00725	
1000	Tuner.	2422 542 90057	
1003	45 MHz SAW, Filter,.	2422 549 42433	
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807	
1208	Crystal Resonator.	4835 242 77276	
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10869	
S 1572	1 Amp, Radial Fuse,.	4835 253 97162	
S 1573	2.5 Amp Fuse, Radial,.	2422 086 10422	
S 1580	Relay, 12V	2422 132 07317	
1600	Switch, Tactile.	2422 128 02742	
1601	Switch, Tactile.	2422 128 02742	
1602	Switch, Tactile.	2422 128 02742	
1603	Switch, Tactile.	2422 128 02742	
1606	Switch, Tactile.	2422 128 02742	
1660	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488	
1822	Crystal Resonator, 18MHz432, 12 Pin, HC49/U A	2422 543 00842	
2001	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2002	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2003	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2004	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2011	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2101	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2102	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2103	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2104	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2111	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2112	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2115	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2201	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2205	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2207	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2208	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2209	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2211	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2212	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2213	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2214	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2215	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280	
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 16654	
2220	Cap, 15p, 5%, 50V, Ceramic	3198 016 01590	
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2222	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2226	Cap, 33u, 20%, 25V, Electrolytic . .	2020 021 90124	
2227	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2247	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2248	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2249	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2330	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177	
2340	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495	
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320	
S 2343	Cap, 3n3, 10%, 2KV, Ceramic.	2020 558 90529	
2345	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020	
2401	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2402	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2404	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2405	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2407	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2409	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2420	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2426	Cap, 100n, 10%, 63V, Metalized Polyester.	2222 370 75104	
2428	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220	
2429	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2430	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2431	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2437	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2438	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2448	Cap, 220p, 10%, 500V, Ceramic. . . .	3198 019 42210	
2450	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91139	
2451	Cap, 15n, 10%, 50V, Polyester. . . .	2020 300 90575	
2451	0.01uF., 10%, 50V, Polyester, only 27	3198 138 20941	
2456	Cap, 47n, 10%, 250V, Metalized Polyester.	2222 368 90176	
2457	Cap, 390n, 5%, 250V, Metalized Polypropylene.	2222 479 90021	
2458	Cap, 2u2, 20%, 100V, Electrolytic. .	2020 021 91331	
2459	Cap, 680p, 10%, 500V, Ceramic. . . .	3198 019 46810	
2461	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020	
2462	Cap, 47n, 10%, 250V, Metalized Polyester.	2222 368 90176	
2463	470pF., 10%, 2KV, Ceramic.	4835 122 47638	
S 2465	Cap, 10n, 5%, 1600V, Polypropylene .	2222 375 90154	
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050	
2473	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790	
2481	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740	
2482	Cap, 68n, 10%, 250V, Polyester . . .	2222 347 90234	
2484	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2485	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293	
2486	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2487	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2488	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2489	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2490	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710	
2491	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710	
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810	
2500	0.47uF., 250V, Polyester	4835 121 47569	
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
S 2507	Cap, 1n5, 10%, 1KV, Ceramic.	2020 558 90443	
2508	Cap, 470u, 20%, 200V, Electrolytic .	2020 024 90647	
S 2511	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020	
S 2518	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290	
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320	
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320	
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2530	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 021 91147	
2531	Cap, 1n, 2%, 50V, Polypropylene. . .	2020 310 90049	
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220	
2540	Cap, 100u, 20%, 25V, Electrolytic. .	2020 021 90547	
S 2545	1500pF., 250VAC, Ceramic	4835 122 47621	
S 2550	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2551	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91358	
2561	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020	
S 2562	Cap, 220p, 10%, 1KV, Ceramic	2020 558 90424	
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020	
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020	
2571	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91353	
2572	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330	
2575	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820	
2586	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2604	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290	
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2613	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2615	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2619	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2622	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890	
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2629	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230	
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2631	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2679	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2681	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2850	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810	
2851	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2852	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2853	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2854	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2855	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380	
2856	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380	
2858	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790	
2859	Cap, 15p, 5%, 50V, Ceramic	3198 016 01590	
2860	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2861	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	

S = Safety Part Be sure to use exact replacement part.

TS2575C221 (continued)

	2862	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	S	3345	VDR, DC, 1mA, 50V, MAX 115V	2322 593 13507
	2863	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090		3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
	2864	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3401	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
	2865	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3402	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
	2866	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3403	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
	2867	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3405	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002
	2868	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780		3406	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
	2869	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3407	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002
	2870	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
	2871	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090		3409	1.5 ohm, 5%, 1/3W, Metal Film. . . .	4835 116 57664
	2874	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790		3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
	2875	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790		3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
	2877	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3420	470k, 5%, 1/10W, Metal Film.	4835 111 37407
	2882	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
	2883	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090		3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
	2884	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840
	2887	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810		3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606
	2888	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3425	150k, 5%, 1/10W, Metal Film.	4835 111 27045
	2889	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3426	39k, 5%, 1/10W, Metal Film	4835 111 27051
	2891	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390		3428	22k, 5%, 1/10W, Metal Film	4835 111 37441
	2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3429	27k, 5%, 1/10W, Metal Film	4835 111 37442
	2952	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3431	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
	2954	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3432	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
	2955	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3436	Res, 1K, 2%, 0,25W	4822 051 10102
	2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3437	10k, 5%, 1/10W, Metal Film	4835 111 37216
	2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3438	33k, 1/4W, Carbon Film	4835 110 57375
	2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
	2960	Cap, 2u2, 20%, 25V, Electrolytic . .	3198 026 32220		3447	10k, 5%, 1/10W, Metal Film	4835 111 37216
	2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090		3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
	2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090		3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
	2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090	S	3452	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63229
	3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3453	Res, 4R7, 5%, 5W, Wire Wound	2322 251 41478
	3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3454	Res, 33K, 5%, 1 1/3W, Metal Film . .	2322 194 63333
	3013	Zero ohm,.	4835 111 27056		3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
	3014	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052		3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
	3015	22k, 5%, 1/10W, Metal Film	4835 111 37441	S	3462	Res, 6K8, 5%, 5W, Metal Film	2322 257 41682
	3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810		3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
	3100	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510		3464	Res, 1K, 2%, 0,25W	4822 051 10102
	3101	220k, 5%, 1/10W, Metal Film.	4835 111 37235	S	3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
	3103	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3466	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903
	3104	10k, 5%, 1/10W, Metal Film	4835 111 37216		3467	Res, 14K, 1%, 3/5W, Metal Film . . .	2322 156 21403
	3105	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510		3467	Res, 15K, 1%, 3/5W, Metal Film . . .	2322 156 21503
	3108	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
	3109	10k, 5%, 1/10W, Metal Film	4835 111 37216		3469	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
	3122	220k, 5%, 1/10W, Metal Film.	4835 111 37235		3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
	3123	75 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37276		3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703
	3125	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890		3481	Res, 100K, 1%, 3/5W, Metal Film. . .	2322 156 21004
	3145	Res, 1K, 2%, 0,25W	4822 051 10102		3482	Res, 32K4, 1%, 3/5W, Metal Film. . .	2322 156 23243
	3155	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259		3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
	3201	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253		3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3203	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443	S	3485	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
	3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	S	3486	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3205	Res, 1K, 2%, 0,25W	4822 051 10102	S	3487	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3206	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	S	3488	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
	3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3490	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3209	22k, 5%, 1/10W, Metal Film	4835 111 37441	S	3491	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3212	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253	S	3492	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3213	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3495	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272
	3215	22k, 5%, 1/10W, Metal Film	4835 111 37441		3496	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3216	Zero ohm,.	4835 111 27056		3497	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3217	Res, 1M5, 5%, 1/8W, Metalized Glass.	2322 730 61155		3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
	3218	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225
	3219	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3503	10ohm, 120VAC, Positive Temperature C	
	3220	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432			oefficient	4835 116 47001
	3225	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S	3505	Surge Protector.	2422 549 43073
	3228	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
	3231	Zero ohm,.	4835 111 27056	S	3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333
	3232	Zero ohm,.	4835 111 27056	S	3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102
	3233	Zero ohm,.	4835 111 27056		3512	15k, 5%, 1/10W, Metal Film	4835 111 37458
	3243	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052		3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184
	3246	82k, 5%, 1/10W, Metal Film	4835 111 37277		3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204
	3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3515	2.5 ohm, 20%, 3.6W, Negative Temperat	
	3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010			ure Coefficient.	2122 612 00023
	3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340		3516	Res, 1K, 2%, 0,25W	4822 051 10102
	3250	Zero ohm,.	4835 111 27056		3517	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
	3251	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S	3518	Res, 0R22, 5%, 3W, Metal Film. . . .	2120 106 90548
	3252	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		3520	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
	3253	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		3521	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443
	3257	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3525	33 ohm, 5%, 1/3W, Metal Film	4835 116 57665
	3258	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3528	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3259	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3529	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3530	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
	3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3532	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3534	15k, 5%, 1/10W, Metal Film	4835 111 37458
	3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3536	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3537	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046	S	3542	4.7 Megohm, 5%, 1/2W, Metal Film . .	4835 116 57009
S	3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109		3570	15k, 5%, 1/10W, Metal Film	4835 111 37458
S	3341	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483		3571	Res, 150K, 1%, 3/5W, Metal Film. . .	2322 156 21504
S	3342	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483		3573	Res, 2K, 1%, 1/10W, Metalized Glass.	2120 108 92657
	3343	1.5k, 20%, 1/2W, Carbon Composition.	4835 110 47034		3574	33k, 5%, 1/10W, Metal Film	4835 111 37248
	3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290		3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010

S = Safety Part Be sure to use exact replacement part.

TS2575C221 (continued)

3577	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3578	Res, 1K, 2%, 0,25W	4822 051 10102	
3579	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451	
3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3592	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3594	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3595	68k, 5%, 1/6W, Carbon Film	4835 111 37205	
3596	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3597	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3598	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3599	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3607	8.2k, 5%, 1/8W, Inline Package . . .	4835 111 97046	
3608	2.2k, 5%, 1/8W, Inline Package . . .	4835 111 97049	
3609	2.2k, 5%, Resistor Network	2120 108 93868	
3611	Res, 1K, 2%, 0,25W	4822 051 10102	
3612	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3613	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3615	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3617	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3619	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3629	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259	
3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3631	27k, 5%, 1/10W, Metal Film	4835 111 37442	
S 3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63479	
3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210	
3634	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3635	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3636	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3637	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3653	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3654	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3655	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3662	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3663	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3664	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3665	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3666	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376	
3667	27k, 5%, 1/10W, Metal Film	4835 111 37442	
3672	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3673	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3674	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231	
3675	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3676	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3677	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3680	680 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37271	
3681	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3682	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3683	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3684	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3841	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3842	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3843	47k, 5%, 1/10W, Metal Film	4835 111 37445	
3844	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259	
3845	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259	
3850	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810	
3951	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3953	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272	
3954	1.5k, 5%, 1/10W, Metal Film.	4835 111 37437	
3955	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
3956	1.5k, 5%, 1/10W, Metal Film.	4835 111 37437	
3957	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
4001	Zero ohm, ...	4835 111 27056	
4002	Zero ohm, ...	4835 111 27056	
4004	Zero ohm, ...	4835 111 27056	
4007	Zero ohm, ...	4835 111 27056	
4009	Zero ohm, ...	4835 111 27056	
4010	Zero ohm, ...	4835 111 27056	
4011	Zero ohm, ...	4835 111 27056	
4012	Zero ohm, ...	4835 111 27056	
4013	Zero ohm, ...	4835 111 27056	
4020	Zero ohm, ...	4835 111 27056	
4051	Zero ohm, ...	4835 111 27056	
4100	Zero ohm, ...	4835 111 27056	
4101	Zero ohm, ...	4835 111 27056	
4102	Zero ohm, ...	4835 111 27056	
4103	Zero ohm, ...	4835 111 27056	
4143	Zero ohm, ...	4835 111 27056	
4144	Zero ohm, ...	4835 111 27056	
4203	Zero ohm, ...	4835 111 27056	
4207	Zero ohm, ...	4835 111 27056	
4212	Zero ohm, ...	4835 111 27056	
4214	Zero ohm, ...	4835 111 27056	
4215	Zero ohm, ...	4835 111 27056	
4216	Zero ohm, ...	4835 111 27056	
4501	Zero ohm, ...	4835 111 27056	
4602	Zero ohm, ...	4835 111 27056	
4650	Zero ohm, ...	4835 111 27056	
4651	Zero ohm, ...	4835 111 27056	
4652	Zero ohm, ...	4835 111 27056	
4654	Zero ohm, ...	4835 111 27056	
4655	Zero ohm, ...	4835 111 27056	
4684	Zero ohm, ...	4835 111 27056	
4687	Zero ohm, ...	4835 111 27056	
4831	Zero ohm, ...	4835 111 27056	
4832	Zero ohm, ...	4835 111 27056	
4833	Zero ohm, ...	4835 111 27056	
4902	Zero ohm, ...	4835 111 27056	
4903	Zero ohm, ...	4835 111 27056	
4904	Zero ohm, ...	4835 111 27056	
4905	Zero ohm, ...	4835 111 27056	
4909	Zero ohm, ...	4835 111 27056	
4911	Zero ohm, ...	4835 111 27056	
4912	Zero ohm, ...	4835 111 27056	
4914	Zero ohm, ...	4835 111 27056	
4957	Zero ohm, ...	4835 111 27056	
4999	Zero ohm, ...	4835 111 27056	
5000	Coil, 5u6.	3198 018 25680	
5004	Coil, 820n	2422 535 97314	
5101	Coil, 5u6.	3198 018 15680	
5201	Coil, 22u.	3198 018 22290	
5202	Coil, 6u8.	3198 018 16880	
5342	22uH., 10%, Coil, Peaking.	4835 157 67069	
S 5445	Transformer, L.O.T., models ending in C101, C121, and C125	2422 531 02327	
S 5445	Transformer, L.O.T., models ending in C221 and C225.	3128 138 20941	
5451	Coil, 27u.	2422 535 96614	
5457	Coil, Linear Correction.	3128 138 53241	
5461	Transformer.	3128 138 33811	
5480	Coil, 27u.	2422 535 97334	
5480	Coil, 39u.	2422 535 97336	
5480	33uH., Peaking Coil, only in 25. . .	4835 157 58205	
S 5500	Filter, Mains, 5mH, 2A	2422 549 43432	
5516	100uH., Coil	4835 157 67078	
5518	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5521	Coil, 2u2.	3198 018 12280	
5540	Coil, 4u7.	3198 018 14780	
S 5545	Transfomer, ...	2422 531 02314	
5551	27uH., 5%, Coil, Peaking	4835 157 67052	
5552	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5572	100uH., Coil	4835 157 67078	
5573	100uH., Coil	4835 157 67078	
5575	100uH., Coil	4835 157 67078	
5576	100uH., Coil	4835 157 67078	
5577	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5600	Coil, 8u2.	3198 018 18280	
5601	Coil, 8u2.	3198 018 18280	
5620	Coil, 6u8.	3198 018 16880	
5821	Coil, 100u	3198 018 21010	
5831	Coil, 12u.	3198 018 21290	
5832	Coil, 12u.	3198 018 21290	
5833	Coil, 12u.	3198 018 11290	
6008	Zener, 33 Volt BZX79-C33	4835 130 37904	
6113	Zener Diode, 6.8 volt.	9340 386 40115	
6125	Zener Diode, 6.8 volt.	9340 386 40115	
6211	Diode, 1N4148.	4835 130 37048	
6212	Diode, 1N4148.	4835 130 37048	
6213	Diode, 1N4148.	4835 130 37048	
6331	Diode.	4835 130 37294	
6333	Diode.	4835 130 37294	
6335	Diode.	4835 130 37294	
6401	Diode.	4835 130 37094	
6402	Zener, 33 Volt, BZX79-C33.	4835 130 37904	
6403	Diode.	4835 130 37094	
6404	Diode.	4835 130 37094	
6449	Diode, 1N4148.	4835 130 37048	
6450	Diode, 1N4148.	4835 130 37048	
6460	Diode, Rect, BY228/20	9336 215 80112	
6463	Diode, 1N4148.	4835 130 37048	
6464	Zener Diode, 6.2 volt.	9337 242 70133	
6465	Diode, BYD33J.	4835 130 37094	
6466	Diode, BYD33J.	4835 130 37094	
6480	Diode, Zener	4835 130 37947	
6481	Diode, 1N4148.	4835 130 37048	
6485	Diode, BYD33J.	4835 130 37094	
6486	Diode, EGP20DL-530	4835 130 37919	
6487	Diode.	4835 130 37094	
6488	Diode, Rect, BYV27-200.	9322 126 72673	
6490	Diode, Rect, BYV27-200.	9322 126 72673	
6505	Diode, Bridge Rect, GBU6JL-7002 . .	9322 138 08667	
6507	Diode, BYD33J.	4835 130 37094	
6508	Diode, BYD33J.	4835 130 37094	
6510	Zener Diode, 20 volt	9331 178 60133	
6511	Diode, BYV95C.	4835 130 37052	

S = Safety Part Be sure to use exact replacement part.

TS2575C221 (continued)

6512	Diode, Rect, BY228/20	4822 130 41275
6513	Diode, Rect, BY228/20	4822 130 41275
6514	Zener, 18 Volt, BZX79-C18.	4835 130 37908
6540	Diode.	4835 130 37294
6550	Diode, Rect, BY229X-800	9340 380 30127
6560	Diode, EGP20DL-530	4835 130 37919
6570	Diode, EGP20DL-530	4835 130 37919
6582	Diode, EGP20DL-530	4835 130 37919
6584	Diode, 1N4148.	4835 130 37048
6585	Diode, 1N4148.	4835 130 37048
6590	Diode, EGP20DL-530	4835 130 37919
6591	Diode, BAS216.	4835 130 37905
6601	Diode, Zener	4835 130 37684
6606	Zener, 4.7 Volt, BZX79-C4V7.	4835 130 37005
6607	Zener, 6.8 Volt, BZX79-C6V8.	4835 130 37945
6690	LED, LTL-307P.	4835 130 97096
6831	Diode, BAS216.	4835 130 37905
6951	Diode, BAS216.	4835 130 37905
6961	Diode, BAS216.	4835 130 37905
7134	Transistor, BC547B	4835 130 47055
7250	IC,.	9352 620 26112
7251	IC, LM317T	9337 220 80682
7254	Transistor, NPN, BC847B.	4822 130 60511
7256	Transistor, NPN, BC847B.	4822 130 60511
7258	Transistor, NPN, BC847B.	4822 130 60511
7263	Transistor, PNP, BC857B.	5322 130 60508
7266	Transistor, NPN, BC847B.	4822 130 60511
7330	IC,.	9352 184 10112
7401	IC,.	9322 121 47687
7460	Transistor, NPN, BU1508DX.	9340 170 50127
7461	Transistor, NPN, BF819	9335 354 50127
7462	Transistor, BC547B	4835 130 47055
7463	Transistor, BC557B	4835 130 47409
7480	IC,.	9322 028 93682
7481	Transistor, BC557B	4835 130 47409
7482	Transistor, PNP, BC857B.	5322 130 60508
7518	STH8NA60FI SMPS FET	9322 068 92687
7518	STH10NC60FI SMPS FET.	9322 155 66687
7520	IC, MC44603A	4835 209 88537
7570	IC,.	9337 711 00676
S 7581	Coupler, TCDT1101G	9338 431 30682
7590	Transistor, NPN, BC847B.	4822 130 60511
7591	Transistor, NPN, BC847B.	4822 130 60511
7592	Transistor, NPN, BC847B.	4822 130 60511
7600	IC, SAA5543PS/M4/1046 L90US1-1.4	4835 310 57477
7601	IC, ST24W04B6.	9322 097 23682
7603	Transistor, NPN, BC337	9331 796 00126
7604	Transistor, NPN, BC847B.	4822 130 60511
7605	Transistor, NPN, BC847B.	4822 130 60511
7608	Transistor, NPN, BC847B.	4822 130 60511
7609	Transistor, NPN, BC847B.	4822 130 60511
7680	IR Receiver.	9322 127 53667
7833	IC,.	9322 136 54682
7950	IC,.	4835 209 88543
9423	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
CBA	00EMF807A002 Main Chassis Board Asm.	00EM F80 7A002

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Mainscord, 125V, 10A	3135 010 03831
S AC02	Anode Clip	4835 256 97264
AC03	Cabinet Back	3139 124 28681
AC04	Cabinet Front.	3139 137 55921
AC05	Chassis Guide.	3139 124 31381
AC06	Customer Control Buttons	3139 124 30901
S AC07	Convergence and Purity Assembly.	2422 549 43385
S AC08	CRT A63AFW36X (C121 Version)	9301 763 20443
S AC09	Coil, Degaussing	3121 218 62961
AC11	Light Guide.	3139 124 26461
AC13	Owner's Manual, English & Spanish.	3135 015 10892
AC14	Power Button	3139 124 26444
REMOTE	Remote Transmitter, RC2524/04.	3139 228 81592
AC16	Speaker, 5W, 16 ohm (2 Used)	2422 264 00333
S AC18	Yoke (C121 Version).	3321 203 00121
AC19	Yoke Wedge (3 Used).	4835 535 27001
AC21	Battery, 1.5V AA, 2-Pack, (Not Shown	9299 000 10137
AC24	Spring	3139 121 26231

S = Safety Part Be sure to use exact replacement part.

TS2746C101 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts		
S 0127	3.15 Amp Fuse, ...	3122 358 72141	
0152	Cable, DIP, 6 Pin, 400mm	3104 301 09421	
0153	4 Pin Cable.	3104 301 09431	
0212	Connector, 2 Pin	2422 025 15396	
0220	4 Pin Board Connector.	2422 025 04852	
0223	3 Pin Board Connector.	2422 026 04963	
0224	1 Pin Board Connector.	2422 034 20021	
0228	1 Pin Board Connector.	2422 034 20021	
0234	Connector, 4 Pin	2422 025 15847	
S 0243	Connector, 6 Pin	2422 025 04854	
0244	4 Pin Board Connector.	2422 025 04852	
S 0245	Connector, 6 Pin	2422 025 04854	
S 0254	CRT Socket (9 Pin)	2422 500 80022	
0267	Connector, 3 Pin	2412 020 00725	
1000	Tuner.	2422 542 90057	
1001	Filter	2422 549 42501	
1003	45 MHz SAW, Filter,.	2422 549 42433	
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807	
1208	Crystal Resonator.	4835 242 77276	
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10869	
S 1571	1 Amp, Radial Fuse,.	4835 253 97162	
S 1572	1 Amp, Radial Fuse,.	4835 253 97162	
S 1580	Relay, 12V	2422 132 07317	
1600	Switch, Tactile.	2422 128 02742	
1601	Switch, Tactile.	2422 128 02742	
1602	Switch, Tactile.	2422 128 02742	
1603	Switch, Tactile.	2422 128 02742	
1606	Switch, Tactile.	2422 128 02742	
1660	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488	
1821	Ceramic Resonator.	4835 122 97102	
2001	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2002	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2003	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2004	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2006	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290	
2011	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2102	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2103	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2104	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2201	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2202	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2203	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2204	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2205	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2207	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2208	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2209	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2211	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2212	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2213	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2214	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2215	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280	
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 16654	
2220	Cap, 15p, 5%, 50V, Ceramic	3198 016 01590	
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2222	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2226	Cap, 33u, 20%, 25V, Electrolytic . .	2020 021 90124	
2227	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2247	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2248	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2249	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2330	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177	
2340	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495	
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320	
S 2343	Cap, 3n3, 10%, 2KV, Ceramic.	2020 558 90529	
2345	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020	
2401	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2402	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2404	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2405	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2407	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2409	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2420	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2426	Cap, 100n, 10%, 63V, Metalized Polyes ter.	2222 370 75104	
2428	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220	
2429	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2430	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2431	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2437	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2438	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2448	Cap, 220p, 10%, 500V, Ceramic. . . .	3198 019 42210	
2450	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91139	
2451	Cap, 15n, 10%, 50V, Polyester. . . .	2020 300 90575	
2451	0.01uF., 10%, 50V, Polyester, only 27	3198 138 20941	
2456	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176	
2457	Cap, 390n, 5%, 250V, Metalized Polypr opylene.	2222 479 90021	
2458	Cap, 2u2, 20%, 100V, Electrolytic. .	2020 021 91331	
2459	Cap, 680p, 10%, 500V, Ceramic. . . .	3198 019 46810	
2461	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020	
2462	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176	
2463	680pF., 10%, 2KV, Ceramic.	4835 122 47584	
S 2465	Cap, 10n, 5%, 1600V, Polypropylene .	2222 375 90154	
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050	
2473	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790	
2481	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740	
2482	Cap, 68n, 10%, 250V, Polyester . . .	2222 347 90234	
2484	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2485	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293	
2486	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2487	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2488	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2489	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2490	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710	
2491	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710	
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810	
2500	0.47uF., 250V, Polyester	4835 121 47569	
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
S 2507	Cap, 1n5, 10%, 1KV, Ceramic.	2020 558 90443	
2508	Cap, 470u, 20%, 200V, Electrolytic .	2020 024 90647	
S 2511	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020	
S 2518	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290	
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320	
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320	
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2530	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 021 91147	
2531	Cap, 1n, 2%, 50V, Polypropylene. . .	2020 310 90049	
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220	
2540	Cap, 100u, 20%, 25V, Electrolytic. .	2020 021 90547	
S 2545	1500pF., 250VAC, Ceramic	4835 122 47621	
S 2550	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2551	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91358	
2561	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020	
S 2562	Cap, 220p, 10%, 1KV, Ceramic	2020 558 90424	
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020	
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020	
2572	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330	
2575	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820	
2577	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020	
2586	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2604	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290	
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2613	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2615	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2619	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2622	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890	
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2629	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230	
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2631	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2679	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2681	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2821	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280	
2823	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2825	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2826	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090	
2827	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2828	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2829	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	
2830	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280	
2831	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	
2832	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280	

S = Safety Part Be sure to use exact replacement part.

TS2746C101 (continued)

2833	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280		3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
2834	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780		3401	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2835	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3402	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2836	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3403	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2837	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740		3405	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002
2838	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3406	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2839	Cap, 1u, 5%, 50V, Metalized Polyester	2020 308 90124		3407	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002
2840	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2841	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3409	1.5 ohm, 5%, 1/3W, Metal Film. . . .	4835 116 57664
2842	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2844	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3420	470k, 5%, 1/10W, Metal Film.	4835 111 37407
2845	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2913	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280		3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2914	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330		3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840
2915	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606
2916	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648		3425	Res, 120K, 5%, 1/10W, Metalized Glass	2120 108 91716
2917	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3426	39k, 5%, 1/10W, Metal Film	4835 111 27051
2918	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330		3428	22k, 5%, 1/10W, Metal Film	4835 111 37441
2919	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3429	27k, 5%, 1/10W, Metal Film	4835 111 37442
2920	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648		3431	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
2921	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3432	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
2931	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280		3436	Res, 1K, 2%, 0,25W	4822 051 10102
2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3437	10k, 5%, 1/10W, Metal Film	4835 111 37216
2952	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3438	33k, 1/4W, Carbon Film	4835 110 57375
2954	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
2955	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3447	10k, 5%, 1/10W, Metal Film	4835 111 37216
2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	S	3452	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63229
2960	Cap, 220u, 20%, 50V, Electrolytic. .	3198 026 52210	S	3453	Res, 4R7, 5%, 5W, Wire Wound	2322 251 41478
2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090	S	3454	Res, 33K, 5%, 1 1/3W, Metal Film . .	2322 194 63333
2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090		3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090		3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3462	Res, 6K8, 5%, 5W, Metal Film	2322 257 41682
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3010	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610		3464	Res, 1K, 2%, 0,25W	4822 051 10102
3013	Zero ohm,.	4835 111 27056	S	3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
3014	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052		3466	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903
3015	22k, 5%, 1/10W, Metal Film	4835 111 37441		3467	Res, 14K, 1%, 3/5W, Metal Film . . .	2322 156 21403
3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810		3467	Res, 15K, 1%, 3/5W, Metal Film . . .	2322 156 21503
3021	Res, 1K, 2%, 0,25W	4822 051 10102		3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3103	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3469	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
3104	10k, 5%, 1/10W, Metal Film	4835 111 37216		3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3108	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703
3109	10k, 5%, 1/10W, Metal Film	4835 111 37216		3481	Res, 35K7, 1%, 3/5W, Metal Film. . .	2322 156 23573
3123	75 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37276		3482	Res, 56K, 1%, 3/5W, Metal Film . . .	2322 156 25603
3200	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3201	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253		3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3203	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443	S	3485	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	S	3486	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3205	Res, 1K, 2%, 0,25W	4822 051 10102	S	3487	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3206	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	S	3488	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3490	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3209	22k, 5%, 1/10W, Metal Film	4835 111 37441	S	3491	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3212	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253	S	3492	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3213	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3495	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272
3215	22k, 5%, 1/10W, Metal Film	4835 111 37441		3496	10k, 5%, 1/10W, Metal Film	4835 111 37216
3216	Zero ohm,.	4835 111 27056		3497	10k, 5%, 1/10W, Metal Film	4835 111 37216
3217	Res, 1M5, 5%, 1/8W, Metalized Glass.	2322 730 61155		3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3218	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225
3219	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3503	10ohm, 120VAC, Positive Temperature C	
3220	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432			oefficient	4835 116 47001
3225	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S	3505	Surge Protector.	2422 549 43073
3228	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3231	Zero ohm,.	4835 111 27056	S	3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333
3232	Zero ohm,.	4835 111 27056	S	3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102
3233	Zero ohm,.	4835 111 27056		3512	15k, 5%, 1/10W, Metal Film	4835 111 37458
3243	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052		3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184
3246	82k, 5%, 1/10W, Metal Film	4835 111 37277		3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204
3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3515	2.5 ohm, 20%, 3.6W, Negative Temperat	
3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010			ure Coefficient.	2122 612 00023
3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340		3516	Res, 1K, 2%, 0,25W	4822 051 10102
3250	Zero ohm,.	4835 111 27056		3517	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3251	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S	3518	Res, 0R22, 5%, 3W, Metal Film. . . .	2120 106 90548
3252	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		3520	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3253	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		3521	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443
3257	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3525	33 ohm, 5%, 1/3W, Metal Film	4835 116 57665
3258	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3528	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3259	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3529	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3530	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3532	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3534	15k, 5%, 1/10W, Metal Film	4835 111 37458
3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3536	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3537	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046	S	3542	4.7 Megohm, 5%, 1/2W, Metal Film . .	4835 116 57009
S 3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109		3570	15k, 5%, 1/10W, Metal Film	4835 111 37458
S 3341	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483		3571	Res, 150K, 1%, 3/5W, Metal Film. . .	2322 156 21504
S 3342	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483		3573	Res, 2K, 1%, 1/10W, Metalized Glass.	2120 108 92657
3343	1.5k, 20%, 1/2W, Carbon Composition.	4835 110 47034		3574	33k, 5%, 1/10W, Metal Film	4835 111 37248
3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290		3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
S 3345	VDR, DC, 1mA, 50V, MAX 115V	2322 593 13507		3577	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030

S = Safety Part Be sure to use exact replacement part.

TS2746C101 (continued)

3578	Res, 1K, 2%, 0,25W	4822 051 10102	
3579	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451	
3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3592	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3594	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3595	68k, 5%, 1/6W, Carbon Film	4835 111 37205	
3596	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030	
3597	100 ohm, 5%, 1/10W, Metal Film	4835 111 37432	
3598	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3599	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3607	8.2k, 5%, 1/8W, Inline Package	4835 111 97046	
3608	2.2k, 5%, 1/8W, Inline Package	4835 111 97049	
3609	2.2k, 5%, Resistor Network	2120 108 93868	
3611	Res, 1K, 2%, 0,25W	4822 051 10102	
3612	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3613	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3615	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3617	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3619	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3629	470 ohm, 5%, 1/10W, Metal Film	4835 111 37259	
3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3631	27k, 5%, 1/10W, Metal Film	4835 111 37442	
S 3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63479	
3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210	
3634	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3635	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3636	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3637	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3653	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030	
3654	100 ohm, 5%, 1/10W, Metal Film	4835 111 37432	
3655	100 ohm, 5%, 1/10W, Metal Film	4835 111 37432	
3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3662	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3663	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3664	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3665	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3666	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376	
3667	27k, 5%, 1/10W, Metal Film	4835 111 37442	
3672	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3673	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3674	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231	
3675	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510	
3676	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510	
3677	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510	
3680	680 ohm, 5%, 1/10W, Metal Film	4835 111 37271	
3681	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3682	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3683	100 ohm, 5%, 1/10W, Metal Film	4835 111 37432	
3684	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3821	15k, 5%, 1/10W, Metal Film	4835 111 37458	
3822	1.2k, 5%, 1/10W, Metal Film.	4835 111 27042	
3823	100k, 5%, 1/10W, Metal Film.	4835 111 37434	
3824	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3825	Res, 6K8, 5%, 1/6W, Carbon Film.	3198 011 06820	
3826	Res, 6K8, 5%, 1/6W, Carbon Film.	3198 011 06820	
3827	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3828	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3829	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272	
3830	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272	
3831	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198 011 03310	
3832	47 ohm, 5%, 1/10W, Metal Film.	4835 111 37262	
3908	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3909	Res, 1K, 2%, 0,25W	4822 051 10102	
3910	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376	
3911	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230	
3912	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3913	Res, 6K8, 5%, 1/6W, Carbon Film.	3198 011 06820	
3914	Res, 1K8, 5%, 1/6W, Carbon Film.	3198 011 01820	
3915	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231	
3916	220 ohm, 5%, 1/10W, Metal Film	4835 111 37371	
3917	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3918	Res, 6K8, 5%, 1/6W, Carbon Film.	3198 011 06820	
3919	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376	
3920	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231	
3921	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230	
3922	Res, 1K8, 5%, 1/6W, Carbon Film.	3198 011 01820	
3923	220 ohm, 5%, 1/10W, Metal Film	4835 111 37371	
3924	39k, 5%, 1/10W, Metal Film	4835 111 27051	
3925	39k, 5%, 1/10W, Metal Film	4835 111 27051	
3926	39k, 5%, 1/10W, Metal Film	4835 111 27051	
3929	39k, 5%, 1/10W, Metal Film	4835 111 27051	
3930	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3931	Res, 1K, 2%, 0,25W	4822 051 10102	
3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810	
3951	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3953	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3955	Res, 4K7, 5%, 1/6W, Carbon Film.	3198 011 04720	
3957	Res, 4K7, 5%, 1/6W, Carbon Film.	3198 011 04720	
4001	Zero ohm,	4835 111 27056	
4002	Zero ohm,	4835 111 27056	
4004	Zero ohm,	4835 111 27056	
4007	Zero ohm,	4835 111 27056	
4009	Zero ohm,	4835 111 27056	
4010	Zero ohm,	4835 111 27056	
4011	Zero ohm,	4835 111 27056	
4012	Zero ohm,	4835 111 27056	
4013	Zero ohm,	4835 111 27056	
4020	Zero ohm,	4835 111 27056	
4051	Zero ohm,	4835 111 27056	
4100	Zero ohm,	4835 111 27056	
4101	Zero ohm,	4835 111 27056	
4102	Zero ohm,	4835 111 27056	
4103	Zero ohm,	4835 111 27056	
4143	Zero ohm,	4835 111 27056	
4144	Zero ohm,	4835 111 27056	
4203	Zero ohm,	4835 111 27056	
4207	Zero ohm,	4835 111 27056	
4212	Zero ohm,	4835 111 27056	
4214	Zero ohm,	4835 111 27056	
4215	Zero ohm,	4835 111 27056	
4216	Zero ohm,	4835 111 27056	
4501	Zero ohm,	4835 111 27056	
4602	Zero ohm,	4835 111 27056	
4650	Zero ohm,	4835 111 27056	
4651	Zero ohm,	4835 111 27056	
4652	Zero ohm,	4835 111 27056	
4654	Zero ohm,	4835 111 27056	
4655	Zero ohm,	4835 111 27056	
4684	Zero ohm,	4835 111 27056	
4687	Zero ohm,	4835 111 27056	
4831	Zero ohm,	4835 111 27056	
4832	Zero ohm,	4835 111 27056	
4833	Zero ohm,	4835 111 27056	
4902	Zero ohm,	4835 111 27056	
4903	Zero ohm,	4835 111 27056	
4904	Zero ohm,	4835 111 27056	
4905	Zero ohm,	4835 111 27056	
4909	Zero ohm,	4835 111 27056	
4911	Zero ohm,	4835 111 27056	
4912	Zero ohm,	4835 111 27056	
4914	Zero ohm,	4835 111 27056	
4957	Zero ohm,	4835 111 27056	
4999	Zero ohm,	4835 111 27056	
5000	Coil, 5u6.	3198 018 25680	
5004	Coil, 820n	2422 535 97314	
5201	Coil, 22u.	3198 018 22290	
5202	Coil, 6u8.	3198 018 16880	
5342	22uH., 10%, Coil, Peaking.	4835 157 67069	
S 5445	Transformer, L.O.T., models ending in C101, C121, and C125	2422 531 02327	
S 5445	Transformer, L.O.T., models ending in C221 and C225.	3128 138 20941	
5451	Coil, 27u.	2422 535 96614	
5457	Coil, Linear Correction.	3128 138 53241	
5461	Transformer.	3128 138 33811	
5480	Coil, 27u.	2422 535 97334	
5480	Coil, 39u.	2422 535 97336	
5480	33uH., Peaking Coil, only in 25.	4835 157 58205	
S 5500	Filter, Mains, 5mH, 2A	2422 549 43432	
5516	100uH., Coil	4835 157 67078	
5518	Fixed, Inductor, 100MHz, 50R.	3198 018 90010	
5521	Coil, 2u2.	3198 018 12280	
5540	Coil, 4u7.	3198 018 14780	
S 5545	Transfomer,	2422 531 02314	
5551	27uH., 5%, Coil, Peaking	4835 157 67052	
5552	Fixed, Inductor, 100MHz, 50R.	3198 018 90010	
5572	100uH., Coil	4835 157 67078	
5573	100uH., Coil	4835 157 67078	
5576	100uH., Coil	4835 157 67078	
5577	Fixed, Inductor, 100MHz, 50R.	3198 018 90010	
5600	Coil, 8u2.	3198 018 18280	
5601	Coil, 8u2.	3198 018 18280	
5620	Coil, 6u8.	3198 018 16880	
5821	Coil, 100u	3198 018 21010	
5822	Coil, 18u.	3198 018 21890	
6008	Zener, 33 Volt BZX79-C33	4835 130 37904	
6113	Zener Diode, 6.8 volt.	9340 386 40115	
6211	Diode, 1N4148.	4835 130 37048	
6212	Diode, 1N4148.	4835 130 37048	
6213	Diode, 1N4148.	4835 130 37048	
6331	Diode.	4835 130 37294	
6333	Diode.	4835 130 37294	
6335	Diode.	4835 130 37294	
6401	Diode.	4835 130 37094	
6402	Zener, 33 Volt, BZX79-C33.	4835 130 37904	
6403	Diode.	4835 130 37094	

S = Safety Part Be sure to use exact replacement part.

TS2746C101 (continued)

6404	Diode.	4835 130 37094
6404	Zener Diode, 75 volt	9331 180 00133
6449	Diode, 1N4148.	4835 130 37048
6450	Diode, 1N4148.	4835 130 37048
6460	Diode, Rect, BY228/20	9336 215 80112
6463	Diode, 1N4148.	4835 130 37048
6464	Zener Diode, 6.2 volt.	9337 242 70133
6465	Diode, BYD33J.	4835 130 37094
6466	Diode, BYD33J.	4835 130 37094
6480	Diode, Zener	4835 130 37947
6481	Diode, 1N4148.	4835 130 37048
6485	Diode, BYD33J.	4835 130 37094
6486	Diode, EGP20DL-530	4835 130 37919
6487	Diode.	4835 130 37094
6488	Diode, Rect, BYV27-200.	9322 126 72673
6490	Diode, Rect, BYV27-200.	9322 126 72673
6505	Diode, Bridge Rect, GBU6JL-7002	9322 138 08667
6507	Diode, BYD33J.	4835 130 37094
6508	Diode, BYD33J.	4835 130 37094
6510	Zener Diode, 20 volt	9331 178 60133
6511	Diode, BYV95C.	4835 130 37052
6512	Diode, Rect, BY228/20	4822 130 41275
6513	Diode, Rect, BY228/20	4822 130 41275
6514	Zener, 18 Volt, BZX79-C18.	4835 130 37908
6540	Diode.	4835 130 37294
6550	Diode, Rect, BY229X-800	9340 380 30127
6560	Diode, EGP20DL-530	4835 130 37919
6580	Diode, Rect, SB140.	9339 577 60673
6584	Diode, 1N4148.	4835 130 37048
6585	Diode, 1N4148.	4835 130 37048
6591	Diode, BAS216.	4835 130 37905
6601	Diode, Zener	4835 130 37684
6606	Zener, 4.7 Volt, BZX79-C4V7.	4835 130 37005
6607	Zener, 6.8 Volt, BZX79-C6V8.	4835 130 37945
6690	LED, LTL-307P.	4835 130 97096
6821	Zener Diode, 9.1 volt.	9331 177 80133
6822	Fixed Coil	4835 130 37048
6951	Diode, BAS216.	4835 130 37905
6961	Diode, BAS216.	4835 130 37905
7250	IC,.	9352 620 26112
7251	IC, LM317T	9337 220 80682
7254	Transistor, NPN, BC847B.	4822 130 60511
7256	Transistor, NPN, BC847B.	4822 130 60511
7258	Transistor, NPN, BC847B.	4822 130 60511
7263	Transistor, PNP, BC857B.	5322 130 60508
7266	Transistor, NPN, BC847B.	4822 130 60511
7330	IC,.	9352 184 10112
7401	IC,.	9322 121 47687
7460	Transistor, NPN, BU1508DX.	9340 170 50127
7461	Transistor, NPN, BF819	9335 354 50127
7462	Transistor, BC547B	4835 130 47055
7463	Transistor, BC557B	4835 130 47409
7480	IC,.	9322 028 93682
7481	Transistor, BC557B	4835 130 47409
7482	Transistor, PNP, BC857B.	5322 130 60508
7518	STH8NA60FI SMPS FET	9322 068 92687
7518	STH10NC60FI SMPS FET.	9322 155 66687
7520	IC, MC44603A	4835 209 88537
7570	IC,.	9337 711 00676
S 7581	Coupler, TCDT1101G	9338 431 30682
7590	Transistor, NPN, BC847B.	4822 130 60511
7591	Transistor, NPN, BC847B.	4822 130 60511
7592	Transistor, NPN, BC847B.	4822 130 60511
7600	IC, SAA5543PS/M4/1046 L90US1-1.4	4835 310 57477
7601	IC, ST24W04B6.	9322 097 23682
7603	Transistor, NPN, BC337	9331 796 00126
7604	Transistor, NPN, BC847B.	4822 130 60511
7605	Transistor, NPN, BC847B.	4822 130 60511
7608	Transistor, NPN, BC847B.	4822 130 60511
7609	Transistor, NPN, BC847B.	4822 130 60511
7680	IR Receiver.	9322 127 53667
7821	IC,.	9352 374 70112
7822	IC, HEF4052BT.	9333 729 50653
7823	Transistor, NPN, BC337-25.	3198 020 43530
7904	Transistor, NPN, BC847B.	4822 130 60511
7908	Transistor, NPN, BC847B.	4822 130 60511
7951	IC,.	4822 209 13706
9423	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
CBA	00EMF830A102 Main Chassis Board Asm.	00EM F83 0A102

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Mainscord, 125V, 10A	3135 010 03831
S AC02	Anode Clip	4835 256 97264
AC03	Cabinet Back	3139 124 27871
AC04	Cabinet Front.	3139 137 53001
AC05	Chassis Guide.	3139 124 31381
AC06	Control Buttons.	3139 124 27351
S AC07	Convergence and Purity Assembly.	2422 549 43385
S AC08	CRT A68AJB82X.	4835 131 27167
S AC09	Coil, Degaussing	3121 218 62701
AC11	Light Guide.	3139 124 26461
AC13	Owner's Manual, English.	3135 015 10761
AC14	Power Button	3139 124 26444
REMOTE	Remote Transmitter	3139 148 54201
AC16	Speaker, 16R, 1W5 (2 Used)	2422 264 00343
S AC18	Yoke	3313 203 01242
AC19	Yoke Wedge (3 Used).	4835 535 27001
AC21	Batteries f/Remote Transmitter	9299 000 13827
AC24	Spring	3139 121 26231

S = Safety Part Be sure to use exact replacement part.

TS2746C121 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts		
S 0127	3.15 Amp Fuse, ...	3122 358 72141	
0152	Cable, DIP, 6 Pin, 400mm	3104 301 09421	
0153	4 Pin Cable.	3104 301 09431	
0212	Connector, 2 Pin	2422 025 15396	
0220	4 Pin Board Connector.	2422 025 04852	
0223	3 Pin Board Connector.	2422 026 04963	
0224	1 Pin Board Connector.	2422 034 20021	
0228	1 Pin Board Connector.	2422 034 20021	
0234	Connector, 4 Pin	2422 025 15847	
S 0243	Connector, 6 Pin	2422 025 04854	
0244	4 Pin Board Connector.	2422 025 04852	
S 0245	Connector, 6 Pin	2422 025 04854	
S 0254	CRT Socket (9 Pin)	2422 500 80022	
0267	Connector, 3 Pin	2412 020 00725	
1000	Tuner.	2422 542 90057	
1001	Filter	2422 549 42501	
1003	45 MHz SAW, Filter,.	2422 549 42433	
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807	
1208	Crystal Resonator.	4835 242 77276	
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10869	
S 1571	1 Amp, Radial Fuse,.	4835 253 97162	
S 1572	1 Amp, Radial Fuse,.	4835 253 97162	
S 1580	Relay, 12V	2422 132 07317	
1600	Switch, Tactile.	2422 128 02742	
1601	Switch, Tactile.	2422 128 02742	
1602	Switch, Tactile.	2422 128 02742	
1603	Switch, Tactile.	2422 128 02742	
1606	Switch, Tactile.	2422 128 02742	
1660	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488	
1821	Ceramic Resonator.	4835 122 97102	
2001	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2002	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2003	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2004	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2006	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290	
2011	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2102	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2103	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2104	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2201	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2202	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2203	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2204	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2205	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2207	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2208	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2209	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2211	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2212	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2213	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2214	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2215	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280	
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 16654	
2220	Cap, 15p, 5%, 50V, Ceramic	3198 016 01590	
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2222	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2226	Cap, 33u, 20%, 25V, Electrolytic . .	2020 021 90124	
2227	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2247	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2248	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2249	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2330	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177	
2340	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495	
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320	
S 2343	Cap, 3n3, 10%, 2KV, Ceramic.	2020 558 90529	
2345	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020	
2401	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2402	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2404	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2405	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2407	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2409	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2420	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2426	Cap, 100n, 10%, 63V, Metalized Polyes ter.	2222 370 75104	
2428	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220	
2429	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2430	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2431	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2437	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2438	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2448	Cap, 220p, 10%, 500V, Ceramic. . . .	3198 019 42210	
2450	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91139	
2451	Cap, 15n, 10%, 50V, Polyester. . . .	2020 300 90575	
2451	0.01uF., 10%, 50V, Polyester, only 27	3198 138 20941	
2456	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176	
2457	Cap, 390n, 5%, 250V, Metalized Polypr opylene.	2222 479 90021	
2458	Cap, 2u2, 20%, 100V, Electrolytic. .	2020 021 91331	
2459	Cap, 680p, 10%, 500V, Ceramic. . . .	3198 019 46810	
2461	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020	
2462	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176	
2463	680pF., 10%, 2KV, Ceramic.	4835 122 47584	
S 2465	Cap, 10n, 5%, 1600V, Polypropylene .	2222 375 90154	
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050	
2473	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790	
2481	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740	
2482	Cap, 68n, 10%, 250V, Polyester . . .	2222 347 90234	
2484	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2485	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293	
2486	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2487	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2488	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2489	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2490	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710	
2491	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710	
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810	
2500	0.47uF., 250V, Polyester	4835 121 47569	
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
S 2507	Cap, 1n5, 10%, 1KV, Ceramic.	2020 558 90443	
2508	Cap, 470u, 20%, 200V, Electrolytic .	2020 024 90647	
S 2511	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020	
S 2518	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290	
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320	
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320	
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2530	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 021 91147	
2531	Cap, 1n, 2%, 50V, Polypropylene. . .	2020 310 90049	
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220	
2540	Cap, 100u, 20%, 25V, Electrolytic. .	2020 021 90547	
S 2545	1500pF., 250VAC, Ceramic	4835 122 47621	
S 2550	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2551	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91358	
2561	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020	
S 2562	Cap, 220p, 10%, 1KV, Ceramic	2020 558 90424	
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020	
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020	
2572	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330	
2575	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820	
2577	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020	
2586	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2604	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290	
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2613	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2615	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2619	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2622	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890	
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2629	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230	
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2631	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2679	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2681	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2821	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280	
2823	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2825	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2826	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090	
2827	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2828	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2829	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	
2830	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280	
2831	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	
2832	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280	

S = Safety Part Be sure to use exact replacement part.

TS2746C121 (continued)

2833	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280		3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
2834	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780		3401	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2835	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3402	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2836	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3403	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2837	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740		3405	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002
2838	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3406	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2839	Cap, 1u, 5%, 50V, Metalized Polyester	2020 308 90124		3407	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002
2840	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2841	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3409	1.5 ohm, 5%, 1/3W, Metal Film. . . .	4835 116 57664
2842	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2844	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3420	470k, 5%, 1/10W, Metal Film.	4835 111 37407
2845	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2913	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280		3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2914	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330		3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840
2915	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606
2916	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648		3425	Res, 120K, 5%, 1/10W, Metalized Glass	2120 108 91716
2917	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3426	39k, 5%, 1/10W, Metal Film	4835 111 27051
2918	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330		3428	22k, 5%, 1/10W, Metal Film	4835 111 37441
2919	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3429	27k, 5%, 1/10W, Metal Film	4835 111 37442
2920	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648		3431	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
2921	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3432	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
2931	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280		3436	Res, 1K, 2%, 0,25W	4822 051 10102
2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3437	10k, 5%, 1/10W, Metal Film	4835 111 37216
2952	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3438	33k, 1/4W, Carbon Film	4835 110 57375
2954	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
2955	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3447	10k, 5%, 1/10W, Metal Film	4835 111 37216
2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	S	3452	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63229
2960	Cap, 220u, 20%, 50V, Electrolytic. .	3198 026 52210	S	3453	Res, 4R7, 5%, 5W, Wire Wound	2322 251 41478
2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090	S	3454	Res, 33K, 5%, 1 1/3W, Metal Film . .	2322 194 63333
2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090		3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090		3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3462	Res, 6K8, 5%, 5W, Metal Film	2322 257 41682
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3010	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610		3464	Res, 1K, 2%, 0,25W	4822 051 10102
3013	Zero ohm,.	4835 111 27056	S	3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
3014	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052		3466	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903
3015	22k, 5%, 1/10W, Metal Film	4835 111 37441		3467	Res, 14K, 1%, 3/5W, Metal Film . . .	2322 156 21403
3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810		3467	Res, 15K, 1%, 3/5W, Metal Film . . .	2322 156 21503
3021	Res, 1K, 2%, 0,25W	4822 051 10102		3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3103	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3469	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
3104	10k, 5%, 1/10W, Metal Film	4835 111 37216		3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3108	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703
3109	10k, 5%, 1/10W, Metal Film	4835 111 37216		3481	Res, 35K7, 1%, 3/5W, Metal Film. . .	2322 156 23573
3123	75 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37276		3482	Res, 56K, 1%, 3/5W, Metal Film . . .	2322 156 25603
3200	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3201	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253		3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3203	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443	S	3485	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	S	3486	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3205	Res, 1K, 2%, 0,25W	4822 051 10102	S	3487	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3206	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	S	3488	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3490	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3209	22k, 5%, 1/10W, Metal Film	4835 111 37441	S	3491	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3212	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253	S	3492	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3213	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3495	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272
3215	22k, 5%, 1/10W, Metal Film	4835 111 37441		3496	10k, 5%, 1/10W, Metal Film	4835 111 37216
3216	Zero ohm,.	4835 111 27056		3497	10k, 5%, 1/10W, Metal Film	4835 111 37216
3217	Res, 1M5, 5%, 1/8W, Metalized Glass.	2322 730 61155		3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3218	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225
3219	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3503	10ohm, 120VAC, Positive Temperature C	
3220	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432			oefficient	4835 116 47001
3225	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S	3505	Surge Protector.	2422 549 43073
3228	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3231	Zero ohm,.	4835 111 27056	S	3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333
3232	Zero ohm,.	4835 111 27056	S	3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102
3233	Zero ohm,.	4835 111 27056		3512	15k, 5%, 1/10W, Metal Film	4835 111 37458
3243	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052		3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184
3246	82k, 5%, 1/10W, Metal Film	4835 111 37277		3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204
3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3515	2.5 ohm, 20%, 3.6W, Negative Temperat	
3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010			ure Coefficient.	2122 612 00023
3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340		3516	Res, 1K, 2%, 0,25W	4822 051 10102
3250	Zero ohm,.	4835 111 27056		3517	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3251	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S	3518	Res, 0R22, 5%, 3W, Metal Film. . . .	2120 106 90548
3252	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		3520	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3253	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		3521	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443
3257	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3525	33 ohm, 5%, 1/3W, Metal Film	4835 116 57665
3258	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3528	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3259	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3529	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3530	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3532	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3534	15k, 5%, 1/10W, Metal Film	4835 111 37458
3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3536	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3537	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046	S	3542	4.7 Megohm, 5%, 1/2W, Metal Film . .	4835 116 57009
S 3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109		3570	15k, 5%, 1/10W, Metal Film	4835 111 37458
S 3341	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483		3571	Res, 150K, 1%, 3/5W, Metal Film. . .	2322 156 21504
S 3342	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483		3573	Res, 2K, 1%, 1/10W, Metalized Glass.	2120 108 92657
3343	1.5k, 20%, 1/2W, Carbon Composition.	4835 110 47034		3574	33k, 5%, 1/10W, Metal Film	4835 111 37248
3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290		3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
S 3345	VDR, DC, 1mA, 50V, MAX 115V	2322 593 13507		3577	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030

S = Safety Part Be sure to use exact replacement part.

TS2746C121 (continued)

3578	Res, 1K, 2%, 0,25W	4822 051 10102	
3579	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451	
3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3592	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3594	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3595	68k, 5%, 1/6W, Carbon Film	4835 111 37205	
3596	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3597	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3598	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3599	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3607	8.2k, 5%, 1/8W, Inline Package . . .	4835 111 97046	
3608	2.2k, 5%, 1/8W, Inline Package . . .	4835 111 97049	
3609	2.2k, 5%, Resistor Network	2120 108 93868	
3611	Res, 1K, 2%, 0,25W	4822 051 10102	
3612	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3613	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3615	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3617	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3619	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3629	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259	
3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3631	27k, 5%, 1/10W, Metal Film	4835 111 37442	
S 3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63479	
3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210	
3634	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3635	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3636	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3637	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3653	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3654	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3655	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3662	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3663	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3664	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3665	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3666	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376	
3667	27k, 5%, 1/10W, Metal Film	4835 111 37442	
3672	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3673	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3674	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231	
3675	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3676	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3677	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3680	680 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37271	
3681	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3682	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3683	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3684	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3821	15k, 5%, 1/10W, Metal Film	4835 111 37458	
3822	1.2k, 5%, 1/10W, Metal Film.	4835 111 27042	
3823	100k, 5%, 1/10W, Metal Film.	4835 111 37434	
3824	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3825	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3826	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3827	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3828	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3829	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272	
3830	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272	
3831	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198 011 03310	
3832	47 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37262	
3908	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3909	Res, 1K, 2%, 0,25W	4822 051 10102	
3910	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376	
3911	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230	
3912	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3913	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3914	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	
3915	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231	
3916	220 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37371	
3917	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3918	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3919	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376	
3920	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231	
3921	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230	
3922	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	
3923	220 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37371	
3924	39k, 5%, 1/10W, Metal Film	4835 111 27051	
3925	39k, 5%, 1/10W, Metal Film	4835 111 27051	
3926	39k, 5%, 1/10W, Metal Film	4835 111 27051	
3929	39k, 5%, 1/10W, Metal Film	4835 111 27051	
3930	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3931	Res, 1K, 2%, 0,25W	4822 051 10102	
3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810	
3951	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3953	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3955	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
3957	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
4001	Zero ohm,.	4835 111 27056	
4002	Zero ohm,.	4835 111 27056	
4004	Zero ohm,.	4835 111 27056	
4007	Zero ohm,.	4835 111 27056	
4009	Zero ohm,.	4835 111 27056	
4010	Zero ohm,.	4835 111 27056	
4011	Zero ohm,.	4835 111 27056	
4012	Zero ohm,.	4835 111 27056	
4013	Zero ohm,.	4835 111 27056	
4020	Zero ohm,.	4835 111 27056	
4051	Zero ohm,.	4835 111 27056	
4100	Zero ohm,.	4835 111 27056	
4101	Zero ohm,.	4835 111 27056	
4102	Zero ohm,.	4835 111 27056	
4103	Zero ohm,.	4835 111 27056	
4143	Zero ohm,.	4835 111 27056	
4144	Zero ohm,.	4835 111 27056	
4203	Zero ohm,.	4835 111 27056	
4207	Zero ohm,.	4835 111 27056	
4212	Zero ohm,.	4835 111 27056	
4214	Zero ohm,.	4835 111 27056	
4215	Zero ohm,.	4835 111 27056	
4216	Zero ohm,.	4835 111 27056	
4501	Zero ohm,.	4835 111 27056	
4602	Zero ohm,.	4835 111 27056	
4650	Zero ohm,.	4835 111 27056	
4651	Zero ohm,.	4835 111 27056	
4652	Zero ohm,.	4835 111 27056	
4654	Zero ohm,.	4835 111 27056	
4655	Zero ohm,.	4835 111 27056	
4684	Zero ohm,.	4835 111 27056	
4687	Zero ohm,.	4835 111 27056	
4831	Zero ohm,.	4835 111 27056	
4832	Zero ohm,.	4835 111 27056	
4833	Zero ohm,.	4835 111 27056	
4902	Zero ohm,.	4835 111 27056	
4903	Zero ohm,.	4835 111 27056	
4904	Zero ohm,.	4835 111 27056	
4905	Zero ohm,.	4835 111 27056	
4909	Zero ohm,.	4835 111 27056	
4911	Zero ohm,.	4835 111 27056	
4912	Zero ohm,.	4835 111 27056	
4914	Zero ohm,.	4835 111 27056	
4957	Zero ohm,.	4835 111 27056	
4999	Zero ohm,.	4835 111 27056	
5000	Coil, 5u6.	3198 018 25680	
5004	Coil, 820n	2422 535 97314	
5201	Coil, 22u.	3198 018 22290	
5202	Coil, 6u8.	3198 018 16880	
5342	22uH., 10%, Coil, Peaking.	4835 157 67069	
S 5445	Transformer, L.O.T., models ending in C101, C121, and C125	2422 531 02327	
S 5445	Transformer, L.O.T., models ending in C221 and C225.	3128 138 20941	
5451	Coil, 27u.	2422 535 96614	
5457	Coil, Linear Correction.	3128 138 53241	
5461	Transformer.	3128 138 33811	
5480	Coil, 27u.	2422 535 97334	
5480	Coil, 39u.	2422 535 97336	
5480	33uH., Peaking Coil, only in 25. . .	4835 157 58205	
S 5500	Filter, Mains, 5mH, 2A	2422 549 43432	
5516	100uH., Coil	4835 157 67078	
5518	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5521	Coil, 2u2.	3198 018 12280	
5540	Coil, 4u7.	3198 018 14780	
S 5545	Transfomer,.	2422 531 02314	
5551	27uH., 5%, Coil, Peaking	4835 157 67052	
5552	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5572	100uH., Coil	4835 157 67078	
5573	100uH., Coil	4835 157 67078	
5576	100uH., Coil	4835 157 67078	
5577	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5600	Coil, 8u2.	3198 018 18280	
5601	Coil, 8u2.	3198 018 18280	
5620	Coil, 6u8.	3198 018 16880	
5821	Coil, 100u	3198 018 21010	
5822	Coil, 18u.	3198 018 21890	
6008	Zener, 33 Volt BZX79-C33	4835 130 37904	
6113	Zener Diode, 6.8 volt.	9340 386 40115	
6211	Diode, 1N4148.	4835 130 37048	
6212	Diode, 1N4148.	4835 130 37048	
6213	Diode, 1N4148.	4835 130 37048	
6331	Diode.	4835 130 37294	
6333	Diode.	4835 130 37294	
6335	Diode.	4835 130 37294	
6401	Diode.	4835 130 37094	
6402	Zener, 33 Volt, BZX79-C33.	4835 130 37904	
6403	Diode.	4835 130 37094	

S = Safety Part Be sure to use exact replacement part.

TS2746C121 (continued)

6404	Diode.	4835 130 37094
6404	Zener Diode, 75 volt	9331 180 00133
6449	Diode, 1N4148.	4835 130 37048
6450	Diode, 1N4148.	4835 130 37048
6460	Diode, Rect, BY228/20	9336 215 80112
6463	Diode, 1N4148.	4835 130 37048
6464	Zener Diode, 6.2 volt.	9337 242 70133
6465	Diode, BYD33J.	4835 130 37094
6466	Diode, BYD33J.	4835 130 37094
6480	Diode, Zener	4835 130 37947
6481	Diode, 1N4148.	4835 130 37048
6485	Diode, BYD33J.	4835 130 37094
6486	Diode, EGP20DL-530	4835 130 37919
6487	Diode.	4835 130 37094
6488	Diode, Rect, BYV27-200.	9322 126 72673
6490	Diode, Rect, BYV27-200.	9322 126 72673
6505	Diode, Bridge Rect, GBU6JL-7002	9322 138 08667
6507	Diode, BYD33J.	4835 130 37094
6508	Diode, BYD33J.	4835 130 37094
6510	Zener Diode, 20 volt	9331 178 60133
6511	Diode, BYV95C.	4835 130 37052
6512	Diode, Rect, BY228/20	4822 130 41275
6513	Diode, Rect, BY228/20	4822 130 41275
6514	Zener, 18 Volt, BZX79-C18.	4835 130 37908
6540	Diode.	4835 130 37294
6550	Diode, Rect, BY229X-800	9340 380 30127
6560	Diode, EGP20DL-530	4835 130 37919
6580	Diode, Rect, SB140.	9339 577 60673
6584	Diode, 1N4148.	4835 130 37048
6585	Diode, 1N4148.	4835 130 37048
6591	Diode, BAS216.	4835 130 37905
6601	Diode, Zener	4835 130 37684
6606	Zener, 4.7 Volt, BZX79-C4V7.	4835 130 37005
6607	Zener, 6.8 Volt, BZX79-C6V8.	4835 130 37945
6690	LED, LTL-307P.	4835 130 97096
6821	Zener Diode, 9.1 volt.	9331 177 80133
6822	Fixed Coil	4835 130 37048
6951	Diode, BAS216.	4835 130 37905
6961	Diode, BAS216.	4835 130 37905
7250	IC,.	9352 620 26112
7251	IC, LM317T	9337 220 80682
7254	Transistor, NPN, BC847B.	4822 130 60511
7256	Transistor, NPN, BC847B.	4822 130 60511
7258	Transistor, NPN, BC847B.	4822 130 60511
7263	Transistor, PNP, BC857B.	5322 130 60508
7266	Transistor, NPN, BC847B.	4822 130 60511
7330	IC,.	9352 184 10112
7401	IC,.	9322 121 47687
7460	Transistor, NPN, BU1508DX.	9340 170 50127
7461	Transistor, NPN, BF819	9335 354 50127
7462	Transistor, BC547B	4835 130 47055
7463	Transistor, BC557B	4835 130 47409
7480	IC,.	9322 028 93682
7481	Transistor, BC557B	4835 130 47409
7482	Transistor, PNP, BC857B.	5322 130 60508
7518	STH8NA60FI SMPS FET	9322 068 92687
7518	STH10NC60FI SMPS FET.	9322 155 66687
7520	IC, MC44603A	4835 209 88537
7570	IC,.	9337 711 00676
S 7581	Coupler, TCDT1101G	9338 431 30682
7590	Transistor, NPN, BC847B.	4822 130 60511
7591	Transistor, NPN, BC847B.	4822 130 60511
7592	Transistor, NPN, BC847B.	4822 130 60511
7600	IC, SAA5543PS/M4/1046 L90US1-1.4	4835 310 57477
7601	IC, ST24W04B6.	9322 097 23682
7603	Transistor, NPN, BC337	9331 796 00126
7604	Transistor, NPN, BC847B.	4822 130 60511
7605	Transistor, NPN, BC847B.	4822 130 60511
7608	Transistor, NPN, BC847B.	4822 130 60511
7609	Transistor, NPN, BC847B.	4822 130 60511
7680	IR Receiver.	9322 127 53667
7821	IC,.	9352 374 70112
7822	IC, HEF4052BT.	9333 729 50653
7823	Transistor, NPN, BC337-25.	3198 020 43530
7904	Transistor, NPN, BC847B.	4822 130 60511
7908	Transistor, NPN, BC847B.	4822 130 60511
7951	IC,.	4822 209 13706
9423	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
CBA	00EMF830A102 Main Chassis Board Asm.	00EM F83 0A102

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Mainscord, 125V, 10A	3135 010 03831
S AC02	Anode Clip	4835 256 97264
AC03	Cabinet Back	3139 124 27871
AC04	Cabinet Front.	3139 137 53001
AC05	Chassis Guide.	3139 124 31381
AC06	Control Buttons.	3139 124 27351
S AC07	Convergence and Purity Assembly.	2422 549 43385
S AC08	CRT A68AJB82X.	4835 131 27167
S AC09	Coil, Degaussing	3121 218 62701
AC11	Light Guide.	3139 124 26461
AC13	Owner's Manual, English.	3135 015 10761
AC14	Power Button	3139 124 26444
REMOTE	Remote Transmitter	3139 148 54201
AC16	Speaker, 16R, 1W5 (2 Used)	2422 264 00343
S AC18	Yoke	3313 203 01242
AC19	Yoke Wedge (3 Used).	4835 535 27001
AC21	Batteries f/Remote Transmitter	9299 000 13827
AC24	Spring	3139 121 26231

S = Safety Part Be sure to use exact replacement part.

TS2746C221 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts	
0113	L9 SOPS HEATSINK	3139 121 62041
0119	DIODE HEATSINK L9.	3139 121 26691
0121	LINE HEATSINK (CINCH).	3139 121 61942
S 0127	Holder, Fuse, 2 Pin.	3122 358 71251
0211	Connector, 2 Pin	2422 025 11196
0212	Connector, 2 Pin	2422 025 15396
0220	4 Pin Board Connector.	2422 025 04852
0221	Connector, 4 Pin	2422 025 15503
0222	Connector, 2 Pin	2422 025 10646
0223	3 Pin Board Connector.	2422 026 04963
0225	1 Pin Board Connector.	2422 034 20021
0226	1 Pin Board Connector.	2422 034 20021
0234	Connector, 4 Pin	2422 025 15847
S 0243	Connector, 6 Pin	2422 025 04854
0244	4 Pin Board Connector.	2422 025 04852
S 0245	Connector, 6 Pin	2422 025 04854
S 0254	CRT Socket (9 Pin)	2422 500 80022
0267	Connector, 3 Pin	2412 020 00725
0350	ISOPROPYL ALCOHOL.	1306 500 43201
1000	TUNER.	3139 147 16412
1001	Filter	2422 549 42501
1003	45 MHz SAW, Filter,.	2422 549 42433
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807
1208	Crystal Resonator, 3.58MHz	2422 543 00832
S 1500	Fue, 4 A, 250V	2422 086 10905
S 1571	FUSE 1A 250V	2422 086 10779
S 1572	FUSE 1A 250V	2422 086 10779
S 1580	Relay, 12V, 5A G5PA-1.	2422 132 07444
1600	Switch, Tactile.	2422 128 02742
1601	Switch, Tactile.	2422 128 02742
1602	Switch, Tactile.	2422 128 02742
1603	Switch, Tactile.	2422 128 02742
1606	Switch, Tactile.	2422 128 02742
1660	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488
1821	Ceramic Resonator, 514KHz5, CSB503F58	2422 540 98344
2001	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2002	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2003	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2004	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2006	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2011	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2102	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2103	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2104	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2201	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2202	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2203	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2204	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2205	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2208	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2209	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2211	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2212	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2213	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2214	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2215	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 15654
2220	Cap, 18p, 5%, 50V, Ceramic	3198 016 01890
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2222	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2226	Cap, 33u, 20%, 25V, Electrolytic . .	2020 021 90124
2227	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2247	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2248	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2249	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2330	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177
2340	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320
S 2343	Cap, 3n3, 10%, 2KV, Ceramic.	2020 558 90529
2345	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2401	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2402	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2404	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2405	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2407	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2409	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2420	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2426	Cap, 100n, 10%, 63V, Metalized Polyes ter.	2222 370 75104
2428	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2429	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2430	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2431	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2437	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2438	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2448	Cap, 33p, 5%, 500V, Ceramic.	2020 557 90192
2450	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91139
2451	Cap, 10n, 10%, 50V, Polyester. . . .	3198 014 01030
2456	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176
2457	Cap, 390n, 5%, 250V, Metalized Polypr opylene.	2222 479 90021
2458	Cap, 2u2, 20%, 100V, Electrolytic. .	2020 021 91331
2459	Cap, 680p, 10%, 500V, Ceramic. . . .	3198 019 46810
2461	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2462	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176
S 2463	Cap, 680p, 10%, 2KV, Ceramic	2020 558 90485
S 2465	Cap, 10n, 5%, 1600V, Polypropylene .	2222 375 90154
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050
2473	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2481	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2482	Cap, 68n, 10%, 250V, Polyester . . .	2222 347 90234
2484	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2485	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2486	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2487	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2488	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2489	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2490	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2491	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810
2499	Cap, 220n, 10%, 100V, Metalized Polye ster	2222 365 25224
2500	Cap, 470n, 20%, 275V, Polypropylene.	2222 336 29148
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2507	Cap, 1n5, 10%, 1KV, Ceramic.	3198 019 61520
2508	Cap, 470u, 20%, 200V, Electrolytic .	2020 024 90647
2511	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
2518	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2530	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 021 91147
2531	Cap, 1n, 2%, 50V, Polypropylene. . .	2020 310 90049
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2540	Cap, 100u, 20%, 25V, Electrolytic. .	2020 021 90547
S 2545	Cap, 1n5, 20%, v, Ceramic.	2020 554 90128
2550	Cap, 470p, 10%, 1KV, Ceramic	3198 019 64710
2551	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91358
2561	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2562	Cap, 220p, 10%, 1KV, Ceramic	3198 019 62210
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2572	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2575	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2577	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
2586	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2604	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2613	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2615	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2619	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2622	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2629	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2679	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2681	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2821	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280
2823	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2825	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2826	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090

S = Safety Part Be sure to use exact replacement part.

TS2746C221 (continued)

2827	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
2828	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	3198 013 01020
2829	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
2830	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280		3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	3198 013 01020
2831	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	S	3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
2832	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280	S	3341	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
2833	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280	S	3342	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2306 204 03108
2834	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780		3343	Res, 1K5, 20%, 1/2W, Carbon Film . .	3198 013 01520
2835	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
2836	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3345	VDR DC 1MA/50V S MAX 110V A . . .	2122 550 00152
2837	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740		3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
2838	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3401	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2839	Cap, 1u, 10%, 50V, Polyester	3198 014 01050		3402	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2840	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3403	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2841	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3405	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002
2842	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3406	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3407	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002
2844	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2845	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3409	Res, 1R5, 5%, 1/3W, Metal Film . . .	2306 204 03158
2913	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280		3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2914	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330		3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2915	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3420	Res, 470K, 5%, 1/10W, Metalized Glass	3198 021 54740
2916	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648		3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2917	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2918	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330		3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840
2919	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606
2920	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648		3425	Res, 120K, 5%, 1/10W, Metalized Glass	2120 108 91716
2921	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3426	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
2931	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280		3428	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3429	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
2952	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3431	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
2954	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3432	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
2955	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3433	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3436	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3437	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3438	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
2960	Cap, 220u, 20%, 50V, Electrolytic. .	3198 026 52210		3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090		3447	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090		3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090		3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3452	Res, 33 ohm, 5%, 2 1/2W, Metal Film.	3198 012 33390
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3453	Res, 4R7, 5%, 5W, Wire Wound	2322 251 41478
3010	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610	S	3454	Res, 33K, 5%, 1 1/3W, Metal Film . .	2322 194 63333
3013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020		3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3014	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720		3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3015	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	S	3462	Res, 6K8, 5%, 5W, Metal Film	2322 257 41682
3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810		3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3021	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020		3464	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3103	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220	S	3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
3104	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030		3466	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903
3108	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3467	Res, 14K, 1%, 3/5W, Metal Film . . .	2322 156 21403
3109	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030		3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3123	Res, 75 ohm, 5%, 1/10W, Metalized Gla			3469	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
	ss.	3198 021 57590		3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3200	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010		3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703
3201	Res, 390 ohm, 5%, 1/10W, Metalized Gl			3481	Res, 35K7, 1%, 3/5W, Metal Film. . .	2322 156 23573
	ass.	3198 021 53910		3482	Res, 56K, 1%, 3/5W, Metal Film . . .	2322 156 25603
3203	Res, 330 ohm, 5%, 1/10W, Metalized Gl			3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
	ass.	3198 021 53310		3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	S	3486	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
3205	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	S	3487	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
3206	Res, 560 ohm, 5%, 1/10W, Metalized Gl		S	3488	Res, 4R7, 5%, 1/2W, Metal Film . . .	2306 207 03478
	ass.	3198 021 55610	S	3490	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3491	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
3209	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	S	3492	Res, 1 ohm, 5%, 1/2W, Metal Film . .	2306 207 03108
3212	Res, 390 ohm, 5%, 1/10W, Metalized Gl			3495	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
	ass.	3198 021 53910		3496	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3213	Res, 560 ohm, 5%, 1/10W, Metalized Gl			3497	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	ass.	3198 021 55610		3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3215	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	S	3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225
3216	Res, Zero ohm, 'Chip' Jumper	3198 021 90020		3503	PTC DC ZPB 120V S 10R PM30 B . . .	2120 661 00019
3217	Res, 1M5, 5%, 1/8W, Metalized Glass.	2322 730 61155	S	3505	Surge Protector.	2422 549 43073
3218	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010	S	3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3219	Res, 560 ohm, 5%, 1/10W, Metalized Gl		S	3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333
	ass.	3198 021 55610	S	3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102
3220	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010		3512	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3225	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040		3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184
3228	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010		3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204
3243	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	S	3515	2.5 ohm, 20%, 3.6W, Negative Temperat	
3246	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230			ure Coefficient.	2122 612 00023
3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3516	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3517	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340	S	3518	Res, 0R22, 5%, 2 1/2W, Metal Film. .	3198 012 32270
3250	Res, Zero ohm, 'Chip' Jumper	3198 021 90020		3520	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3251	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040		3521	Res, 330 ohm, 5%, 1/10W, Metalized Gl	
3252	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220			ass.	3198 021 53310
3253	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	S	3525	Res, 47 ohm, 5%, 1/3W, Metal Film. .	2306 204 03479
3257	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010		3528	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3258	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010		3529	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3259	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010		3530	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3532	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	3198 013 01020		3534	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530

S = Safety Part Be sure to use exact replacement part.

TS2746C221 (continued)

3536	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3537	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
S 3542	Res, 4M7, 5%, 1/2W, Metalized Glass.	2322 242 13475
3570	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3571	Res, 150K, 1%, 3/5W, Metal Film. . .	2322 156 21504
3573	Res, 2K, 1%, 1/8W, Metalized Glass .	2322 734 62002
3574	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3577	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3578	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3579	Res, 1K, 1%, 1/8W, Metalized Glass .	2322 734 61002
3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3592	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3594	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3595	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198 011 06830
3596	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3597	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3598	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3599	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3607	RST NETW RGLE 10X 8K2 PM5 B . . .	2120 108 93916
3608	RST NETW RGLE 6X 2K2 PM5 B . . .	2120 108 93913
3609	RST NETW RGLE 7X 2K2 PM5 B . . .	2120 108 93915
3611	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3612	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3613	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3615	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3616	Jumper Wire/Staple	0322 179 00003
3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3619	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3629	Res, 470 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 54710
3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
3631	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
S 3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	3198 012 34790
3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210
3634	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3635	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3636	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3637	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3653	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3654	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3655	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710
3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3662	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3663	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220
3664	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220
3665	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3666	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3667	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3672	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3673	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3674	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3675	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3676	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3677	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3680	Res, 680 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 56810
3681	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3682	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220
3683	Res, 100 ohm, 5%, 1/10W, Glass . . .	3198 021 51010
3684	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3821	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3822	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3823	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3824	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3825	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3826	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3827	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3828	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3829	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3830	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3831	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198 011 03310
3832	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3908	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710
3909	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3910	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3911	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230
3912	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
3913	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3914	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820
3915	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3916	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3917	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
3918	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3919	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3920	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3921	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230
3922	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820
3923	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3924	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3925	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3926	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3929	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
3930	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710
3931	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810
3951	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3953	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3955	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3957	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
4001	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4004	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4007	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4009	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4010	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4011	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4012	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4013	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4020	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4051	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4100	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4101	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4144	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4203	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4207	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4212	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4215	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4216	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4465	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4501	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4650	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4651	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4652	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4654	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4684	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4687	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4833	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4902	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4903	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4904	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4905	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4909	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4911	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4912	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4914	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4957	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
4999	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
5000	Coil, 5u6.	3198 018 25680
5004	Coil, 820n	2422 535 97314
5201	Coil, 22u.	3198 018 22290
5202	Coil, 6u8.	3198 018 16880
5342	Coil, 22u.	3198 018 22290
S 5445	Transformer, L.O.T., models ending in C221 and C225.	3128 138 20941
5451	Coil, 27u.	2422 535 96614
5457	Coil, Linear Correction.	3128 138 53241
5461	TFM SIG SLOT UU-1522S WIRE B . . .	2422 531 02318
5461	Transformer.	3128 138 33811
5480	Coil, 39u.	2422 535 97336
S 5500	Filter, Mains, 5mH, 2A	2422 549 43432
5516	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5518	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5521	Coil, 2u2.	3198 018 12280
5540	Coil, 4u7.	3198 018 14780
S 5545	Transfomer,.	2422 531 02314
5551	Coil, 27u.	2422 535 95366
5552	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5572	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5573	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5576	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
5577	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
5600	Coil, 8u2.	3198 018 18280
5601	Coil, 8u2.	3198 018 18280
5620	Coil, 6u8.	3198 018 16880
5821	Coil, 100u	3198 018 21010
5822	Coil, 18u.	3198 018 21890
6008	Zener Diode, 33 volt	3198 010 23390
6113	Zener Diode, 6.8 volt.	9340 386 40115
6211	Diode, Signal, 1N4148.	3198 010 10010
6212	Diode, Signal, 1N4148.	3198 010 10010
6213	Diode, Signal, 1N4148.	3198 010 10010
6331	Diode, Signal, BAV21	3198 010 10070
6333	Diode, Signal, BAV21	3198 010 10070
6335	Diode, Signal, BAV21	3198 010 10070

S = Safety Part Be sure to use exact replacement part.

TS2746C221 (continued)

6401	Diode, Rect, BYD33D	9337 234 00133	9203	Jumper Wire/Staple	0322 179 00003
6402	Zener Diode, 33 volt	3198 010 23390	9204	Jumper Wire/Staple	0322 179 00003
6403	Diode, Rect, BYD33D	9337 234 00133	9205	Jumper Wire/Staple	0322 179 00003
6404	Zener Diode, 75 volt	9331 180 00133	9206	Jumper Wire/Staple	0322 179 00003
6449	Diode, Signal, 1N4148.	3198 010 10010	9207	Jumper Wire/Staple	0322 179 00003
6450	Diode, Signal, 1N4148.	3198 010 10010	9208	Jumper Wire/Staple	0322 179 00003
6460	Diode, Rect, BY228/20	9336 215 80112	9209	Jumper Wire/Staple	0322 179 00003
6463	Diode, Signal, 1N4148.	3198 010 10010	9210	Jumper Wire/Staple	0322 179 00003
6464	Zener Diode, 6.2 volt.	9331 668 30133	9211	Jumper Wire/Staple	0322 179 00003
6465	Diode, Rect, BYD33J	9337 234 20133	9214	Jumper Wire/Staple	0322 179 00003
6466	Diode, Rect, BYD33J	9337 234 20133	9215	Jumper Wire/Staple	0322 179 00003
6480	Zener Diode, 27 volt	3198 010 22790	9216	Jumper Wire/Staple	0322 179 00003
6481	Diode, Signal, 1N4148.	3198 010 10010	9217	Jumper Wire/Staple	0322 179 00003
6485	Diode, Rect, BYD33J	9337 234 20133	9218	Jumper Wire/Staple	0322 179 00003
6486	Diode, Rect, EGP20DL-5300	9322 100 13682	9220	Jumper Wire/Staple	0322 179 00003
6487	Diode, Rect, BYD33D	9337 234 00133	9221	Jumper Wire/Staple	0322 179 00003
6488	Diode, Rect, BYV27-200.	9322 126 72673	9222	Jumper Wire/Staple	0322 179 00003
6490	Diode, Rect, BYV27-200.	9322 126 72673	9225	Jumper Wire/Staple	0322 179 00003
6505	Diode, Bridge Rect, GBU6JL-7002	9322 138 08667	9226	Jumper Wire/Staple	0322 179 00003
6507	Diode, Rect, BYD33J	9337 234 20133	9227	Jumper Wire/Staple	0322 179 00003
6508	Diode, Rect, BYD33J	9337 234 20133	9228	Jumper Wire/Staple	0322 179 00003
6510	Zener Diode, 20 volt	9331 178 60133	9229	Jumper Wire/Staple	0322 179 00003
6511	Diode, Rect, BYV95C	9335 001 80133	9230	Jumper Wire/Staple	0322 179 00003
6512	Diode, Rect, 1N5062	3198 010 10120	9231	Jumper Wire/Staple	0322 179 00003
6513	Diode, Rect, 1N5062	3198 010 10120	9232	Jumper Wire/Staple	0322 179 00003
6514	Zener Diode, 18 volt	3198 010 21890	9233	Jumper Wire/Staple	0322 179 00003
6540	Diode, Signal, BAV21	3198 010 10070	9234	Jumper Wire/Staple	0322 179 00003
6550	Diode, Rect, BY229X-800	9340 380 30127	9236	Jumper Wire/Staple	0322 179 00003
6560	Diode, Rect, EGP20DL-5300	9322 100 13682	9237	Jumper Wire/Staple	0322 179 00003
6580	Diode, Rect, SB140.	9339 577 60673	9238	Jumper Wire/Staple	0322 179 00003
6584	Diode, Signal, 1N4148.	3198 010 10010	9240	Jumper Wire/Staple	0322 179 00003
6585	Diode, Signal, 1N4148.	3198 010 10010	9241	Jumper Wire/Staple	0322 179 00003
6591	Diode, Signal, BAS16WS	9322 031 99685	9242	Jumper Wire/Staple	0322 179 00003
6601	Zener Diode, 3.9 volt.	3198 010 23980	9243	Jumper Wire/Staple	0322 179 00003
6603	Jumper Wire/Staple	0322 179 00003	9245	Jumper Wire/Staple	0322 179 00003
6604	Jumper Wire/Staple	0322 179 00003	9301	Jumper Wire/Staple	0322 179 00003
6605	Jumper Wire/Staple	0322 179 00003	9401	Jumper Wire/Staple	0322 179 00003
6606	Zener Diode, 4.7 volt.	3198 010 24780	9402	Jumper Wire/Staple	0322 179 00003
6607	Zener Diode, 6.8 volt.	3198 010 26880	9403	Jumper Wire/Staple	0322 179 00003
6690	LED VS LTL-307P (LITO) B	9322 033 95682	9404	Jumper Wire/Staple	0322 179 00003
6821	Zener Diode, 9.1 volt.	9331 177 80133	9407	Jumper Wire/Staple	0322 179 00003
6822	Diode, Signal, 1N4148.	3198 010 10010	9408	Jumper Wire/Staple	0322 179 00003
6951	Diode, Signal, BAS16WS	9322 031 99685	9411	Jumper Wire/Staple	0322 179 00003
6961	Diode, Signal, BAS16WS	9322 031 99685	9414	Jumper Wire/Staple	0322 179 00003
7250	IC,	9352 620 26112	9417	Jumper Wire/Staple	0322 179 00003
7251	IC, LM317T	9337 220 80682	9419	Jumper Wire/Staple	0322 179 00003
7254	Transistor, NPN, BC847B.	3198 010 42030	9420	Jumper Wire/Staple	0322 179 00003
7256	Transistor, NPN, BC847B.	3198 010 42030	9421	Jumper Wire/Staple	0322 179 00003
7258	Transistor, NPN, BC847B.	3198 010 42030	9422	Jumper Wire/Staple	0322 179 00003
7263	Transistor, PNP, BC857B.	3198 010 42150	9424	Jumper Wire/Staple	0322 179 00003
7266	Transistor, NPN, BC847B.	3198 010 42030	9425	Jumper Wire/Staple	0322 179 00003
7330	IC, TDA6107Q/N2.	9352 576 50112	9427	Jumper Wire/Staple	0322 179 00003
7401	IC,	9322 121 47687	9428	Jumper Wire/Staple	0322 179 00003
7460	Transistor, NPN, BU1508DX.	9340 170 50127	9460	Jumper Wire/Staple	0322 179 00003
7461	Transistor, NPN, BF819	9335 354 50127	9461	Jumper Wire/Staple	0322 179 00003
7462	Transistor, NPN, BC547B.	3198 020 40030	9500	Jumper Wire/Staple	0322 179 00003
7463	Transistor, PNP, BC557B.	3198 020 40110	9501	Jumper Wire/Staple	0322 179 00003
7480	IC,	9322 028 93682	9502	Jumper Wire/Staple	0322 179 00003
7481	Transistor, PNP, BC557B.	3198 020 40110	9503	Jumper Wire/Staple	0322 179 00003
7482	Transistor, PNP, BC857B.	3198 010 42150	9505	Jumper Wire/Staple	0322 179 00003
7518	STH10NC60FI SMPS FET.	9322 155 66687	9509	Jumper Wire/Staple	0322 179 00003
7520	IC,	9322 108 36682	9510	Jumper Wire/Staple	0322 179 00003
7570	IC,	9337 711 00676	9511	Jumper Wire/Staple	0322 179 00003
S 7581	Coupler, TCDT1101G	9338 431 30682	9512	Jumper Wire/Staple	0322 179 00003
7590	Transistor, NPN, BC847B.	3198 010 42030	9513	Jumper Wire/Staple	0322 179 00003
7591	Transistor, NPN, BC847B.	3198 010 42030	9515	Jumper Wire/Staple	0322 179 00003
7592	Transistor, NPN, BC847B.	3198 010 42030	9516	Jumper Wire/Staple	0322 179 00003
7600	IC,	9352 670 96112	9517	Jumper Wire/Staple	0322 179 00003
7601	IC, ST24W04B6.	9322 097 23682	9518	Jumper Wire/Staple	0322 179 00003
7603	Transistor, NPN, BC337	9331 796 00126	9521	Jumper Wire/Staple	0322 179 00003
7604	Transistor, NPN, BC847B.	3198 010 42030	9526	Jumper Wire/Staple	0322 179 00003
7605	Transistor, NPN, BC847B.	3198 010 42030	9601	Jumper Wire/Staple	0322 179 00003
7608	Transistor, NPN, BC847B.	3198 010 42030	9602	Jumper Wire/Staple	0322 179 00003
7609	Transistor, NPN, BC847B.	3198 010 42030	9603	Jumper Wire/Staple	0322 179 00003
7680	IR RECEIVER.	9322 154 48667	9604	Jumper Wire/Staple	0322 179 00003
7821	IC,	9352 374 70112	9605	Jumper Wire/Staple	0322 179 00003
7822	IC, HEF4052BT.	9333 729 50653	9606	Jumper Wire/Staple	0322 179 00003
7823	Transistor, NPN, BC337-25.	3198 020 43530	9608	Jumper Wire/Staple	0322 179 00003
7904	Transistor, NPN, BC847B.	3198 010 42030	9609	Jumper Wire/Staple	0322 179 00003
7908	Transistor, NPN, BC847B.	3198 010 42030	9610	Jumper Wire/Staple	0322 179 00003
7951	IC,	9351 861 60112	9611	Jumper Wire/Staple	0322 179 00003
9001	Jumper Wire/Staple	0322 179 00003	9612	Jumper Wire/Staple	0322 179 00003
9003	Jumper Wire/Staple	0322 179 00003	9613	Jumper Wire/Staple	0322 179 00003
9005	Jumper Wire/Staple	0322 179 00003	9614	Jumper Wire/Staple	0322 179 00003
9011	Jumper Wire/Staple	0322 179 00003	9615	Jumper Wire/Staple	0322 179 00003
9012	Jumper Wire/Staple	0322 179 00003	9618	Jumper Wire/Staple	0322 179 00003
9105	Jumper Wire/Staple	0322 179 00003	9621	Jumper Wire/Staple	0322 179 00003
9126	Jumper Wire/Staple	0322 179 00003	9622	Jumper Wire/Staple	0322 179 00003
9132	Jumper Wire/Staple	0322 179 00003	9624	Jumper Wire/Staple	0322 179 00003
9140	Jumper Wire/Staple	0322 179 00003	9625	Jumper Wire/Staple	0322 179 00003
9200	Jumper Wire/Staple	0322 179 00003	9626	Jumper Wire/Staple	0322 179 00003
9202	Jumper Wire/Staple	0322 179 00003	9629	Jumper Wire/Staple	0322 179 00003

S = Safety Part Be sure to use exact replacement part.

TS2746C221 (continued)

9631	Jumper Wire/Staple	0322 179 00003
9632	Jumper Wire/Staple	0322 179 00003
9637	Jumper Wire/Staple	0322 179 00003
9640	Jumper Wire/Staple	0322 179 00003
9642	Jumper Wire/Staple	0322 179 00003
9643	Jumper Wire/Staple	0322 179 00003
9644	Jumper Wire/Staple	0322 179 00003
9660	Jumper Wire/Staple	0322 179 00003
9754	Jumper Wire/Staple	0322 179 00003
9788	Jumper Wire/Staple	0322 179 00003
9793	Jumper Wire/Staple	0322 179 00003
9800	Jumper Wire/Staple	0322 179 00003
9805	Jumper Wire/Staple	0322 179 00003
9806	Jumper Wire/Staple	0322 179 00003
9807	Jumper Wire/Staple	0322 179 00003
9810	Jumper Wire/Staple	0322 179 00003
9901	Jumper Wire/Staple	0322 179 00003
9904	Jumper Wire/Staple	0322 179 00003
9905	Jumper Wire/Staple	0322 179 00003
9906	Jumper Wire/Staple	0322 179 00003
9920	Jumper Wire/Staple	0322 179 00003
9933	Jumper Wire/Staple	0322 179 00003
9936	Jumper Wire/Staple	0322 179 00003
9940	Jumper Wire/Staple	0322 179 00003
9941	Jumper Wire/Staple	0322 179 00003
9942	Jumper Wire/Staple	0322 179 00003
9943	Jumper Wire/Staple	0322 179 00003
9944	Jumper Wire/Staple	0322 179 00003
9945	Jumper Wire/Staple	0322 179 00003
9946	Jumper Wire/Staple	0322 179 00003
9947	Jumper Wire/Staple	0322 179 00003
9948	Jumper Wire/Staple	0322 179 00003
9949	Jumper Wire/Staple	0322 179 00003
9950	Jumper Wire/Staple	0322 179 00003
9951	Jumper Wire/Staple	0322 179 00003
9952	Jumper Wire/Staple	0322 179 00003
9953	Jumper Wire/Staple	0322 179 00003
9955	Jumper Wire/Staple	0322 179 00003
9956	Jumper Wire/Staple	0322 179 00003
9957	Jumper Wire/Staple	0322 179 00003
9958	Jumper Wire/Staple	0322 179 00003
9959	Jumper Wire/Staple	0322 179 00003
9960	Jumper Wire/Staple	0322 179 00003
9962	Jumper Wire/Staple	0322 179 00003
9963	Jumper Wire/Staple	0322 179 00003
9964	Jumper Wire/Staple	0322 179 00003
9965	Jumper Wire/Staple	0322 179 00003
9966	Jumper Wire/Staple	0322 179 00003
9967	Jumper Wire/Staple	0322 179 00003
9968	Jumper Wire/Staple	0322 179 00003
9969	Jumper Wire/Staple	0322 179 00003
9970	Jumper Wire/Staple	0322 179 00003
9971	Jumper Wire/Staple	0322 179 00003
9972	Jumper Wire/Staple	0322 179 00003
9974	Jumper Wire/Staple	0322 179 00003
9975	Jumper Wire/Staple	0322 179 00003
9976	Jumper Wire/Staple	0322 179 00003
9977	Jumper Wire/Staple	0322 179 00003
9981	Jumper Wire/Staple	0322 179 00003
9982	Jumper Wire/Staple	0322 179 00003
9983	Jumper Wire/Staple	0322 179 00003
9984	Jumper Wire/Staple	0322 179 00003
9987	Jumper Wire/Staple	0322 179 00003
9989	Jumper Wire/Staple	0322 179 00003
9990	Jumper Wire/Staple	0322 179 00003
9991	Jumper Wire/Staple	0322 179 00003
9992	Jumper Wire/Staple	0322 179 00003
9993	Jumper Wire/Staple	0322 179 00003
CBA	313917868471 Main Chassis Board Asm.	3139 178 68471

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Mainscord, 125V, 10A	3135 010 03831
AC02	Clip, Anode Lead	3135 014 04471
AC03	Cabinet Back	3139 124 27871
AC04	Cabinet Front.	3139 137 53001
AC05	Chassis Guide.	3139 124 31381
AC06	Control Buttons.	3139 124 27351
S AC07	Convergence and Purity Assembly. . .	2422 549 43385
S AC08	CRT A68AJB82X.	9301 787 60472
S AC09	Coil, Degaussing	2422 549 43967
AC10	Holder, Degaussing (4 Used).	3135 013 01641
AC11	Light Guide.	3139 124 26461
AC13	Owner's Manual, English.	3135 015 10761
AC14	Power Button	3139 124 26444
REMOTE	Remote Transmitter	3139 148 54201
AC16	Speaker, 16R, 1W5 (2 Used)	2422 264 00343
S AC18	Yoke	3313 203 01242
AC19	Yoke Wedge (3 used).	3135 013 00311
AC21	Batteries f/Remote Transmitter . . .	9299 000 13827
AC24	Spring	3139 121 26231

S = Safety Part Be sure to use exact replacement part.

TS2757C101 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts		
S 0127	3.15 Amp Fuse, ...	3122 358 72141	
0152	Cable, DIP, 6 Pin, 400mm	3104 301 09421	
0153	4 Pin Cable.	3104 301 09431	
0212	Connector, 2 Pin	2422 025 15396	
0220	4 Pin Board Connector.	2422 025 04852	
0223	3 Pin Board Connector.	2422 026 04963	
0224	1 Pin Board Connector.	2422 034 20021	
0228	1 Pin Board Connector.	2422 034 20021	
0234	Connector, 4 Pin	2422 025 15847	
S 0243	Connector, 6 Pin	2422 025 04854	
0244	4 Pin Board Connector.	2422 025 04852	
S 0245	Connector, 6 Pin	2422 025 04854	
S 0254	CRT Socket (9 Pin)	2422 500 80022	
0267	Connector, 3 Pin	2412 020 00725	
1000	Tuner.	2422 542 90057	
1001	Filter	2422 549 42501	
1003	45 MHz SAW, Filter,.	2422 549 42433	
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807	
1208	Crystal Resonator.	4835 242 77276	
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10869	
S 1571	1 Amp, Radial Fuse,.	4835 253 97162	
S 1572	1 Amp, Radial Fuse,.	4835 253 97162	
S 1580	Relay, 12V	2422 132 07317	
1600	Switch, Tactile.	2422 128 02742	
1601	Switch, Tactile.	2422 128 02742	
1602	Switch, Tactile.	2422 128 02742	
1603	Switch, Tactile.	2422 128 02742	
1606	Switch, Tactile.	2422 128 02742	
1660	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488	
1821	Ceramic Resonator.	4835 122 97102	
2001	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2002	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2003	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2004	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2006	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290	
2011	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2102	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2103	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2104	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2201	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2202	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2203	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2204	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2205	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2207	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2208	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2209	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2211	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2212	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2213	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2214	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2215	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280	
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 16654	
2220	Cap, 15p, 5%, 50V, Ceramic	3198 016 01590	
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2222	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2226	Cap, 33u, 20%, 25V, Electrolytic . .	2020 021 90124	
2227	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2247	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2248	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2249	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2330	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177	
2340	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495	
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320	
S 2343	Cap, 3n3, 10%, 2KV, Ceramic.	2020 558 90529	
2345	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020	
2401	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2402	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2404	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2405	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2407	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2409	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2420	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2426	Cap, 100n, 10%, 63V, Metalized Polyes ter.	2222 370 75104	
2428	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220	
2429	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2430	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2431	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2437	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2438	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2448	Cap, 220p, 10%, 500V, Ceramic. . . .	3198 019 42210	
2450	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91139	
2451	Cap, 15n, 10%, 50V, Polyester. . . .	2020 300 90575	
2451	0.01uF., 10%, 50V, Polyester, only 27	3198 138 20941	
2456	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176	
2457	Cap, 390n, 5%, 250V, Metalized Polypr opylene.	2222 479 90021	
2458	Cap, 2u2, 20%, 100V, Electrolytic. .	2020 021 91331	
2459	Cap, 680p, 10%, 500V, Ceramic. . . .	3198 019 46810	
2461	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020	
2462	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176	
2463	680pF., 10%, 2KV, Ceramic.	4835 122 47584	
S 2465	Cap, 10n, 5%, 1600V, Polypropylene .	2222 375 90154	
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050	
2473	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790	
2481	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740	
2482	Cap, 68n, 10%, 250V, Polyester . . .	2222 347 90234	
2484	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2485	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293	
2486	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2487	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2488	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2489	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2490	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710	
2491	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710	
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810	
2500	0.47uF., 250V, Polyester	4835 121 47569	
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
S 2507	Cap, 1n5, 10%, 1KV, Ceramic.	2020 558 90443	
2508	Cap, 470u, 20%, 200V, Electrolytic .	2020 024 90647	
S 2511	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020	
S 2518	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290	
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320	
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320	
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2530	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 021 91147	
2531	Cap, 1n, 2%, 50V, Polypropylene. . .	2020 310 90049	
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220	
2540	Cap, 100u, 20%, 25V, Electrolytic. .	2020 021 90547	
S 2545	1500pF., 250VAC, Ceramic	4835 122 47621	
S 2550	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2551	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91358	
2561	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020	
S 2562	Cap, 220p, 10%, 1KV, Ceramic	2020 558 90424	
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020	
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020	
2572	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330	
2575	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820	
2577	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020	
2586	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2604	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290	
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2613	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2615	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2619	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2622	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890	
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2629	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230	
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2631	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2679	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2681	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2821	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280	
2823	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2825	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2826	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090	
2827	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2828	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2829	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	
2830	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280	
2831	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	
2832	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280	

S = Safety Part Be sure to use exact replacement part.

TS2757C101 (continued)

	2833	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280		3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
	2834	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780		3401	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
	2835	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3402	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
	2836	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3403	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
	2837	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740		3405	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002
	2838	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3406	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
	2839	Cap, 1u, 5%, 50V, Metalized Polyester	2020 308 90124		3407	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002
	2840	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
	2841	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3409	1.5 ohm, 5%, 1/3W, Metal Film. . . .	4835 116 57664
	2842	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
	2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
	2844	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3420	470k, 5%, 1/10W, Metal Film.	4835 111 37407
	2845	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
	2913	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280		3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
	2914	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330		3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840
	2915	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606
	2916	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648		3425	Res, 120K, 5%, 1/10W, Metalized Glass	2120 108 91716
	2917	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3426	39k, 5%, 1/10W, Metal Film	4835 111 27051
	2918	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330		3428	22k, 5%, 1/10W, Metal Film	4835 111 37441
	2919	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3429	27k, 5%, 1/10W, Metal Film	4835 111 37442
	2920	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648		3431	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
	2921	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3432	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
	2931	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280		3436	Res, 1K, 2%, 0,25W	4822 051 10102
	2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3437	10k, 5%, 1/10W, Metal Film	4835 111 37216
	2952	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3438	33k, 1/4W, Carbon Film	4835 110 57375
	2954	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
	2955	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3447	10k, 5%, 1/10W, Metal Film	4835 111 37216
	2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
	2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
	2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	S	3452	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63229
	2960	Cap, 220u, 20%, 50V, Electrolytic. .	3198 026 52210	S	3453	Res, 4R7, 5%, 5W, Wire Wound	2322 251 41478
	2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090	S	3454	Res, 33K, 5%, 1 1/3W, Metal Film . .	2322 194 63333
	2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090		3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
	2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090		3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
	3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3462	Res, 6K8, 5%, 5W, Metal Film	2322 257 41682
	3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
	3010	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610		3464	Res, 1K, 2%, 0,25W	4822 051 10102
	3013	Zero ohm,.	4835 111 27056	S	3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
	3014	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052		3466	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903
	3015	22k, 5%, 1/10W, Metal Film	4835 111 37441		3467	Res, 14K, 1%, 3/5W, Metal Film . . .	2322 156 21403
	3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810		3467	Res, 15K, 1%, 3/5W, Metal Film . . .	2322 156 21503
	3021	Res, 1K, 2%, 0,25W	4822 051 10102		3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
	3103	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3469	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
	3104	10k, 5%, 1/10W, Metal Film	4835 111 37216		3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
	3108	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703
	3109	10k, 5%, 1/10W, Metal Film	4835 111 37216		3481	Res, 35K7, 1%, 3/5W, Metal Film. . .	2322 156 23573
	3123	75 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37276		3482	Res, 56K, 1%, 3/5W, Metal Film . . .	2322 156 25603
	3200	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
	3201	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253		3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3203	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443	S	3485	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
	3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	S	3486	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3205	Res, 1K, 2%, 0,25W	4822 051 10102	S	3487	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3206	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	S	3488	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
	3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3490	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3209	22k, 5%, 1/10W, Metal Film	4835 111 37441	S	3491	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3212	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253	S	3492	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3213	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3495	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272
	3215	22k, 5%, 1/10W, Metal Film	4835 111 37441		3496	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3216	Zero ohm,.	4835 111 27056		3497	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3217	Res, 1M5, 5%, 1/8W, Metalized Glass.	2322 730 61155		3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
	3218	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225
	3219	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3503	10ohm, 120VAC, Positive Temperature C	
	3220	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432			oefficient	4835 116 47001
	3225	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S	3505	Surge Protector.	2422 549 43073
	3228	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
	3231	Zero ohm,.	4835 111 27056	S	3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333
	3232	Zero ohm,.	4835 111 27056	S	3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102
	3233	Zero ohm,.	4835 111 27056		3512	15k, 5%, 1/10W, Metal Film	4835 111 37458
	3243	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052		3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184
	3246	82k, 5%, 1/10W, Metal Film	4835 111 37277		3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204
	3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3515	2.5 ohm, 20%, 3.6W, Negative Temperat	
	3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010			ure Coefficient.	2122 612 00023
	3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340		3516	Res, 1K, 2%, 0,25W	4822 051 10102
	3250	Zero ohm,.	4835 111 27056		3517	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
	3251	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S	3518	Res, 0R22, 5%, 3W, Metal Film. . . .	2120 106 90548
	3252	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		3520	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
	3253	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		3521	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443
	3257	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3525	33 ohm, 5%, 1/3W, Metal Film	4835 116 57665
	3258	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3528	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3259	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3529	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3530	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
	3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3532	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3534	15k, 5%, 1/10W, Metal Film	4835 111 37458
	3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3536	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3537	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046	S	3542	4.7 Megohm, 5%, 1/2W, Metal Film . .	4835 116 57009
S	3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109		3570	15k, 5%, 1/10W, Metal Film	4835 111 37458
S	3341	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483		3571	Res, 150K, 1%, 3/5W, Metal Film. . .	2322 156 21504
S	3342	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483		3573	Res, 2K, 1%, 1/10W, Metalized Glass.	2120 108 92657
	3343	1.5k, 20%, 1/2W, Carbon Composition.	4835 110 47034		3574	33k, 5%, 1/10W, Metal Film	4835 111 37248
	3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290		3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
S	3345	VDR, DC, 1mA, 50V, MAX 115V	2322 593 13507		3577	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030

S = Safety Part Be sure to use exact replacement part.

TS2757C101 (continued)

3578	Res, 1K, 2%, 0,25W	4822 051 10102	
3579	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451	
3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3592	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3594	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3595	68k, 5%, 1/6W, Carbon Film	4835 111 37205	
3596	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3597	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3598	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3599	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3607	8.2k, 5%, 1/8W, Inline Package . . .	4835 111 97046	
3608	2.2k, 5%, 1/8W, Inline Package . . .	4835 111 97049	
3609	2.2k, 5%, Resistor Network	2120 108 93868	
3611	Res, 1K, 2%, 0,25W	4822 051 10102	
3612	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3613	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3615	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3617	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3619	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3629	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259	
3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3631	27k, 5%, 1/10W, Metal Film	4835 111 37442	
S 3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63479	
3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210	
3634	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3635	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3636	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3637	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3653	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3654	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3655	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3662	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3663	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3664	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3665	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3666	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376	
3667	27k, 5%, 1/10W, Metal Film	4835 111 37442	
3672	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3673	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3674	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231	
3675	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3676	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3677	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3680	680 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37271	
3681	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3682	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3683	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3684	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3821	15k, 5%, 1/10W, Metal Film	4835 111 37458	
3822	1.2k, 5%, 1/10W, Metal Film.	4835 111 27042	
3823	100k, 5%, 1/10W, Metal Film.	4835 111 37434	
3824	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3825	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3826	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3827	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3828	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3829	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272	
3830	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272	
3831	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198 011 03310	
3832	47 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37262	
3908	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3909	Res, 1K, 2%, 0,25W	4822 051 10102	
3910	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376	
3911	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230	
3912	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3913	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3914	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	
3915	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231	
3916	220 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37371	
3917	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3918	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3919	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376	
3920	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231	
3921	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230	
3922	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	
3923	220 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37371	
3924	39k, 5%, 1/10W, Metal Film	4835 111 27051	
3925	39k, 5%, 1/10W, Metal Film	4835 111 27051	
3926	39k, 5%, 1/10W, Metal Film	4835 111 27051	
3929	39k, 5%, 1/10W, Metal Film	4835 111 27051	
3930	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3931	Res, 1K, 2%, 0,25W	4822 051 10102	
3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810	
3951	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3953	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3955	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
3957	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
4001	Zero ohm,.	4835 111 27056	
4002	Zero ohm,.	4835 111 27056	
4004	Zero ohm,.	4835 111 27056	
4007	Zero ohm,.	4835 111 27056	
4009	Zero ohm,.	4835 111 27056	
4010	Zero ohm,.	4835 111 27056	
4011	Zero ohm,.	4835 111 27056	
4012	Zero ohm,.	4835 111 27056	
4013	Zero ohm,.	4835 111 27056	
4020	Zero ohm,.	4835 111 27056	
4051	Zero ohm,.	4835 111 27056	
4100	Zero ohm,.	4835 111 27056	
4101	Zero ohm,.	4835 111 27056	
4102	Zero ohm,.	4835 111 27056	
4103	Zero ohm,.	4835 111 27056	
4143	Zero ohm,.	4835 111 27056	
4144	Zero ohm,.	4835 111 27056	
4203	Zero ohm,.	4835 111 27056	
4207	Zero ohm,.	4835 111 27056	
4212	Zero ohm,.	4835 111 27056	
4214	Zero ohm,.	4835 111 27056	
4215	Zero ohm,.	4835 111 27056	
4216	Zero ohm,.	4835 111 27056	
4501	Zero ohm,.	4835 111 27056	
4602	Zero ohm,.	4835 111 27056	
4650	Zero ohm,.	4835 111 27056	
4651	Zero ohm,.	4835 111 27056	
4652	Zero ohm,.	4835 111 27056	
4654	Zero ohm,.	4835 111 27056	
4655	Zero ohm,.	4835 111 27056	
4684	Zero ohm,.	4835 111 27056	
4687	Zero ohm,.	4835 111 27056	
4831	Zero ohm,.	4835 111 27056	
4832	Zero ohm,.	4835 111 27056	
4833	Zero ohm,.	4835 111 27056	
4902	Zero ohm,.	4835 111 27056	
4903	Zero ohm,.	4835 111 27056	
4904	Zero ohm,.	4835 111 27056	
4905	Zero ohm,.	4835 111 27056	
4909	Zero ohm,.	4835 111 27056	
4911	Zero ohm,.	4835 111 27056	
4912	Zero ohm,.	4835 111 27056	
4914	Zero ohm,.	4835 111 27056	
4957	Zero ohm,.	4835 111 27056	
4999	Zero ohm,.	4835 111 27056	
5000	Coil, 5u6.	3198 018 25680	
5004	Coil, 820n	2422 535 97314	
5201	Coil, 22u.	3198 018 22290	
5202	Coil, 6u8.	3198 018 16880	
5342	22uH., 10%, Coil, Peaking.	4835 157 67069	
S 5445	Transformer, L.O.T., models ending in C101, C121, and C125	2422 531 02327	
S 5445	Transformer, L.O.T., models ending in C221 and C225.	3128 138 20941	
5451	Coil, 27u.	2422 535 96614	
5457	Coil, Linear Correction.	3128 138 53241	
5461	Transformer.	3128 138 33811	
5480	Coil, 27u.	2422 535 97334	
5480	Coil, 39u.	2422 535 97336	
5480	33uH., Peaking Coil, only in 25. . .	4835 157 58205	
S 5500	Filter, Mains, 5mH, 2A	2422 549 43432	
5516	100uH., Coil	4835 157 67078	
5518	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5521	Coil, 2u2.	3198 018 12280	
5540	Coil, 4u7.	3198 018 14780	
S 5545	Transfomer,.	2422 531 02314	
5551	27uH., 5%, Coil, Peaking	4835 157 67052	
5552	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5572	100uH., Coil	4835 157 67078	
5573	100uH., Coil	4835 157 67078	
5576	100uH., Coil	4835 157 67078	
5577	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5600	Coil, 8u2.	3198 018 18280	
5601	Coil, 8u2.	3198 018 18280	
5620	Coil, 6u8.	3198 018 16880	
5821	Coil, 100u	3198 018 21010	
5822	Coil, 18u.	3198 018 21890	
6008	Zener, 33 Volt BZX79-C33	4835 130 37904	
6113	Zener Diode, 6.8 volt.	9340 386 40115	
6211	Diode, 1N4148.	4835 130 37048	
6212	Diode, 1N4148.	4835 130 37048	
6213	Diode, 1N4148.	4835 130 37048	
6331	Diode.	4835 130 37294	
6333	Diode.	4835 130 37294	
6335	Diode.	4835 130 37294	
6401	Diode.	4835 130 37094	
6402	Zener, 33 Volt, BZX79-C33.	4835 130 37904	
6403	Diode.	4835 130 37094	

S = Safety Part Be sure to use exact replacement part.

TS2757C101 (continued)

6404	Diode.	4835 130 37094	
6449	Diode, 1N4148.	4835 130 37048	
6450	Diode, 1N4148.	4835 130 37048	
6460	Diode, Rect, BY228/20	9336 215 80112	
6463	Diode, 1N4148.	4835 130 37048	
6464	Zener Diode, 6.2 volt.	9337 242 70133	
6465	Diode, BYD33J.	4835 130 37094	
6466	Diode, BYD33J.	4835 130 37094	
6480	Diode, Zener	4835 130 37947	
6481	Diode, 1N4148.	4835 130 37048	
6485	Diode, BYD33J.	4835 130 37094	
6486	Diode, EGP20DL-530	4835 130 37919	
6487	Diode.	4835 130 37094	
6488	Diode, Rect, BYV27-200.	9322 126 72673	
6490	Diode, Rect, BYV27-200.	9322 126 72673	
6505	Diode, Bridge Rect, GBU6JL-7002	9322 138 08667	
6507	Diode, BYD33J.	4835 130 37094	
6508	Diode, BYD33J.	4835 130 37094	
6510	Zener Diode, 20 volt	9331 178 60133	
6511	Diode, BYV95C.	4835 130 37052	
6512	Diode, Rect, BY228/20	4822 130 41275	
6513	Diode, Rect, BY228/20	4822 130 41275	
6514	Zener, 18 Volt, BZX79-C18.	4835 130 37908	
6540	Diode.	4835 130 37294	
6550	Diode, Rect, BY229X-800	9340 380 30127	
6560	Diode, EGP20DL-530	4835 130 37919	
6580	Diode, Rect, SB140.	9339 577 60673	
6584	Diode, 1N4148.	4835 130 37048	
6585	Diode, 1N4148.	4835 130 37048	
6591	Diode, BAS216.	4835 130 37905	
6601	Diode, Zener	4835 130 37684	
6606	Zener, 4.7 Volt, BZX79-C4V7.	4835 130 37005	
6607	Zener, 6.8 Volt, BZX79-C6V8.	4835 130 37945	
6690	LED, LTL-307P.	4835 130 97096	
6821	Zener Diode, 9.1 volt.	9331 177 80133	
6822	Fixed Coil	4835 130 37048	
6951	Diode, BAS216.	4835 130 37905	
6961	Diode, BAS216.	4835 130 37905	
7250	IC,.	9352 620 26112	
7251	IC, LM317T	9337 220 80682	
7254	Transistor, NPN, BC847B.	4822 130 60511	
7256	Transistor, NPN, BC847B.	4822 130 60511	
7258	Transistor, NPN, BC847B.	4822 130 60511	
7263	Transistor, PNP, BC857B.	5322 130 60508	
7266	Transistor, NPN, BC847B.	4822 130 60511	
7330	IC,.	9352 184 10112	
7401	IC,.	9322 121 47687	
7460	Transistor, NPN, BU1508DX.	9340 170 50127	
7461	Transistor, NPN, BF819	9335 354 50127	
7462	Transistor, BC547B	4835 130 47055	
7463	Transistor, BC557B	4835 130 47409	
7480	IC,.	9322 028 93682	
7481	Transistor, BC557B	4835 130 47409	
7482	Transistor, PNP, BC857B.	5322 130 60508	
7518	STH8NA60FI SMPS FET	9322 068 92687	
7518	STH10NC60FI SMPS FET.	9322 155 66687	
7520	IC, MC44603A	4835 209 88537	
7570	IC,.	9337 711 00676	
S 7581	Coupler, TCDT1101G	9338 431 30682	
7590	Transistor, NPN, BC847B.	4822 130 60511	
7591	Transistor, NPN, BC847B.	4822 130 60511	
7592	Transistor, NPN, BC847B.	4822 130 60511	
7600	IC, SAA5543PS/M4/1046 L90US1-1.4	4835 310 57477	
7601	IC, ST24W04B6.	9322 097 23682	
7603	Transistor, NPN, BC337	9331 796 00126	
7604	Transistor, NPN, BC847B.	4822 130 60511	
7605	Transistor, NPN, BC847B.	4822 130 60511	
7608	Transistor, NPN, BC847B.	4822 130 60511	
7609	Transistor, NPN, BC847B.	4822 130 60511	
7680	IR Receiver.	9322 127 53667	
7821	IC,.	9352 374 70112	
7822	IC, HEF4052BT.	9333 729 50653	
7823	Transistor, NPN, BC337-25.	3198 020 43530	
7904	Transistor, NPN, BC847B.	4822 130 60511	
7905	Transistor, NPN, BC847B.	4822 130 60511	
7906	Transistor, NPN, BC847B.	4822 130 60511	
7908	Transistor, NPN, BC847B.	4822 130 60511	
7909	Transistor, NPN, BC847B.	4822 130 60511	
7910	Transistor, NPN, BC847B.	4822 130 60511	
7951	IC,.	4822 209 13706	
9423	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030	
CBA	00EMF832A101 Main Chassis Board Asm.	00EM F83 2A101	

Cabinet & Accessory Parts

	Cabinet & Accessory Parts		
S AC01	Mainscord, 125V, 10A	3135 010 03831	
S AC02	Anode Clip	4835 256 97264	
AC03	Cabinet Back	3139 124 27871	
AC04	Cabinet Front.	3139 137 65871	
AC05	Chassis Guide.	3139 124 31381	
AC06	Control Buttons.	3139 124 27351	
S AC07	Convergence and Purity Assembly.	2422 549 43385	
S AC08	CRT A68AJB82X.	4835 131 27167	
S AC09	Coil, Degaussing	3121 218 62701	
AC11	Light Guide.	3139 124 26461	
AC13	Owner's Manual, English.	3135 015 10821	
AC14	Power Button	3139 124 26444	
REMOTE	Remote Transmitter, RC2524/04.	3139 228 81592	
AC16	Speaker, 16R, 1W5 (2 Used)	2422 264 00343	
S AC18	Yoke	3313 203 01242	
AC19	Yoke Wedge (3 Used).	4835 535 27001	
AC21	Battery, 1.5V AA, 2-Pack, (Not Shown	9299 000 10137	
AC24	Spring	3139 121 26231	

S = Safety Part Be sure to use exact replacement part.

TS2774C101 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts	
S 0127	3.15 Amp Fuse, ...	3122 358 72141
0152	Cable, DIP, 6 Pin, 400mm	3104 301 09421
0153	4 Pin Cable.	3104 301 09431
0212	Connector, 2 Pin	2422 025 15396
0220	4 Pin Board Connector.	2422 025 04852
0223	Socket, Cinch, 6 Pin	2422 026 04827
0224	1 Pin Board Connector.	2422 034 20021
0228	1 Pin Board Connector.	2422 034 20021
0234	Connector, 4 Pin	2422 025 12479
S 0243	Connector, 6 Pin	2422 025 04854
0244	4 Pin Board Connector.	2422 025 04852
S 0245	Connector, 6 Pin	2422 025 04854
S 0254	CRT Socket (9 Pin)	2422 500 80022
0267	Connector, 3 Pin	2412 020 00725
1000	Tuner.	2422 542 90057
1003	45 MHz SAW, Filter,.	2422 549 42433
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807
1208	Crystal Resonator.	4835 242 77276
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10869
S 1572	1 Amp, Radial Fuse,.	4835 253 97162
S 1573	2.5 Amp Fuse, Radial,.	2422 086 10422
S 1580	Relay, 12V	2422 132 07317
1600	Switch, Tactile.	2422 128 02742
1601	Switch, Tactile.	2422 128 02742
1602	Switch, Tactile.	2422 128 02742
1603	Switch, Tactile.	2422 128 02742
1606	Switch, Tactile.	2422 128 02742
1660	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488
1822	Crystal Resonator, 18MHz432, 12 Pin, HC49/U A	2422 543 00842
2001	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2002	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2003	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2004	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2011	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2101	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2102	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2103	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2104	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2111	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2112	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2115	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2201	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2205	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2208	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2209	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2211	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2212	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2213	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2214	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2215	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 16654
2220	Cap, 15p, 5%, 50V, Ceramic	3198 016 01590
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2222	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2226	Cap, 33u, 20%, 25V, Electrolytic . .	2020 021 90124
2227	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2247	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2248	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2249	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2330	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2340	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320
S 2343	Cap, 3n3, 10%, 2KV, Ceramic.	2020 558 90529
2345	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2401	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2402	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2404	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2405	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2407	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2409	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2420	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2426	Cap, 100n, 10%, 63V, Metalized Polyester.	2222 370 75104
2428	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2429	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2430	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2431	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2437	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2438	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2448	Cap, 220p, 10%, 500V, Ceramic. . . .	3198 019 42210
2450	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91139
2451	Cap, 15n, 10%, 50V, Polyester. . . .	2020 300 90575
2451	0.01uF., 10%, 50V, Polyester, only 27	3198 138 20941
2456	Cap, 47n, 10%, 250V, Metalized Polyester.	2222 368 90176
2457	Cap, 390n, 5%, 250V, Metalized Polypropylene.	2222 479 90021
2458	Cap, 2u2, 20%, 100V, Electrolytic. .	2020 021 91331
2459	Cap, 680p, 10%, 500V, Ceramic. . . .	3198 019 46810
2461	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2462	Cap, 47n, 10%, 250V, Metalized Polyester.	2222 368 90176
2463	680pF., 10%, 2KV, Ceramic.	4835 122 47584
S 2465	Cap, 10n, 5%, 1600V, Polypropylene .	2222 375 90154
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050
2473	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2481	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2482	Cap, 68n, 10%, 250V, Polyester . . .	2222 347 90234
2484	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2485	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2486	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2487	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2488	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2489	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2490	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2491	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810
2500	0.47uF., 250V, Polyester	4835 121 47569
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
S 2507	Cap, 1n5, 10%, 1KV, Ceramic.	2020 558 90443
2508	Cap, 470u, 20%, 200V, Electrolytic .	2020 024 90647
S 2511	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
S 2518	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2530	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 021 91147
2531	Cap, 1n, 2%, 50V, Polypropylene. . .	2020 310 90049
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2540	Cap, 100u, 20%, 25V, Electrolytic. .	2020 021 90547
S 2545	1500pF., 250VAC, Ceramic	4835 122 47621
S 2550	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2551	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91358
2561	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
S 2562	Cap, 220p, 10%, 1KV, Ceramic	2020 558 90424
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2571	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91353
2572	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2575	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2586	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2604	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2613	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2615	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2619	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2622	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2629	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2679	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2681	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2850	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810
2851	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2852	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2853	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2854	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2855	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2856	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2858	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2859	Cap, 15p, 5%, 50V, Ceramic	3198 016 01590
2860	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2861	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040

S = Safety Part Be sure to use exact replacement part.

TS2774C101 (continued)

2862	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	S 3345	VDR, DC, 1mA, 50V, MAX 115V	2322 593 13507
2863	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
2864	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	3401	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2865	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	3402	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2866	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	3403	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2867	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	3405	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002
2868	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780	3406	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2869	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	3407	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002
2870	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2871	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	3409	1.5 ohm, 5%, 1/3W, Metal Film. . . .	4835 116 57664
2874	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790	3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2875	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790	3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2877	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	3420	470k, 5%, 1/10W, Metal Film.	4835 111 37407
2882	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2883	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2884	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840
2887	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810	3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606
2888	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	3425	Res, 120K, 5%, 1/10W, Metalized Glass	2120 108 91716
2889	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	3426	39k, 5%, 1/10W, Metal Film	4835 111 27051
2891	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390	3428	22k, 5%, 1/10W, Metal Film	4835 111 37441
2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	3429	27k, 5%, 1/10W, Metal Film	4835 111 37442
2952	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	3431	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
2954	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	3432	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
2955	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	3436	Res, 1K, 2%, 0,25W	4822 051 10102
2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	3437	10k, 5%, 1/10W, Metal Film	4835 111 37216
2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	3438	33k, 1/4W, Carbon Film	4835 110 57375
2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
2960	Cap, 2u2, 20%, 25V, Electrolytic . .	3198 026 32220	3447	10k, 5%, 1/10W, Metal Film	4835 111 37216
2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090	3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090	3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090	S 3452	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63229
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S 3453	Res, 4R7, 5%, 5W, Wire Wound	2322 251 41478
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S 3454	Res, 33K, 5%, 1 1/3W, Metal Film . .	2322 194 63333
3013	Zero ohm,.	4835 111 27056	3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3014	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3015	22k, 5%, 1/10W, Metal Film	4835 111 37441	S 3462	Res, 6K8, 5%, 5W, Metal Film	2322 257 41682
3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810	3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3100	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510	3464	Res, 1K, 2%, 0,25W	4822 051 10102
3101	220k, 5%, 1/10W, Metal Film.	4835 111 37235	S 3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
3103	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220	3466	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903
3104	10k, 5%, 1/10W, Metal Film	4835 111 37216	3467	Res, 14K, 1%, 3/5W, Metal Film . . .	2322 156 21403
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510	3467	Res, 15K, 1%, 3/5W, Metal Film . . .	2322 156 21503
3108	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220	3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3109	10k, 5%, 1/10W, Metal Film	4835 111 37216	3469	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
3122	220k, 5%, 1/10W, Metal Film.	4835 111 37235	3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3123	75 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37276	3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703
3125	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890	3481	Res, 35K7, 1%, 3/5W, Metal Film. . .	2322 156 23573
3145	Res, 1K, 2%, 0,25W	4822 051 10102	3482	Res, 56K, 1%, 3/5W, Metal Film . . .	2322 156 25603
3155	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259	3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3201	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253	3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3203	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443	S 3485	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	S 3486	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3205	Res, 1K, 2%, 0,25W	4822 051 10102	S 3487	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3206	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	S 3488	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S 3490	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3209	22k, 5%, 1/10W, Metal Film	4835 111 37441	S 3491	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3212	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253	S 3492	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3213	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	3495	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272
3215	22k, 5%, 1/10W, Metal Film	4835 111 37441	3496	10k, 5%, 1/10W, Metal Film	4835 111 37216
3216	Zero ohm,.	4835 111 27056	3497	10k, 5%, 1/10W, Metal Film	4835 111 37216
3217	Res, 1M5, 5%, 1/8W, Metalized Glass.	2322 730 61155	3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3218	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S 3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225
3219	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	3503	10ohm, 120VAC, Positive Temperature C	
3220	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		oefficient	4835 116 47001
3225	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S 3505	Surge Protector.	2422 549 43073
3228	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S 3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3231	Zero ohm,.	4835 111 27056	S 3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333
3232	Zero ohm,.	4835 111 27056	S 3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102
3233	Zero ohm,.	4835 111 27056	3512	15k, 5%, 1/10W, Metal Film	4835 111 37458
3243	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184
3246	82k, 5%, 1/10W, Metal Film	4835 111 37277	3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204
3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S 3515	2.5 ohm, 20%, 3.6W, Negative Temperat	
3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		ure Coefficient.	2122 612 00023
3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340	3516	Res, 1K, 2%, 0,25W	4822 051 10102
3250	Zero ohm,.	4835 111 27056	3517	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3251	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S 3518	Res, 0R22, 5%, 3W, Metal Film. . . .	2120 106 90548
3252	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	3520	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3253	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	3521	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443
3257	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S 3525	33 ohm, 5%, 1/3W, Metal Film	4835 116 57665
3258	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	3528	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3259	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	3529	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	3530	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046	3532	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	3534	15k, 5%, 1/10W, Metal Film	4835 111 37458
3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046	3536	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	3537	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046	S 3542	4.7 Megohm, 5%, 1/2W, Metal Film . .	4835 116 57009
S 3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109	3570	15k, 5%, 1/10W, Metal Film	4835 111 37458
S 3341	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483	3571	Res, 150K, 1%, 3/5W, Metal Film. . .	2322 156 21504
S 3342	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483	3573	Res, 2K, 1%, 1/10W, Metalized Glass.	2120 108 92657
3343	1.5k, 20%, 1/2W, Carbon Composition.	4835 110 47034	3574	33k, 5%, 1/10W, Metal Film	4835 111 37248
3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290	3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010

S = Safety Part Be sure to use exact replacement part.

TS2774C101 (continued)

3577	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3578	Res, 1K, 2%, 0,25W	4822 051 10102	
3579	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451	
3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3592	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3594	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3595	68k, 5%, 1/6W, Carbon Film	4835 111 37205	
3596	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3597	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3598	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3599	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3607	8.2k, 5%, 1/8W, Inline Package . . .	4835 111 97046	
3608	2.2k, 5%, 1/8W, Inline Package . . .	4835 111 97049	
3609	2.2k, 5%, Resistor Network	2120 108 93868	
3611	Res, 1K, 2%, 0,25W	4822 051 10102	
3612	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3613	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3615	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3617	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3619	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3629	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259	
3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3631	27k, 5%, 1/10W, Metal Film	4835 111 37442	
S 3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63479	
3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210	
3634	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3635	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3636	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3637	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3653	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3654	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3655	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3662	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3663	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3664	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3665	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3666	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376	
3667	27k, 5%, 1/10W, Metal Film	4835 111 37442	
3672	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3673	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3674	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231	
3675	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3676	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3677	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3680	680 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37271	
3681	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3682	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3683	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3684	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3841	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3842	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3843	47k, 5%, 1/10W, Metal Film	4835 111 37445	
3844	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259	
3845	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259	
3850	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810	
3951	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3953	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272	
3954	1.5k, 5%, 1/10W, Metal Film.	4835 111 37437	
3955	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
3956	1.5k, 5%, 1/10W, Metal Film.	4835 111 37437	
3957	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
4001	Zero ohm, ...	4835 111 27056	
4002	Zero ohm, ...	4835 111 27056	
4004	Zero ohm, ...	4835 111 27056	
4007	Zero ohm, ...	4835 111 27056	
4009	Zero ohm, ...	4835 111 27056	
4010	Zero ohm, ...	4835 111 27056	
4011	Zero ohm, ...	4835 111 27056	
4012	Zero ohm, ...	4835 111 27056	
4013	Zero ohm, ...	4835 111 27056	
4020	Zero ohm, ...	4835 111 27056	
4051	Zero ohm, ...	4835 111 27056	
4100	Zero ohm, ...	4835 111 27056	
4101	Zero ohm, ...	4835 111 27056	
4102	Zero ohm, ...	4835 111 27056	
4103	Zero ohm, ...	4835 111 27056	
4143	Zero ohm, ...	4835 111 27056	
4144	Zero ohm, ...	4835 111 27056	
4203	Zero ohm, ...	4835 111 27056	
4207	Zero ohm, ...	4835 111 27056	
4212	Zero ohm, ...	4835 111 27056	
4214	Zero ohm, ...	4835 111 27056	
4215	Zero ohm, ...	4835 111 27056	
4216	Zero ohm, ...	4835 111 27056	
4501	Zero ohm, ...	4835 111 27056	
4602	Zero ohm, ...	4835 111 27056	
4650	Zero ohm, ...	4835 111 27056	
4651	Zero ohm, ...	4835 111 27056	
4652	Zero ohm, ...	4835 111 27056	
4654	Zero ohm, ...	4835 111 27056	
4655	Zero ohm, ...	4835 111 27056	
4684	Zero ohm, ...	4835 111 27056	
4687	Zero ohm, ...	4835 111 27056	
4831	Zero ohm, ...	4835 111 27056	
4832	Zero ohm, ...	4835 111 27056	
4833	Zero ohm, ...	4835 111 27056	
4902	Zero ohm, ...	4835 111 27056	
4903	Zero ohm, ...	4835 111 27056	
4904	Zero ohm, ...	4835 111 27056	
4905	Zero ohm, ...	4835 111 27056	
4909	Zero ohm, ...	4835 111 27056	
4911	Zero ohm, ...	4835 111 27056	
4912	Zero ohm, ...	4835 111 27056	
4914	Zero ohm, ...	4835 111 27056	
4957	Zero ohm, ...	4835 111 27056	
4999	Zero ohm, ...	4835 111 27056	
5000	Coil, 5u6.	3198 018 25680	
5004	Coil, 820n	2422 535 97314	
5101	Coil, 5u6.	3198 018 15680	
5201	Coil, 22u.	3198 018 22290	
5202	Coil, 6u8.	3198 018 16880	
5342	22uH., 10%, Coil, Peaking.	4835 157 67069	
S 5445	Transformer, L.O.T., models ending in C101, C121, and C125	2422 531 02327	
S 5445	Transformer, L.O.T., models ending in C221 and C225.	3128 138 20941	
5451	Coil, 27u.	2422 535 96614	
5457	Coil, Linear Correction.	3128 138 53241	
5461	Transformer.	3128 138 33811	
5480	Coil, 27u.	2422 535 97334	
5480	Coil, 39u.	2422 535 97336	
5480	33uH., Peaking Coil, only in 25. . .	4835 157 58205	
S 5500	Filter, Mains, 5mH, 2A	2422 549 43432	
5516	100uH., Coil	4835 157 67078	
5518	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5521	Coil, 2u2.	3198 018 12280	
5540	Coil, 4u7.	3198 018 14780	
S 5545	Transfomer, ...	2422 531 02314	
5551	27uH., 5%, Coil, Peaking	4835 157 67052	
5552	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5572	100uH., Coil	4835 157 67078	
5573	100uH., Coil	4835 157 67078	
5575	100uH., Coil	4835 157 67078	
5576	100uH., Coil	4835 157 67078	
5577	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5600	Coil, 8u2.	3198 018 18280	
5601	Coil, 8u2.	3198 018 18280	
5620	Coil, 6u8.	3198 018 16880	
5821	Coil, 100u	3198 018 21010	
5831	Coil, 12u.	3198 018 21290	
5832	Coil, 12u.	3198 018 21290	
5833	Coil, 12u.	3198 018 11290	
6008	Zener, 33 Volt BZX79-C33	4835 130 37904	
6113	Zener Diode, 6.8 volt.	9340 386 40115	
6125	Zener Diode, 6.8 volt.	9340 386 40115	
6211	Diode, 1N4148.	4835 130 37048	
6212	Diode, 1N4148.	4835 130 37048	
6213	Diode, 1N4148.	4835 130 37048	
6331	Diode.	4835 130 37294	
6333	Diode.	4835 130 37294	
6335	Diode.	4835 130 37294	
6401	Diode.	4835 130 37094	
6402	Zener, 33 Volt, BZX79-C33.	4835 130 37904	
6403	Diode.	4835 130 37094	
6404	Diode.	4835 130 37094	
6449	Diode, 1N4148.	4835 130 37048	
6450	Diode, 1N4148.	4835 130 37048	
6460	Diode, Rect, BY228/20	9336 215 80112	
6463	Diode, 1N4148.	4835 130 37048	
6464	Zener Diode, 6.2 volt.	9337 242 70133	
6465	Diode, BYD33J.	4835 130 37094	
6466	Diode, BYD33J.	4835 130 37094	
6480	Diode, Zener	4835 130 37947	
6481	Diode, 1N4148.	4835 130 37048	
6485	Diode, BYD33J.	4835 130 37094	
6486	Diode, EGP20DL-530	4835 130 37919	
6487	Diode.	4835 130 37094	
6488	Diode, Rect, BYV27-200.	9322 126 72673	
6490	Diode, Rect, BYV27-200.	9322 126 72673	
6505	Diode, Bridge Rect, GBU6JL-7002 . .	9322 138 08667	
6507	Diode, BYD33J.	4835 130 37094	
6508	Diode, BYD33J.	4835 130 37094	
6510	Zener Diode, 20 volt	9331 178 60133	
6511	Diode, BYV95C.	4835 130 37052	

S = Safety Part Be sure to use exact replacement part.

TS2774C101 (continued)

6512	Diode, Rect, BY228/20	4822 130 41275
6513	Diode, Rect, BY228/20	4822 130 41275
6514	Zener, 18 Volt, BZX79-C18.	4835 130 37908
6540	Diode.	4835 130 37294
6550	Diode, Rect, BY229X-800	9340 380 30127
6560	Diode, EGP20DL-530	4835 130 37919
6570	Diode, EGP20DL-530	4835 130 37919
6582	Diode, EGP20DL-530	4835 130 37919
6584	Diode, 1N4148.	4835 130 37048
6585	Diode, 1N4148.	4835 130 37048
6590	Diode, EGP20DL-530	4835 130 37919
6591	Diode, BAS216.	4835 130 37905
6601	Diode, Zener	4835 130 37684
6606	Zener, 4.7 Volt, BZX79-C4V7.	4835 130 37005
6607	Zener, 6.8 Volt, BZX79-C6V8.	4835 130 37945
6690	LED, LTL-307P.	4835 130 97096
6831	Diode, BAS216.	4835 130 37905
6951	Diode, BAS216.	4835 130 37905
6961	Diode, BAS216.	4835 130 37905
7134	Transistor, BC547B	4835 130 47055
7250	IC,.	9352 620 26112
7251	IC, LM317T	9337 220 80682
7254	Transistor, NPN, BC847B.	4822 130 60511
7256	Transistor, NPN, BC847B.	4822 130 60511
7258	Transistor, NPN, BC847B.	4822 130 60511
7263	Transistor, PNP, BC857B.	5322 130 60508
7266	Transistor, NPN, BC847B.	4822 130 60511
7330	IC,.	9352 184 10112
7401	IC,.	9322 121 47687
7460	Transistor, NPN, BU1508DX.	9340 170 50127
7461	Transistor, NPN, BF819	9335 354 50127
7462	Transistor, BC547B	4835 130 47055
7463	Transistor, BC557B	4835 130 47409
7480	IC,.	9322 028 93682
7481	Transistor, BC557B	4835 130 47409
7482	Transistor, PNP, BC857B.	5322 130 60508
7518	STH8NA60FI SMPS FET	9322 068 92687
7518	STH10NC60FI SMPS FET.	9322 155 66687
7520	IC, MC44603A	4835 209 88537
7570	IC,.	9337 711 00676
S 7581	Coupler, TCDT1101G	9338 431 30682
7590	Transistor, NPN, BC847B.	4822 130 60511
7591	Transistor, NPN, BC847B.	4822 130 60511
7592	Transistor, NPN, BC847B.	4822 130 60511
7600	IC, SAA5543PS/M4/1046 L90US1-1.4 . .	4835 310 57477
7601	IC, ST24W04B6.	9322 097 23682
7603	Transistor, NPN, BC337	9331 796 00126
7604	Transistor, NPN, BC847B.	4822 130 60511
7605	Transistor, NPN, BC847B.	4822 130 60511
7608	Transistor, NPN, BC847B.	4822 130 60511
7609	Transistor, NPN, BC847B.	4822 130 60511
7680	IR Receiver.	9322 127 53667
7833	IC,.	9322 136 54682
7950	IC,.	4835 209 88543
9423	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
CBA	00EMF833A102 Main Chassis Board Asm.	00EM F83 3A102

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Mainscord, 125V, 10A	3135 010 03831
S AC02	Anode Clip	4835 256 97264
AC03	Cabinet Back	3139 124 27321
AC04	Cabinet Front.	3139 137 52951
AC05	Chassis Guide.	3139 124 31381
AC06	Control Buttons.	3139 124 27371
S AC07	Convergence and Purity Assembly. . .	2422 549 43385
S AC08	CRT A68AJB82X.	4835 131 27167
S AC09	Coil, Degaussing	3121 218 62701
AC11	Light Guide.	3139 124 26461
AC13	Owner's Manual, English.	3135 015 10661
AC14	Knob, Power.	3139 124 29981
REMOTE	Remote Transmitter, RC2524/04. . . .	3139 228 81592
AC16	Speaker, 5W, 16 ohm (2 Used)	2422 264 00333
S AC18	Yoke	3313 203 01242
AC19	Yoke Wedge (3 Used).	4835 535 27001
AC21	Battery, 1.5V AA, 2-Pack, (Not Shown	9299 000 10137
AC24	Spring	3139 121 26231

S = Safety Part Be sure to use exact replacement part.

TS2774C121 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts	
S 0127	3.15 Amp Fuse, ...	3122 358 72141
0152	Cable, DIP, 6 Pin, 400mm	3104 301 09421
0153	4 Pin Cable.	3104 301 09431
0212	Connector, 2 Pin	2422 025 15396
0220	4 Pin Board Connector.	2422 025 04852
0223	Socket, Cinch, 6 Pin	2422 026 04827
0224	1 Pin Board Connector.	2422 034 20021
0228	1 Pin Board Connector.	2422 034 20021
0234	Connector, 4 Pin	2422 025 12479
S 0243	Connector, 6 Pin	2422 025 04854
0244	4 Pin Board Connector.	2422 025 04852
S 0245	Connector, 6 Pin	2422 025 04854
S 0254	CRT Socket (9 Pin)	2422 500 80022
0267	Connector, 3 Pin	2412 020 00725
1000	Tuner.	2422 542 90057
1003	45 MHz SAW, Filter,.	2422 549 42433
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807
1208	Crystal Resonator.	4835 242 77276
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10869
S 1572	1 Amp, Radial Fuse,.	4835 253 97162
S 1573	2.5 Amp Fuse, Radial,.	2422 086 10422
S 1580	Relay, 12V	2422 132 07317
1600	Switch, Tactile.	2422 128 02742
1601	Switch, Tactile.	2422 128 02742
1602	Switch, Tactile.	2422 128 02742
1603	Switch, Tactile.	2422 128 02742
1606	Switch, Tactile.	2422 128 02742
1660	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488
1822	Crystal Resonator, 18MHz432, 12 Pin, HC49/U A	2422 543 00842
2001	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2002	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2003	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2004	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2011	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2101	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2102	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2103	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2104	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2111	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2112	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2115	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2201	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2205	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2208	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2209	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2211	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2212	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2213	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2214	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2215	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 16654
2220	Cap, 15p, 5%, 50V, Ceramic	3198 016 01590
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2222	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2226	Cap, 33u, 20%, 25V, Electrolytic . .	2020 021 90124
2227	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2247	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2248	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2249	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2330	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2340	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320
S 2343	Cap, 3n3, 10%, 2KV, Ceramic.	2020 558 90529
2345	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2401	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2402	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2404	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2405	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2407	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2409	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2420	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2426	Cap, 100n, 10%, 63V, Metalized Polyester.	2222 370 75104
2428	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2429	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2430	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2431	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2437	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2438	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2448	Cap, 220p, 10%, 500V, Ceramic. . . .	3198 019 42210
2450	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91139
2451	Cap, 15n, 10%, 50V, Polyester. . . .	2020 300 90575
2451	0.01uF., 10%, 50V, Polyester, only 27	3198 138 20941
2456	Cap, 47n, 10%, 250V, Metalized Polyester.	2222 368 90176
2457	Cap, 390n, 5%, 250V, Metalized Polypropylene.	2222 479 90021
2458	Cap, 2u2, 20%, 100V, Electrolytic. .	2020 021 91331
2459	Cap, 680p, 10%, 500V, Ceramic. . . .	3198 019 46810
2461	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2462	Cap, 47n, 10%, 250V, Metalized Polyester.	2222 368 90176
2463	680pF., 10%, 2KV, Ceramic.	4835 122 47584
S 2465	Cap, 10n, 5%, 1600V, Polypropylene .	2222 375 90154
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050
2473	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2481	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2482	Cap, 68n, 10%, 250V, Polyester . . .	2222 347 90234
2484	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2485	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2486	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2487	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2488	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2489	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2490	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2491	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810
2500	0.47uF., 250V, Polyester	4835 121 47569
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
S 2507	Cap, 1n5, 10%, 1KV, Ceramic.	2020 558 90443
2508	Cap, 470u, 20%, 200V, Electrolytic .	2020 024 90647
S 2511	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
S 2518	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2530	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 021 91147
2531	Cap, 1n, 2%, 50V, Polypropylene. . .	2020 310 90049
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2540	Cap, 100u, 20%, 25V, Electrolytic. .	2020 021 90547
S 2545	1500pF., 250VAC, Ceramic	4835 122 47621
S 2550	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2551	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91358
2561	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
S 2562	Cap, 220p, 10%, 1KV, Ceramic	2020 558 90424
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2571	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91353
2572	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2575	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2586	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2604	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2613	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2615	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2619	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2622	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2629	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2679	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2681	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2850	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810
2851	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2852	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2853	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2854	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2855	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2856	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380
2858	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790
2859	Cap, 15p, 5%, 50V, Ceramic	3198 016 01590
2860	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2861	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040

S = Safety Part Be sure to use exact replacement part.

TS2774C121 (continued)

2862	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	S 3345	VDR, DC, 1mA, 50V, MAX 115V	2322 593 13507
2863	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
2864	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	3401	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2865	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	3402	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2866	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	3403	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2867	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	3405	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002
2868	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780	3406	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2869	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	3407	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002
2870	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2871	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	3409	1.5 ohm, 5%, 1/3W, Metal Film. . . .	4835 116 57664
2874	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790	3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2875	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790	3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2877	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	3420	470k, 5%, 1/10W, Metal Film.	4835 111 37407
2882	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2883	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2884	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840
2887	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810	3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606
2888	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	3425	Res, 120K, 5%, 1/10W, Metalized Glass	2120 108 91716
2889	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	3426	39k, 5%, 1/10W, Metal Film	4835 111 27051
2891	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390	3428	22k, 5%, 1/10W, Metal Film	4835 111 37441
2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	3429	27k, 5%, 1/10W, Metal Film	4835 111 37442
2952	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	3431	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
2954	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	3432	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
2955	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	3436	Res, 1K, 2%, 0,25W	4822 051 10102
2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	3437	10k, 5%, 1/10W, Metal Film	4835 111 37216
2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	3438	33k, 1/4W, Carbon Film	4835 110 57375
2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
2960	Cap, 2u2, 20%, 25V, Electrolytic . .	3198 026 32220	3447	10k, 5%, 1/10W, Metal Film	4835 111 37216
2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090	3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090	3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090	S 3452	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63229
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S 3453	Res, 4R7, 5%, 5W, Wire Wound	2322 251 41478
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S 3454	Res, 33K, 5%, 1 1/3W, Metal Film . .	2322 194 63333
3013	Zero ohm,.	4835 111 27056	3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3014	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3015	22k, 5%, 1/10W, Metal Film	4835 111 37441	S 3462	Res, 6K8, 5%, 5W, Metal Film	2322 257 41682
3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810	3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3100	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510	3464	Res, 1K, 2%, 0,25W	4822 051 10102
3101	220k, 5%, 1/10W, Metal Film.	4835 111 37235	S 3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
3103	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220	3466	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903
3104	10k, 5%, 1/10W, Metal Film	4835 111 37216	3467	Res, 14K, 1%, 3/5W, Metal Film . . .	2322 156 21403
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510	3467	Res, 15K, 1%, 3/5W, Metal Film . . .	2322 156 21503
3108	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220	3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3109	10k, 5%, 1/10W, Metal Film	4835 111 37216	3469	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
3122	220k, 5%, 1/10W, Metal Film.	4835 111 37235	3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3123	75 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37276	3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703
3125	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890	3481	Res, 35K7, 1%, 3/5W, Metal Film. . .	2322 156 23573
3145	Res, 1K, 2%, 0,25W	4822 051 10102	3482	Res, 56K, 1%, 3/5W, Metal Film . . .	2322 156 25603
3155	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259	3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3201	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253	3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3203	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443	S 3485	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	S 3486	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3205	Res, 1K, 2%, 0,25W	4822 051 10102	S 3487	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3206	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	S 3488	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S 3490	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3209	22k, 5%, 1/10W, Metal Film	4835 111 37441	S 3491	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3212	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253	S 3492	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3213	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	3495	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272
3215	22k, 5%, 1/10W, Metal Film	4835 111 37441	3496	10k, 5%, 1/10W, Metal Film	4835 111 37216
3216	Zero ohm,.	4835 111 27056	3497	10k, 5%, 1/10W, Metal Film	4835 111 37216
3217	Res, 1M5, 5%, 1/8W, Metalized Glass.	2322 730 61155	3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3218	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S 3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225
3219	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	3503	10ohm, 120VAC, Positive Temperature C	
3220	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		oefficient	4835 116 47001
3225	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S 3505	Surge Protector.	2422 549 43073
3228	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S 3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3231	Zero ohm,.	4835 111 27056	S 3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333
3232	Zero ohm,.	4835 111 27056	S 3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102
3233	Zero ohm,.	4835 111 27056	3512	15k, 5%, 1/10W, Metal Film	4835 111 37458
3243	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184
3246	82k, 5%, 1/10W, Metal Film	4835 111 37277	3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204
3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S 3515	2.5 ohm, 20%, 3.6W, Negative Temperat	
3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		ure Coefficient.	2122 612 00023
3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340	3516	Res, 1K, 2%, 0,25W	4822 051 10102
3250	Zero ohm,.	4835 111 27056	3517	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3251	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S 3518	Res, 0R22, 5%, 3W, Metal Film. . . .	2120 106 90548
3252	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	3520	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3253	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	3521	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443
3257	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S 3525	33 ohm, 5%, 1/3W, Metal Film	4835 116 57665
3258	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	3528	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3259	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	3529	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	3530	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046	3532	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	3534	15k, 5%, 1/10W, Metal Film	4835 111 37458
3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046	3536	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	3537	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046	S 3542	4.7 Megohm, 5%, 1/2W, Metal Film . .	4835 116 57009
S 3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109	3570	15k, 5%, 1/10W, Metal Film	4835 111 37458
S 3341	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483	3571	Res, 150K, 1%, 3/5W, Metal Film. . .	2322 156 21504
S 3342	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483	3573	Res, 2K, 1%, 1/10W, Metalized Glass.	2120 108 92657
3343	1.5k, 20%, 1/2W, Carbon Composition.	4835 110 47034	3574	33k, 5%, 1/10W, Metal Film	4835 111 37248
3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290	3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010

S = Safety Part Be sure to use exact replacement part.

TS2774C121 (continued)

3577	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3578	Res, 1K, 2%, 0,25W	4822 051 10102	
3579	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451	
3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3592	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3594	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3595	68k, 5%, 1/6W, Carbon Film	4835 111 37205	
3596	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3597	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3598	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3599	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3607	8.2k, 5%, 1/8W, Inline Package . . .	4835 111 97046	
3608	2.2k, 5%, 1/8W, Inline Package . . .	4835 111 97049	
3609	2.2k, 5%, Resistor Network	2120 108 93868	
3611	Res, 1K, 2%, 0,25W	4822 051 10102	
3612	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3613	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3615	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3617	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3619	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3629	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259	
3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3631	27k, 5%, 1/10W, Metal Film	4835 111 37442	
S 3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63479	
3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210	
3634	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3635	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3636	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3637	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3653	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3654	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3655	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3662	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3663	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3664	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3665	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3666	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376	
3667	27k, 5%, 1/10W, Metal Film	4835 111 37442	
3672	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3673	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3674	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231	
3675	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3676	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3677	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3680	680 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37271	
3681	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3682	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3683	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3684	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3841	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3842	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3843	47k, 5%, 1/10W, Metal Film	4835 111 37445	
3844	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259	
3845	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259	
3850	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810	
3951	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3953	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272	
3954	1.5k, 5%, 1/10W, Metal Film.	4835 111 37437	
3955	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
3956	1.5k, 5%, 1/10W, Metal Film.	4835 111 37437	
3957	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
4001	Zero ohm, ...	4835 111 27056	
4002	Zero ohm, ...	4835 111 27056	
4004	Zero ohm, ...	4835 111 27056	
4007	Zero ohm, ...	4835 111 27056	
4009	Zero ohm, ...	4835 111 27056	
4010	Zero ohm, ...	4835 111 27056	
4011	Zero ohm, ...	4835 111 27056	
4012	Zero ohm, ...	4835 111 27056	
4013	Zero ohm, ...	4835 111 27056	
4020	Zero ohm, ...	4835 111 27056	
4051	Zero ohm, ...	4835 111 27056	
4100	Zero ohm, ...	4835 111 27056	
4101	Zero ohm, ...	4835 111 27056	
4102	Zero ohm, ...	4835 111 27056	
4103	Zero ohm, ...	4835 111 27056	
4143	Zero ohm, ...	4835 111 27056	
4144	Zero ohm, ...	4835 111 27056	
4203	Zero ohm, ...	4835 111 27056	
4207	Zero ohm, ...	4835 111 27056	
4212	Zero ohm, ...	4835 111 27056	
4214	Zero ohm, ...	4835 111 27056	
4215	Zero ohm, ...	4835 111 27056	
4216	Zero ohm, ...	4835 111 27056	
4501	Zero ohm, ...	4835 111 27056	
4602	Zero ohm, ...	4835 111 27056	
4650	Zero ohm, ...	4835 111 27056	
4651	Zero ohm, ...	4835 111 27056	
4652	Zero ohm, ...	4835 111 27056	
4654	Zero ohm, ...	4835 111 27056	
4655	Zero ohm, ...	4835 111 27056	
4684	Zero ohm, ...	4835 111 27056	
4687	Zero ohm, ...	4835 111 27056	
4831	Zero ohm, ...	4835 111 27056	
4832	Zero ohm, ...	4835 111 27056	
4833	Zero ohm, ...	4835 111 27056	
4902	Zero ohm, ...	4835 111 27056	
4903	Zero ohm, ...	4835 111 27056	
4904	Zero ohm, ...	4835 111 27056	
4905	Zero ohm, ...	4835 111 27056	
4909	Zero ohm, ...	4835 111 27056	
4911	Zero ohm, ...	4835 111 27056	
4912	Zero ohm, ...	4835 111 27056	
4914	Zero ohm, ...	4835 111 27056	
4957	Zero ohm, ...	4835 111 27056	
4999	Zero ohm, ...	4835 111 27056	
5000	Coil, 5u6.	3198 018 25680	
5004	Coil, 820n	2422 535 97314	
5101	Coil, 5u6.	3198 018 15680	
5201	Coil, 22u.	3198 018 22290	
5202	Coil, 6u8.	3198 018 16880	
5342	22uH., 10%, Coil, Peaking.	4835 157 67069	
S 5445	Transformer, L.O.T., models ending in C101, C121, and C125	2422 531 02327	
S 5445	Transformer, L.O.T., models ending in C221 and C225.	3128 138 20941	
5451	Coil, 27u.	2422 535 96614	
5457	Coil, Linear Correction.	3128 138 53241	
5461	Transformer.	3128 138 33811	
5480	Coil, 27u.	2422 535 97334	
5480	Coil, 39u.	2422 535 97336	
5480	33uH., Peaking Coil, only in 25. . .	4835 157 58205	
S 5500	Filter, Mains, 5mH, 2A	2422 549 43432	
5516	100uH., Coil	4835 157 67078	
5518	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5521	Coil, 2u2.	3198 018 12280	
5540	Coil, 4u7.	3198 018 14780	
S 5545	Transfomer, ...	2422 531 02314	
5551	27uH., 5%, Coil, Peaking	4835 157 67052	
5552	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5572	100uH., Coil	4835 157 67078	
5573	100uH., Coil	4835 157 67078	
5575	100uH., Coil	4835 157 67078	
5576	100uH., Coil	4835 157 67078	
5577	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5600	Coil, 8u2.	3198 018 18280	
5601	Coil, 8u2.	3198 018 18280	
5620	Coil, 6u8.	3198 018 16880	
5821	Coil, 100u	3198 018 21010	
5831	Coil, 12u.	3198 018 21290	
5832	Coil, 12u.	3198 018 21290	
5833	Coil, 12u.	3198 018 11290	
6008	Zener, 33 Volt BZX79-C33	4835 130 37904	
6113	Zener Diode, 6.8 volt.	9340 386 40115	
6125	Zener Diode, 6.8 volt.	9340 386 40115	
6211	Diode, 1N4148.	4835 130 37048	
6212	Diode, 1N4148.	4835 130 37048	
6213	Diode, 1N4148.	4835 130 37048	
6331	Diode.	4835 130 37294	
6333	Diode.	4835 130 37294	
6335	Diode.	4835 130 37294	
6401	Diode.	4835 130 37094	
6402	Zener, 33 Volt, BZX79-C33.	4835 130 37904	
6403	Diode.	4835 130 37094	
6404	Diode.	4835 130 37094	
6449	Diode, 1N4148.	4835 130 37048	
6450	Diode, 1N4148.	4835 130 37048	
6460	Diode, Rect, BY228/20	9336 215 80112	
6463	Diode, 1N4148.	4835 130 37048	
6464	Zener Diode, 6.2 volt.	9337 242 70133	
6465	Diode, BYD33J.	4835 130 37094	
6466	Diode, BYD33J.	4835 130 37094	
6480	Diode, Zener	4835 130 37947	
6481	Diode, 1N4148.	4835 130 37048	
6485	Diode, BYD33J.	4835 130 37094	
6486	Diode, EGP20DL-530	4835 130 37919	
6487	Diode.	4835 130 37094	
6488	Diode, Rect, BYV27-200.	9322 126 72673	
6490	Diode, Rect, BYV27-200.	9322 126 72673	
6505	Diode, Bridge Rect, GBU6JL-7002 . .	9322 138 08667	
6507	Diode, BYD33J.	4835 130 37094	
6508	Diode, BYD33J.	4835 130 37094	
6510	Zener Diode, 20 volt	9331 178 60133	
6511	Diode, BYV95C.	4835 130 37052	

S = Safety Part Be sure to use exact replacement part.

TS2774C121 (continued)

6512	Diode, Rect, BY228/20	4822 130 41275
6513	Diode, Rect, BY228/20	4822 130 41275
6514	Zener, 18 Volt, BZX79-C18.	4835 130 37908
6540	Diode.	4835 130 37294
6550	Diode, Rect, BY229X-800	9340 380 30127
6560	Diode, EGP20DL-530	4835 130 37919
6570	Diode, EGP20DL-530	4835 130 37919
6582	Diode, EGP20DL-530	4835 130 37919
6584	Diode, 1N4148.	4835 130 37048
6585	Diode, 1N4148.	4835 130 37048
6590	Diode, EGP20DL-530	4835 130 37919
6591	Diode, BAS216.	4835 130 37905
6601	Diode, Zener	4835 130 37684
6606	Zener, 4.7 Volt, BZX79-C4V7.	4835 130 37005
6607	Zener, 6.8 Volt, BZX79-C6V8.	4835 130 37945
6690	LED, LTL-307P.	4835 130 97096
6831	Diode, BAS216.	4835 130 37905
6951	Diode, BAS216.	4835 130 37905
6961	Diode, BAS216.	4835 130 37905
7134	Transistor, BC547B	4835 130 47055
7250	IC,.	9352 620 26112
7251	IC, LM317T	9337 220 80682
7254	Transistor, NPN, BC847B.	4822 130 60511
7256	Transistor, NPN, BC847B.	4822 130 60511
7258	Transistor, NPN, BC847B.	4822 130 60511
7263	Transistor, PNP, BC857B.	5322 130 60508
7266	Transistor, NPN, BC847B.	4822 130 60511
7330	IC,.	9352 184 10112
7401	IC,.	9322 121 47687
7460	Transistor, NPN, BU1508DX.	9340 170 50127
7461	Transistor, NPN, BF819	9335 354 50127
7462	Transistor, BC547B	4835 130 47055
7463	Transistor, BC557B	4835 130 47409
7480	IC,.	9322 028 93682
7481	Transistor, BC557B	4835 130 47409
7482	Transistor, PNP, BC857B.	5322 130 60508
7518	STH8NA60FI SMPS FET	9322 068 92687
7518	STH10NC60FI SMPS FET.	9322 155 66687
7520	IC, MC44603A	4835 209 88537
7570	IC,.	9337 711 00676
S 7581	Coupler, TCDT1101G	9338 431 30682
7590	Transistor, NPN, BC847B.	4822 130 60511
7591	Transistor, NPN, BC847B.	4822 130 60511
7592	Transistor, NPN, BC847B.	4822 130 60511
7600	IC, SAA5543PS/M4/1046 L90US1-1.4	4835 310 57477
7601	IC, ST24W04B6.	9322 097 23682
7603	Transistor, NPN, BC337	9331 796 00126
7604	Transistor, NPN, BC847B.	4822 130 60511
7605	Transistor, NPN, BC847B.	4822 130 60511
7608	Transistor, NPN, BC847B.	4822 130 60511
7609	Transistor, NPN, BC847B.	4822 130 60511
7680	IR Receiver.	9322 127 53667
7833	IC,.	9322 136 54682
7950	IC,.	4835 209 88543
9423	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
CBA	00EMF833A102 Main Chassis Board Asm.	00EM F83 3A102

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Mainscord, 125V, 10A	3135 010 03831
S AC02	Anode Clip	4835 256 97264
AC03	Cabinet Back	3139 124 27321
AC04	Cabinet Front.	3139 137 52951
AC05	Chassis Guide.	3139 124 31381
AC06	Control Buttons.	3139 124 27371
S AC07	Convergence and Purity Assembly.	2422 549 43385
S AC08	CRT A68AJB82X.	4835 131 27167
S AC09	Coil, Degaussing	3121 218 62701
AC11	Light Guide.	3139 124 26461
AC13	Owner's Manual, English.	3135 015 10661
AC14	Knob, Power.	3139 124 29981
REMOTE	Remote Transmitter, RC2524/04.	3139 228 81592
AC16	Speaker, 5W, 16 ohm (2 Used)	2422 264 00333
S AC18	Yoke	3313 203 01242
AC19	Yoke Wedge (3 Used).	4835 535 27001
AC21	Battery, 1.5V AA, 2-Pack, (Not Shown	9299 000 10137
AC24	Spring	3139 121 26231

S = Safety Part Be sure to use exact replacement part.

TS3256C101 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts	
S 0127	3.15 Amp Fuse, ...	3122 358 72141
0152	Cable, DIP, 6 Pin, 400mm	3104 301 09421
0153	4 Pin Cable.	3104 301 09431
S 0165	Aqua/Earth 1V.	3104 301 08281
0212	Connector, 2 Pin	2422 025 15396
0220	4 Pin Board Connector.	2422 025 04852
0223	Socket, Cinch, 6 Pin	2422 026 04827
0224	1 Pin Board Connector.	2422 034 20021
0228	1 Pin Board Connector.	2422 034 20021
0234	Connector, 4 Pin	2422 025 12479
S 0243	Connector, 6 Pin	2422 025 04854
0244	4 Pin Board Connector.	2422 025 04852
S 0245	Connector, 6 Pin	2422 025 04854
S 0254	CRT Socket (9 Pin)	2422 500 80022
0267	Connector, 3 Pin	2412 020 00725
1000	Tuner.	2422 542 90057
1003	45 MHz SAW, Filter,.	2422 549 42433
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807
1208	Crystal Resonator.	4835 242 77276
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10869
S 1572	1 Amp, Radial Fuse,.	4835 253 97162
S 1573	2.5 Amp Fuse, Radial,.	2422 086 10422
S 1580	Relay, 12V	2422 132 07317
1600	Switch, Tactile.	2422 128 02742
1601	Switch, Tactile.	2422 128 02742
1602	Switch, Tactile.	2422 128 02742
1603	Switch, Tactile.	2422 128 02742
1606	Switch, Tactile.	2422 128 02742
1660	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488
1822	Crystal Resonator, 18MHz432, 12 Pin, HC49/U A	2422 543 00842
2001	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2002	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2003	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2004	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2011	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2101	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2102	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2103	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2104	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2111	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2112	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2115	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2201	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2205	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2208	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2209	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2211	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2212	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2213	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2214	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2215	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 16654
2220	Cap, 18p, 5%, 50V, Ceramic	3198 016 01890
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2222	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2226	Cap, 33u, 20%, 25V, Electrolytic . .	2020 021 90124
2227	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2247	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2248	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2249	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2330	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2340	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320
S 2343	Cap, 3n3, 10%, 2KV, Ceramic.	2020 558 90529
2345	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2401	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2402	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2403	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2405	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2407	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2409	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2420	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2426	Cap, 100n, 10%, 63V, Metalized Polyester.	2222 370 75104
2428	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2429	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2430	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2431	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2437	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2438	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2448	Cap, 220p, 10%, 500V, Ceramic. . . .	3198 019 42210
2450	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91139
2451	Cap, 15n, 10%, 50V, Polyester. . . .	2020 300 90575
2451	0.012uF., 5%, 50V, Polyester	3198 014 01230
2451	0.01uF., 10%, 50V, Polyester, only 27	3198 138 20941
2456	Cap, 47n, 10%, 250V, Metalized Polyester.	2222 368 90176
2457	Cap, 390n, 5%, 250V, Metalized Polypropylene.	2222 479 90021
2458	Cap, 2u2, 20%, 100V, Electrolytic. .	2020 021 91331
2459	Cap, 680p, 10%, 500V, Ceramic. . . .	3198 019 46810
2461	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2462	Cap, 47n, 10%, 250V, Metalized Polyester.	2222 368 90176
S 2463	Cap, 1n2, 10%, 2KV, Ceramic.	2020 558 90488
2464	Cap, 2u2, 5%, 160V, Polypropylene. .	2222 479 90042
S 2465	Cap, 12n, 5%, 1600V, Polypropylene .	2222 375 90156
2467	Cap, 15n, 10%, 400V, Polyester . . .	2222 347 90219
2468	Cap, 18n, 10%, 400V, Polyester . . .	2222 347 90222
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050
2470	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2472	Cap, 2u2, 20%, 50V, Electrolytic . .	2020 021 90552
2473	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2481	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2482	Cap, 68n, 10%, 250V, Polyester . . .	2222 347 90234
2484	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2485	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2486	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2487	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2488	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2489	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2490	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2491	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810
2500	0.47uF., 250V, Polyester	4835 121 47569
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
S 2507	Cap, 1n5, 10%, 1KV, Ceramic.	2020 558 90443
2508	Cap, 470u, 20%, 200V, Electrolytic .	2020 024 90647
S 2511	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
S 2518	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2530	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 021 91147
2531	Cap, 1n, 2%, 50V, Polypropylene. . .	2020 310 90049
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2540	Cap, 100u, 20%, 25V, Electrolytic. .	2020 021 90547
S 2545	1500pF., 250VAC, Ceramic	4835 122 47621
S 2550	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2551	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91358
2561	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
S 2562	Cap, 220p, 10%, 1KV, Ceramic	2020 558 90424
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2571	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91353
2572	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2575	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2586	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2604	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2613	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2615	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2619	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2622	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2629	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2679	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2681	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2850	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810
2851	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2852	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2853	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020

S = Safety Part Be sure to use exact replacement part.

TS3256C101 (continued)

2854	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046
2855	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380	S	3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
2856	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380	S	3341	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483
2858	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790	S	3342	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483
2859	Cap, 15p, 5%, 50V, Ceramic	3198 016 01590		3343	1.5k, 20%, 1/2W, Carbon Composition.	4835 110 47034
2860	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090		3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
2861	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	S	3345	VDR, DC, 1mA, 50V, MAX 115V	2322 593 13507
2862	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
2863	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090		3401	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2864	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3402	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2865	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3403	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2866	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3405	2.2k, 1%, 0.6W, Metal Film	4835 116 57676
2867	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3406	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2868	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780		3407	2.2k, 1%, 0.6W, Metal Film	4835 116 57676
2869	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2870	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3409	1.5 ohm, 5%, 1/3W, Metal Film. . . .	4835 116 57664
2871	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090		3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2874	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790		3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2875	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790		3420	470k, 5%, 1/10W, Metal Film.	4835 111 37407
2877	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2882	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2883	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090		3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840
2884	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606
2887	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810		3425	68k, 5%, 1/10W, Metal Film	4835 111 37273
2888	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3426	39k, 5%, 1/10W, Metal Film	4835 111 27051
2889	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3428	22k, 5%, 1/10W, Metal Film	4835 111 37441
2891	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390		3429	27k, 5%, 1/10W, Metal Film	4835 111 37442
2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3431	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
2952	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3432	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
2954	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3433	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
2955	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3436	Res, 1K, 2%, 0,25W	4822 051 10102
2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3437	10k, 5%, 1/10W, Metal Film	4835 111 37216
2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3438	33k, 1/4W, Carbon Film	4835 110 57375
2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
2960	Cap, 2u2, 20%, 25V, Electrolytic . .	3198 026 32220		3447	10k, 5%, 1/10W, Metal Film	4835 111 37216
2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090		3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090		3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090	S	3452	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63229
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3454	Res, 33K, 5%, 2W, Metal Film	2120 105 93438
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3013	Zero ohm,.	4835 111 27056		3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3014	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	S	3462	Res, 6K8, 5%, 5W, Metal Film	2322 257 41682
3015	22k, 5%, 1/10W, Metal Film	4835 111 37441		3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810		3464	Res, 1K, 2%, 0,25W	4822 051 10102
3100	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510	S	3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
3101	220k, 5%, 1/10W, Metal Film.	4835 111 37235		3466	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903
3103	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3467	Res, 14K, 1%, 3/5W, Metal Film . . .	2322 156 21403
3104	10k, 5%, 1/10W, Metal Film	4835 111 37216		3467	Res, 15K, 1%, 3/5W, Metal Film . . .	2322 156 21503
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510		3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3108	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3469	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
3109	10k, 5%, 1/10W, Metal Film	4835 111 37216		3470	Res, 220K, 5%, 1/4W, Carbon Film . .	2120 101 74224
3122	220k, 5%, 1/10W, Metal Film.	4835 111 37235		3472	Res, 56K, 5%, 1/6W, Carbon Film. . .	3198 011 05630
3123	75 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37276		3473	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3125	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890		3474	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3145	Res, 1K, 2%, 0,25W	4822 051 10102		3475	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3155	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259		3477	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3201	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253		3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3203	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443		3479	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198 011 03310
3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820		3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703
3205	Res, 1K, 2%, 0,25W	4822 051 10102		3481	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903
3206	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3482	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903
3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3209	22k, 5%, 1/10W, Metal Film	4835 111 37441		3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3212	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253	S	3485	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
3213	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	S	3486	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3215	22k, 5%, 1/10W, Metal Film	4835 111 37441	S	3487	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3216	Zero ohm,.	4835 111 27056	S	3488	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
3218	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3490	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3219	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	S	3491	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3220	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3492	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3225	100k, 5%, 1/10W, Metal Film.	4835 111 37434		3495	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
3228	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3496	10k, 5%, 1/10W, Metal Film	4835 111 37216
3231	Zero ohm,.	4835 111 27056		3497	10k, 5%, 1/10W, Metal Film	4835 111 37216
3232	Zero ohm,.	4835 111 27056		3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3233	Zero ohm,.	4835 111 27056	S	3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225
3243	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052		3503	10ohm, 120VAC, Positive Temperature C	
3246	82k, 5%, 1/10W, Metal Film	4835 111 37277			oefficient	4835 116 47001
3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3505	Surge Protector.	2422 549 43073
3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340	S	3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333
3250	Zero ohm,.	4835 111 27056	S	3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102
3251	270k, 5%, 1/10W, Metal Film.	3198 021 52740		3512	15k, 5%, 1/10W, Metal Film	4835 111 37458
3252	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184
3253	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204
3257	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3515	2.5 ohm, 20%, 3.6W, Negative Temperat	
3258	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432			ure Coefficient.	2122 612 00023
3259	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3516	Res, 1K, 2%, 0,25W	4822 051 10102
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3517	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046	S	3518	Res, 0R22, 5%, 3W, Metal Film. . . .	2120 106 90548
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3520	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3521	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3525	33 ohm, 5%, 1/3W, Metal Film	4835 116 57665

S = Safety Part Be sure to use exact replacement part.

TS3256C101 (continued)

3528	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3529	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890	
3530	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320	
3532	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3534	15k, 5%, 1/10W, Metal Film	4835 111 37458	
3536	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830	
3537	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
S 3542	4.7 Megohm, 5%, 1/2W, Metal Film . .	4835 116 57009	
3570	15k, 5%, 1/10W, Metal Film	4835 111 37458	
3571	Res, 150K, 1%, 3/5W, Metal Film. . .	2322 156 21504	
3573	Res, 2K, 1%, 1/10W, Metalized Glass.	2120 108 92657	
3574	33k, 5%, 1/10W, Metal Film	4835 111 37248	
3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3577	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3578	Res, 1K, 2%, 0,25W	4822 051 10102	
3579	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451	
3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3592	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3594	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3595	68k, 5%, 1/6W, Carbon Film	4835 111 37205	
3596	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3597	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3598	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3599	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3607	8.2k, 5%, 1/8W, Inline Package . . .	4835 111 97046	
3608	2.2k, 5%, 1/8W, Inline Package . . .	4835 111 97049	
3609	2.2k, 5%, Resistor Network	2120 108 93868	
3611	Res, 1K, 2%, 0,25W	4822 051 10102	
3612	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3613	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3615	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3619	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3629	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259	
3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3631	27k, 5%, 1/10W, Metal Film	4835 111 37442	
S 3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63479	
3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210	
3634	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3635	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3636	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3637	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3637	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3653	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3654	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3655	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3662	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3663	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3664	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3665	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3666	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376	
3667	27k, 5%, 1/10W, Metal Film	4835 111 37442	
3672	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3673	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3674	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231	
3675	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510	
3676	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510	
3677	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510	
3680	680 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37271	
3681	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3682	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3683	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3684	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3841	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3842	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3843	47k, 5%, 1/10W, Metal Film	4835 111 37445	
3844	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259	
3845	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259	
3850	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810	
3951	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3953	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272	
3954	1.5k, 5%, 1/10W, Metal Film.	4835 111 37437	
3955	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
3956	1.5k, 5%, 1/10W, Metal Film.	4835 111 37437	
3957	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
4001	Zero ohm,.	4835 111 27056	
4002	Zero ohm,.	4835 111 27056	
4004	Zero ohm,.	4835 111 27056	
4007	Zero ohm,.	4835 111 27056	
4009	Zero ohm,.	4835 111 27056	
4010	Zero ohm,.	4835 111 27056	
4011	Zero ohm,.	4835 111 27056	
4012	Zero ohm,.	4835 111 27056	
4013	Zero ohm,.	4835 111 27056	
4020	Zero ohm,.	4835 111 27056	
4051	Zero ohm,.	4835 111 27056	
4100	Zero ohm,.	4835 111 27056	
4101	Zero ohm,.	4835 111 27056	
4102	Zero ohm,.	4835 111 27056	
4103	Zero ohm,.	4835 111 27056	
4143	Zero ohm,.	4835 111 27056	
4144	Zero ohm,.	4835 111 27056	
4203	Zero ohm,.	4835 111 27056	
4207	Zero ohm,.	4835 111 27056	
4212	Zero ohm,.	4835 111 27056	
4214	Zero ohm,.	4835 111 27056	
4215	Zero ohm,.	4835 111 27056	
4216	Zero ohm,.	4835 111 27056	
4410	Res, 1K, 2%, 0,25W	4822 051 10102	
4501	Zero ohm,.	4835 111 27056	
4602	Zero ohm,.	4835 111 27056	
4650	Zero ohm,.	4835 111 27056	
4651	Zero ohm,.	4835 111 27056	
4652	Zero ohm,.	4835 111 27056	
4654	Zero ohm,.	4835 111 27056	
4655	Zero ohm,.	4835 111 27056	
4684	Zero ohm,.	4835 111 27056	
4687	Zero ohm,.	4835 111 27056	
4831	Zero ohm,.	4835 111 27056	
4832	Zero ohm,.	4835 111 27056	
4833	Zero ohm,.	4835 111 27056	
4902	Zero ohm,.	4835 111 27056	
4903	Zero ohm,.	4835 111 27056	
4904	Zero ohm,.	4835 111 27056	
4905	Zero ohm,.	4835 111 27056	
4909	Zero ohm,.	4835 111 27056	
4911	Zero ohm,.	4835 111 27056	
4912	Zero ohm,.	4835 111 27056	
4914	Zero ohm,.	4835 111 27056	
4957	Zero ohm,.	4835 111 27056	
4999	Zero ohm,.	4835 111 27056	
5000	Coil, 5u6.	3198 018 25680	
5004	Coil, 820n	2422 535 97314	
5101	Coil, 5u6.	3198 018 15680	
5201	Coil, 22u.	3198 018 22290	
5202	Coil, 6u8.	3198 018 16880	
5342	22uH., 10%, Coil, Peaking.	4835 157 67069	
S 5445	Transformer, L.O.T., models ending in C101, C121, and C125	2422 531 02327	
S 5445	Transformer, L.O.T., models ending in C221 and C225.	3128 138 20941	
5451	Coil, 27u.	2422 535 96614	
5457	Coil	3128 138 53181	
5461	Transformer.	3128 138 33811	
5463	350uH., Bridge Coil.	3128 138 34851	
5471	Coil, 1m	2422 535 94652	
5480	Coil, 27u.	2422 535 97334	
5480	Coil, 39u.	2422 535 97336	
5480	Coil, 47u.	2422 535 97337	
5480	33uH., Peaking Coil, only in 25. . .	4835 157 58205	
S 5500	Filter, Mains, 5mH, 2A	2422 549 43432	
5516	100uH., Coil	4835 157 67078	
5518	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5521	Coil, 2u2.	3198 018 12280	
5540	Coil, 4u7.	3198 018 14780	
S 5545	Transfomer,.	2422 531 02314	
5551	27uH., 5%, Coil, Peaking	4835 157 67052	
5552	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5572	100uH., Coil	4835 157 67078	
5573	100uH., Coil	4835 157 67078	
5575	100uH., Coil	4835 157 67078	
5576	100uH., Coil	4835 157 67078	
5577	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5600	Coil, 8u2.	3198 018 18280	
5601	Coil, 8u2.	3198 018 18280	
5620	Coil, 6u8.	3198 018 16880	
5821	Coil, 100u	3198 018 21010	
5831	Coil, 12u.	3198 018 21290	
5832	Coil, 12u.	3198 018 21290	
5833	Coil, 12u.	3198 018 11290	
6008	Zener, 33 Volt BZX79-C33	4835 130 37904	
6113	Zener Diode, 6.8 volt.	9340 386 40115	
6125	Zener Diode, 6.8 volt.	9340 386 40115	
6211	Diode, 1N4148.	4835 130 37048	
6212	Diode, 1N4148.	4835 130 37048	
6213	Diode, 1N4148.	4835 130 37048	
6331	Diode.	4835 130 37294	
6333	Diode.	4835 130 37294	
6335	Diode.	4835 130 37294	
6401	Diode.	4835 130 37094	
6402	Zener, 18 Volt, BZX79-C18.	4835 130 37908	
6449	Diode, 1N4148.	4835 130 37048	
6450	Diode, 1N4148.	4835 130 37048	
6460	Diode, Rect, BY228/20	9336 215 80112	
6461	Diode, Rect, BYW95C-20.	9336 215 90112	

S = Safety Part Be sure to use exact replacement part.

TS3256C101 (continued)

6463	Diode, 1N4148.	4835 130 37048
6464	Zener, 6.2 Volt, BZX79-B6V2.	4835 130 37948
6465	Diode, BYD33J.	4835 130 37094
6466	Diode, BYD33J.	4835 130 37094
6470	Zener Diode, 9.1 volt.	9331 177 80133
6472	Diode, 1N4148.	4835 130 37048
6480	Diode, Zener	4835 130 37947
6481	Diode, 1N4148.	4835 130 37048
6485	Diode, BYD33J.	4835 130 37094
6486	Diode, EGP20DL-530	4835 130 37919
6487	Diode.	4835 130 37094
6488	Diode, Rect, BYV27-200.	9322 126 72673
6490	Diode, Rect, BYV27-200.	9322 126 72673
6505	Diode, Bridge Rect, GBU6JL-7002 . .	9322 138 08667
6507	Diode, BYD33J.	4835 130 37094
6508	Diode, BYD33J.	4835 130 37094
6510	Zener Diode, 20 volt	9331 178 60133
6511	Diode, BYV95C.	4835 130 37052
6512	Diode, Rect, BY228/20	4822 130 41275
6513	Diode, Rect, BY228/20	4822 130 41275
6514	Zener, 18 Volt, BZX79-C18.	4835 130 37908
6540	Diode.	4835 130 37294
6550	Diode, Rect, BY229X-800	9340 380 30127
6560	Diode, EGP20DL-530	4835 130 37919
6570	Diode, EGP20DL-530	4835 130 37919
6582	Diode, EGP20DL-530	4835 130 37919
6584	Diode, 1N4148.	4835 130 37048
6585	Diode, 1N4148.	4835 130 37048
6590	Diode, EGP20DL-530	4835 130 37919
6591	Diode, BAS216.	4835 130 37905
6601	Diode, Zener	4835 130 37684
6606	Zener, 4.7 Volt, BZX79-C4V7.	4835 130 37005
6607	Zener, 6.8 Volt, BZX79-C6V8.	4835 130 37945
6690	LED, LTL-307P.	4835 130 97096
6831	Diode, BAS216.	4835 130 37905
6951	Diode, BAS216.	4835 130 37905
6961	Diode, BAS216.	4835 130 37905
7134	Transistor, BC547B	4835 130 47055
7250	IC,.	9352 620 24112
7251	IC, LM317T	9337 220 80682
7254	Transistor, NPN, BC847B.	4822 130 60511
7256	Transistor, NPN, BC847B.	4822 130 60511
7258	Transistor, NPN, BC847B.	4822 130 60511
7263	Transistor, PNP, BC857B.	5322 130 60508
7266	Transistor, NPN, BC847B.	4822 130 60511
7330	IC,.	9352 561 40112
7401	IC,.	4835 209 88531
7460	Transistor, NPN, BU1508DX.	9340 170 50127
7461	Transistor, NPN, BF819	9335 354 50127
7462	Transistor, BC547B	4835 130 47055
7463	Transistor, BC557B	4835 130 47409
7470	F.E.T., Power, STP16NE06FP	9322 123 96687
7480	IC,.	9322 028 93682
7481	Transistor, BC557B	4835 130 47409
7482	Transistor, PNP, BC857B.	5322 130 60508
7518	STH8NA60FI SMPS FET	9322 068 92687
7518	STH10NC60FI SMPS FET.	9322 155 66687
7520	IC, MC44603A	4835 209 88537
7570	IC,.	9337 711 00676
S 7581	Coupler, TCDT1101G	9338 431 30682
7590	Transistor, NPN, BC847B.	4822 130 60511
7591	Transistor, NPN, BC847B.	4822 130 60511
7592	Transistor, NPN, BC847B.	4822 130 60511
7600	IC, SAA5543PS/M4/1046 L90US1-1.4 . .	4835 310 57477
7601	IC, ST24W04B6.	9322 097 23682
7603	Transistor, NPN, BC337	9331 796 00126
7604	Transistor, NPN, BC847B.	4822 130 60511
7605	Transistor, NPN, BC847B.	4822 130 60511
7608	Transistor, NPN, BC847B.	4822 130 60511
7609	Transistor, NPN, BC847B.	4822 130 60511
7680	IR Receiver.	9322 127 53667
7833	IC,.	9322 136 54682
7950	IC,.	4835 209 88543
CBA	00EMF880A102 Main Chassis Board Asm.	00EM F88 0A102

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Power Cord	3135 010 05051
S AC02	Anode Clip	4835 256 97264
AC03	Cabinet Back,.	3139 124 32111
AC04	Cabinet Front, ...	3139 137 68031
AC05	Chassis Guide, ...	3139 124 31321
AC06	Control Buttons, ...	3139 124 26481
S AC08	CRT A80ECK272X56	4835 131 27165
S AC09	Coil, Degaussing	3121 218 62641
AC11	Light Guide.	3139 124 26461
AC12	Nameplate, ...	3135 015 04411
AC13	Owner's Manual,.	3135 015 14381
AC14	Power Button,.	3139 124 26453
REMOTE	Remote Transmitter, RC2524/04. . . .	3139 228 81592
AC16	Speaker, 5W, 16 ohm (2 Used)	2422 264 00333
S AC18	Yoke	3313 203 13511
AC21	Battery, 1.5V AA, 2-Pack, (Not Shown	9299 000 10137
AC24	Spring	3139 121 26231

S = Safety Part Be sure to use exact replacement part.

TS3256C121 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts	
S 0127	3.15 Amp Fuse.	3122 358 72141
0152	Cable, DIP, 6 Pin, 400mm	3104 301 09421
0153	4 Pin Cable.	3104 301 09431
S 0165	Aqua/Earth 1V.	3104 301 08281
0212	Connector, 2 Pin	2422 025 15396
0220	4 Pin Board Connector.	2422 025 04852
0223	Socket, Cinch, 6 Pin	2422 026 04827
0224	1 Pin Board Connector.	2422 034 20021
0228	1 Pin Board Connector.	2422 034 20021
0234	Connector, 4 Pin	2422 025 12479
S 0243	Connector, 6 Pin	2422 025 04854
0244	4 Pin Board Connector.	2422 025 04852
S 0245	Connector, 6 Pin	2422 025 04854
S 0254	CRT Socket (9 Pin)	2422 500 80022
0267	Connector, 3 Pin	2412 020 00725
1000	Tuner.	2422 542 90057
1003	45 MHz SAW, Filter,.	2422 549 42433
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807
1208	Crystal Resonator.	4835 242 77276
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10869
S 1572	1 Amp, Radial Fuse,.	4835 253 97162
S 1573	2.5 Amp Fuse, Radial,.	2422 086 10422
S 1580	Relay, 12V	2422 132 07317
1600	Switch, Tactile.	2422 128 02742
1601	Switch, Tactile.	2422 128 02742
1602	Switch, Tactile.	2422 128 02742
1603	Switch, Tactile.	2422 128 02742
1606	Switch, Tactile.	2422 128 02742
1660	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488
1822	Crystal Resonator, 18MHz432, 12 Pin, HC49/U A	2422 543 00842
2001	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2002	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2003	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2004	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2011	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2101	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2102	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2103	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2104	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2111	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2112	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2115	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2201	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2205	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2207	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2208	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2209	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2211	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2212	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2213	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740
2214	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230
2215	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 16654
2220	Cap, 18p, 5%, 50V, Ceramic	3198 016 01890
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2222	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2226	Cap, 33u, 20%, 25V, Electrolytic . .	2020 021 90124
2227	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2247	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2248	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2249	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730
2330	Cap, 100n, 10%, 250V, Metalized Polyester	2222 368 90177
2340	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320
S 2343	Cap, 3n3, 10%, 2KV, Ceramic.	2020 558 90529
2345	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2401	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2402	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2403	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2405	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2407	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2409	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240
2420	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720
2426	Cap, 100n, 10%, 63V, Metalized Polyester.	2222 370 75104
2428	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2429	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2430	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090
2431	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2437	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2438	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2448	Cap, 220p, 10%, 500V, Ceramic. . . .	3198 019 42210
2450	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91139
2451	Cap, 15n, 10%, 50V, Polyester. . . .	2020 300 90575
2451	0.012uF., 5%, 50V, Polyester	3198 014 01230
2451	0.01uF., 10%, 50V, Polyester, only 27	3198 138 20941
2456	Cap, 47n, 10%, 250V, Metalized Polyester.	2222 368 90176
2457	Cap, 390n, 5%, 250V, Metalized Polypropylene.	2222 479 90021
2458	Cap, 2u2, 20%, 100V, Electrolytic. .	2020 021 91331
2459	Cap, 680p, 10%, 500V, Ceramic. . . .	3198 019 46810
2461	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020
2462	Cap, 47n, 10%, 250V, Metalized Polyester.	2222 368 90176
S 2463	Cap, 1n2, 10%, 2KV, Ceramic.	2020 558 90488
2464	Cap, 2u2, 5%, 160V, Polypropylene. .	2222 479 90042
S 2465	Cap, 12n, 5%, 1600V, Polypropylene .	2222 375 90156
2467	Cap, 15n, 10%, 400V, Polyester . . .	2222 347 90219
2468	Cap, 18n, 10%, 400V, Polyester . . .	2222 347 90222
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050
2470	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2472	Cap, 2u2, 20%, 50V, Electrolytic . .	2020 021 90552
2473	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790
2481	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740
2482	Cap, 68n, 10%, 250V, Polyester . . .	2222 347 90234
2484	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2485	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293
2486	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2487	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010
2488	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2489	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710
2490	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2491	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810
2500	0.47uF., 250V, Polyester	4835 121 47569
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220
S 2507	Cap, 1n5, 10%, 1KV, Ceramic.	2020 558 90443
2508	Cap, 470u, 20%, 200V, Electrolytic .	2020 024 90647
S 2511	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020
S 2518	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2530	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 021 91147
2531	Cap, 1n, 2%, 50V, Polypropylene. . .	2020 310 90049
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220
2540	Cap, 100u, 20%, 25V, Electrolytic. .	2020 021 90547
S 2545	1500pF., 250VAC, Ceramic	4835 122 47621
S 2550	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471
2551	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91358
2561	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020
S 2562	Cap, 220p, 10%, 1KV, Ceramic	2020 558 90424
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020
2571	Cap, 2u2, 20%, 25V, Electrolytic . .	2020 021 91353
2572	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330
2575	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820
2586	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2604	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2613	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040
2615	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010
2619	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290
2622	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910
2629	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2631	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050
2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030
2679	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040
2681	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010
2850	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810
2851	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2852	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020
2853	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020

S = Safety Part Be sure to use exact replacement part.

TS3256C121 (continued)

2854	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046
2855	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380	S	3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
2856	Cap, 3p3, 8%, 50V, Ceramic	3198 016 03380	S	3341	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483
2858	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790	S	3342	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483
2859	Cap, 15p, 5%, 50V, Ceramic	3198 016 01590		3343	1.5k, 20%, 1/2W, Carbon Composition.	4835 110 47034
2860	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090		3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
2861	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	S	3345	VDR, DC, 1mA, 50V, MAX 115V	2322 593 13507
2862	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
2863	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090		3401	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2864	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3402	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2865	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3403	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2866	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3405	2.2k, 1%, 0.6W, Metal Film	4835 116 57676
2867	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3406	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2868	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780		3407	2.2k, 1%, 0.6W, Metal Film	4835 116 57676
2869	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2870	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3409	1.5 ohm, 5%, 1/3W, Metal Film. . . .	4835 116 57664
2871	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090		3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2874	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790		3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2875	Cap, 47p, 5%, 50V, Ceramic	3198 016 04790		3420	470k, 5%, 1/10W, Metal Film.	4835 111 37407
2877	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2882	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2883	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090		3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840
2884	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020		3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606
2887	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810		3425	68k, 5%, 1/10W, Metal Film	4835 111 37273
2888	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3426	39k, 5%, 1/10W, Metal Film	4835 111 27051
2889	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3428	22k, 5%, 1/10W, Metal Film	4835 111 37441
2891	Cap, 33p, 5%, 50V, Ceramic	3198 016 03390		3429	27k, 5%, 1/10W, Metal Film	4835 111 37442
2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3431	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
2952	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3432	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
2954	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3433	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
2955	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3436	Res, 1K, 2%, 0,25W	4822 051 10102
2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3437	10k, 5%, 1/10W, Metal Film	4835 111 37216
2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3438	33k, 1/4W, Carbon Film	4835 110 57375
2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
2960	Cap, 2u2, 20%, 25V, Electrolytic . .	3198 026 32220		3447	10k, 5%, 1/10W, Metal Film	4835 111 37216
2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090		3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090		3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090	S	3452	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63229
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3454	Res, 33K, 5%, 2W, Metal Film	2120 105 93438
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3013	Zero ohm,.	4835 111 27056		3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3014	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	S	3462	Res, 6K8, 5%, 5W, Metal Film	2322 257 41682
3015	22k, 5%, 1/10W, Metal Film	4835 111 37441		3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810		3464	Res, 1K, 2%, 0,25W	4822 051 10102
3100	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510	S	3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
3101	220k, 5%, 1/10W, Metal Film.	4835 111 37235		3466	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903
3103	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3467	Res, 14K, 1%, 3/5W, Metal Film . . .	2322 156 21403
3104	10k, 5%, 1/10W, Metal Film	4835 111 37216		3467	Res, 15K, 1%, 3/5W, Metal Film . . .	2322 156 21503
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510		3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3108	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3469	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
3109	10k, 5%, 1/10W, Metal Film	4835 111 37216		3470	Res, 220K, 5%, 1/4W, Carbon Film . .	2120 101 74224
3122	220k, 5%, 1/10W, Metal Film.	4835 111 37235		3472	Res, 56K, 5%, 1/6W, Carbon Film. . .	3198 011 05630
3123	75 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37276		3473	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3125	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890		3474	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3145	Res, 1K, 2%, 0,25W	4822 051 10102		3475	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
3155	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259		3477	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3201	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253		3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3203	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443		3479	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198 011 03310
3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820		3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703
3205	Res, 1K, 2%, 0,25W	4822 051 10102		3481	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903
3206	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3482	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903
3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3209	22k, 5%, 1/10W, Metal Film	4835 111 37441		3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3212	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253	S	3485	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
3213	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	S	3486	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3215	22k, 5%, 1/10W, Metal Film	4835 111 37441	S	3487	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3216	Zero ohm,.	4835 111 27056	S	3488	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
3218	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3490	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3219	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	S	3491	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3220	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3492	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3225	100k, 5%, 1/10W, Metal Film.	4835 111 37434		3495	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
3228	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3496	10k, 5%, 1/10W, Metal Film	4835 111 37216
3231	Zero ohm,.	4835 111 27056		3497	10k, 5%, 1/10W, Metal Film	4835 111 37216
3232	Zero ohm,.	4835 111 27056		3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3233	Zero ohm,.	4835 111 27056	S	3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225
3243	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052		3503	10ohm, 120VAC, Positive Temperature C	
3246	82k, 5%, 1/10W, Metal Film	4835 111 37277			oefficient	4835 116 47001
3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3505	Surge Protector.	2422 549 43073
3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340	S	3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333
3250	Zero ohm,.	4835 111 27056	S	3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102
3251	270k, 5%, 1/10W, Metal Film.	3198 021 52740		3512	15k, 5%, 1/10W, Metal Film	4835 111 37458
3252	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184
3253	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204
3257	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3515	2.5 ohm, 20%, 3.6W, Negative Temperat	
3258	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432			ure Coefficient.	2122 612 00023
3259	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3516	Res, 1K, 2%, 0,25W	4822 051 10102
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3517	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046	S	3518	Res, 0R22, 5%, 3W, Metal Film. . . .	2120 106 90548
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3520	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3521	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3525	33 ohm, 5%, 1/3W, Metal Film	4835 116 57665

S = Safety Part Be sure to use exact replacement part.

TS3256C121 (continued)

3528	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3529	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890	
3530	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320	
3532	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3534	15k, 5%, 1/10W, Metal Film	4835 111 37458	
3536	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830	
3537	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
S 3542	4.7 Megohm, 5%, 1/2W, Metal Film . .	4835 116 57009	
3570	15k, 5%, 1/10W, Metal Film	4835 111 37458	
3571	Res, 150K, 1%, 3/5W, Metal Film. . .	2322 156 21504	
3573	Res, 2K, 1%, 1/10W, Metalized Glass.	2120 108 92657	
3574	33k, 5%, 1/10W, Metal Film	4835 111 37248	
3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3577	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3578	Res, 1K, 2%, 0,25W	4822 051 10102	
3579	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451	
3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3592	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3594	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3595	68k, 5%, 1/6W, Carbon Film	4835 111 37205	
3596	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3597	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3598	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3599	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3607	8.2k, 5%, 1/8W, Inline Package . . .	4835 111 97046	
3608	2.2k, 5%, 1/8W, Inline Package . . .	4835 111 97049	
3609	2.2k, 5%, Resistor Network	2120 108 93868	
3611	Res, 1K, 2%, 0,25W	4822 051 10102	
3612	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3613	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3615	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3619	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3629	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259	
3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3631	27k, 5%, 1/10W, Metal Film	4835 111 37442	
S 3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63479	
3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210	
3634	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3635	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3636	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3637	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3637	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3653	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3654	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3655	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3662	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3663	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3664	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3665	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3666	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376	
3667	27k, 5%, 1/10W, Metal Film	4835 111 37442	
3672	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3673	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3674	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231	
3675	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510	
3676	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510	
3677	Res, 150 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51510	
3680	680 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37271	
3681	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3682	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3683	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3684	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3841	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3842	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3843	47k, 5%, 1/10W, Metal Film	4835 111 37445	
3844	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259	
3845	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259	
3850	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810	
3951	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3953	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272	
3954	1.5k, 5%, 1/10W, Metal Film.	4835 111 37437	
3955	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
3956	1.5k, 5%, 1/10W, Metal Film.	4835 111 37437	
3957	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
4001	Zero ohm,.	4835 111 27056	
4002	Zero ohm,.	4835 111 27056	
4004	Zero ohm,.	4835 111 27056	
4007	Zero ohm,.	4835 111 27056	
4009	Zero ohm,.	4835 111 27056	
4010	Zero ohm,.	4835 111 27056	
4011	Zero ohm,.	4835 111 27056	
4012	Zero ohm,.	4835 111 27056	
4013	Zero ohm,.	4835 111 27056	
4020	Zero ohm,.	4835 111 27056	
4051	Zero ohm,.	4835 111 27056	
4100	Zero ohm,.	4835 111 27056	
4101	Zero ohm,.	4835 111 27056	
4102	Zero ohm,.	4835 111 27056	
4103	Zero ohm,.	4835 111 27056	
4143	Zero ohm,.	4835 111 27056	
4144	Zero ohm,.	4835 111 27056	
4203	Zero ohm,.	4835 111 27056	
4207	Zero ohm,.	4835 111 27056	
4212	Zero ohm,.	4835 111 27056	
4214	Zero ohm,.	4835 111 27056	
4215	Zero ohm,.	4835 111 27056	
4216	Zero ohm,.	4835 111 27056	
4410	Res, 1K, 2%, 0,25W	4822 051 10102	
4501	Zero ohm,.	4835 111 27056	
4602	Zero ohm,.	4835 111 27056	
4650	Zero ohm,.	4835 111 27056	
4651	Zero ohm,.	4835 111 27056	
4652	Zero ohm,.	4835 111 27056	
4654	Zero ohm,.	4835 111 27056	
4655	Zero ohm,.	4835 111 27056	
4684	Zero ohm,.	4835 111 27056	
4687	Zero ohm,.	4835 111 27056	
4831	Zero ohm,.	4835 111 27056	
4832	Zero ohm,.	4835 111 27056	
4833	Zero ohm,.	4835 111 27056	
4902	Zero ohm,.	4835 111 27056	
4903	Zero ohm,.	4835 111 27056	
4904	Zero ohm,.	4835 111 27056	
4905	Zero ohm,.	4835 111 27056	
4909	Zero ohm,.	4835 111 27056	
4911	Zero ohm,.	4835 111 27056	
4912	Zero ohm,.	4835 111 27056	
4914	Zero ohm,.	4835 111 27056	
4957	Zero ohm,.	4835 111 27056	
4999	Zero ohm,.	4835 111 27056	
5000	Coil, 5u6.	3198 018 25680	
5004	Coil, 820n	2422 535 97314	
5101	Coil, 5u6.	3198 018 15680	
5201	Coil, 22u.	3198 018 22290	
5202	Coil, 6u8.	3198 018 16880	
5342	22uH., 10%, Coil, Peaking.	4835 157 67069	
S 5445	Transformer, L.O.T., models ending in C101, C121, and C125	2422 531 02327	
S 5445	Transformer, L.O.T., models ending in C221 and C225.	3128 138 20941	
5451	Coil, 27u.	2422 535 96614	
5457	Coil	3128 138 53181	
5461	Transformer.	3128 138 33811	
5463	350uH., Bridge Coil.	3128 138 34851	
5471	Coil, 1m	2422 535 94652	
5480	Coil, 27u.	2422 535 97334	
5480	Coil, 39u.	2422 535 97336	
5480	Coil, 47u.	2422 535 97337	
5480	33uH., Peaking Coil, only in 25. . .	4835 157 58205	
S 5500	Filter, Mains, 5mH, 2A	2422 549 43432	
5516	100uH., Coil	4835 157 67078	
5518	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5521	Coil, 2u2.	3198 018 12280	
5540	Coil, 4u7.	3198 018 14780	
S 5545	Transfomer,.	2422 531 02314	
5551	27uH., 5%, Coil, Peaking	4835 157 67052	
5552	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5572	100uH., Coil	4835 157 67078	
5573	100uH., Coil	4835 157 67078	
5575	100uH., Coil	4835 157 67078	
5576	100uH., Coil	4835 157 67078	
5577	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5600	Coil, 8u2.	3198 018 18280	
5601	Coil, 8u2.	3198 018 18280	
5620	Coil, 6u8.	3198 018 16880	
5821	Coil, 100u	3198 018 21010	
5831	Coil, 12u.	3198 018 21290	
5832	Coil, 12u.	3198 018 21290	
5833	Coil, 12u.	3198 018 11290	
6008	Zener, 33 Volt BZX79-C33	4835 130 37904	
6113	Zener Diode, 6.8 volt.	9340 386 40115	
6125	Zener Diode, 6.8 volt.	9340 386 40115	
6211	Diode, 1N4148.	4835 130 37048	
6212	Diode, 1N4148.	4835 130 37048	
6213	Diode, 1N4148.	4835 130 37048	
6331	Diode.	4835 130 37294	
6333	Diode.	4835 130 37294	
6335	Diode.	4835 130 37294	
6401	Diode.	4835 130 37094	
6402	Zener, 18 Volt, BZX79-C18.	4835 130 37908	
6449	Diode, 1N4148.	4835 130 37048	
6450	Diode, 1N4148.	4835 130 37048	
6460	Diode, Rect, BY228/20	9336 215 80112	
6461	Diode, Rect, BYW95C-20.	9336 215 90112	

S = Safety Part Be sure to use exact replacement part.

TS3256C121 (continued)

6463	Diode, 1N4148.	4835 130 37048
6464	Zener, 6.2 Volt, BZX79-B6V2.	4835 130 37948
6465	Diode, BYD33J.	4835 130 37094
6466	Diode, BYD33J.	4835 130 37094
6470	Zener Diode, 9.1 volt.	9331 177 80133
6472	Diode, 1N4148.	4835 130 37048
6480	Diode, Zener	4835 130 37947
6481	Diode, 1N4148.	4835 130 37048
6485	Diode, BYD33J.	4835 130 37094
6486	Diode, EGP20DL-530	4835 130 37919
6487	Diode.	4835 130 37094
6488	Diode, Rect, BYV27-200.	9322 126 72673
6490	Diode, Rect, BYV27-200.	9322 126 72673
6505	Diode, Bridge Rect, GBU6JL-7002 . .	9322 138 08667
6507	Diode, BYD33J.	4835 130 37094
6508	Diode, BYD33J.	4835 130 37094
6510	Zener Diode, 20 volt	9331 178 60133
6511	Diode, BYV95C.	4835 130 37052
6512	Diode, Rect, BY228/20	4822 130 41275
6513	Diode, Rect, BY228/20	4822 130 41275
6514	Zener, 18 Volt, BZX79-C18.	4835 130 37908
6540	Diode.	4835 130 37294
6550	Diode, Rect, BY229X-800	9340 380 30127
6560	Diode, EGP20DL-530	4835 130 37919
6570	Diode, EGP20DL-530	4835 130 37919
6582	Diode, EGP20DL-530	4835 130 37919
6584	Diode, 1N4148.	4835 130 37048
6585	Diode, 1N4148.	4835 130 37048
6590	Diode, EGP20DL-530	4835 130 37919
6591	Diode, BAS216.	4835 130 37905
6601	Diode, Zener	4835 130 37684
6606	Zener, 4.7 Volt, BZX79-C4V7.	4835 130 37005
6607	Zener, 6.8 Volt, BZX79-C6V8.	4835 130 37945
6690	LED, LTL-307P.	4835 130 97096
6831	Diode, BAS216.	4835 130 37905
6951	Diode, BAS216.	4835 130 37905
6961	Diode, BAS216.	4835 130 37905
7134	Transistor, BC547B	4835 130 47055
7250	IC,.	9352 620 24112
7251	IC, LM317T	9337 220 80682
7254	Transistor, NPN, BC847B.	4822 130 60511
7256	Transistor, NPN, BC847B.	4822 130 60511
7258	Transistor, NPN, BC847B.	4822 130 60511
7263	Transistor, PNP, BC857B.	5322 130 60508
7266	Transistor, NPN, BC847B.	4822 130 60511
7330	IC,.	9352 561 40112
7401	IC,.	4835 209 88531
7460	Transistor, NPN, BU1508DX.	9340 170 50127
7461	Transistor, NPN, BF819	9335 354 50127
7462	Transistor, BC547B	4835 130 47055
7463	Transistor, BC557B	4835 130 47409
7470	F.E.T., Power, STP16NE06FP	9322 123 96687
7480	IC,.	9322 028 93682
7481	Transistor, BC557B	4835 130 47409
7482	Transistor, PNP, BC857B.	5322 130 60508
7518	STH8NA60FI SMPS FET	9322 068 92687
7518	STH10NC60FI SMPS FET.	9322 155 66687
7520	IC, MC44603A	4835 209 88537
7570	IC,.	9337 711 00676
S 7581	Coupler, TCDT1101G	9338 431 30682
7590	Transistor, NPN, BC847B.	4822 130 60511
7591	Transistor, NPN, BC847B.	4822 130 60511
7592	Transistor, NPN, BC847B.	4822 130 60511
7600	IC, SAA5543PS/M4/1046 L90US1-1.4 . .	4835 310 57477
7601	IC, ST24W04B6.	9322 097 23682
7603	Transistor, NPN, BC337	9331 796 00126
7604	Transistor, NPN, BC847B.	4822 130 60511
7605	Transistor, NPN, BC847B.	4822 130 60511
7608	Transistor, NPN, BC847B.	4822 130 60511
7609	Transistor, NPN, BC847B.	4822 130 60511
7680	IR Receiver.	9322 127 53667
7833	IC,.	9322 136 54682
7950	IC,.	4835 209 88543
CBA	00EMF880A102 Main Chassis Board Asm.	00EM F88 0A102

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Power Cord	3135 010 05051
S AC02	Anode Clip	4835 256 97264
AC03	Cabinet Back,.	3139 124 32111
AC04	Cabinet Front, ...	3139 137 68031
AC05	Chassis Guide, ...	3139 124 31321
AC06	Control Buttons, ...	3139 124 26481
S AC08	CRT A80ECK272X56	4835 131 27165
S AC09	Coil, Degaussing	3121 218 62641
AC11	Light Guide.	3139 124 26461
AC12	Nameplate, ...	3135 015 04411
AC13	Owner's Manual,.	3135 015 14381
AC14	Power Button,.	3139 124 26453
REMOTE	Remote Transmitter, RC2524/04. . . .	3139 228 81592
AC16	Speaker, 5W, 16 ohm (2 Used)	2422 264 00333
S AC18	Yoke	3313 203 13511
AC21	Battery, 1.5V AA, 2-Pack, (Not Shown	9299 000 10137
AC24	Spring	3139 121 26231

S = Safety Part Be sure to use exact replacement part.

XR2503C121 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts		
S 0127	3.15 Amp Fuse, ...	3122 358 72141	
0152	Cable, DIP, 6 Pin, 400mm	3104 301 09421	
0153	4 Pin Cable.	3104 301 09431	
0212	Connector, 2 Pin	2422 025 15396	
0215	Connector, 2 Pin	2412 020 00724	
0220	4 Pin Board Connector.	2422 025 04852	
0224	1 Pin Board Connector.	2422 034 20021	
0228	1 Pin Board Connector.	2422 034 20021	
S 0243	Connector, 6 Pin	2422 025 04854	
0244	4 Pin Board Connector.	2422 025 04852	
S 0245	Connector, 6 Pin	2422 025 04854	
S 0254	CRT Socket (9 Pin)	2422 500 80022	
0267	Connector, 3 Pin	2412 020 00725	
1000	Tuner.	2422 542 90057	
1001	Filter	2422 549 42501	
1003	45 MHz SAW, Filter,.	2422 549 42433	
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807	
1208	Crystal Resonator.	4835 242 77276	
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10869	
S 1571	1 Amp, Radial Fuse,.	4835 253 97162	
S 1572	1 Amp, Radial Fuse,.	4835 253 97162	
S 1580	Relay, 12V	2422 132 07317	
1600	Switch, Tactile.	2422 128 02742	
1601	Switch, Tactile.	2422 128 02742	
1602	Switch, Tactile.	2422 128 02742	
1603	Switch, Tactile.	2422 128 02742	
1606	Switch, Tactile.	2422 128 02742	
1660	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488	
2001	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2002	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2003	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2004	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2006	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290	
2011	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2201	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2202	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2203	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2204	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2205	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2207	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2208	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2209	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2211	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2212	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2213	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2214	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2215	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280	
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 16654	
2220	Cap, 15p, 5%, 50V, Ceramic	3198 016 01590	
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2222	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2226	Cap, 33u, 20%, 25V, Electrolytic . .	2020 021 90124	
2227	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2247	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2248	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2249	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2330	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177	
2340	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495	
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320	
S 2343	Cap, 3n3, 10%, 2KV, Ceramic.	2020 558 90529	
2345	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020	
2401	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2402	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2404	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2405	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2407	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2409	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2420	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2426	Cap, 100n, 10%, 63V, Metalized Polyes ter.	2222 370 75104	
2428	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220	
2429	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2430	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2431	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2437	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2438	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2448	Cap, 220p, 10%, 500V, Ceramic. . . .	3198 019 42210	
2450	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91139	
2451	Cap, 15n, 10%, 50V, Polyester. . . .	2020 300 90575	
2451	0.01uF., 10%, 50V, Polyester, only 27	3198 138 20941	
2456	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176	
2457	Cap, 390n, 5%, 250V, Metalized Polypr opylene.	2222 479 90021	
2458	Cap, 2u2, 20%, 100V, Electrolytic. .	2020 021 91331	
2459	Cap, 680p, 10%, 500V, Ceramic. . . .	3198 019 46810	
2461	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020	
2462	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176	
2463	470pF., 10%, 2KV, Ceramic.	4835 122 47638	
S 2465	Cap, 10n, 5%, 1600V, Polypropylene .	2222 375 90154	
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050	
2473	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790	
2481	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740	
2482	Cap, 68n, 10%, 250V, Polyester . . .	2222 347 90234	
2484	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2485	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293	
2486	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2487	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2488	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2489	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2490	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710	
2491	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710	
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810	
2500	0.47uF., 250V, Polyester	4835 121 47569	
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
S 2507	Cap, 1n5, 10%, 1KV, Ceramic.	2020 558 90443	
2508	Cap, 470u, 20%, 200V, Electrolytic .	2020 024 90647	
S 2511	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020	
S 2518	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290	
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320	
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320	
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2530	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 021 91147	
2531	Cap, 1n, 2%, 50V, Polypropylene. . .	2020 310 90049	
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220	
2540	Cap, 100u, 20%, 25V, Electrolytic. .	2020 021 90547	
S 2545	1500pF., 250VAC, Ceramic	4835 122 47621	
S 2550	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2551	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91358	
2561	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020	
S 2562	Cap, 220p, 10%, 1KV, Ceramic	2020 558 90424	
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020	
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020	
2572	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330	
2575	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820	
2577	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020	
2586	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2604	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290	
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2613	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2615	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2619	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2622	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890	
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2629	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230	
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2631	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2679	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2681	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2913	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280	
2914	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330	
2915	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	
2916	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648	
2917	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2960	Cap, 220u, 20%, 50V, Electrolytic. .	3198 026 52210	
2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090	
2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090	
2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090	
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	

S = Safety Part Be sure to use exact replacement part.

XR2503C121 (continued)

	3010	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610		3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
	3013	Zero ohm,.	4835 111 27056		3469	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
	3014	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052		3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
	3015	22k, 5%, 1/10W, Metal Film	4835 111 37441		3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703
	3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810		3481	Res, 100K, 1%, 3/5W, Metal Film. . .	2322 156 21004
	3021	Res, 1K, 2%, 0,25W	4822 051 10102		3482	Res, 32K4, 1%, 3/5W, Metal Film. . .	2322 156 23243
	3200	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
	3201	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253		3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3203	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443	S	3485	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
	3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	S	3486	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3205	Res, 1K, 2%, 0,25W	4822 051 10102	S	3487	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3206	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	S	3488	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
	3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3490	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3209	22k, 5%, 1/10W, Metal Film	4835 111 37441	S	3491	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3212	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253	S	3492	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3213	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3495	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272
	3215	22k, 5%, 1/10W, Metal Film	4835 111 37441		3496	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3216	Zero ohm,.	4835 111 27056		3497	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3217	Res, 1M5, 5%, 1/8W, Metalized Glass.	2322 730 61155		3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
	3218	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225
	3219	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3503	10ohm, 120VAC, Positive Temperature C	
	3220	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432			oefficient	4835 116 47001
	3225	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S	3505	Surge Protector.	2422 549 43073
	3228	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
	3231	Zero ohm,.	4835 111 27056	S	3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333
	3232	Zero ohm,.	4835 111 27056	S	3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102
	3233	Zero ohm,.	4835 111 27056		3512	15k, 5%, 1/10W, Metal Film	4835 111 37458
	3243	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052		3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184
	3246	82k, 5%, 1/10W, Metal Film	4835 111 37277		3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204
	3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3515	2.5 ohm, 20%, 3.6W, Negative Temperat	
	3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010			ure Coefficient.	2122 612 00023
	3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340		3516	Res, 1K, 2%, 0,25W	4822 051 10102
	3250	Zero ohm,.	4835 111 27056		3517	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
	3251	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S	3518	Res, 0R22, 5%, 3W, Metal Film. . . .	2120 106 90548
	3252	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		3520	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
	3253	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		3521	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443
	3257	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3525	33 ohm, 5%, 1/3W, Metal Film	4835 116 57665
	3258	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3528	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3259	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3529	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3530	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
	3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3532	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3534	15k, 5%, 1/10W, Metal Film	4835 111 37458
	3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3536	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3537	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046	S	3542	4.7 Megohm, 5%, 1/2W, Metal Film . .	4835 116 57009
S	3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109		3570	15k, 5%, 1/10W, Metal Film	4835 111 37458
S	3341	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483		3571	Res, 150K, 1%, 3/5W, Metal Film. . .	2322 156 21504
S	3342	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483		3573	Res, 2K, 1%, 1/10W, Metalized Glass.	2120 108 92657
	3343	1.5k, 20%, 1/2W, Carbon Composition.	4835 110 47034		3574	33k, 5%, 1/10W, Metal Film	4835 111 37248
	3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290		3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
S	3345	VDR, DC, 1mA, 50V, MAX 115V	2322 593 13507		3577	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290		3578	Res, 1K, 2%, 0,25W	4822 051 10102
	3401	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380		3579	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451
	3402	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380		3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3403	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380		3592	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3405	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002		3594	22k, 5%, 1/10W, Metal Film	4835 111 37441
	3406	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020		3595	68k, 5%, 1/6W, Carbon Film	4835 111 37205
	3407	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002		3596	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020		3597	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
	3409	1.5 ohm, 5%, 1/3W, Metal Film. . . .	4835 116 57664		3598	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210		3599	22k, 5%, 1/10W, Metal Film	4835 111 37441
	3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210		3607	8.2k, 5%, 1/8W, Inline Package . . .	4835 111 97046
	3420	470k, 5%, 1/10W, Metal Film.	4835 111 37407		3608	2.2k, 5%, 1/8W, Inline Package . . .	4835 111 97049
	3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220		3609	2.2k, 5%, Resistor Network	2120 108 93868
	3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220		3611	Res, 1K, 2%, 0,25W	4822 051 10102
	3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840		3612	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606		3613	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3425	150k, 5%, 1/10W, Metal Film.	4835 111 27045		3615	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3426	39k, 5%, 1/10W, Metal Film	4835 111 27051		3617	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
	3428	22k, 5%, 1/10W, Metal Film	4835 111 37441		3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3429	27k, 5%, 1/10W, Metal Film	4835 111 37442		3619	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
	3431	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247		3629	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259
	3432	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
	3436	Res, 1K, 2%, 0,25W	4822 051 10102		3631	27k, 5%, 1/10W, Metal Film	4835 111 37442
	3437	10k, 5%, 1/10W, Metal Film	4835 111 37216	S	3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63479
	3438	33k, 1/4W, Carbon Film	4835 110 57375		3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210
	3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920		3634	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
	3447	10k, 5%, 1/10W, Metal Film	4835 111 37216		3635	22k, 5%, 1/10W, Metal Film	4835 111 37441
	3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3636	22k, 5%, 1/10W, Metal Film	4835 111 37441
	3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320		3637	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234
S	3452	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63229		3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
S	3453	Res, 4R7, 5%, 5W, Wire Wound	2322 251 41478		3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
S	3454	Res, 33K, 5%, 1 1/3W, Metal Film . .	2322 194 63333		3653	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020		3654	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
	3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720		3655	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
S	3462	Res, 6K8, 5%, 5W, Metal Film	2322 257 41682		3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710
	3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790		3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3464	Res, 1K, 2%, 0,25W	4822 051 10102		3662	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
S	3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109		3663	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
	3466	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903		3664	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448
	3467	Res, 14K, 1%, 3/5W, Metal Film . . .	2322 156 21403		3665	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052
	3467	Res, 15K, 1%, 3/5W, Metal Film . . .	2322 156 21503		3666	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376

S = Safety Part Be sure to use exact replacement part.

XR2503C121 (continued)

3667	27k, 5%, 1/10W, Metal Film	4835 111 37442	
3672	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3673	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3674	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231	
3675	Res, 150 ohm, 5%, 1/10W, Metalized Glass	3198 021 51510	
3676	Res, 150 ohm, 5%, 1/10W, Metalized Glass	3198 021 51510	
3677	Res, 150 ohm, 5%, 1/10W, Metalized Glass	3198 021 51510	
3680	680 ohm, 5%, 1/10W, Metal Film	4835 111 37271	
3681	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3682	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3683	100 ohm, 5%, 1/10W, Metal Film	4835 111 37432	
3684	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3908	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3909	Res, 1K, 2%, 0,25W	4822 051 10102	
3910	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376	
3911	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230	
3912	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3913	Res, 6K8, 5%, 1/6W, Carbon Film.	3198 011 06820	
3914	Res, 1K8, 5%, 1/6W, Carbon Film.	3198 011 01820	
3915	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231	
3916	220 ohm, 5%, 1/10W, Metal Film	4835 111 37371	
3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810	
3951	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3953	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272	
3955	Res, 4K7, 5%, 1/6W, Carbon Film.	3198 011 04720	
4001	Zero ohm,	4835 111 27056	
4002	Zero ohm,	4835 111 27056	
4004	Zero ohm,	4835 111 27056	
4007	Zero ohm,	4835 111 27056	
4009	Zero ohm,	4835 111 27056	
4010	Zero ohm,	4835 111 27056	
4011	Zero ohm,	4835 111 27056	
4012	Zero ohm,	4835 111 27056	
4013	Zero ohm,	4835 111 27056	
4020	Zero ohm,	4835 111 27056	
4051	Zero ohm,	4835 111 27056	
4100	Zero ohm,	4835 111 27056	
4101	Zero ohm,	4835 111 27056	
4102	Zero ohm,	4835 111 27056	
4103	Zero ohm,	4835 111 27056	
4143	Zero ohm,	4835 111 27056	
4144	Zero ohm,	4835 111 27056	
4203	Zero ohm,	4835 111 27056	
4207	Zero ohm,	4835 111 27056	
4212	Zero ohm,	4835 111 27056	
4214	Zero ohm,	4835 111 27056	
4215	Zero ohm,	4835 111 27056	
4216	Zero ohm,	4835 111 27056	
4501	Zero ohm,	4835 111 27056	
4602	Zero ohm,	4835 111 27056	
4650	Zero ohm,	4835 111 27056	
4651	Zero ohm,	4835 111 27056	
4652	Zero ohm,	4835 111 27056	
4654	Zero ohm,	4835 111 27056	
4655	Zero ohm,	4835 111 27056	
4684	Zero ohm,	4835 111 27056	
4687	Zero ohm,	4835 111 27056	
4831	Zero ohm,	4835 111 27056	
4832	Zero ohm,	4835 111 27056	
4833	Zero ohm,	4835 111 27056	
4902	Zero ohm,	4835 111 27056	
4903	Zero ohm,	4835 111 27056	
4904	Zero ohm,	4835 111 27056	
4905	Zero ohm,	4835 111 27056	
4909	Zero ohm,	4835 111 27056	
4911	Zero ohm,	4835 111 27056	
4912	Zero ohm,	4835 111 27056	
4914	Zero ohm,	4835 111 27056	
4957	Zero ohm,	4835 111 27056	
4999	Zero ohm,	4835 111 27056	
5000	Coil, 5u6.	3198 018 25680	
5004	Coil, 820n	2422 535 97314	
5201	Coil, 22u.	3198 018 22290	
5202	Coil, 6u8.	3198 018 16880	
5342	22uH., 10%, Coil, Peaking.	4835 157 67069	
S 5445	Transformer, L.O.T., models ending in C101, C121, and C125	2422 531 02327	
S 5445	Transformer, L.O.T., models ending in C221 and C225.	3128 138 20941	
5451	Coil, 27u.	2422 535 96614	
5457	Coil, Linear Correction.	3128 138 53241	
5461	Transformer.	3128 138 33811	
5480	Coil, 27u.	2422 535 97334	
5480	Coil, 39u.	2422 535 97336	
5480	33uH., Peaking Coil, only in 25.	4835 157 58205	
S 5500	Filter, Mains, 5mH, 2A	2422 549 43432	
5516	100uH., Coil	4835 157 67078	
5518	Fixed, Inductor, 100MHz, 50R.	3198 018 90010	
5521	Coil, 2u2.	3198 018 12280	
5540	Coil, 4u7.	3198 018 14780	
S 5545	Transfomer,	2422 531 02314	
5551	27uH., 5%, Coil, Peaking	4835 157 67052	
5552	Fixed, Inductor, 100MHz, 50R.	3198 018 90010	
5572	100uH., Coil	4835 157 67078	
5573	100uH., Coil	4835 157 67078	
5576	100uH., Coil	4835 157 67078	
5577	Fixed, Inductor, 100MHz, 50R.	3198 018 90010	
5600	Coil, 8u2.	3198 018 18280	
5601	Coil, 8u2.	3198 018 18280	
5620	Coil, 6u8.	3198 018 16880	
5821	Coil, 100u	3198 018 21010	
6008	Zener, 33 Volt BZX79-C33	4835 130 37904	
6211	Diode, 1N4148.	4835 130 37048	
6212	Diode, 1N4148.	4835 130 37048	
6213	Diode, 1N4148.	4835 130 37048	
6331	Diode.	4835 130 37294	
6333	Diode.	4835 130 37294	
6335	Diode.	4835 130 37294	
6401	Diode.	4835 130 37094	
6402	Zener, 33 Volt, BZX79-C33.	4835 130 37904	
6403	Diode.	4835 130 37094	
6404	Diode.	4835 130 37094	
6449	Diode, 1N4148.	4835 130 37048	
6450	Diode, 1N4148.	4835 130 37048	
6460	Diode, Rect, BY228/20	9336 215 80112	
6463	Diode, 1N4148.	4835 130 37048	
6464	Zener, 6.2 Volt, BZX79-B6V2.	4835 130 37948	
6464	Zener Diode, 6.2 volt.	9337 242 70133	
6465	Diode, BYD33J.	4835 130 37094	
6466	Diode, BYD33J.	4835 130 37094	
6480	Diode, Zener	4835 130 37947	
6481	Diode, 1N4148.	4835 130 37048	
6485	Diode, BYD33J.	4835 130 37094	
6486	Diode, EGP20DL-530	4835 130 37919	
6487	Diode.	4835 130 37094	
6488	Diode, Rect, BYV27-200.	9322 126 72673	
6490	Diode, Rect, BYV27-200.	9322 126 72673	
6505	Diode, Bridge Rect, GBU6JL-7002	9322 138 08667	
6507	Diode, BYD33J.	4835 130 37094	
6508	Diode, BYD33J.	4835 130 37094	
6510	Zener Diode, 20 volt	9331 178 60133	
6511	Diode, BYV95C.	4835 130 37052	
6512	Diode, Rect, BY228/20	4822 130 41275	
6513	Diode, Rect, BY228/20	4822 130 41275	
6514	Zener, 18 Volt, BZX79-C18.	4835 130 37908	
6540	Diode.	4835 130 37294	
6550	Diode, Rect, BY229X-800	9340 380 30127	
6560	Diode, EGP20DL-530	4835 130 37919	
6580	Diode, Rect, BYV27-200.	9322 126 72673	
6584	Diode, 1N4148.	4835 130 37048	
6585	Diode, 1N4148.	4835 130 37048	
6591	Diode, BAS216.	4835 130 37905	
6601	Diode, Zener	4835 130 37684	
6606	Zener, 4.7 Volt, BZX79-C4V7.	4835 130 37005	
6607	Zener, 6.8 Volt, BZX79-C6V8.	4835 130 37945	
6690	LED, LTL-307P.	4835 130 97096	
6951	Diode, BAS216.	4835 130 37905	
6961	Diode, BAS216.	4835 130 37905	
7250	IC,	9352 620 26112	
7251	IC, LM317T	9337 220 80682	
7254	Transistor, NPN, BC847B.	4822 130 60511	
7256	Transistor, NPN, BC847B.	4822 130 60511	
7258	Transistor, NPN, BC847B.	4822 130 60511	
7263	Transistor, PNP, BC857B.	5322 130 60508	
7266	Transistor, NPN, BC847B.	4822 130 60511	
7330	IC,	9352 184 10112	
7401	IC,	9322 121 47687	
7460	Transistor, NPN, BU1508DX.	9340 170 50127	
7461	Transistor, NPN, BF819	9335 354 50127	
7462	Transistor, BC547B	4835 130 47055	
7463	Transistor, BC557B	4835 130 47409	
7480	IC,	9322 028 93682	
7481	Transistor, BC557B	4835 130 47409	
7482	Transistor, PNP, BC857B.	5322 130 60508	
7518	STH8NA60FI SMPS FET	9322 068 92687	
7518	STH10NC60FI SMPS FET.	9322 155 66687	
7520	IC, MC44603A	4835 209 88537	
7570	IC,	9337 711 00676	
S 7581	Coupler, TCDT1101G	9338 431 30682	
7590	Transistor, NPN, BC847B.	4822 130 60511	
7591	Transistor, NPN, BC847B.	4822 130 60511	
7592	Transistor, NPN, BC847B.	4822 130 60511	
7600	IC, SAA5542PS/M4/1044 L90UM1-1.3	4835 310 57476	
7601	IC, ST24W04B6.	9322 097 23682	
7603	Transistor, NPN, BC337	9331 796 00126	
7604	Transistor, NPN, BC847B.	4822 130 60511	
7605	Transistor, NPN, BC847B.	4822 130 60511	
7608	Transistor, NPN, BC847B.	4822 130 60511	
7609	Transistor, NPN, BC847B.	4822 130 60511	
7680	IR Receiver.	9322 127 53667	

S = Safety Part Be sure to use exact replacement part.

XR2503C121 (continued)

7904	Transistor, NPN, BC847B.	4822	130 60511
7952	IC,.	4835	209 88542
9423	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198	011 01030
CBA	00EMF801A002 Main Chassis Board Asm.	00EM	F80 1A002

Cabinet & Accessory Parts

	Cabinet & Accessory Parts		
S AC01	Mainscord, 125V, 10A	3135	010 03831
S AC02	Anode Clip	4835	256 97264
AC03	Cabinet Back	3139	124 27951
AC04	Cabinet Front.	3139	137 53291
AC05	Chassis Guide.	3139	124 31381
AC06	Control Buttons.	3139	124 27461
S AC07	Convergence and Purity Assembly. . .	2422	549 43385
S AC08	CRT A63AFW36X (C121 Version)	9301	763 20443
S AC09	Coil, Degaussing	3121	218 62961
AC11	Light Guide.	3139	124 26461
AC13	Owner's Manual, English.	3135	015 10681
AC14	Power Button	3139	124 26444
REMOTE	Remote Transmitter	3139	148 54201
AC16	Speaker, 16R, 1W5 (2 Used)	2422	264 00343
S AC18	Yoke (C121 Version).	3321	203 00121
AC19	Yoke Wedge (3 Used).	4835	535 27001
AC21	Batteries f/Remote Transmitter . . .	9299	000 13827
AC24	Spring	3139	121 26231

XS2556C121 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts		
S 0127	3.15 Amp Fuse, ...	3122 358 72141	
0152	Cable, DIP, 6 Pin, 400mm	3104 301 09421	
0153	4 Pin Cable.	3104 301 09431	
0212	Connector, 2 Pin	2422 025 15396	
0220	4 Pin Board Connector.	2422 025 04852	
0223	3 Pin Board Connector.	2422 026 04963	
0224	1 Pin Board Connector.	2422 034 20021	
0228	1 Pin Board Connector.	2422 034 20021	
0234	Connector, 4 Pin	2422 025 15847	
S 0243	Connector, 6 Pin	2422 025 04854	
0244	4 Pin Board Connector.	2422 025 04852	
S 0245	Connector, 6 Pin	2422 025 04854	
S 0254	CRT Socket (9 Pin)	2422 500 80022	
0267	Connector, 3 Pin	2412 020 00725	
1000	Tuner.	2422 542 90057	
1001	Filter	2422 549 42501	
1003	45 MHz SAW, Filter,.	2422 549 42433	
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807	
1208	Crystal Resonator.	4835 242 77276	
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10869	
S 1571	1 Amp, Radial Fuse,.	4835 253 97162	
S 1572	1 Amp, Radial Fuse,.	4835 253 97162	
S 1580	Relay, 12V	2422 132 07317	
1600	Switch, Tactile.	2422 128 02742	
1601	Switch, Tactile.	2422 128 02742	
1602	Switch, Tactile.	2422 128 02742	
1603	Switch, Tactile.	2422 128 02742	
1606	Switch, Tactile.	2422 128 02742	
1660	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488	
1821	Ceramic Resonator.	4835 122 97102	
2001	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2002	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2003	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2004	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2006	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290	
2011	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2102	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2103	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2104	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2201	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2202	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2203	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2204	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2205	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2207	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2208	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2209	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2211	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2212	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2213	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2214	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2215	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280	
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 16654	
2220	Cap, 15p, 5%, 50V, Ceramic	3198 016 01590	
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2222	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2226	Cap, 33u, 20%, 25V, Electrolytic . .	2020 021 90124	
2227	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2247	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2248	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2249	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2330	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177	
2340	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495	
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320	
S 2343	Cap, 3n3, 10%, 2KV, Ceramic.	2020 558 90529	
2345	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020	
2401	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2402	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2404	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2405	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2407	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2409	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2420	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2426	Cap, 100n, 10%, 63V, Metalized Polyes ter.	2222 370 75104	
2428	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220	
2429	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2430	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2431	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2437	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2438	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2448	Cap, 220p, 10%, 500V, Ceramic. . . .	3198 019 42210	
2450	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91139	
2451	Cap, 15n, 10%, 50V, Polyester. . . .	2020 300 90575	
2451	0.01uF., 10%, 50V, Polyester, only 27	3198 138 20941	
2456	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176	
2457	Cap, 390n, 5%, 250V, Metalized Polypr opylene.	2222 479 90021	
2458	Cap, 2u2, 20%, 100V, Electrolytic. .	2020 021 91331	
2459	Cap, 680p, 10%, 500V, Ceramic. . . .	3198 019 46810	
2461	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020	
2462	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176	
2463	470pF., 10%, 2KV, Ceramic.	4835 122 47638	
S 2465	Cap, 10n, 5%, 1600V, Polypropylene .	2222 375 90154	
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050	
2473	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790	
2481	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740	
2482	Cap, 68n, 10%, 250V, Polyester . . .	2222 347 90234	
2484	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2485	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293	
2486	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2487	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2488	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2489	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2490	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710	
2491	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710	
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810	
2500	0.47uF., 250V, Polyester	4835 121 47569	
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
S 2507	Cap, 1n5, 10%, 1KV, Ceramic.	2020 558 90443	
2508	Cap, 470u, 20%, 200V, Electrolytic .	2020 024 90647	
S 2511	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020	
S 2518	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290	
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320	
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320	
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2530	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 021 91147	
2531	Cap, 1n, 2%, 50V, Polypropylene. . .	2020 310 90049	
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220	
2540	Cap, 100u, 20%, 25V, Electrolytic. .	2020 021 90547	
S 2545	1500pF., 250VAC, Ceramic	4835 122 47621	
S 2550	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2551	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91358	
2561	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020	
S 2562	Cap, 220p, 10%, 1KV, Ceramic	2020 558 90424	
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020	
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020	
2572	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330	
2575	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820	
2577	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020	
2586	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2604	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290	
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2613	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2615	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2619	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2622	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890	
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2629	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230	
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2631	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2679	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2681	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2821	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280	
2823	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2825	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2826	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090	
2827	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2828	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2829	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	
2830	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280	
2831	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	
2832	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280	

S = Safety Part Be sure to use exact replacement part.

XS2556C121 (continued)

	2833	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280		3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
	2834	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780		3401	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
	2835	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3402	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
	2836	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3403	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
	2837	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740		3405	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002
	2838	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3406	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
	2839	Cap, 1u, 5%, 50V, Metalized Polyester	2020 308 90124		3407	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002
	2840	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
	2841	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3409	1.5 ohm, 5%, 1/3W, Metal Film. . . .	4835 116 57664
	2842	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
	2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
	2844	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3420	470k, 5%, 1/10W, Metal Film.	4835 111 37407
	2845	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
	2913	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280		3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
	2914	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330		3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840
	2915	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606
	2916	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648		3425	150k, 5%, 1/10W, Metal Film.	4835 111 27045
	2917	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3426	39k, 5%, 1/10W, Metal Film	4835 111 27051
	2918	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330		3428	22k, 5%, 1/10W, Metal Film	4835 111 37441
	2919	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3429	27k, 5%, 1/10W, Metal Film	4835 111 37442
	2920	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648		3431	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
	2921	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3432	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
	2931	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280		3436	Res, 1K, 2%, 0,25W	4822 051 10102
	2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3437	10k, 5%, 1/10W, Metal Film	4835 111 37216
	2952	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3438	33k, 1/4W, Carbon Film	4835 110 57375
	2954	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
	2955	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3447	10k, 5%, 1/10W, Metal Film	4835 111 37216
	2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
	2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
	2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	S	3452	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63229
	2960	Cap, 220u, 20%, 50V, Electrolytic. .	3198 026 52210	S	3453	Res, 4R7, 5%, 5W, Wire Wound	2322 251 41478
	2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090	S	3454	Res, 33K, 5%, 1 1/3W, Metal Film . .	2322 194 63333
	2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090		3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
	2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090		3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
	3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3462	Res, 6K8, 5%, 5W, Metal Film	2322 257 41682
	3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
	3010	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610		3464	Res, 1K, 2%, 0,25W	4822 051 10102
	3013	Zero ohm,.	4835 111 27056	S	3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
	3014	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052		3466	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903
	3015	22k, 5%, 1/10W, Metal Film	4835 111 37441		3467	Res, 14K, 1%, 3/5W, Metal Film . . .	2322 156 21403
	3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810		3467	Res, 15K, 1%, 3/5W, Metal Film . . .	2322 156 21503
	3021	Res, 1K, 2%, 0,25W	4822 051 10102		3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
	3103	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3469	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
	3104	10k, 5%, 1/10W, Metal Film	4835 111 37216		3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
	3108	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703
	3109	10k, 5%, 1/10W, Metal Film	4835 111 37216		3481	Res, 100K, 1%, 3/5W, Metal Film. . .	2322 156 21004
	3123	75 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37276		3482	Res, 32K4, 1%, 3/5W, Metal Film. . .	2322 156 23243
	3200	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
	3201	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253		3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3203	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443	S	3485	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
	3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	S	3486	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3205	Res, 1K, 2%, 0,25W	4822 051 10102	S	3487	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3206	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	S	3488	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
	3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3490	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3209	22k, 5%, 1/10W, Metal Film	4835 111 37441	S	3491	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3212	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253	S	3492	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
	3213	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3495	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272
	3215	22k, 5%, 1/10W, Metal Film	4835 111 37441		3496	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3216	Zero ohm,.	4835 111 27056		3497	10k, 5%, 1/10W, Metal Film	4835 111 37216
	3217	Res, 1M5, 5%, 1/8W, Metalized Glass.	2322 730 61155		3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
	3218	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225
	3219	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3503	10ohm, 120VAC, Positive Temperature C	
	3220	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432			oefficient	4835 116 47001
	3225	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S	3505	Surge Protector.	2422 549 43073
	3228	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
	3231	Zero ohm,.	4835 111 27056	S	3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333
	3232	Zero ohm,.	4835 111 27056	S	3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102
	3233	Zero ohm,.	4835 111 27056		3512	15k, 5%, 1/10W, Metal Film	4835 111 37458
	3243	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052		3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184
	3246	82k, 5%, 1/10W, Metal Film	4835 111 37277		3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204
	3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3515	2.5 ohm, 20%, 3.6W, Negative Temperat	
	3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010			ure Coefficient.	2122 612 00023
	3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340		3516	Res, 1K, 2%, 0,25W	4822 051 10102
	3250	Zero ohm,.	4835 111 27056		3517	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
	3251	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S	3518	Res, 0R22, 5%, 3W, Metal Film. . . .	2120 106 90548
	3252	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		3520	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
	3253	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		3521	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443
	3257	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3525	33 ohm, 5%, 1/3W, Metal Film	4835 116 57665
	3258	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3528	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
	3259	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3529	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3530	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
	3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3532	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3534	15k, 5%, 1/10W, Metal Film	4835 111 37458
	3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3536	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3537	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
	3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046	S	3542	4.7 Megohm, 5%, 1/2W, Metal Film . .	4835 116 57009
S	3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109		3570	15k, 5%, 1/10W, Metal Film	4835 111 37458
S	3341	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483		3571	Res, 150K, 1%, 3/5W, Metal Film. . .	2322 156 21504
S	3342	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483		3573	Res, 2K, 1%, 1/10W, Metalized Glass.	2120 108 92657
	3343	1.5k, 20%, 1/2W, Carbon Composition.	4835 110 47034		3574	33k, 5%, 1/10W, Metal Film	4835 111 37248
	3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290		3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
S	3345	VDR, DC, 1mA, 50V, MAX 115V	2322 593 13507		3577	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030

S = Safety Part Be sure to use exact replacement part.

XS2556C121 (continued)

3578	Res, 1K, 2%, 0,25W	4822 051 10102	
3579	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451	
3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3592	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3594	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3595	68k, 5%, 1/6W, Carbon Film	4835 111 37205	
3596	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3597	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3598	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3599	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3607	8.2k, 5%, 1/8W, Inline Package . . .	4835 111 97046	
3608	2.2k, 5%, 1/8W, Inline Package . . .	4835 111 97049	
3609	2.2k, 5%, Resistor Network	2120 108 93868	
3611	Res, 1K, 2%, 0,25W	4822 051 10102	
3612	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3613	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3615	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3617	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3619	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3629	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259	
3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3631	27k, 5%, 1/10W, Metal Film	4835 111 37442	
S 3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63479	
3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210	
3634	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3635	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3636	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3637	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3653	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3654	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3655	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3662	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3663	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3664	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3665	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3666	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376	
3667	27k, 5%, 1/10W, Metal Film	4835 111 37442	
3672	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3673	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3674	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231	
3675	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3676	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3677	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3680	680 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37271	
3681	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3682	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3683	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3684	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3821	15k, 5%, 1/10W, Metal Film	4835 111 37458	
3822	1.2k, 5%, 1/10W, Metal Film.	4835 111 27042	
3823	100k, 5%, 1/10W, Metal Film.	4835 111 37434	
3824	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3825	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3826	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3827	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3828	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3829	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272	
3830	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272	
3831	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198 011 03310	
3832	47 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37262	
3908	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3909	Res, 1K, 2%, 0,25W	4822 051 10102	
3910	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376	
3911	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230	
3912	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3913	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3914	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	
3915	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231	
3916	220 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37371	
3917	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3918	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3919	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376	
3920	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231	
3921	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230	
3922	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	
3923	220 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37371	
3924	39k, 5%, 1/10W, Metal Film	4835 111 27051	
3925	39k, 5%, 1/10W, Metal Film	4835 111 27051	
3926	39k, 5%, 1/10W, Metal Film	4835 111 27051	
3929	39k, 5%, 1/10W, Metal Film	4835 111 27051	
3930	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3931	Res, 1K, 2%, 0,25W	4822 051 10102	
3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810	
3951	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3953	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3955	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
3957	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
4001	Zero ohm,.	4835 111 27056	
4002	Zero ohm,.	4835 111 27056	
4004	Zero ohm,.	4835 111 27056	
4007	Zero ohm,.	4835 111 27056	
4009	Zero ohm,.	4835 111 27056	
4010	Zero ohm,.	4835 111 27056	
4011	Zero ohm,.	4835 111 27056	
4012	Zero ohm,.	4835 111 27056	
4013	Zero ohm,.	4835 111 27056	
4020	Zero ohm,.	4835 111 27056	
4051	Zero ohm,.	4835 111 27056	
4100	Zero ohm,.	4835 111 27056	
4101	Zero ohm,.	4835 111 27056	
4102	Zero ohm,.	4835 111 27056	
4103	Zero ohm,.	4835 111 27056	
4143	Zero ohm,.	4835 111 27056	
4144	Zero ohm,.	4835 111 27056	
4203	Zero ohm,.	4835 111 27056	
4207	Zero ohm,.	4835 111 27056	
4212	Zero ohm,.	4835 111 27056	
4214	Zero ohm,.	4835 111 27056	
4215	Zero ohm,.	4835 111 27056	
4216	Zero ohm,.	4835 111 27056	
4501	Zero ohm,.	4835 111 27056	
4602	Zero ohm,.	4835 111 27056	
4650	Zero ohm,.	4835 111 27056	
4651	Zero ohm,.	4835 111 27056	
4652	Zero ohm,.	4835 111 27056	
4654	Zero ohm,.	4835 111 27056	
4655	Zero ohm,.	4835 111 27056	
4684	Zero ohm,.	4835 111 27056	
4687	Zero ohm,.	4835 111 27056	
4831	Zero ohm,.	4835 111 27056	
4832	Zero ohm,.	4835 111 27056	
4833	Zero ohm,.	4835 111 27056	
4902	Zero ohm,.	4835 111 27056	
4903	Zero ohm,.	4835 111 27056	
4904	Zero ohm,.	4835 111 27056	
4905	Zero ohm,.	4835 111 27056	
4909	Zero ohm,.	4835 111 27056	
4911	Zero ohm,.	4835 111 27056	
4912	Zero ohm,.	4835 111 27056	
4914	Zero ohm,.	4835 111 27056	
4957	Zero ohm,.	4835 111 27056	
4999	Zero ohm,.	4835 111 27056	
5000	Coil, 5u6.	3198 018 25680	
5004	Coil, 820n	2422 535 97314	
5201	Coil, 22u.	3198 018 22290	
5202	Coil, 6u8.	3198 018 16880	
5342	22uH., 10%, Coil, Peaking.	4835 157 67069	
S 5445	Transformer, L.O.T., models ending in C101, C121, and C125	2422 531 02327	
S 5445	Transformer, L.O.T., models ending in C221 and C225.	3128 138 20941	
5451	Coil, 27u.	2422 535 96614	
5457	Coil, Linear Correction.	3128 138 53241	
5461	Transformer.	3128 138 33811	
5480	Coil, 27u.	2422 535 97334	
5480	Coil, 39u.	2422 535 97336	
5480	33uH., Peaking Coil, only in 25. . .	4835 157 58205	
S 5500	Filter, Mains, 5mH, 2A	2422 549 43432	
5516	100uH., Coil	4835 157 67078	
5518	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5521	Coil, 2u2.	3198 018 12280	
5540	Coil, 4u7.	3198 018 14780	
S 5545	Transfomer,.	2422 531 02314	
5551	27uH., 5%, Coil, Peaking	4835 157 67052	
5552	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5572	100uH., Coil	4835 157 67078	
5573	100uH., Coil	4835 157 67078	
5576	100uH., Coil	4835 157 67078	
5577	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5600	Coil, 8u2.	3198 018 18280	
5601	Coil, 8u2.	3198 018 18280	
5620	Coil, 6u8.	3198 018 16880	
5821	Coil, 100u	3198 018 21010	
5822	Coil, 18u.	3198 018 21890	
6008	Zener, 33 Volt BZX79-C33	4835 130 37904	
6113	Zener Diode, 6.8 volt.	9340 386 40115	
6211	Diode, 1N4148.	4835 130 37048	
6212	Diode, 1N4148.	4835 130 37048	
6213	Diode, 1N4148.	4835 130 37048	
6331	Diode.	4835 130 37294	
6333	Diode.	4835 130 37294	
6335	Diode.	4835 130 37294	
6401	Diode.	4835 130 37094	
6402	Zener, 33 Volt, BZX79-C33.	4835 130 37904	
6403	Diode.	4835 130 37094	

S = Safety Part Be sure to use exact replacement part.

XS2556C121 (continued)

6404	Diode.	4835 130 37094
6449	Diode, 1N4148.	4835 130 37048
6450	Diode, 1N4148.	4835 130 37048
6460	Diode, Rect, BY228/20	9336 215 80112
6463	Diode, 1N4148.	4835 130 37048
6464	Zener Diode, 6.2 volt.	9337 242 70133
6465	Diode, BYD33J.	4835 130 37094
6466	Diode, BYD33J.	4835 130 37094
6480	Diode, Zener	4835 130 37947
6481	Diode, 1N4148.	4835 130 37048
6485	Diode, BYD33J.	4835 130 37094
6486	Diode, EGP20DL-530	4835 130 37919
6487	Diode.	4835 130 37094
6488	Diode, Rect, BYV27-200.	9322 126 72673
6490	Diode, Rect, BYV27-200.	9322 126 72673
6505	Diode, Bridge Rect, GBU6JL-7002	9322 138 08667
6507	Diode, BYD33J.	4835 130 37094
6508	Diode, BYD33J.	4835 130 37094
6510	Zener Diode, 20 volt	9331 178 60133
6511	Diode, BYV95C.	4835 130 37052
6512	Diode, Rect, BY228/20	4822 130 41275
6513	Diode, Rect, BY228/20	4822 130 41275
6514	Zener, 18 Volt, BZX79-C18.	4835 130 37908
6540	Diode.	4835 130 37294
6550	Diode, Rect, BY229X-800	9340 380 30127
6560	Diode, EGP20DL-530	4835 130 37919
6580	Diode, Rect, SB140.	9339 577 60673
6584	Diode, 1N4148.	4835 130 37048
6585	Diode, 1N4148.	4835 130 37048
6591	Diode, BAS216.	4835 130 37905
6601	Diode, Zener	4835 130 37684
6606	Zener, 4.7 Volt, BZX79-C4V7.	4835 130 37005
6607	Zener, 6.8 Volt, BZX79-C6V8.	4835 130 37945
6690	LED, LTL-307P.	4835 130 97096
6821	Zener Diode, 9.1 volt.	9331 177 80133
6822	Fixed Coil	4835 130 37048
6951	Diode, BAS216.	4835 130 37905
6961	Diode, BAS216.	4835 130 37905
7250	IC,.	9352 620 26112
7251	IC, LM317T	9337 220 80682
7254	Transistor, NPN, BC847B.	4822 130 60511
7256	Transistor, NPN, BC847B.	4822 130 60511
7258	Transistor, NPN, BC847B.	4822 130 60511
7263	Transistor, PNP, BC857B.	5322 130 60508
7266	Transistor, NPN, BC847B.	4822 130 60511
7330	IC,.	9352 184 10112
7401	IC,.	9322 121 47687
7460	Transistor, NPN, BU1508DX.	9340 170 50127
7461	Transistor, NPN, BF819	9335 354 50127
7462	Transistor, BC547B	4835 130 47055
7463	Transistor, BC557B	4835 130 47409
7480	IC,.	9322 028 93682
7481	Transistor, BC557B	4835 130 47409
7482	Transistor, PNP, BC857B.	5322 130 60508
7518	STH8NA60FI SMPS FET	9322 068 92687
7518	STH10NC60FI SMPS FET.	9322 155 66687
7520	IC, MC44603A	4835 209 88537
7570	IC,.	9337 711 00676
S 7581	Coupler, TCDT1101G	9338 431 30682
7590	Transistor, NPN, BC847B.	4822 130 60511
7591	Transistor, NPN, BC847B.	4822 130 60511
7592	Transistor, NPN, BC847B.	4822 130 60511
7600	IC, SAA5543PS/M4/1046 L90US1-1.4	4835 310 57477
7601	IC, ST24W04B6.	9322 097 23682
7603	Transistor, NPN, BC337	9331 796 00126
7604	Transistor, NPN, BC847B.	4822 130 60511
7605	Transistor, NPN, BC847B.	4822 130 60511
7608	Transistor, NPN, BC847B.	4822 130 60511
7609	Transistor, NPN, BC847B.	4822 130 60511
7680	IR Receiver.	9322 127 53667
7821	IC,.	9352 374 70112
7822	IC, HEF4052BT.	9333 729 50653
7823	Transistor, NPN, BC337-25.	3198 020 43530
7904	Transistor, NPN, BC847B.	4822 130 60511
7905	Transistor, NPN, BC847B.	4822 130 60511
7906	Transistor, NPN, BC847B.	4822 130 60511
7908	Transistor, NPN, BC847B.	4822 130 60511
7909	Transistor, NPN, BC847B.	4822 130 60511
7910	Transistor, NPN, BC847B.	4822 130 60511
7951	IC,.	4822 209 13706
9423	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
CBA	00EMF806A002 Main Chassis Board Asm.	00EM F80 6A002

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Mainscord, 125V, 10A	3135 010 03831
S AC02	Anode Clip	4835 256 97264
AC03	Cabinet Back	3139 124 27731
AC04	Cabinet Front.	3139 137 65911
AC05	Chassis Guide.	3139 124 31381
AC06	Control Buttons.	3139 124 27351
S AC07	Convergence and Purity Assembly.	2422 549 43385
S AC08	CRT A63AFW36X (C121 Version)	9301 763 20443
S AC09	Coil, Degaussing	3121 218 62961
AC11	Light Guide.	3139 124 26461
AC13	Owner's Manual, English.	3135 015 10731
AC14	Power Button	3139 124 26444
REMOTE	Remote Transmitter, RC282901/04.	3139 228 81451
AC16	Speaker, 16R, 1W5 (2 Used)	2422 264 00343
S AC18	Yoke (C121 Version).	3321 203 00121
AC19	Yoke Wedge (3 Used).	4835 535 27001
AC21	Battery, 1.5V AA, 2-Pack, (Not Shown	9299 000 10137
AC24	Spring	3139 121 26231

S = Safety Part Be sure to use exact replacement part.

XS2757C101 - Manual no. 7583

Main Chassis Parts

	Main Chassis Parts		
S 0127	3.15 Amp Fuse, ...	3122 358 72141	
0152	Cable, DIP, 6 Pin, 400mm	3104 301 09421	
0153	4 Pin Cable.	3104 301 09431	
0212	Connector, 2 Pin	2422 025 15396	
0220	4 Pin Board Connector.	2422 025 04852	
0223	3 Pin Board Connector.	2422 026 04963	
0224	1 Pin Board Connector.	2422 034 20021	
0228	1 Pin Board Connector.	2422 034 20021	
0234	Connector, 4 Pin	2422 025 15847	
S 0243	Connector, 6 Pin	2422 025 04854	
0244	4 Pin Board Connector.	2422 025 04852	
S 0245	Connector, 6 Pin	2422 025 04854	
S 0254	CRT Socket (9 Pin)	2422 500 80022	
0267	Connector, 3 Pin	2412 020 00725	
1000	Tuner.	2422 542 90057	
1001	Filter	2422 549 42501	
1003	45 MHz SAW, Filter,.	2422 549 42433	
1200	Filter, Ceramic, 4.5MHz.	2422 549 40807	
1208	Crystal Resonator.	4835 242 77276	
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10869	
S 1571	1 Amp, Radial Fuse,.	4835 253 97162	
S 1572	1 Amp, Radial Fuse,.	4835 253 97162	
S 1580	Relay, 12V	2422 132 07317	
1600	Switch, Tactile.	2422 128 02742	
1601	Switch, Tactile.	2422 128 02742	
1602	Switch, Tactile.	2422 128 02742	
1603	Switch, Tactile.	2422 128 02742	
1606	Switch, Tactile.	2422 128 02742	
1660	Crystal, Resonator, 12MHz, 20 Pin. .	2422 543 00488	
1821	Ceramic Resonator.	4835 122 97102	
2001	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2002	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2003	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2004	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2005	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2006	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290	
2011	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2013	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2102	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2103	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2104	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2201	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2202	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2203	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2204	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2205	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2206	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2207	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2208	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2209	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2211	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2212	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2213	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740	
2214	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2215	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280	
2216	Cap, 220n, 10%, 16V, Ceramic	2238 780 16654	
2220	Cap, 15p, 5%, 50V, Ceramic	3198 016 01590	
2221	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2222	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2226	Cap, 33u, 20%, 25V, Electrolytic . .	2020 021 90124	
2227	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2247	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2248	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2249	Cap, 47n, 10%, 25V, Ceramic.	3198 023 04730	
2330	Cap, 100n, 10%, 250V, Metalized Polye ster	2222 368 90177	
2340	Cap, 10u, 20%, 250V, Electrolytic. .	2020 012 93495	
2341	Cap, 3n3, 10%, 500V, Ceramic	3198 019 43320	
S 2343	Cap, 3n3, 10%, 2KV, Ceramic.	2020 558 90529	
2345	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020	
2401	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2402	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2404	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2405	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2407	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2409	Cap, 220n, 10%, 50V, Polyester . . .	3198 014 02240	
2420	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2426	Cap, 100n, 10%, 63V, Metalized Polyes ter.	2222 370 75104	
2428	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220	
2429	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2430	Cap, 10u, 20%, 50V, Electrolytic . .	3198 025 51090	
2431	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2437	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2438	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2440	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2441	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2448	Cap, 220p, 10%, 500V, Ceramic. . . .	3198 019 42210	
2450	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91139	
2451	Cap, 15n, 10%, 50V, Polyester. . . .	2020 300 90575	
2451	0.01uF., 10%, 50V, Polyester, only 27	3198 138 20941	
2456	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176	
2457	Cap, 390n, 5%, 250V, Metalized Polypr opylene.	2222 479 90021	
2458	Cap, 2u2, 20%, 100V, Electrolytic. .	2020 021 91331	
2459	Cap, 680p, 10%, 500V, Ceramic. . . .	3198 019 46810	
2461	Cap, 1n, 10%, 500V, Ceramic.	3198 019 41020	
2462	Cap, 47n, 10%, 250V, Metalized Polyes ter.	2222 368 90176	
2463	680pF., 10%, 2KV, Ceramic.	4835 122 47584	
S 2465	Cap, 10n, 5%, 1600V, Polypropylene .	2222 375 90154	
2469	Cap, 1u, 10%, 50V, Polyester	3198 014 01050	
2473	Cap, 47u, 20%, 50V, Electrolytic . .	3198 025 54790	
2481	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740	
2482	Cap, 68n, 10%, 250V, Polyester . . .	2222 347 90234	
2484	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2485	Cap, 4u7, 20%, 250V, Electrolytic. .	2020 012 93293	
2486	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2487	Cap, 100u, 20%, 50V, Electrolytic. .	3198 025 51010	
2488	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2489	Cap, 470u, 20%, 16V, Electrolytic. .	3198 025 24710	
2490	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710	
2491	Cap, 470p, 10%, 500V, Ceramic. . . .	3198 019 44710	
2492	Cap, 180p, 5%, 50V, Ceramic.	3198 016 01810	
2500	0.47uF., 250V, Polyester	4835 121 47569	
2502	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
2504	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
2505	Cap, 2n2, 10%, 1KV, Ceramic.	3198 019 52220	
S 2507	Cap, 1n5, 10%, 1KV, Ceramic.	2020 558 90443	
2508	Cap, 470u, 20%, 200V, Electrolytic .	2020 024 90647	
S 2511	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2517	Cap, 1n, 10%, 50V, Ceramic	3198 019 11020	
S 2518	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2520	Cap, 82p, 5%, 50V, Ceramic	3198 016 08290	
2521	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320	
2522	Cap, 3n3, 10%, 50V, Ceramic.	3198 017 03320	
2524	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2529	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2530	Cap, 1u, 20%, 50V, Electrolytic. . .	2020 021 91147	
2531	Cap, 1n, 2%, 50V, Polypropylene. . .	2020 310 90049	
2532	Cap, 470p, 5%, 50V, Ceramic.	3198 016 04710	
2533	Cap, 2n2, 10%, 50V, Ceramic.	3198 017 02220	
2540	Cap, 100u, 20%, 25V, Electrolytic. .	2020 021 90547	
S 2545	1500pF., 250VAC, Ceramic	4835 122 47621	
S 2550	Cap, 470p, 10%, 1KV, Ceramic	2020 558 90471	
2551	Cap, 47u, 20%, 160v, Electrolytic. .	2020 021 91358	
2561	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020	
S 2562	Cap, 220p, 10%, 1KV, Ceramic	2020 558 90424	
2564	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020	
2565	Cap, 1n, 10%, 50V, Ceramic	3198 017 01020	
2572	Cap, 330p, 5%, 50V, Ceramic.	3198 016 03310	
2573	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330	
2575	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2576	Cap, 6n8, 10%, 50V, Ceramic.	3198 017 06820	
2577	Cap, 1000u, 20%, 16V, Electrolytic .	3198 026 21020	
2586	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2604	Cap, 22u, 20%, 50V, Electrolytic . .	3198 025 52290	
2609	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2613	Cap, 100n, 10%, 50V, Polyester . . .	3198 014 01040	
2615	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2616	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2617	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2618	Cap, 100p, 5%, 50V, Ceramic.	3198 016 01010	
2619	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2620	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2621	Cap, 22p, 5%, 50V, Ceramic	3198 016 02290	
2622	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2623	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2624	Cap, 68p, 5%, 50V, Ceramic	3198 016 06890	
2625	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2626	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2627	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2628	Cap, 390p, 5%, 50V, Ceramic.	3198 016 03910	
2629	Cap, 22n, +80/-20%, 50V, Ceramic . .	3198 019 22230	
2630	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2631	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050	
2633	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	
2679	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040	
2681	Cap, 220u, 20%, 25V, Electrolytic. .	3198 025 32210	
2697	Cap, 1n, 5%, 50V, Ceramic.	3198 016 01020	
2821	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280	
2823	Cap, 22n, 10%, 50V, Ceramic.	3198 017 02230	
2824	Cap, 4n7, 10%, 50V, Ceramic.	3198 017 04720	
2825	Cap, 1u, 20%, 50V, Electrolytic. . .	3198 025 51080	
2826	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090	
2827	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2828	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010	
2829	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	
2830	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280	
2831	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240	
2832	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280	

S = Safety Part Be sure to use exact replacement part.

XS2757C101 (continued)

2833	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 028 52280		3346	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290
2834	Cap, 4u7, 20%, 50V, Electrolytic . .	3198 025 54780		3401	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2835	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3402	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2836	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3403	3.3 ohm, 5%, 1/4W, Carbon Film . . .	3198 011 03380
2837	Cap, 470n, 10%, 50V, Polyester . . .	3198 014 04740		3405	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002
2838	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3406	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2839	Cap, 1u, 5%, 50V, Metalized Polyester	2020 308 90124		3407	Res, 2K, 1%, 3/5W, Metal Film. . . .	2322 156 22002
2840	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3408	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2841	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3409	1.5 ohm, 5%, 1/3W, Metal Film. . . .	4835 116 57664
2842	Cap, 100n, +80/-20%, 25V, Ceramic. .	3198 023 21040		3410	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2843	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3411	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
2844	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3420	470k, 5%, 1/10W, Metal Film.	4835 111 37407
2845	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3421	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2913	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280		3422	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2914	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330		3423	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840
2915	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3424	Res, 10M, 10%, 1/10W, Metalized Glass	2120 108 90606
2916	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648		3425	Res, 120K, 5%, 1/10W, Metalized Glass	2120 108 91716
2917	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3426	39k, 5%, 1/10W, Metal Film	4835 111 27051
2918	Cap, 33n, 10%, 50V, Ceramic.	3198 017 03330		3428	22k, 5%, 1/10W, Metal Film	4835 111 37441
2919	Cap, 220n, +80/-20%, 25V, Ceramic. .	3198 023 22240		3429	27k, 5%, 1/10W, Metal Film	4835 111 37442
2920	Cap, 82n, 10%, 25V, Ceramic.	2222 910 16648		3431	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
2921	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3432	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432
2931	Cap, 2u2, 20%, 50V, Electrolytic . .	3198 025 52280		3436	Res, 1K, 2%, 0,25W	4822 051 10102
2950	Cap, 100u, 20%, 25V, Electrolytic. .	3198 025 31010		3437	10k, 5%, 1/10W, Metal Film	4835 111 37216
2952	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3438	33k, 1/4W, Carbon Film	4835 110 57375
2954	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3442	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920
2955	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030		3447	10k, 5%, 1/10W, Metal Film	4835 111 37216
2956	Cap, 1u, +80/-20%, 16V, Ceramic. . .	3198 017 21050		3448	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
2958	Cap, 470n, +80/-20%, 16V, Ceramic. .	3198 017 24740		3449	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
2959	Cap, 10n, 10%, 50V, Ceramic.	3198 017 01030	S	3452	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63229
2960	Cap, 220u, 20%, 50V, Electrolytic. .	3198 026 52210	S	3453	Res, 4R7, 5%, 5W, Wire Wound	2322 251 41478
2961	Cap, 10u, 20%, 16V, Electrolytic . .	3198 028 21090	S	3454	Res, 33K, 5%, 1 1/3W, Metal Film . .	2322 194 63333
2962	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090		3458	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2963	Cap, 10p, 5%, 50V, Ceramic	3198 016 01090		3461	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3462	Res, 6K8, 5%, 5W, Metal Film	2322 257 41682
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3463	Res, 47 ohm, 5%, 1/6W, Carbon Film .	3198 011 04790
3010	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610		3464	Res, 1K, 2%, 0,25W	4822 051 10102
3013	Zero ohm,.	4835 111 27056	S	3465	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109
3014	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052		3466	Res, 39K, 1%, 3/5W, Metal Film . . .	2322 156 23903
3015	22k, 5%, 1/10W, Metal Film	4835 111 37441		3467	Res, 14K, 1%, 3/5W, Metal Film . . .	2322 156 21403
3016	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810		3467	Res, 15K, 1%, 3/5W, Metal Film . . .	2322 156 21503
3021	Res, 1K, 2%, 0,25W	4822 051 10102		3468	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3103	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3469	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247
3104	10k, 5%, 1/10W, Metal Film	4835 111 37216		3478	Res, 220K, 5%, 1/6W, Carbon Film . .	3198 011 02240
3108	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220		3480	Res, 27K, 1%, 3/5W, Metal Film . . .	2322 156 22703
3109	10k, 5%, 1/10W, Metal Film	4835 111 37216		3481	Res, 35K7, 1%, 3/5W, Metal Film. . .	2322 156 23573
3123	75 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37276		3482	Res, 56K, 1%, 3/5W, Metal Film . . .	2322 156 25603
3200	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3483	Res, 22K, 5%, 1/6W, Carbon Film. . .	3198 011 02230
3201	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253		3484	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3203	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443	S	3485	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
3204	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	S	3486	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3205	Res, 1K, 2%, 0,25W	4822 051 10102	S	3487	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3206	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054	S	3488	4.7 ohm, 5%, 1/2W, Metal Film. . . .	4835 110 47023
3208	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3490	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3209	22k, 5%, 1/10W, Metal Film	4835 111 37441	S	3491	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3212	390 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37253	S	3492	1 ohm, 5%, 1/2W, Metal Film.	4835 110 27012
3213	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3495	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272
3215	22k, 5%, 1/10W, Metal Film	4835 111 37441		3496	10k, 5%, 1/10W, Metal Film	4835 111 37216
3216	Zero ohm,.	4835 111 27056		3497	10k, 5%, 1/10W, Metal Film	4835 111 37216
3217	Res, 1M5, 5%, 1/8W, Metalized Glass.	2322 730 61155		3501	Res, 470 ohm, 20%, 1/2W, Carbon Film	2120 103 90019
3218	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3502	Res, 2M2, 5%, 1/2W, Metalized Glass.	2322 242 13225
3219	560 ohm, 5%, 1/10W, Metal Film . . .	4835 111 27054		3503	10ohm, 120VAC, Positive Temperature C	
3220	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432			oefficient	4835 116 47001
3225	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S	3505	Surge Protector.	2422 549 43073
3228	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3508	Res, 22K, 5%, 2 1/2W, Metal Film . .	2322 195 63223
3231	Zero ohm,.	4835 111 27056	S	3510	Res, 33K, 5%, 2 1/2W, Metal Film . .	2322 195 63333
3232	Zero ohm,.	4835 111 27056	S	3511	Res, 1K, 10%, 7W, Metal Film	2322 258 41102
3233	Zero ohm,.	4835 111 27056		3512	15k, 5%, 1/10W, Metal Film	4835 111 37458
3243	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052		3513	Res, 180K, 5%, 1/4W, Carbon Film . .	2120 101 74184
3246	82k, 5%, 1/10W, Metal Film	4835 111 37277		3514	Res, 820K, 1%, 3/5W, Metal Film. . .	2322 156 28204
3247	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S	3515	2.5 ohm, 20%, 3.6W, Negative Temperat	
3248	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010			ure Coefficient.	2122 612 00023
3249	Res, 330K, 5%, 1/10W, Glass.	3198 021 53340		3516	Res, 1K, 2%, 0,25W	4822 051 10102
3250	Zero ohm,.	4835 111 27056		3517	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3251	100k, 5%, 1/10W, Metal Film.	4835 111 37434	S	3518	Res, 0R22, 5%, 3W, Metal Film. . . .	2120 106 90548
3252	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		3520	Res, 82K, 5%, 1/6W, Carbon Film. . .	3198 011 08230
3253	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234		3521	330 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37443
3257	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	S	3525	33 ohm, 5%, 1/3W, Metal Film	4835 116 57665
3258	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3528	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3259	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432		3529	Res, 68 ohm, 5%, 1/6W, Carbon Film .	3198 011 06890
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3530	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3532	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3534	15k, 5%, 1/10W, Metal Film	4835 111 37458
3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046		3536	Res, 18K, 5%, 1/6W, Carbon Film. . .	3198 011 01830
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010		3537	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	2120 103 90046	S	3542	4.7 Megohm, 5%, 1/2W, Metal Film . .	4835 116 57009
S 3340	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2306 204 03109		3570	15k, 5%, 1/10W, Metal Film	4835 111 37458
S 3341	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483		3571	Res, 150K, 1%, 3/5W, Metal Film. . .	2322 156 21504
S 3342	1 ohm, 5%, 1/3W, Metal Film.	4822 111 30483		3573	Res, 2K, 1%, 1/10W, Metalized Glass.	2120 108 92657
3343	1.5k, 20%, 1/2W, Carbon Composition.	4835 110 47034		3574	33k, 5%, 1/10W, Metal Film	4835 111 37248
3344	Res, 22 ohm, 5%, 1/6W, Carbon Film .	3198 011 02290		3575	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
S 3345	VDR, DC, 1mA, 50V, MAX 115V	2322 593 13507		3577	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030

S = Safety Part Be sure to use exact replacement part.

XS2757C101 (continued)

3578	Res, 1K, 2%, 0,25W	4822 051 10102	
3579	Res, 1K, 1%, 1/10W, Metalized Glass.	2120 108 91451	
3585	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3592	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3594	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3595	68k, 5%, 1/6W, Carbon Film	4835 111 37205	
3596	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3597	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3598	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3599	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3607	8.2k, 5%, 1/8W, Inline Package . . .	4835 111 97046	
3608	2.2k, 5%, 1/8W, Inline Package . . .	4835 111 97049	
3609	2.2k, 5%, Resistor Network	2120 108 93868	
3611	Res, 1K, 2%, 0,25W	4822 051 10102	
3612	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3613	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3615	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3617	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3618	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3619	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3629	470 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37259	
3630	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3631	27k, 5%, 1/10W, Metal Film	4835 111 37442	
S 3632	Res, 47 ohm, 5%, 2 1/2W, Metal Film.	2322 195 63479	
3633	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210	
3634	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3635	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3636	22k, 5%, 1/10W, Metal Film	4835 111 37441	
3637	2.2k, 5%, 1/10W, Metal Film.	4835 111 37234	
3651	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3652	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3653	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	
3654	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3655	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3657	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3661	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3662	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3663	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3664	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3665	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3666	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376	
3667	27k, 5%, 1/10W, Metal Film	4835 111 37442	
3672	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3673	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3674	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231	
3675	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3676	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3677	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510	
3680	680 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37271	
3681	4.7k, 5%, 1/10W, Metal Film.	4835 111 27052	
3682	8.2k, 5%, 1/10W, Metal Film.	4835 111 37448	
3683	100 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37432	
3684	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3821	15k, 5%, 1/10W, Metal Film	4835 111 37458	
3822	1.2k, 5%, 1/10W, Metal Film.	4835 111 27042	
3823	100k, 5%, 1/10W, Metal Film.	4835 111 37434	
3824	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3825	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3826	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3827	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3828	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3829	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272	
3830	6.8k, 5%, 1/10W, Metal Film.	4835 111 37272	
3831	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198 011 03310	
3832	47 ohm, 5%, 1/10W, Metal Film. . . .	4835 111 37262	
3908	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3909	Res, 1K, 2%, 0,25W	4822 051 10102	
3910	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376	
3911	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230	
3912	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3913	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3914	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	
3915	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231	
3916	220 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37371	
3917	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	
3918	Res, 6K8, 5%, 1/6W, Carbon Film. . .	3198 011 06820	
3919	5.6k, 5%, 1/10W, Metal Film.	4835 111 37376	
3920	1.8k, 5%, 1/10W, Metal Film.	4835 111 37231	
3921	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230	
3922	Res, 1K8, 5%, 1/6W, Carbon Film. . .	3198 011 01820	
3923	220 ohm, 5%, 1/10W, Metal Film . . .	4835 111 37371	
3924	39k, 5%, 1/10W, Metal Film	4835 111 27051	
3925	39k, 5%, 1/10W, Metal Film	4835 111 27051	
3926	39k, 5%, 1/10W, Metal Film	4835 111 27051	
3929	39k, 5%, 1/10W, Metal Film	4835 111 27051	
3930	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710	
3931	Res, 1K, 2%, 0,25W	4822 051 10102	
3950	Res, 680 ohm, 5%, 1/6W, Carbon Film.	3198 011 06810	
3951	3.3k, 5%, 1/10W, Metal Film.	4835 111 37247	
3952	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	
3953	10k, 5%, 1/10W, Metal Film	4835 111 37216	
3955	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
3957	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	
4001	Zero ohm,.	4835 111 27056	
4002	Zero ohm,.	4835 111 27056	
4004	Zero ohm,.	4835 111 27056	
4007	Zero ohm,.	4835 111 27056	
4009	Zero ohm,.	4835 111 27056	
4010	Zero ohm,.	4835 111 27056	
4011	Zero ohm,.	4835 111 27056	
4012	Zero ohm,.	4835 111 27056	
4013	Zero ohm,.	4835 111 27056	
4020	Zero ohm,.	4835 111 27056	
4051	Zero ohm,.	4835 111 27056	
4100	Zero ohm,.	4835 111 27056	
4101	Zero ohm,.	4835 111 27056	
4102	Zero ohm,.	4835 111 27056	
4103	Zero ohm,.	4835 111 27056	
4143	Zero ohm,.	4835 111 27056	
4144	Zero ohm,.	4835 111 27056	
4203	Zero ohm,.	4835 111 27056	
4207	Zero ohm,.	4835 111 27056	
4212	Zero ohm,.	4835 111 27056	
4214	Zero ohm,.	4835 111 27056	
4215	Zero ohm,.	4835 111 27056	
4216	Zero ohm,.	4835 111 27056	
4501	Zero ohm,.	4835 111 27056	
4602	Zero ohm,.	4835 111 27056	
4650	Zero ohm,.	4835 111 27056	
4651	Zero ohm,.	4835 111 27056	
4652	Zero ohm,.	4835 111 27056	
4654	Zero ohm,.	4835 111 27056	
4655	Zero ohm,.	4835 111 27056	
4684	Zero ohm,.	4835 111 27056	
4687	Zero ohm,.	4835 111 27056	
4831	Zero ohm,.	4835 111 27056	
4832	Zero ohm,.	4835 111 27056	
4833	Zero ohm,.	4835 111 27056	
4902	Zero ohm,.	4835 111 27056	
4903	Zero ohm,.	4835 111 27056	
4904	Zero ohm,.	4835 111 27056	
4905	Zero ohm,.	4835 111 27056	
4909	Zero ohm,.	4835 111 27056	
4911	Zero ohm,.	4835 111 27056	
4912	Zero ohm,.	4835 111 27056	
4914	Zero ohm,.	4835 111 27056	
4957	Zero ohm,.	4835 111 27056	
4999	Zero ohm,.	4835 111 27056	
5000	Coil, 5u6.	3198 018 25680	
5004	Coil, 820n	2422 535 97314	
5201	Coil, 22u.	3198 018 22290	
5202	Coil, 6u8.	3198 018 16880	
5342	22uH., 10%, Coil, Peaking.	4835 157 67069	
S 5445	Transformer, L.O.T., models ending in C101, C121, and C125	2422 531 02327	
S 5445	Transformer, L.O.T., models ending in C221 and C225.	3128 138 20941	
5451	Coil, 27u.	2422 535 96614	
5457	Coil, Linear Correction.	3128 138 53241	
5461	Transformer.	3128 138 33811	
5480	Coil, 27u.	2422 535 97334	
5480	Coil, 39u.	2422 535 97336	
5480	33uH., Peaking Coil, only in 25. . .	4835 157 58205	
S 5500	Filter, Mains, 5mH, 2A	2422 549 43432	
5516	100uH., Coil	4835 157 67078	
5518	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5521	Coil, 2u2.	3198 018 12280	
5540	Coil, 4u7.	3198 018 14780	
S 5545	Transfomer,.	2422 531 02314	
5551	27uH., 5%, Coil, Peaking	4835 157 67052	
5552	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5572	100uH., Coil	4835 157 67078	
5573	100uH., Coil	4835 157 67078	
5576	100uH., Coil	4835 157 67078	
5577	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010	
5600	Coil, 8u2.	3198 018 18280	
5601	Coil, 8u2.	3198 018 18280	
5620	Coil, 6u8.	3198 018 16880	
5821	Coil, 100u	3198 018 21010	
5822	Coil, 18u.	3198 018 21890	
6008	Zener, 33 Volt BZX79-C33	4835 130 37904	
6113	Zener Diode, 6.8 volt.	9340 386 40115	
6211	Diode, 1N4148.	4835 130 37048	
6212	Diode, 1N4148.	4835 130 37048	
6213	Diode, 1N4148.	4835 130 37048	
6331	Diode.	4835 130 37294	
6333	Diode.	4835 130 37294	
6335	Diode.	4835 130 37294	
6401	Diode.	4835 130 37094	
6402	Zener, 33 Volt, BZX79-C33.	4835 130 37904	
6403	Diode.	4835 130 37094	

S = Safety Part Be sure to use exact replacement part.

XS2757C101 (continued)

6404	Diode.	4835 130 37094
6449	Diode, 1N4148.	4835 130 37048
6450	Diode, 1N4148.	4835 130 37048
6460	Diode, Rect, BY228/20	9336 215 80112
6463	Diode, 1N4148.	4835 130 37048
6464	Zener Diode, 6.2 volt.	9337 242 70133
6465	Diode, BYD33J.	4835 130 37094
6466	Diode, BYD33J.	4835 130 37094
6480	Diode, Zener	4835 130 37947
6481	Diode, 1N4148.	4835 130 37048
6485	Diode, BYD33J.	4835 130 37094
6486	Diode, EGP20DL-530	4835 130 37919
6487	Diode.	4835 130 37094
6488	Diode, Rect, BYV27-200.	9322 126 72673
6490	Diode, Rect, BYV27-200.	9322 126 72673
6505	Diode, Bridge Rect, GBU6JL-7002	9322 138 08667
6507	Diode, BYD33J.	4835 130 37094
6508	Diode, BYD33J.	4835 130 37094
6510	Zener Diode, 20 volt	9331 178 60133
6511	Diode, BYV95C.	4835 130 37052
6512	Diode, Rect, BY228/20	4822 130 41275
6513	Diode, Rect, BY228/20	4822 130 41275
6514	Zener, 18 Volt, BZX79-C18.	4835 130 37908
6540	Diode.	4835 130 37294
6550	Diode, Rect, BY229X-800	9340 380 30127
6560	Diode, EGP20DL-530	4835 130 37919
6580	Diode, Rect, SB140.	9339 577 60673
6584	Diode, 1N4148.	4835 130 37048
6585	Diode, 1N4148.	4835 130 37048
6591	Diode, BAS216.	4835 130 37905
6601	Diode, Zener	4835 130 37684
6606	Zener, 4.7 Volt, BZX79-C4V7.	4835 130 37005
6607	Zener, 6.8 Volt, BZX79-C6V8.	4835 130 37945
6690	LED, LTL-307P.	4835 130 97096
6821	Zener Diode, 9.1 volt.	9331 177 80133
6822	Fixed Coil	4835 130 37048
6951	Diode, BAS216.	4835 130 37905
6961	Diode, BAS216.	4835 130 37905
7250	IC,.	9352 620 26112
7251	IC, LM317T	9337 220 80682
7254	Transistor, NPN, BC847B.	4822 130 60511
7256	Transistor, NPN, BC847B.	4822 130 60511
7258	Transistor, NPN, BC847B.	4822 130 60511
7263	Transistor, PNP, BC857B.	5322 130 60508
7266	Transistor, NPN, BC847B.	4822 130 60511
7330	IC,.	9352 184 10112
7401	IC,.	9322 121 47687
7460	Transistor, NPN, BU1508DX.	9340 170 50127
7461	Transistor, NPN, BF819	9335 354 50127
7462	Transistor, BC547B	4835 130 47055
7463	Transistor, BC557B	4835 130 47409
7480	IC,.	9322 028 93682
7481	Transistor, BC557B	4835 130 47409
7482	Transistor, PNP, BC857B.	5322 130 60508
7518	STH8NA60FI SMPS FET	9322 068 92687
7518	STH10NC60FI SMPS FET.	9322 155 66687
7520	IC, MC44603A	4835 209 88537
7570	IC,.	9337 711 00676
S 7581	Coupler, TCDT1101G	9338 431 30682
7590	Transistor, NPN, BC847B.	4822 130 60511
7591	Transistor, NPN, BC847B.	4822 130 60511
7592	Transistor, NPN, BC847B.	4822 130 60511
7600	IC, SAA5543PS/M4/1046 L90US1-1.4	4835 310 57477
7601	IC, ST24W04B6.	9322 097 23682
7603	Transistor, NPN, BC337	9331 796 00126
7604	Transistor, NPN, BC847B.	4822 130 60511
7605	Transistor, NPN, BC847B.	4822 130 60511
7608	Transistor, NPN, BC847B.	4822 130 60511
7609	Transistor, NPN, BC847B.	4822 130 60511
7680	IR Receiver.	9322 127 53667
7821	IC,.	9352 374 70112
7822	IC, HEF4052BT.	9333 729 50653
7823	Transistor, NPN, BC337-25.	3198 020 43530
7904	Transistor, NPN, BC847B.	4822 130 60511
7905	Transistor, NPN, BC847B.	4822 130 60511
7906	Transistor, NPN, BC847B.	4822 130 60511
7908	Transistor, NPN, BC847B.	4822 130 60511
7909	Transistor, NPN, BC847B.	4822 130 60511
7910	Transistor, NPN, BC847B.	4822 130 60511
7951	IC,.	4822 209 13706
9423	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
CBA	00EMF832A102 Main Chassis Board Asm.	00EM F83 2A102

Cabinet & Accessory Parts

	Cabinet & Accessory Parts	
S AC01	Mainscord, 125V, 10A	3135 010 03831
S AC02	Anode Clip	4835 256 97264
AC03	Cabinet Back	3139 124 27871
AC04	Cabinet Front.	3139 137 65871
AC05	Chassis Guide.	3139 124 31381
AC06	Control Buttons.	3139 124 27351
S AC07	Convergence and Purity Assembly.	2422 549 43385
S AC08	CRT A68AJB82X.	4835 131 27167
S AC09	Coil, Degaussing	3121 218 62701
AC11	Light Guide.	3139 124 26461
AC13	Owner's Manual, English.	3135 015 10801
AC14	Power Button	3139 124 26444
REMOTE	Remote Transmitter, RC2524/04.	3139 228 81592
AC16	Speaker, 16R, 1W5 (2 Used)	2422 264 00343
S AC18	Yoke	3313 203 01242
AC19	Yoke Wedge (3 Used).	4835 535 27001
AC21	Battery, 1.5V AA, 2-Pack, (Not Shown	9299 000 10137
AC24	Spring	3139 121 26231

S = Safety Part Be sure to use exact replacement part.

Addressable Interface Bd - Part# 313917808561
Used in all ITV/Commercial Models:
PL/TL/PA/PC/PPC/HC/SC/TC/9xxxC

PC Models - From Chassis to A10777 - 0238
PL Models – Direct from Chassis – 0238
From A10777 Interface Bd – J0238B

0238 - 1 Standby (to A7-17 IC 7600-19)
- 2 Data Out (from A7-6 IC 7600-18)
- 3 Data In (from A7-15 IC 7600-17)
- 4 POR/Clock (from A7-7 IC 7600-9)
-5 Chassis Ground

PC Models - From Chassis to A10777 - 0259
PL Models – Direct from Chassis - 0259
From A10777 Interface Bd – J0259

0259 – 1 +5 vdc
- 2 IR
- 3 Chassis Ground

PC Models - From Chassis to A10777 - 0215
PL Models – Direct from Chassis – 0238

From A10777 Interface Bd – J0215B

J3/J7 – 1 Spkr + (Mono)
- 2 Spkr –

From Main Chassis – 0240/F618

Chassis --------- J4/Con1

0240	-1	to		N/C
	-2	to		N/C
	-3	to	J4 -1	N/C
	-4	to	J4 -2	N/C
	-5	to	J4 -3	Chassis Ground
	-6	to	J4 -4	Chassis Ground
	-7	to	J4 -5	Chassis Ground
	-8	to	J4 -6	Chassis Ground
	-9	to	J4 -7	Chassis Ground
	-10	to	J4 -8	Chassis Ground
	-11	to	J4 -9	Chassis Ground

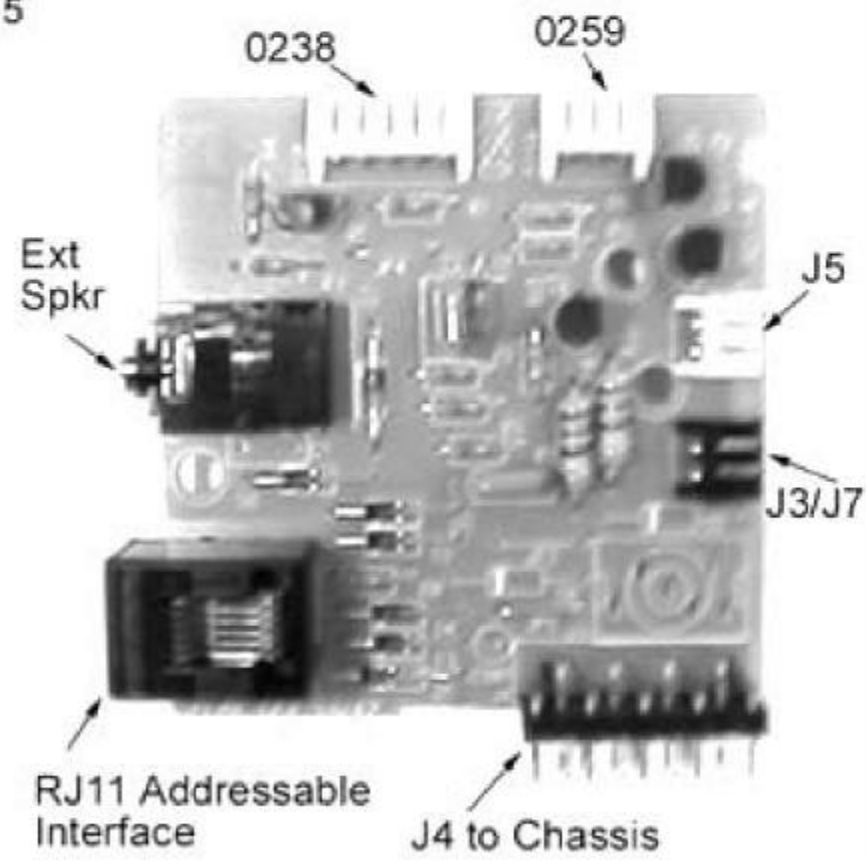

PA/PC/PPC/HC/SC/TC/9xxxC EPS (Extended Power Supply) Bd. Part# 313917853133 (EPS Bd Not Used in PL Models)

From P0213 on Main Chassis (AC Input)

0213	–1	AC
	-2	Input

To J228 – A10777 Interface Bd.

0228	–1	+5 vdc
	-2	Chassis Ground
	-3	+12vdc